

Specification

Part No.	:	GW.48.A151
Product Name	:	Black 2.4 / 5.8GHz Dual Band 3-3.5dBi Rubber Duck Dipole Antenna with RP-SMA(M)
Features	:	2.4/5.8GHz Dual Band Operation UV Resistant, Robust TPEE Housing IP67 Waterproof Enclosure IK05 Impact Rated Enclosure 3.5 dBi Peak Gain @ 2.4GHz 3 dBi Peak Gain @ 5.8GHz Connector Mount: RP-SMA(M) Dimensions: 89.5mm x 7.5mm Diameter RoHS compliant



1. Introduction

The GW.48 dual-band 2.4/5.8GHz RP-SMA(M) mount dipole antenna is designed for superior performance and reliability. With an omnidirectional radiation pattern and excellent efficiency and gain on both 2.4 GHz and 5.8 GHz bands.

At just 89.5mm in height, the GW.48 is a great smaller form factor solution for Bluetooth and Wireless LAN networks. The IP67 rated enclosure makes it suitable for both indoor and outdoor applications. The flexible IK05 rated TPEE enclosure is impact resistant and durable and has the added benefit of UV resistance, allowing it to meet the needs of demanding outdoor applications.

The GW.48 has a 3.5 dBi Peak Gain at 2.4GHz and 3 dBi Peak Gain @ 5.8GHz making it a cost-effective, high-performing choice for any outdoor application operating at 2.4 or 5.8 GHz. Many module manufacturers specify peak gain limits for any antennas that are to be connected to that module. Those peak gain limits are based on free-space conditions. In practice, the peak gain of an antenna tested in free-space can degrade by at least 1 or 2dBi when installed. So ideally you should go for a slightly higher peak gain antenna than mentioned on the module specification to compensate for this effect, giving you better performance.

Upon testing of any of our antennas with your device and a selection of appropriate layout, integration technique, or cable, Taoglas can make sure any of our antennas' peak gain will be below the peak gain limits. Taoglas can then issue a specification and/or report for the selected antenna in your device that will clearly show it complying with the peak gain limits, so you can be assured you are meeting regulatory requirements for that module.

Choosing a Taoglas antenna with a higher peak gain than what is specified by the module manufacturer and enlisting our help will ensure you are getting the best performance possible without exceeding the peak gain limits.


Contact your local Taoglas customer support team for further information.

2. Specification


ELECTRICAL			
Frequency		2.4 ~ 2.5GHz	5.15 ~ 5.85GHz
Return Loss (dB)		<-10	<-7
Peak Gain (dBi)	Free Space	3.42	4.56
	Ground Plane	2.52	2.85
Average Gain (dBi)	Free Space	-1.20	-1.73
	Ground Plane	-1.56	-2.62
Efficiency (%)	Free Space	75.82	67.21
	Ground Plane	69.77	54.65
Polarization		Linear	
Impedance		50 Ω	
Radiation Pattern		Omni	
Input Power		2W max.	
MECHANICAL			
Antenna Length		89.5 mm	
Antenna Diameter		7.5 mm	
Weight		9.5g	
Antenna Body Material		TPEE	
Connector		RP-SMA(M)	
Waterproof		IP67	
Pendulum Hammer Test [IEC62262]		IK05	
ENVIRONMENTAL			
Temperature Range		-40°C to 85°C	
Humidity		Non-condensing 65°C 95% RH	

3. Antenna Measurement Setup & Return Loss

3.1 Test Setup

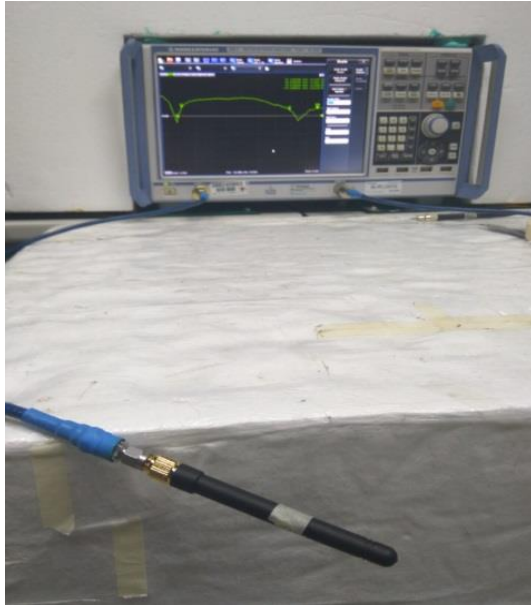


Free Space

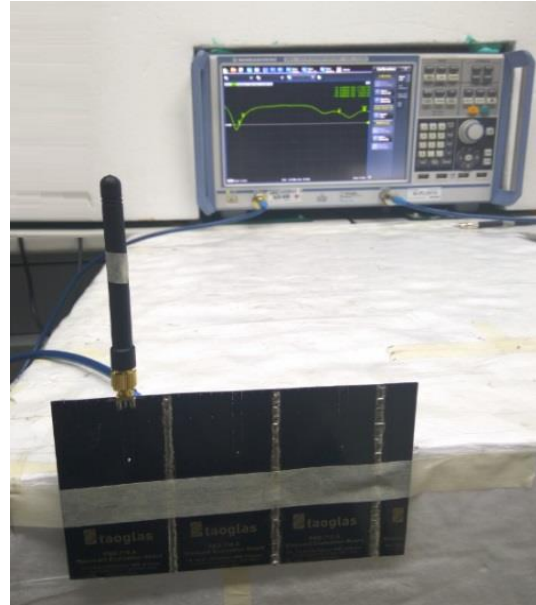


With Ground Plane


3.2 Return Loss

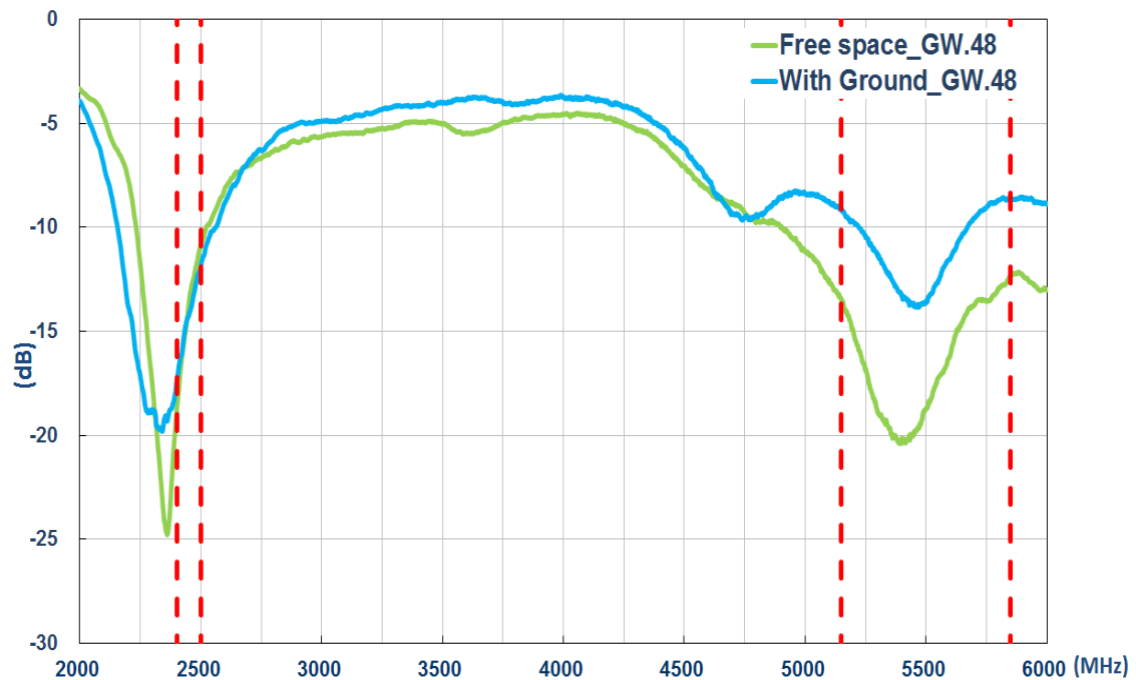


3.2. Efficiency

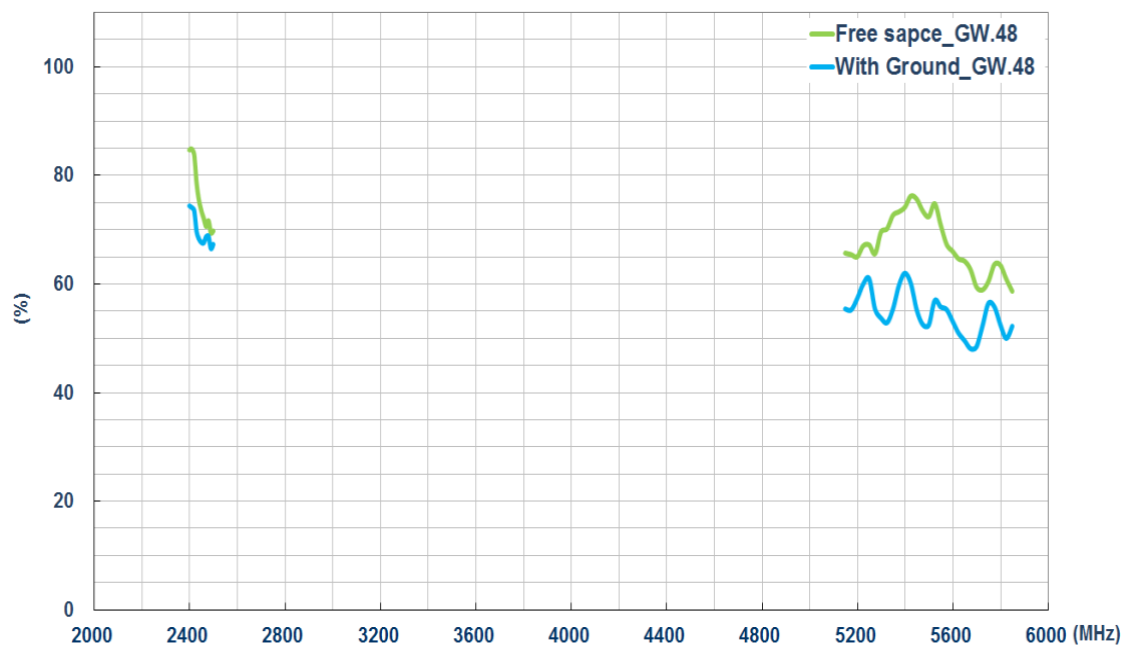

3.3 Average Gain

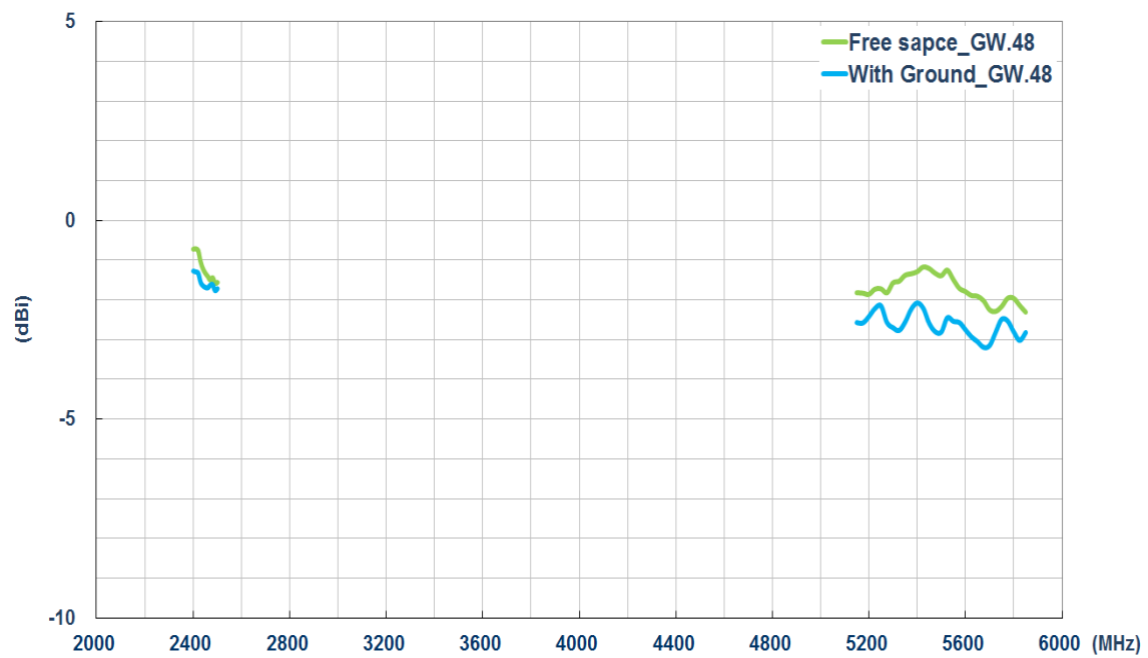

3.4 Peak Gain

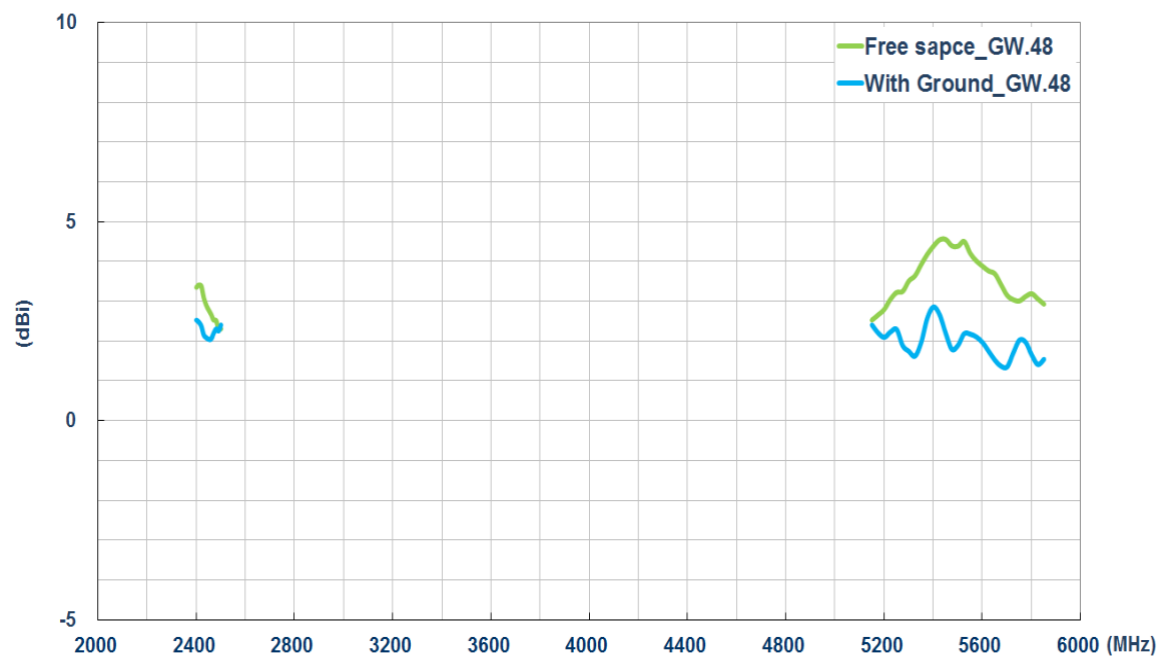


4. Antenna Radiation Patterns

4.1 Antenna Setup (Antenna Test Setup in Anechoic Chamber)



Free Space


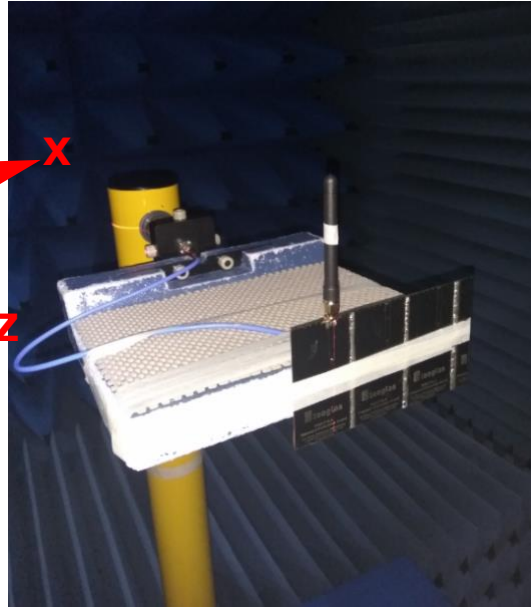


With Ground



4.2 2D Radiation Patterns

4.2.1 Wi-Fi Dual Band - Free Space



XY Plane

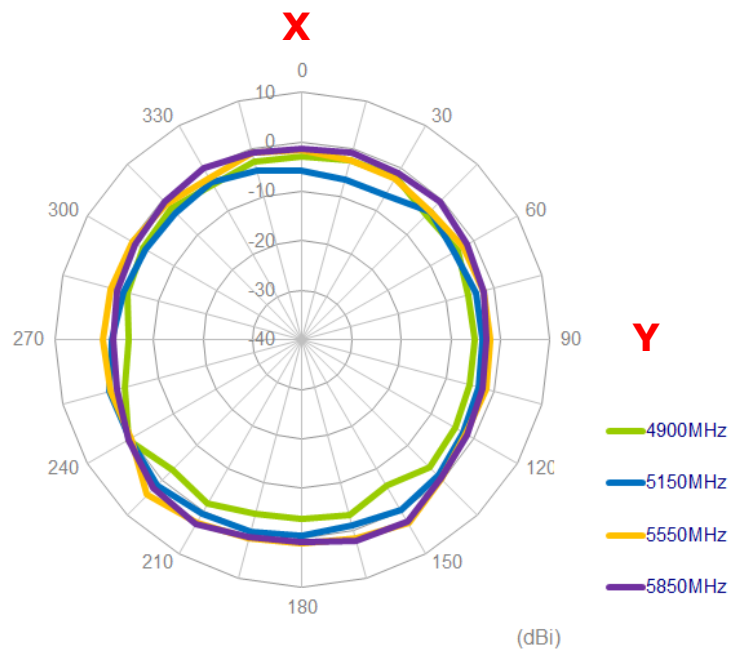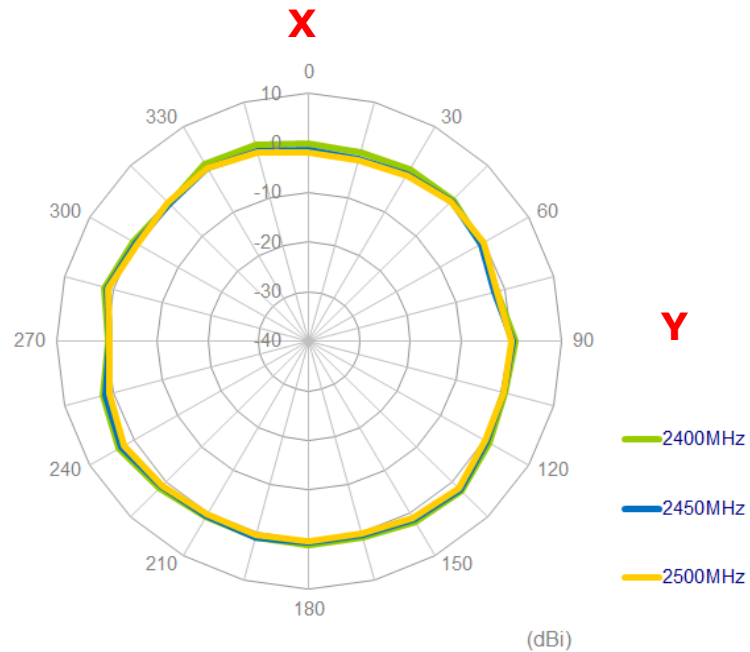

XZ Plane

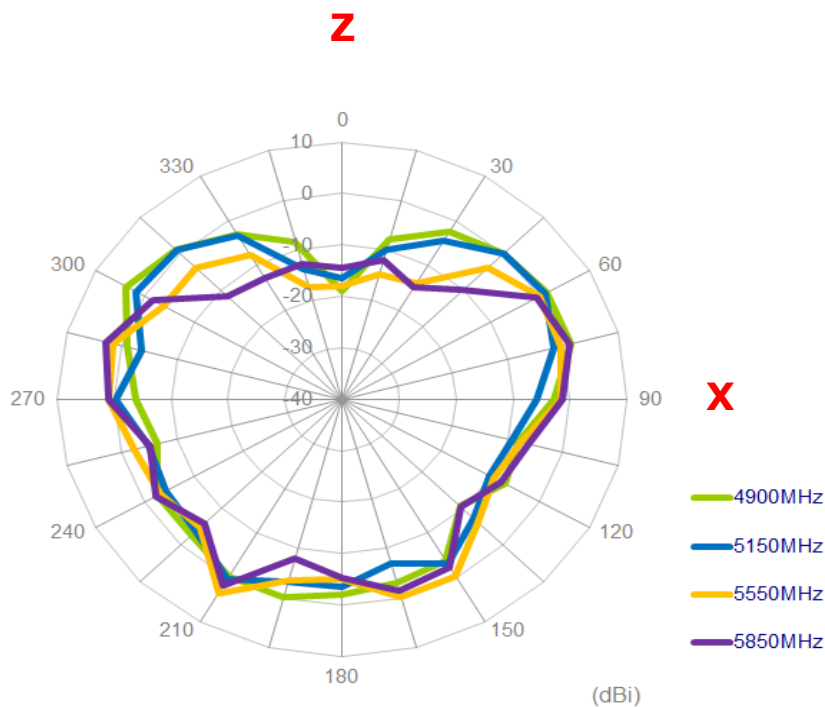
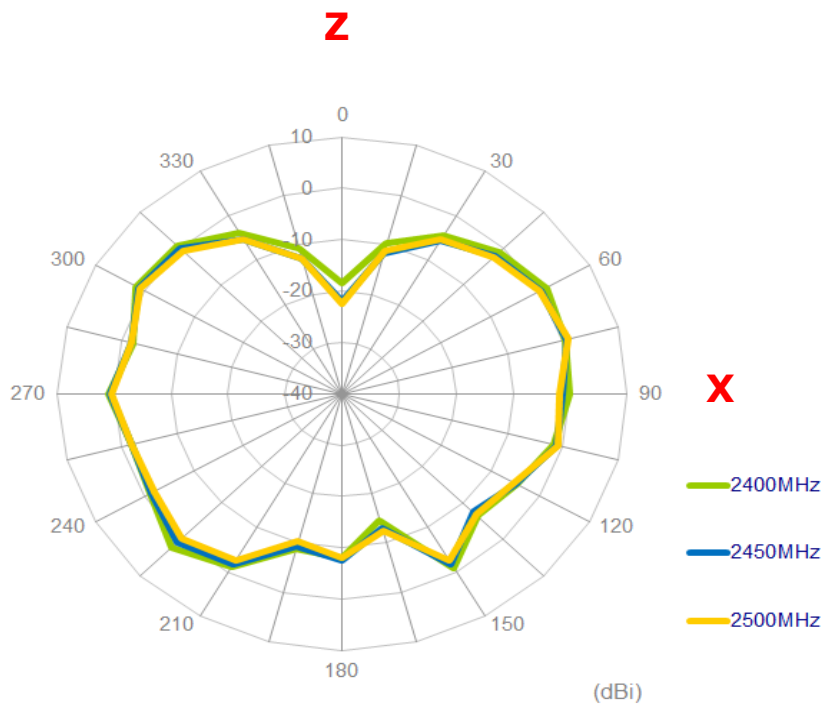


YZ Plane

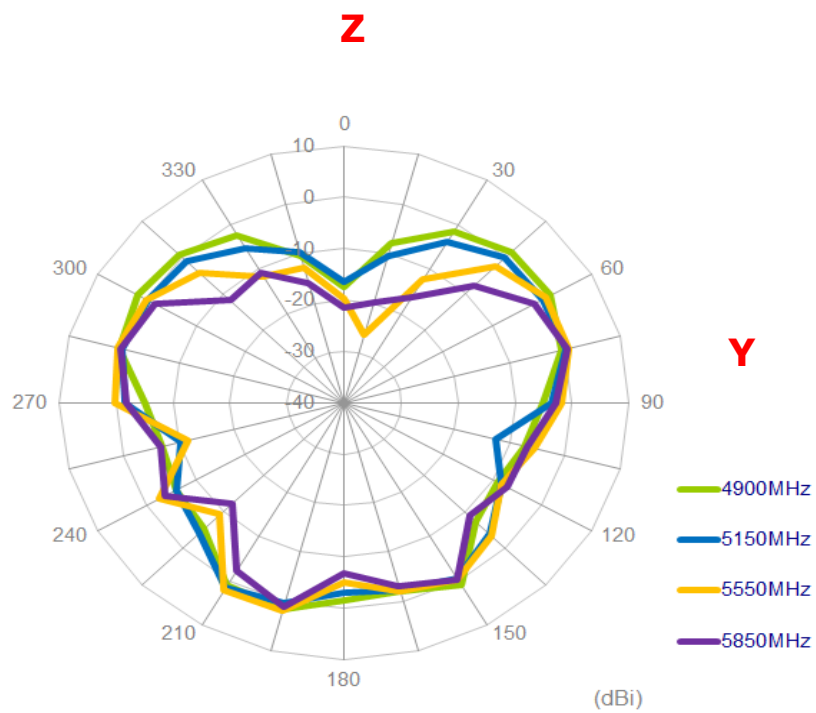
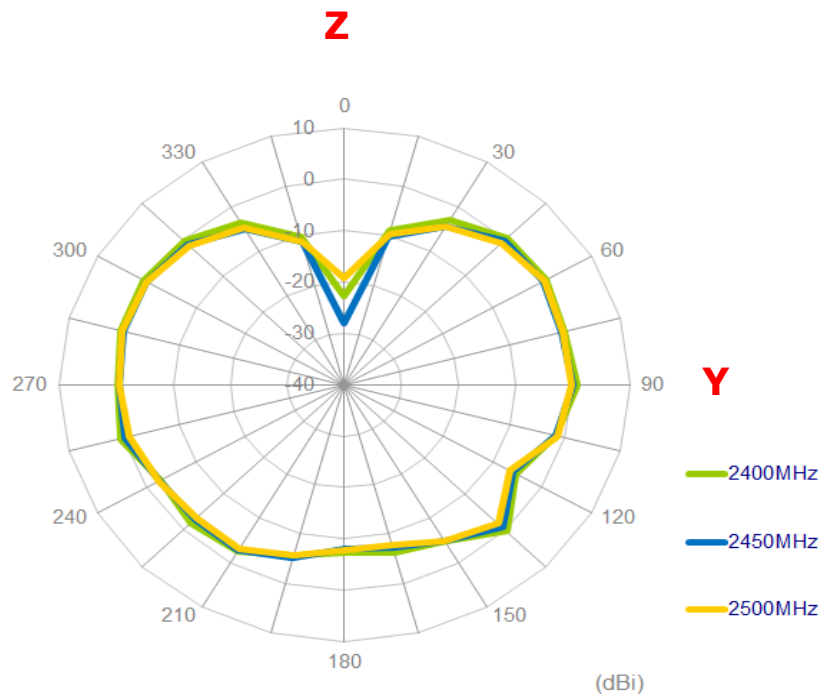


4.2.2 Wi-Fi Dual Band (With Ground)



XY Plane

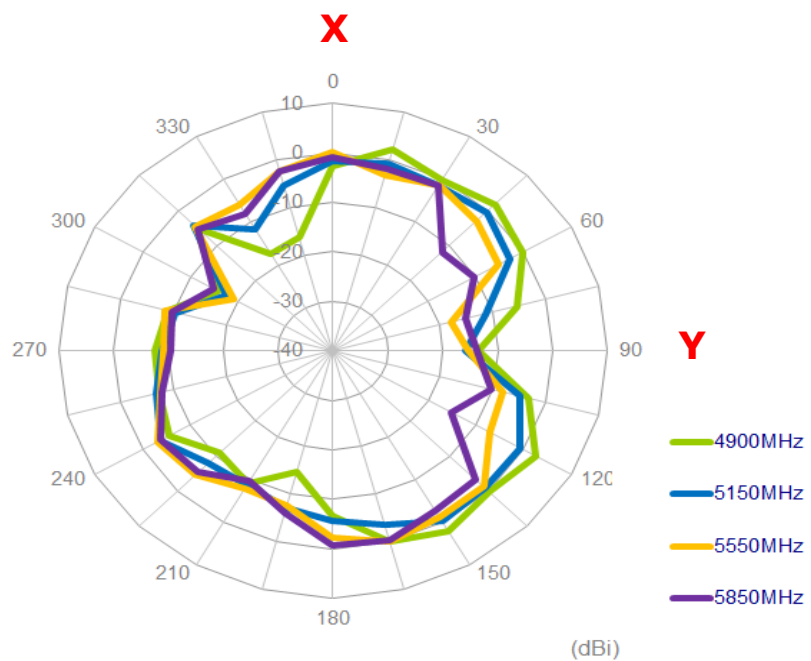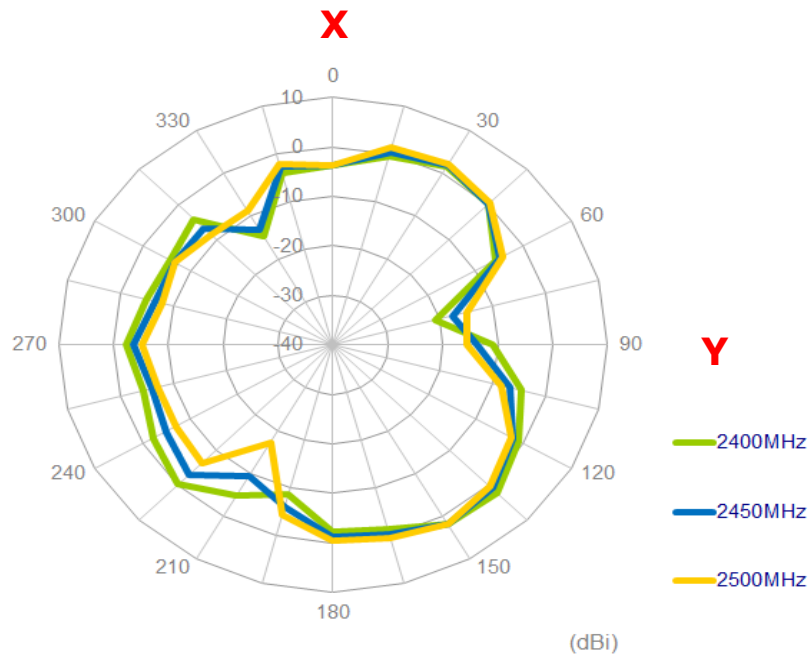



XZ Plane

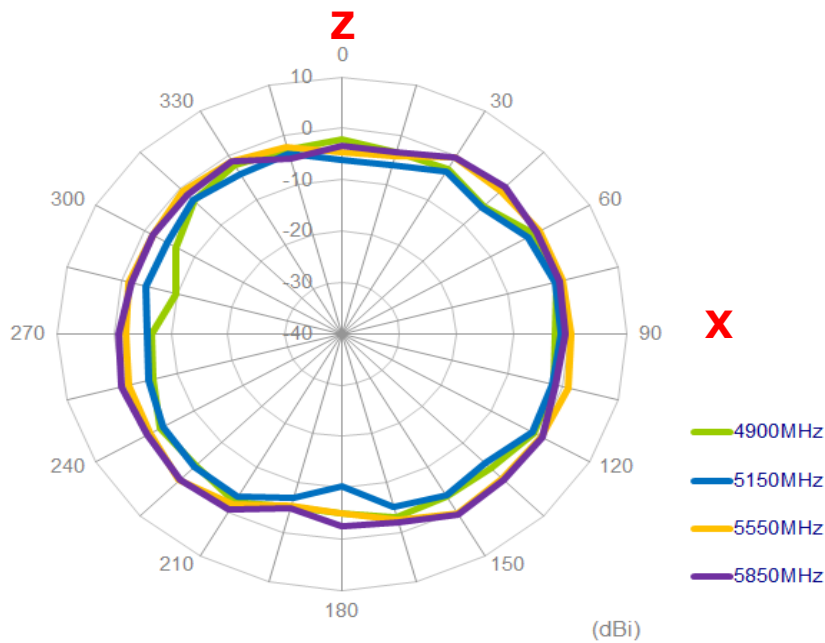
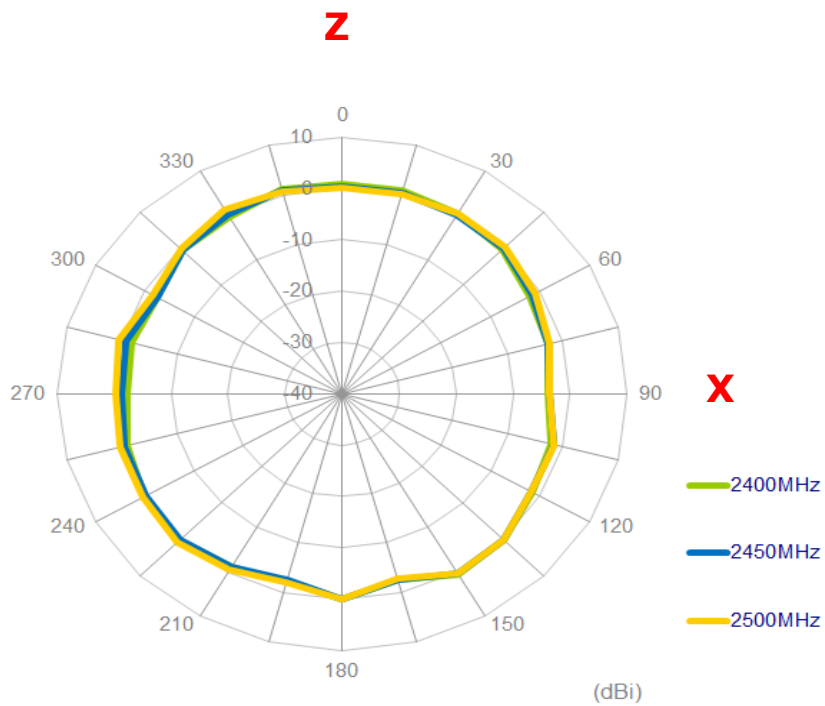


YZ Plane

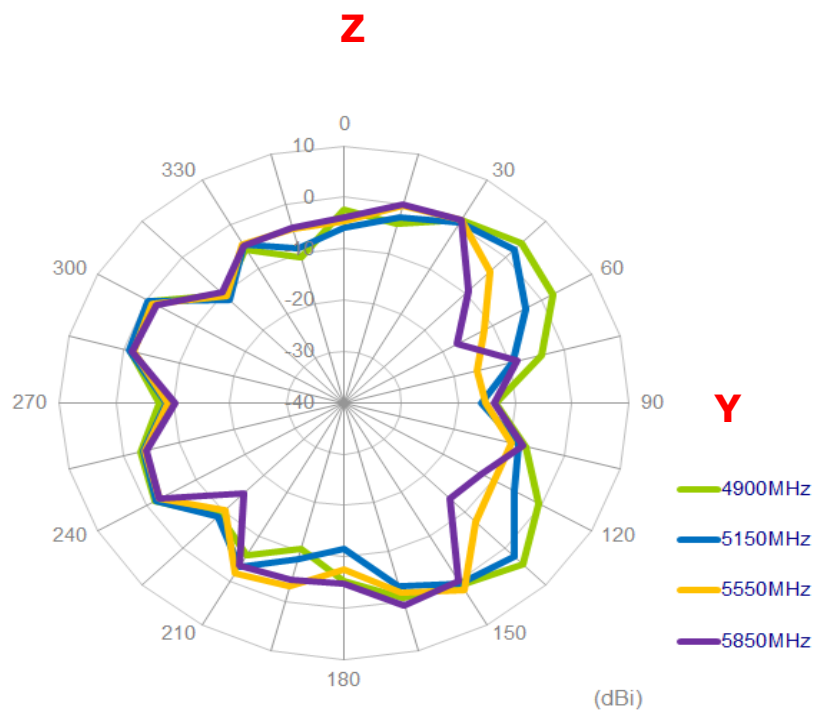
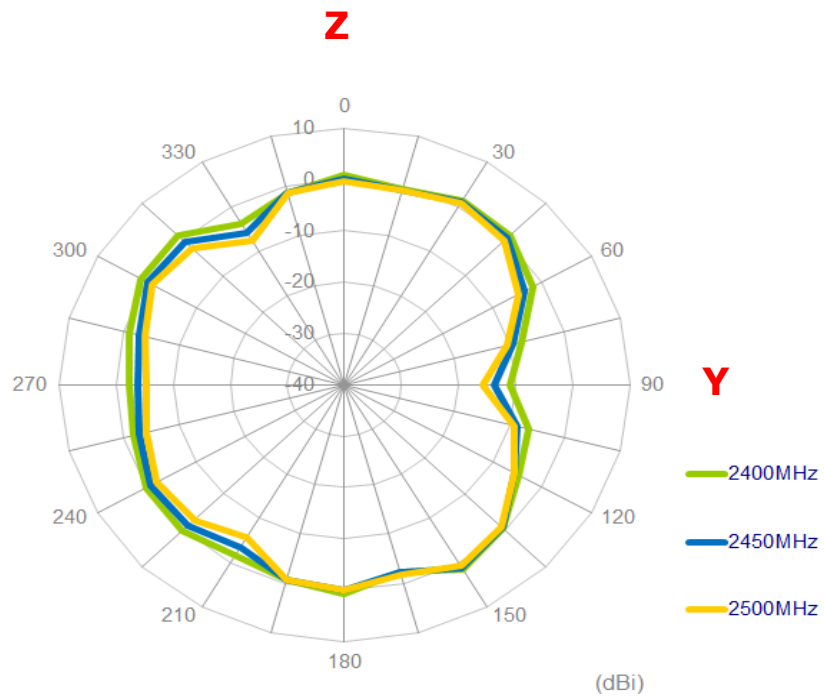




4.2.3 3D Radiation Pattern - Free space

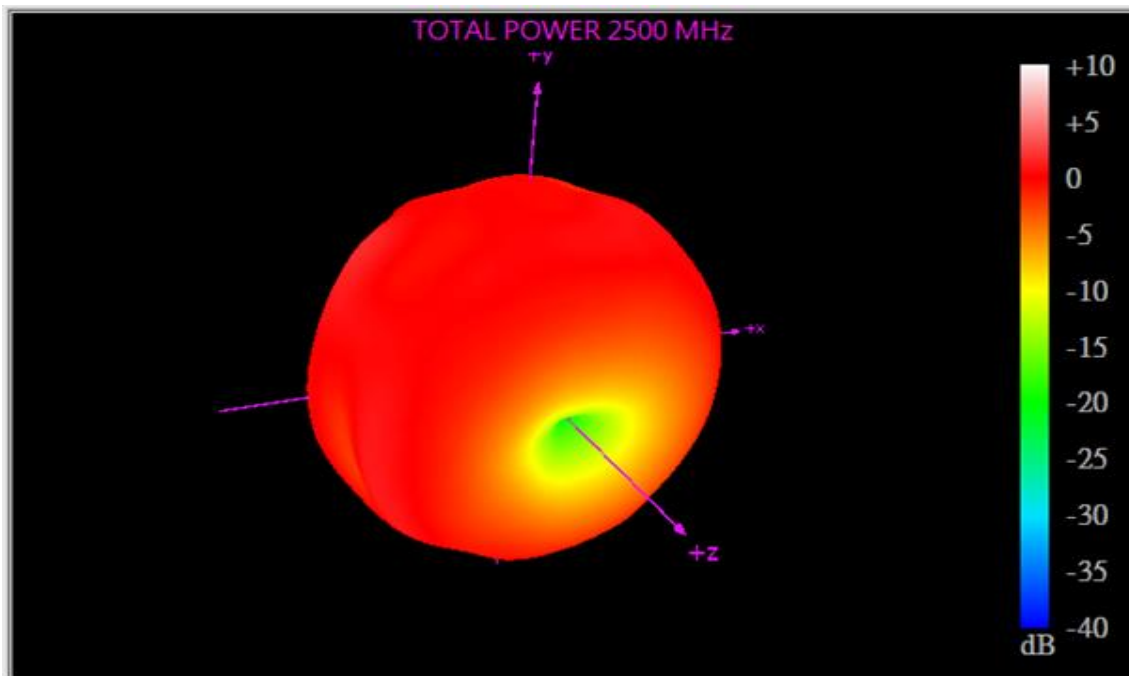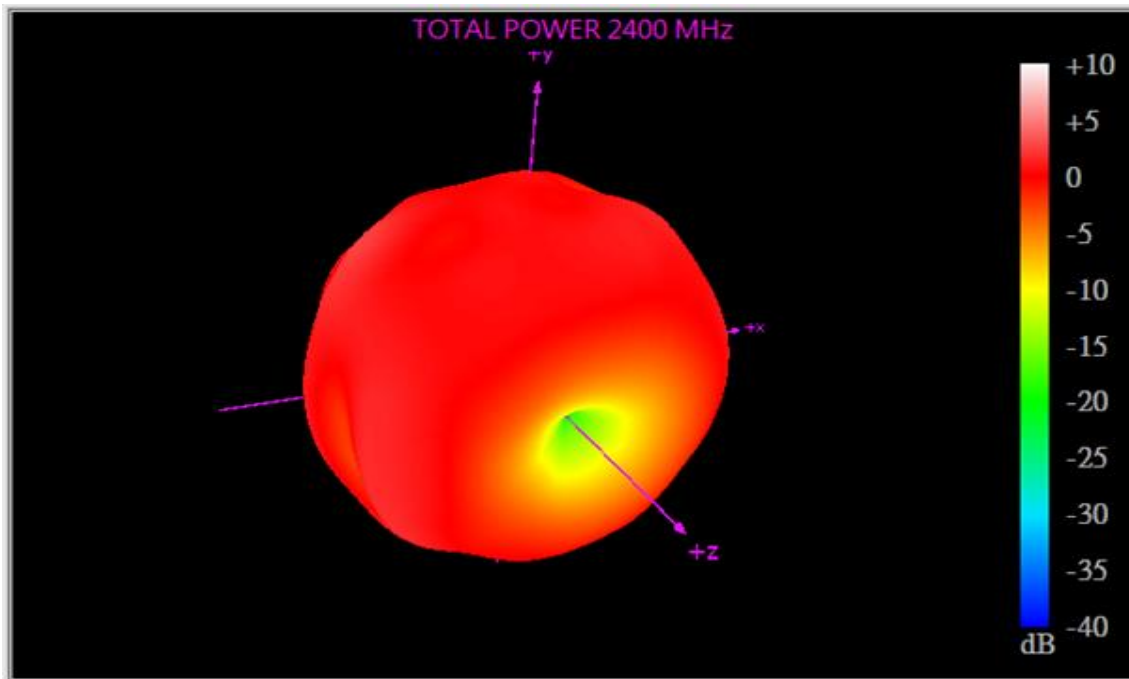

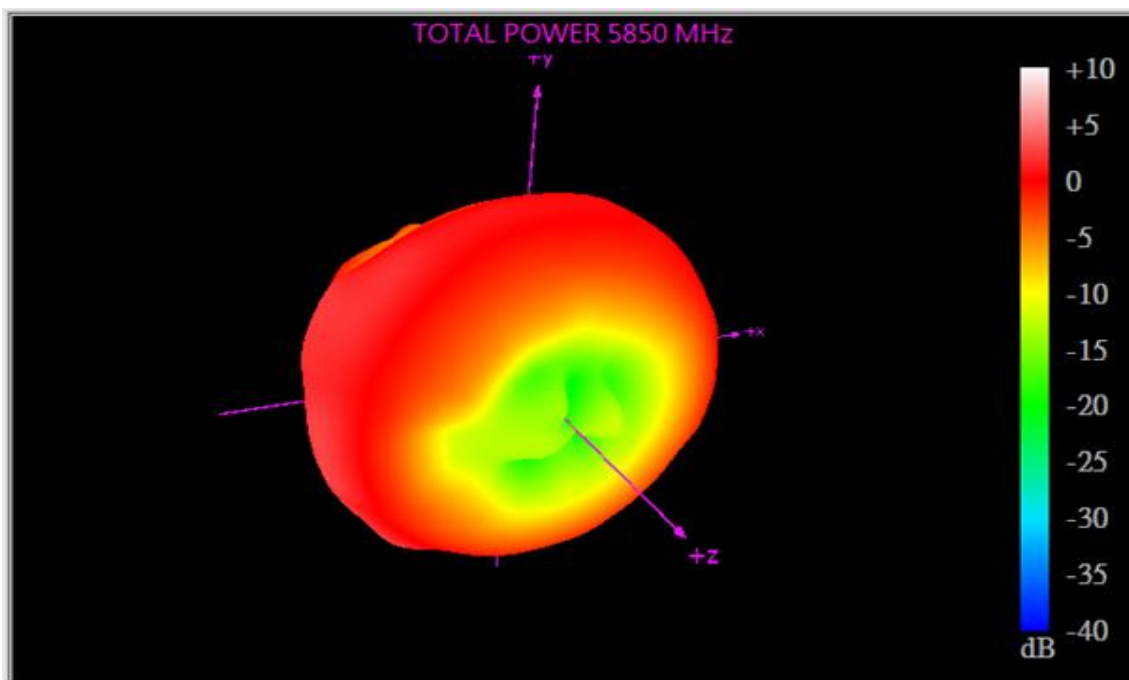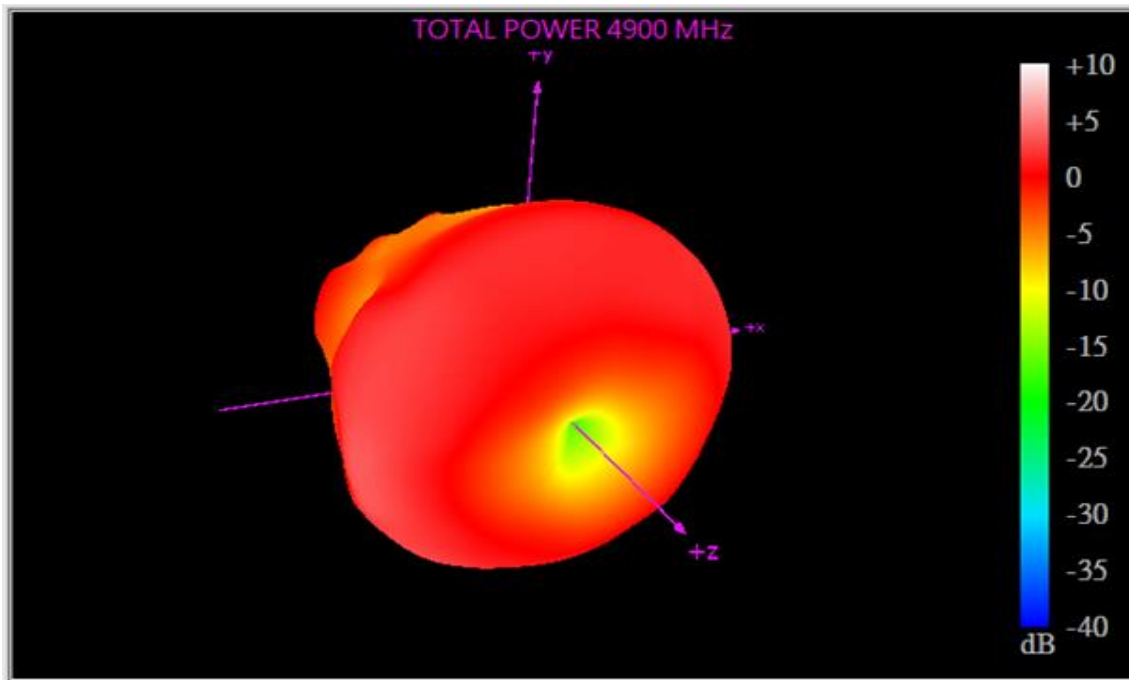


4.2.4 3D Radiation Pattern – with Ground

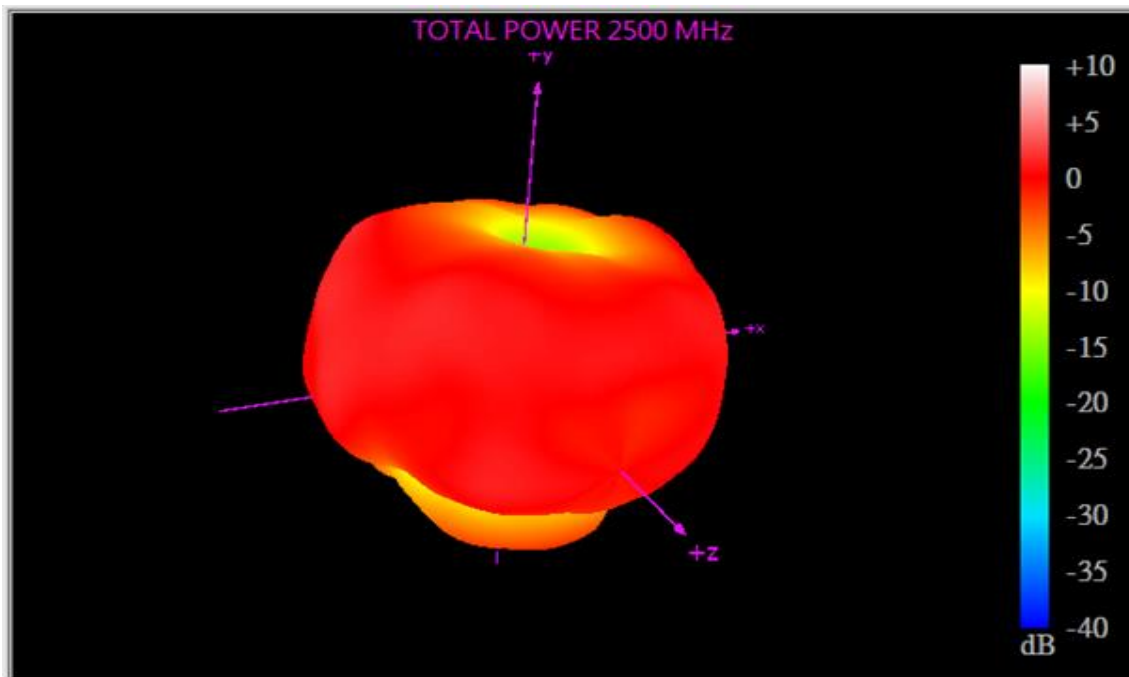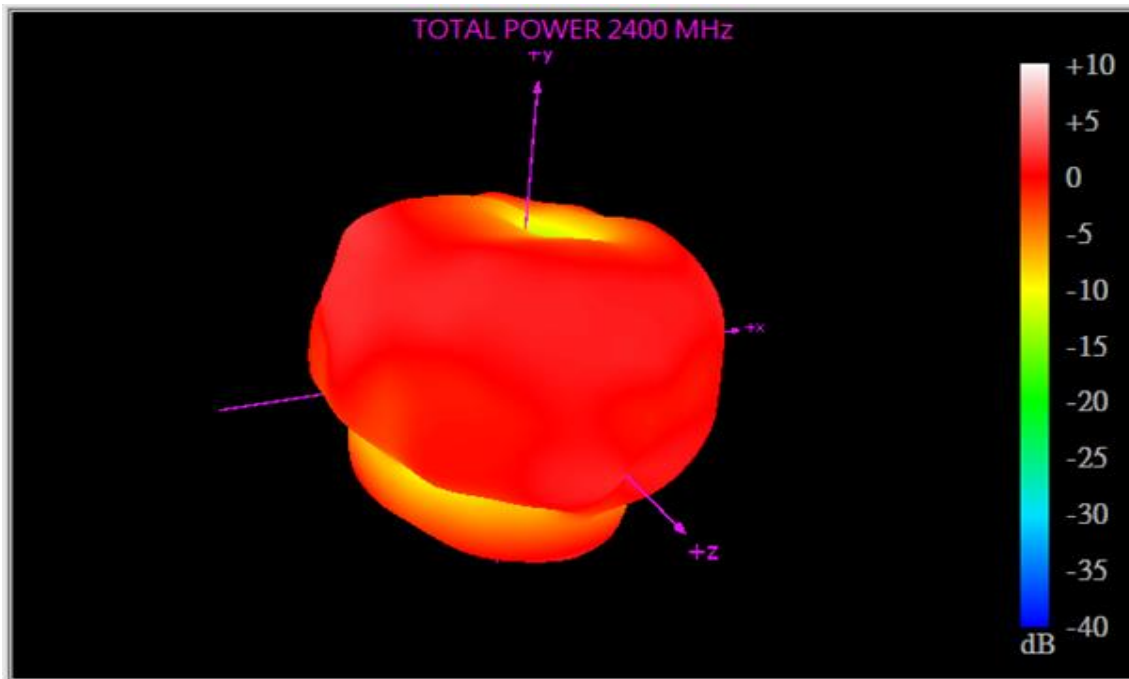

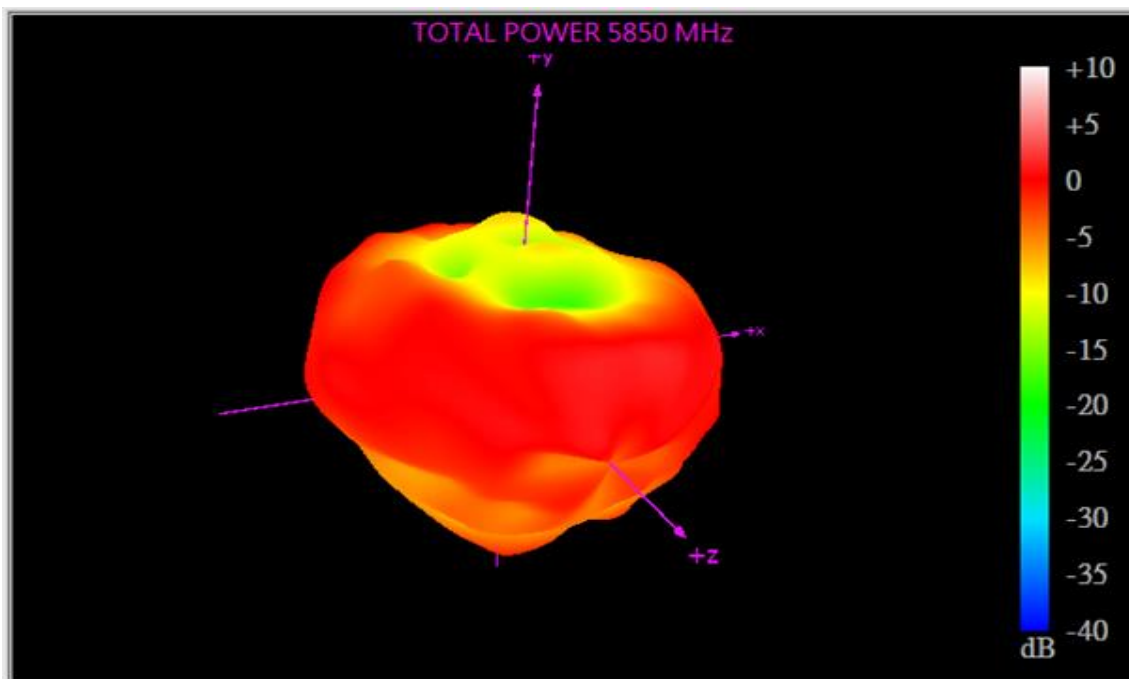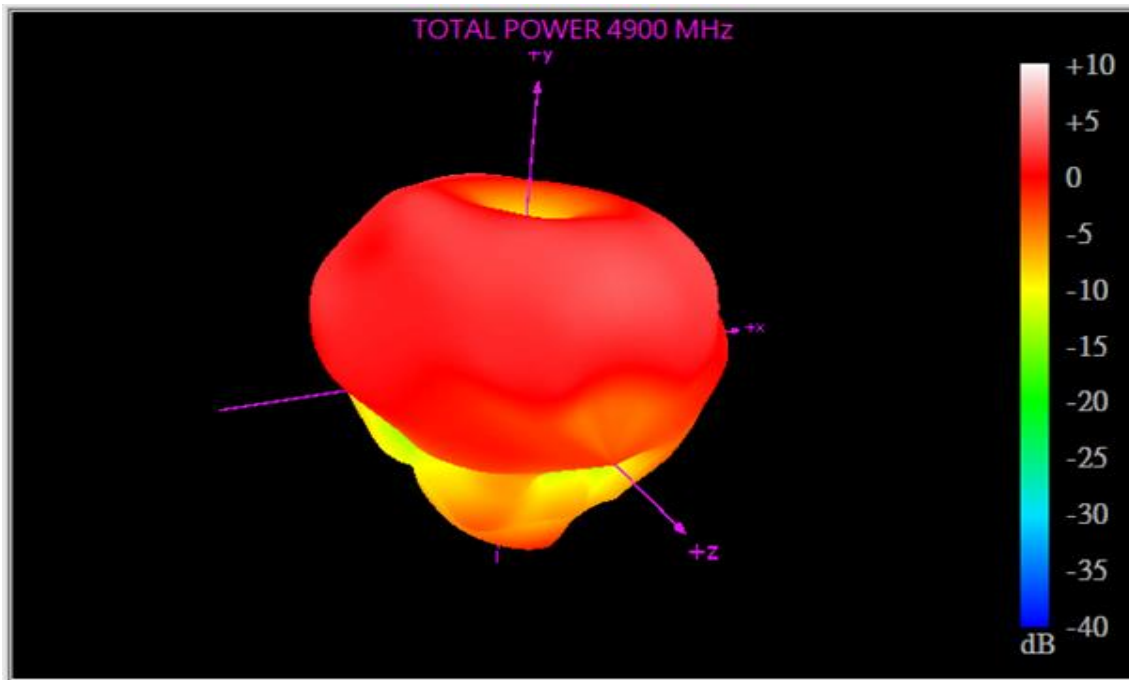


5. Mechanical Drawing (Unit: mm)

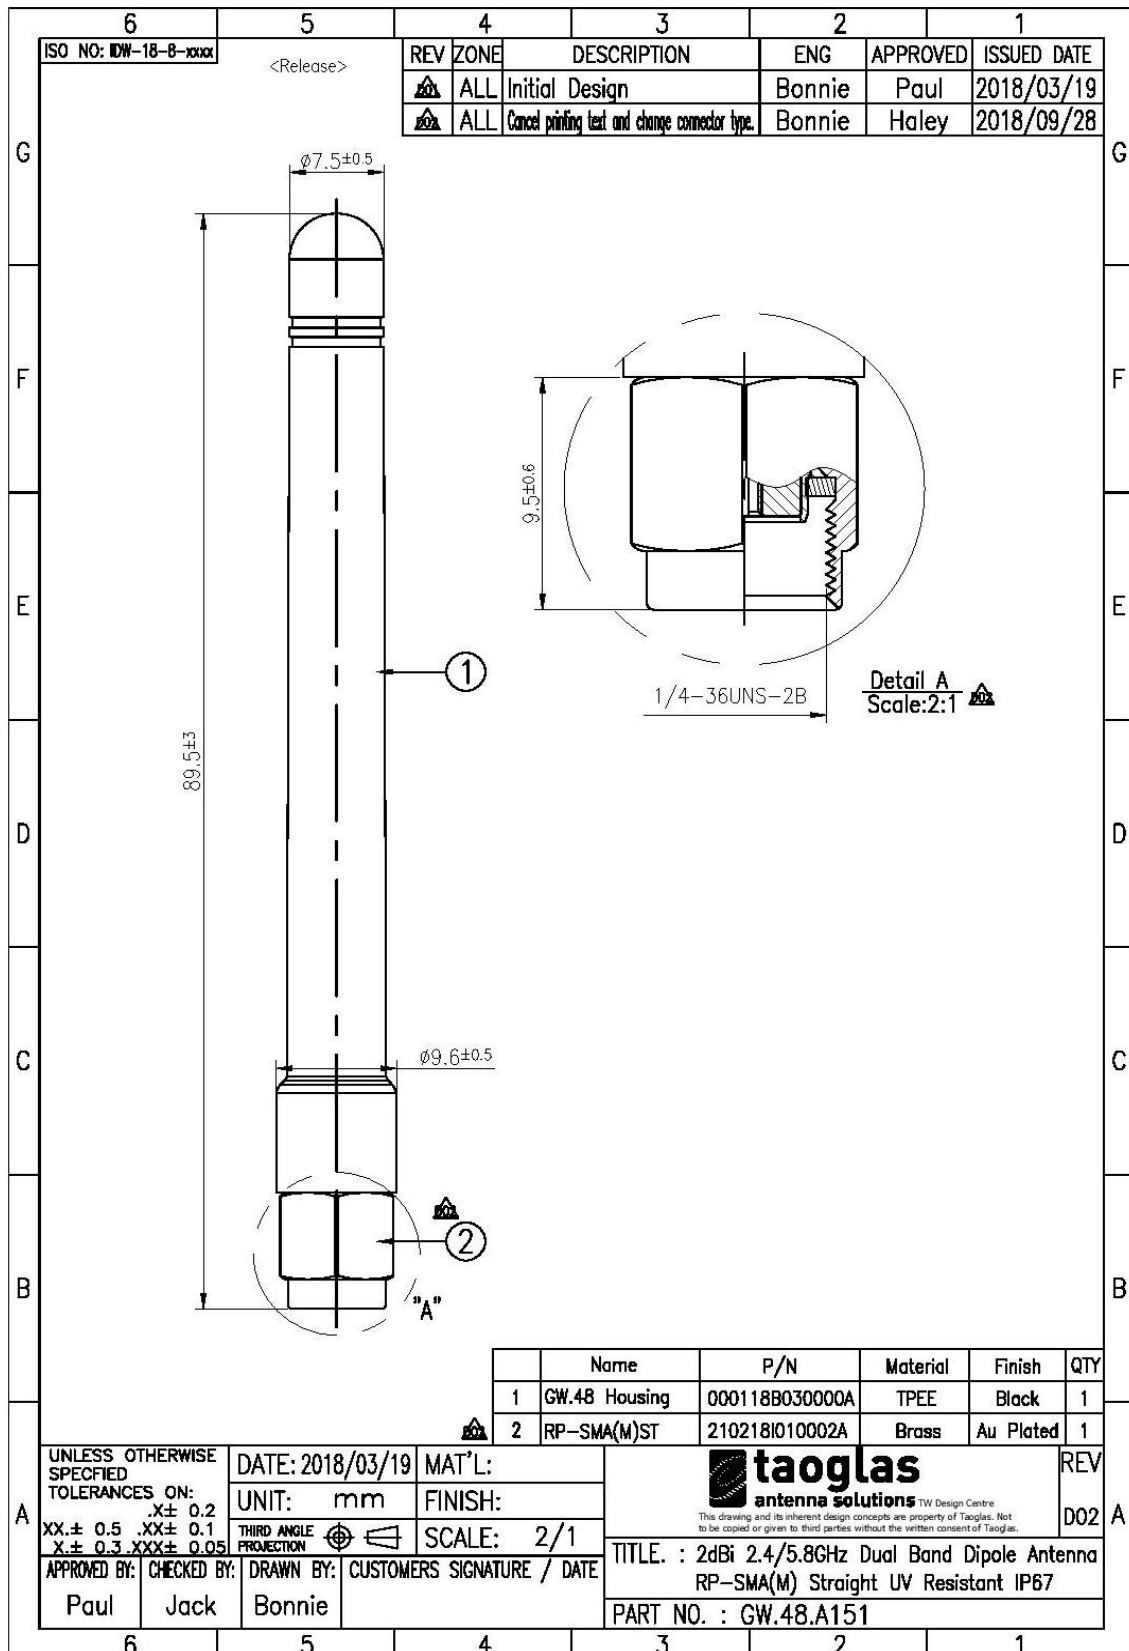


6. Packaging


10 pcs GW.48 per PE Bag
 Bag Dimensions - 100 x 200 mm
 Weight - 86g

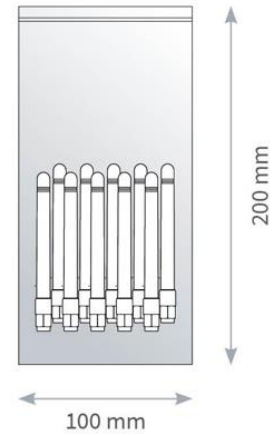

10 Small PE Bag per Large Bag
 100 pcs GW.48 per PE Large Bag
 Bag Dimensions - 300 x 180mm
 Weight - 865g

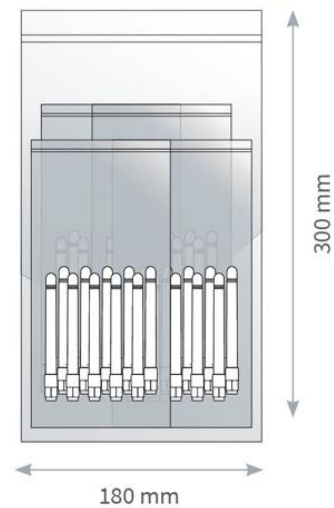

1000 pcs GW.48 per carton
 Carton - 360 x 310 x 160mm
 Weight - 9.6Kg

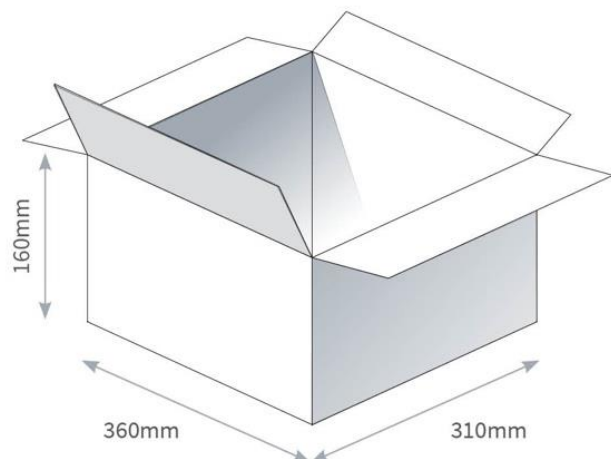

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

© Taoglas

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9