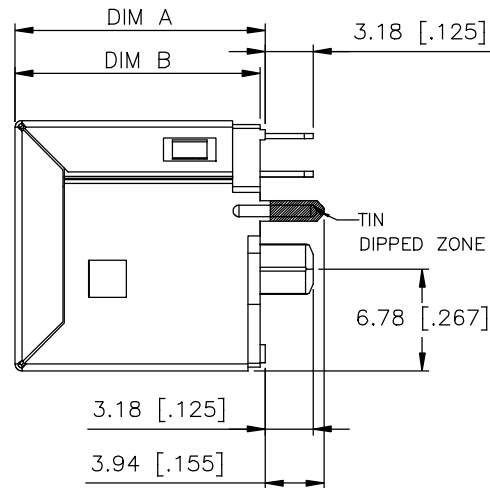
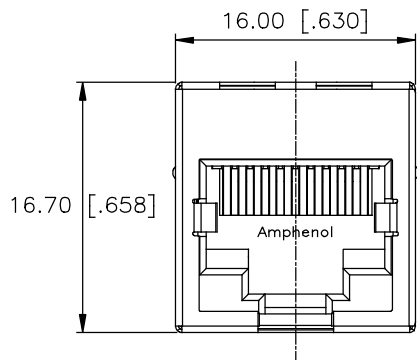


1. MATERIALS:
PLASTIC HOUSING: THERMOPLASTIC PER MATERIAL OPTION IN PART NO.
FLAMMABILITY RATING UL 94V-0
COLOUR: BLACK

CONTACTS: PHOSPHOR BRONZE
PLATING: REFER TO PART NO. FOR GOLD THICKNESS
ON MATING SURFACES.
50 μ " [1.27 MICRONS]
MIN. NICKEL UNDERPLATE
100 μ " [2.54 MICRONS]
MIN. MATTE TIN ON CONTACT TAILS.

SHIELD: STAINLESS STEEL WITH TIN DIPPED PCB TAILS.

AMPHENOL PART NUMBER: RJE74-1XX-1X10-X

NUMBER OF POSITION

8= 8 POSITION
A= 10 POSITION

NUMBER OF CONTACT

4= 4 CONTACT
6= 6 CONTACT
8= 8 CONTACT
A= 10 CONTACT

SHIELD OPTION
1= FULL SHIELD


BLANK= PBT, TRAY PACKAGING,
W/O MYLAR

A= HIGH TEMP. MATERIAL,
TRAY PACKAGING, W/O MYLAR

H= HIGH TEMP. MATERIAL
TAPE/REEL PACKAGING, WITH MYLAR
F= HIGH TEMP. MATERIAL, HALOGEN FREE
TRAY PACKAGING, W/O MYLAR

GOLD PLATING

1 = 6 μ " 3 = 30 μ "
2 = 15 μ " 4 = 50 μ "

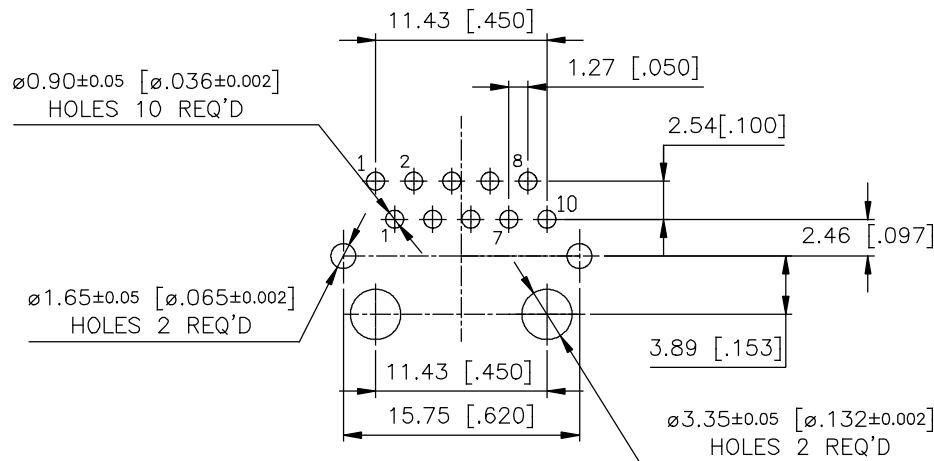

RECOMMENDED P.C.B LAYOUT
(COMPONENT SIDE OF BOARD
TOLERANCES: +/- 0.05[.002],
BASED ON PRODUCT WITH
SHIELD)

LOCATE HOLES
[0.13[0.005]
POSITION DIMENSIONS
ARE BASIC







PART NUMBER	DIM A	DIM B	MYLAR OPTIONS
RJE74-1XX-1X10	16.61[.654]	16.26[.640]	WITHOUT MYLAR
RJE74-1XX-1X10-A	16.61[.654]	16.26[.640]	WITHOUT MYLAR
RJE74-1XX-1X10-H	16.7[.657]	16.35[.644]	WITH MYLAR
RJE74-1XX-1X10-F	16.61[.654]	16.26[.640]	WITHOUT MYLAR

UNLESS SPECIFIED OTHERWISE	DRAWN	G.HSIA	MAR 15/12
PRIMARY UNITS MILLIMETERS	CHECKED		
SECONDARY INCHES	M.E. APP'D		
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APP'D	L.CHAN	MAR 15/12
1 DECIMAL PLACE ±0.38	ENG. REL. NO.		
2 DECIMAL PLACES ±0.25	REF.		
3 DECIMAL PLACES ±0.15*	THIRD ANGLE PROJECTION		
ANGULAR DEGREES ±1.5*	DO NOT SCALE DRAWING		

Amphenol Canada Corp.	
Commercial Products	
TITLE MODULAR JACK, POSITION & CONTACT OPTION, WITH SHIELD, KAPTON TAPE OPTION, -RoHS COMPLIANT	
DWG NO.	P-RJE74-1XX-1X11-X
REV	F
CODE ID NO. 03554	DWG SIZE: C
SCALE: N/A	SHEET 1 OF 2

REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	MAR 14/12	A.G
B	REMOVE KEY FEATURE PER P/N.	SEP 29/12	L.CHAN
C	SPECIFIC THE SHIELDED DRAWING.	APR 10/14	L.CHAN
D	FIX THE ERROR PER ECN 160898	JAN 03/17	L.CHAN
E	ADD HALOGEN FREE OPTIONS	JUL 02/18	L.CHAN
F	UPDATE HALOGEN FREE OPTIONS	JUL 25/18	L.CHAN

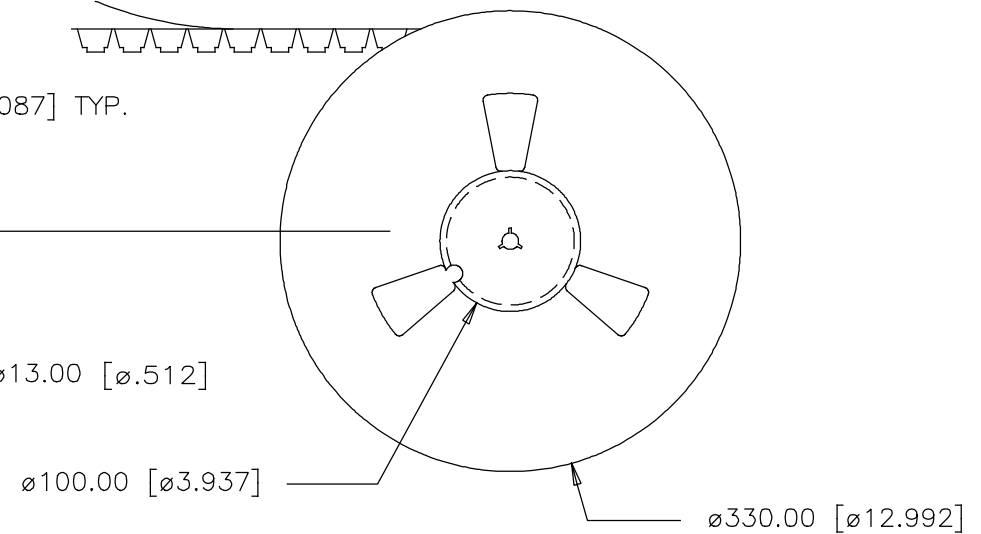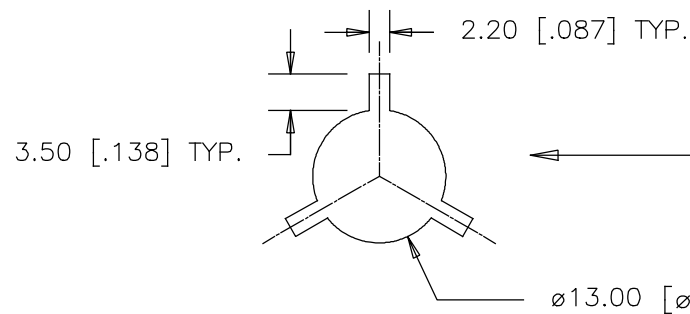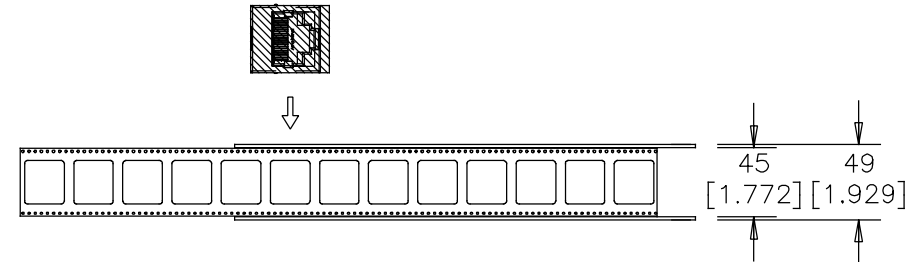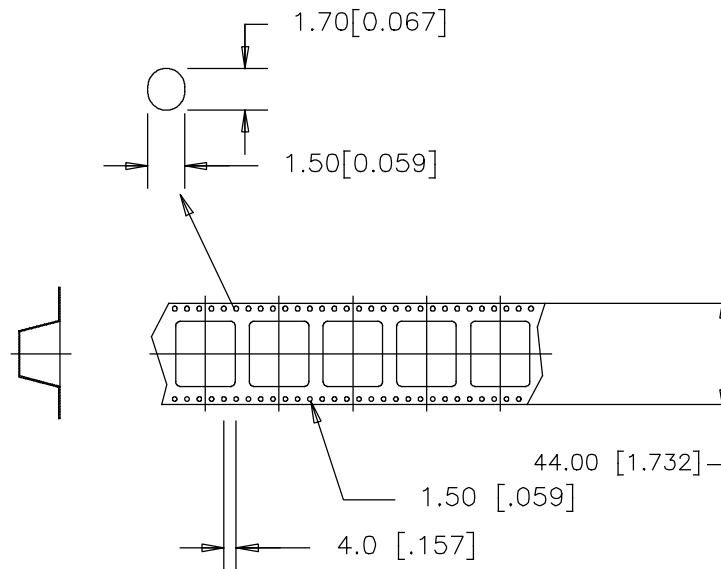

PACKAGING NOTES:

1. ONE REEL SHOULD HOLD 85 CONNECTORS.
2. 10 EMPTY CAVITIES FOR BOTH TOP AND BOTTOM OF THE CARRIER.
3. A FULLY LOADED CARTON SHOULD CONTAIN 5 REELS (425 PCS) OF CONNECTOR.

UNLESS SPECIFIED OTHERWISE		DRAWN		G.HSIA		MAR 15/12		Amphenol Canada Corp.				
PRIMARY UNITS MILLIMETERS		CHECKED						Commercial Products				
SECONDARY UNITS INCHES		M.E. APP'D						TITLE				
REFERENCE IN PARENTHESES		Q.A. APP'D						MODULAR JACK, POSITION & CONTACT OPTION, WITH SHIELD, KAPTON TAPE OPTION, —RoHS COMPLIANT				
GENERAL TOLERANCES		DWG APP'D		L.CHAN		MAR 15/12						
1 DECIMAL PLACE ±0.38		ENG. REL. NO.										
2 DECIMAL PLACES ±0.25		REF.										
3 DECIMAL PLACES		THIRD ANGLE PROJECTION				DO NOT SCALE DRAWING		DWG NO.		P-RJE74-1XX-1X11-X		REV F
ANGULAR DEGREES ±1.5°								CODE ID NO. 03554		DWG SIZE: C	SCALE: N/A	SHEET 2 OF 2

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9