

μCom-10Gb +

Harsh Environment 10Gb
Ethernet Micro Connectors



μCom-Series is a new range of connectors designed to address the latest trends of the industry : **miniaturization** and **high speed**, with the highest resistance for use in the **harshest environments**.

μCom-10Gb + is the first product of this new range.

MAIN FEATURES

- 10Gb+ exceeds 10Gb/s Ethernet following IEEE 802.3an-2006 : **10GBase-T**
- Cat.6A connector according to TIA568C.2 and ISO/IEC11801 standard
- Environmental testing based on **MIL-DTL-38999 series III** military specifications (Thread version)
- Environmental testing based on **MIL-DTL-26482** military specifications (Push Pull version)
- Miniature : **15 mm(.59") max** external diameter
- Receptacle and in-line receptacle compatible with both thread and Push Pull plugs

FEATURES AND BENEFITS


- 4 pairs totally insulated throughout the connector
 - ➔ minimum cross-talk between the four pairs
- Patent pending special interfacial shapes
 - ➔ minimum perturbation at the interface of each pair
- Thread coupling mechanism
 - ➔ 2000 mating cycles & high vibration resistance
- Machined Brass shells
 - ➔ Plating available:
 - Olive Drab Cadmium → not ROHS compliant
 - Black Nickel, and unplated brass → ROHS compliant
 - ➔ shell to shell continuity and 500h salt spray resistance
- Machined & gold plated Solder and Crimp contacts
 - ➔ design & performance according to the innercontact of M39029/77-429#16 M39029/76-425#16 38999 contact
- Solder contact : max AWG24
- Crimp contact : AWG 24 to 26
- IP68 sealing mated and unmated for PCB receptacles
- 1500 Vrms Dielectric Withstanding voltage
- Temperature range : - 55°C / + 125°C

MARKETS & APPLICATIONS

- **DEFENSE** : C4ISR, Battlefield Communications, Shipboard, Ground Vehicles Vetronics.
- **AERONAUTICAL** : In Flight Entertainment, Avionics, Communication Systems.
- **RAIL MASS TRANSIT** : Passenger Information Systems, Communication Systems.



TRANSMISSION DATA




Insertion loss



← Amphenol performance

← IEEE 802.3an Standard requirement


Next 1-2

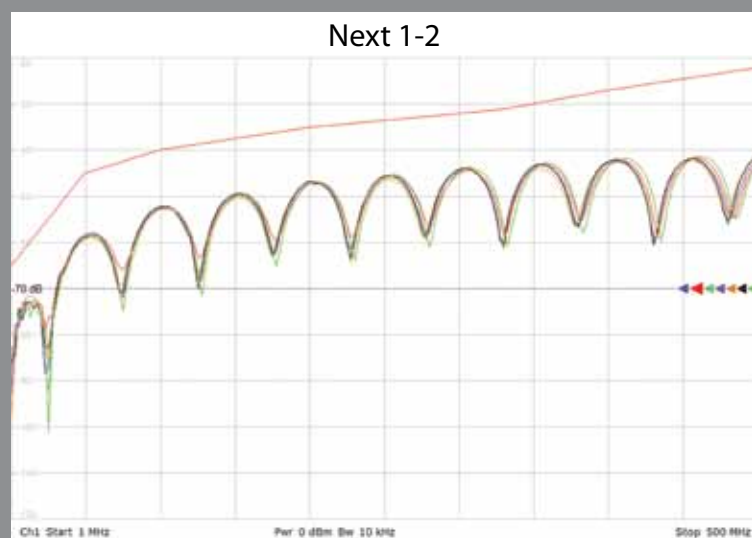

← IEEE 802.3an Standard requirement

← Amphenol performance

Return loss

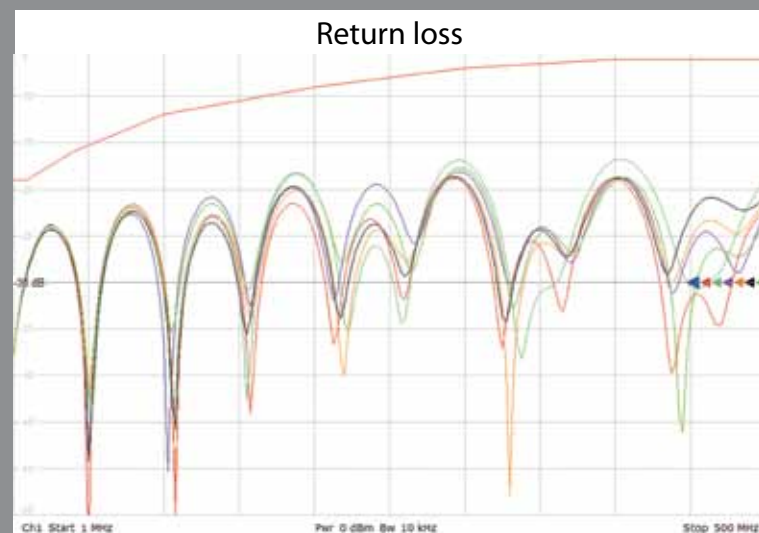

← IEEE 802.3an Standard requirement

← Amphenol performance

FEMALE RECEPTACLES






Female receptacle for printed circuit board

Compatible with both thread & push pull plugs

Part number: **UCOM-10G+ R P x**

x: see the 'How to order' below to complete your part number

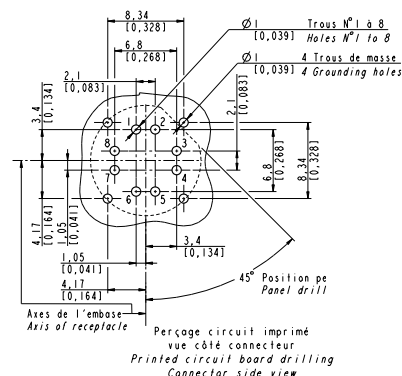

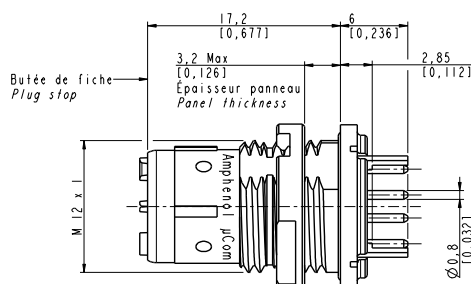


Panel mount female receptacle with metallic band backshell

Compatible with both thread & push pull plugs

Part number: UCOM-10G+ R x x

x: see the 'How to order' below to complete your part number

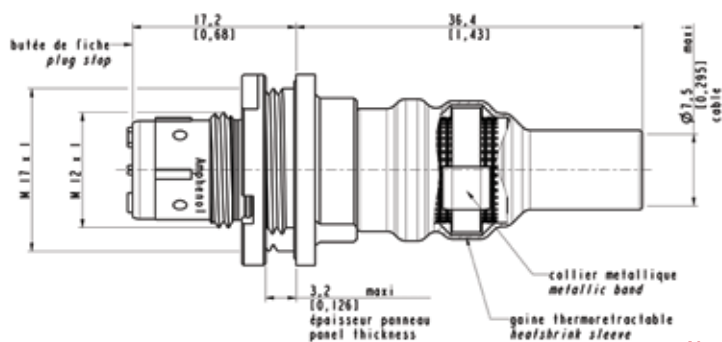

Nota: metallic band and heatshrink sleeve are provided with the connector

HOW TO ORDER Female receptacles

UCOM - 10G+ **P**

Shell

R: receptacle (push pull or thread)

Contacts termination

P: PCB

S: solder

C: crimp

Shell plating

B: black nickel

G: olive drab cadmium

U: unplated brass

NOTA:

- **UCOM** for order designation
- **μCom** for marking on connectors



MALE PLUGS



Plug with cable gland backshell


Part number: UCOM-10G+ P T x x G x

x: see the 'How to order' below to complete your part number

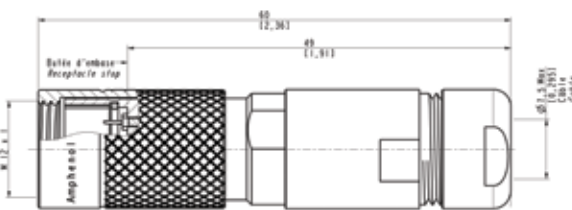

Part number: UCOM-10G+ P P x x G x


x: see the 'How to order' below to complete your part number

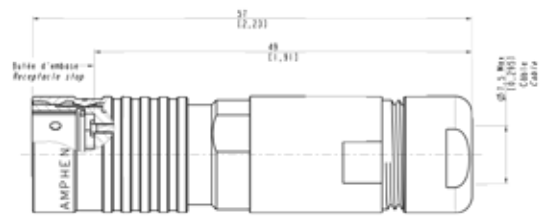

Plug with metallic band backshell


Part number: UCOM-10G+ P T x x B

x: see the 'How to order' below to complete your part number

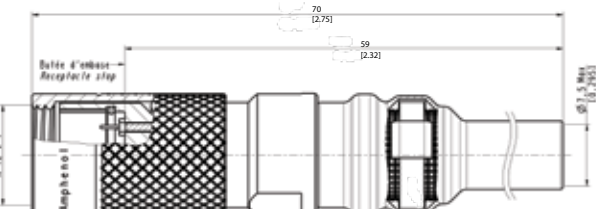

Part number: UCOM-10G+ P P x x B

x: see the 'How to order' below to complete your part number

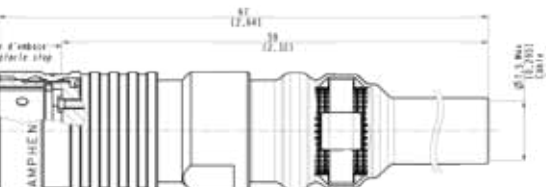

Nota: Metallic band and heatshrink sleeve are provided with the connector

HOW TO ORDER Male plugs

UCOM - 10G+ P T C B G A

Shell
P: plug

Mating (for plugs only)
T: thread
P: push-pull

Contacts termination
C: crimp
S: solder

Shell plating
B: black nickel
G: olive drab cadmium
U: unplated brass

Backshell type
G: gland
B: band

Cable diameter (for gland backshell only)
A: for cable diam 7.5mm
B: to be defined

NOTA:

- UCOM for order designation
- μCom for marking on connectors

FEMALE IN-LINE RECEPTACLES





Female in-line receptacle with cable gland backshell

Compatible with both thread & push pull plugs

Part number: UCOM-10G+ L x x G x

x: see the 'How to order' below to complete your part number


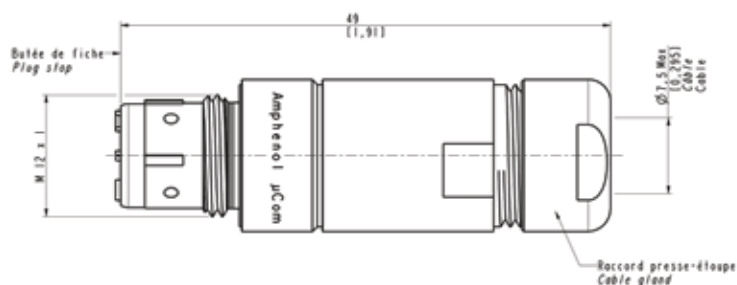


Female in-line receptacle with metallic band backshell

Compatible with both thread & push pull plugs

Part number: UCOM-10G+ L x x B

x: see the 'How to order' below to complete your part number

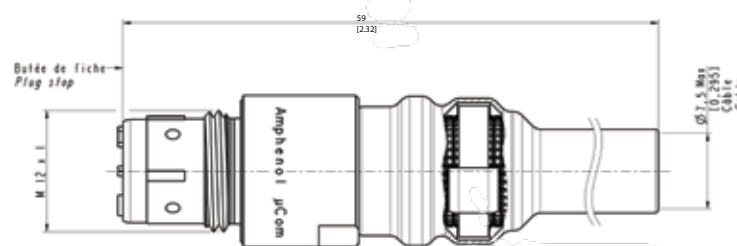

Nota: Metallic band and heatshrink sleeve are provided with the connector

HOW TO ORDER Female in-line receptacles

UCOM - 10G+ L S B G A

Shell

L: in line receptacle (push pull or thread)

Contacts termination

C: crimp

S: solder

Shell plating

B: black nickel

G: olive drab cadmium

U: unplated brass

Backshell type

G: gland

B: band

Cable diameter (for gland backshell only)

A: for cable diam 7.5mm

B: to be defined

NOTA:

- UCOM for order designation
- μCom for marking on connectors

CORDSETS




μCom plug - μCom plug cordset

Part number:

UCOM-10G+ C x x x xxx

x: see the 'How to order' on the next page to complete your part number

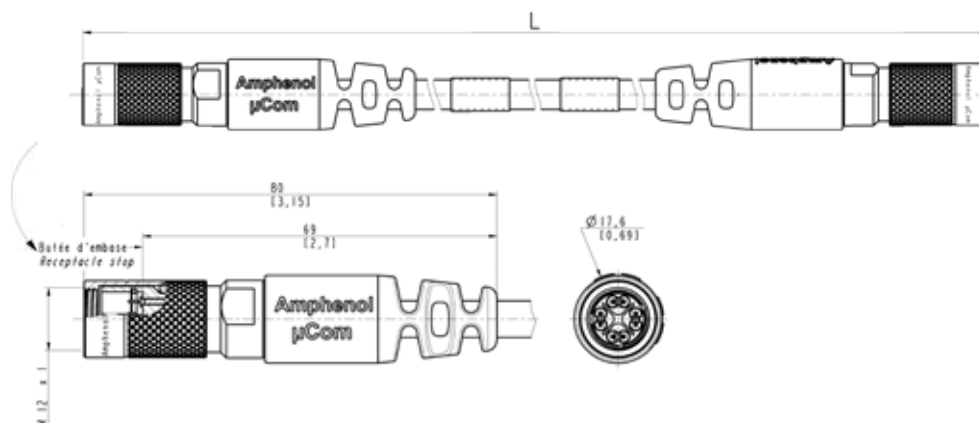


μCom plug - RJ45 Cat6A plug cordset

Part number:

UCOM-10G+ D x x x xxx

x: see the 'How to order' on the next page to complete your part number

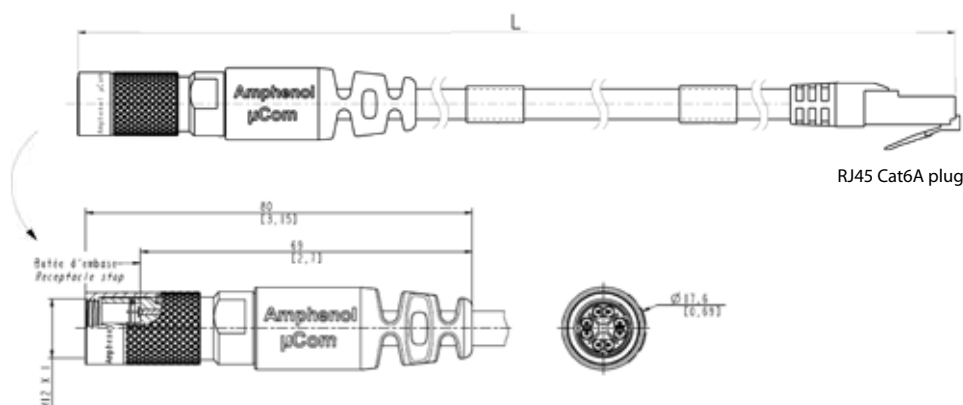


μCom panel mount receptacle - RJ45 Cat6A plug

Part number:

UCOM-10G+ E x x x xxx

x: see the 'How to order' on the next page to complete your part number

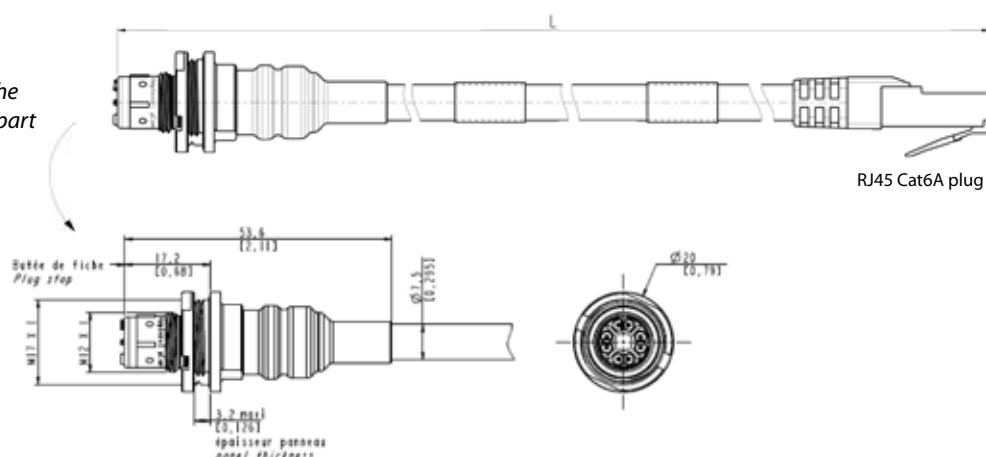


μCom plug - μCom inline receptacle

Part number:

UCOM-10G+ F x x x xxx

x: see the 'How to order' below
to complete your part number

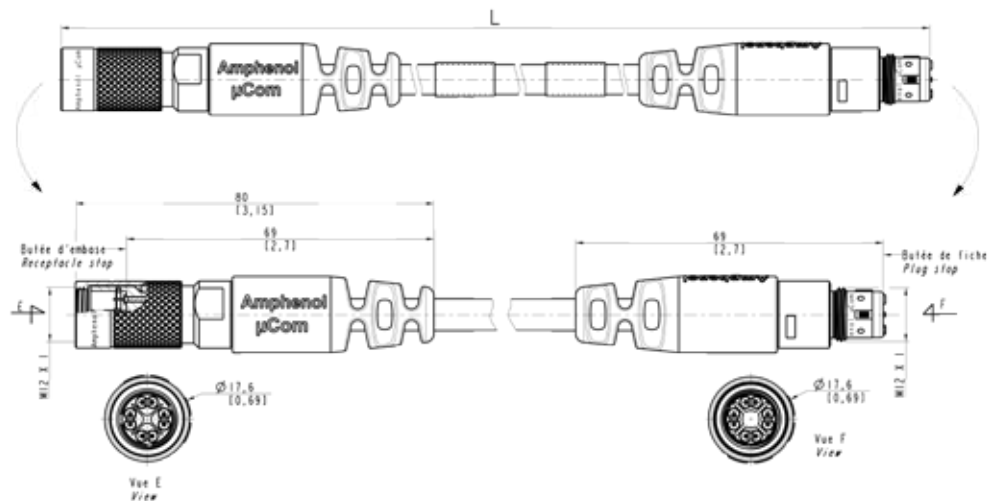

Type of cable used: CAT 7 HFFR - According to EN 50288-4-2



- Stranded bare copper wire (26 AWG)
- 4 screened twisted pairs: 2 wires twisted to a pair, Alulami-nate foil overlapped
- Shield braiding of tinned copper wires, about 80% coverage
- Strain member of Kevlar
- Jacket in black Polyurethane (PUR), glossy finish, acc to DIN VDE 0282
- External diameter 7.0 +/-0.3 mm
- UV & Hydrolysis resistant, Halogen free, RoHS compliant
- Max Pull force: 800 N, Weight : about 54 kg/km
- Temperature : - 40°C / + 85°C
- Min. bending radius allowed: repeated 8 x Ø, single 4 x Ø

HOW TO ORDER Cordsets

UCOM - 10G+ C T C B 015

Shell

C: μCom plug - μCom plug cordset
D: μCom plug - RJ45 Cat6A plug cordset
E: μCom panel mount receptacle - RJ45 Cat6A plug cordset
F: μCom plug - μCom inline receptacle cordset
Open versions:
G: μCom plug - no connector at the end
H: μCom panel mount receptacle - no connector at the end
J: μCom inline receptacle - no connector at the end

Mating (for plugs only)

T: thread

Contacts termination

C: crimp
S: solder

Shell plating

B: black nickel
G: olive drab cadmium
U: unplated brass

Total length - For other lengths, please consult us.

002: 20 cm [7.87]
005: 50 cm [19.68]
010: 1.0 m [39.37]
015: 1.5 m [59.05]
020: 2.0 m [78.74]
050: 5.0 m [196.85]
100: 10.0 m [393.70]

NOTA:

- UCOM for order designation
- μCom for marking on connectors

ACCESSORIES

CAPS for receptacles


IP68 metallic cap

X to be replaced by

B for Black nickel plating

G for Olive drab cadmium plating

U for Unplated brass

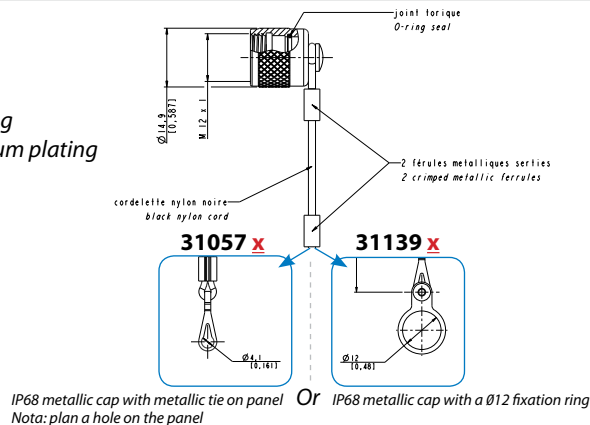

IP68 neoprene cap - Part number: **31091**

Nota: plan a type M3 hole on the panel



CAPS for plugs

Cap in neoprene

Part number: **31092**



CAPS for in line receptacles


Cap in neoprene

Part number: **31093**



Dummy female receptacle

Part number: **31131 X**



X to be replaced by

B for Black nickel plating

G for Olive drab cadmium plating

U for Unplated brass

TOOLS



- Nut clamping tool for receptacle
Part number: **31055**
Only for RPx receptacles



- Insertion tool for crimp contacts
Part number: **31056**



- Contact positioner for M22520/2-01 crimping tool
Part number: **31095**

Other tools:

- Brazing tool for receptacle & in-line receptacle
Part number: **31132**
- Brazing tool for plug
Part number: **31133**

Nota: the assembling instructions are available upon demand (ref. N00-040190-00).

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9