

# TDM / TDMH / TDML SERIES

## Delay-on-Make Timer



\*8-pin models UL listed when used in combination with P1011-6 socket only.



8-PIN

### Description


The TDM/TDMH/TDML Series is a delay-on-make timer that combines accurate digital circuitry with isolated, DPDT relay contacts in an industry standard 8-pin plug-in package. DIP switch adjustment allows precise selection of the time delay over the full time delay range. The TDM/TDMH/TDML Series is the product of choice for custom control panel and OEM designers.

### Operation (Delay-on-Make)

Upon application of input voltage, the time delay begins. The output is de-energized before and during the time delay. At the end of the time delay, the output relay energizes and remains energized until input voltage is removed.

**Reset:** Removing input voltage resets the time delay and output.

### Wiring Diagram



Relay contacts are isolated.

### Features & Benefits

FEATURES	BENEFITS
<b>Wide delay range (0.1s to 2.8h)</b>	User selectable via DIP switches for fine tuning to individual applications.
<b>Microcontroller based</b>	Repeat Accuracy +/- 0.1%
<b>Dip switch adjustment</b>	Provides first time setting accuracy of +/-2%
<b>Setting accuracy +/-2%</b>	Provides flexibility for use in most applications
<b>LED indication</b>	Provides visual indication of time delay status
<b>Isolated 10A, DPDT output contacts</b>	Allows control of loads for AC or DC voltages

### Accessories



#### BZ1 Front Panel Mount Kit

Provides an easy method of through-the-panel mounting of 8- or 11-pin plug-in timers, flashers, and other controls.



#### NDS-8 Octal 8-pin Socket

8-pin 35mm DIN rail or surface mount. Surface mounted with two #6 screws or snaps onto a 35 mm DIN rail. Uses PSC8 hold-down clips.



#### PSC8 or PSC11 Hold-down Clips

Securely mounts plug-in controls in any position. Provides protection against vibration. Use PSC8 with NDS-8 Octal Socket or PSC11 with NDS-11 Socket. Sold in sets of two.



#### P1011-6 Octal Socket for UL listing\*

8-pin surface mount socket with binder head screw terminals. Rated 10A @ 600VAC.



#### C103PM (AL) DIN Rail

35 mm aluminum DIN rail available in a 36 in. (91.4 cm) length.

### Ordering Information

MODEL	INPUT VOLTAGE	DELAY RANGE
TDM120AL	120VAC	1 - 1023s in 1s increments
TDM12DL	12VDC	1 - 1023s in 1s increments
TDM230AL	230VAC	1 - 1023s in 1s increments
TDM24AL	24VAC	1 - 1023s in 1s increments
TDM24DL	24VDC/28VDC	1 - 1023s in 1s increments
TDMH120AL	120VAC	10 - 10230s in 10s increments
TDMH24AL	24VAC	10 - 10230s in 10s increments
TDML110DL	110VDC	0.1 - 102.3s in 0.1s increments
TDML120AL	120VAC	0.1 - 102.3s in 0.1s increments
TDML12DL	12VDC	0.1 - 102.3s in 0.1s increments
TDML24DL	24VDC/28VDC	0.1 - 102.3s in 0.1s increments

If you don't find the part you need, call us for a custom product 800-843-8848

# TDM / TDMH / TDML SERIES

## Specifications

### Time Delay

<b>Type</b>	Digital integrated circuitry
<b>Range*</b>	0.1 - 102.3s in 0.1s increments 1 - 1023s in 1s increments 10 - 10,230s in 10s increments
<b>Repeat Accuracy</b>	±0.1% or 20ms, whichever is greater
<b>Setting Accuracy</b>	±2% or 50ms, whichever is greater
<b>Reset Time</b>	≤ 50ms
<b>Recycle Time</b>	During Timing - TDMH: ≤ 500ms TDM, TDML: ≤ 300ms

### Time Delay vs. Temperature & Voltage

<b>Indicator</b>	±2% LED glows during timing; relay is de-energized
------------------	---

### Input

<b>Voltage</b>	12, 24, or 110 VDC; 24, 120, or 230VAC
----------------	--

### Tolerance

<b>12VDC &amp; 24VDC/AC</b>	-15% - 20%
-----------------------------	------------

<b>110VAC/DC to 230VAC</b>	-20% - 10%
----------------------------	------------

<b>AC Line Frequency</b>	50/60 Hz
--------------------------	----------

<b>Power Consumption</b>	≤ 2.25W
--------------------------	---------

### Output

<b>Type</b>	Electromechanical relay
-------------	-------------------------

<b>Form</b>	DPDT
-------------	------

<b>Rating</b>	10A resistive @ 120/240VAC & 28VDC; 1/3 hp @ 120/240VAC
---------------	--

<b>Life</b>	Mechanical - 1 x 10 <sup>7</sup> ; Electrical - 1 x 10 <sup>6</sup>
-------------	---

<b>Protection</b>	DC units are reverse polarity protected
-------------------	---

<b>Isolation Voltage</b>	≥ 1500V RMS input to output
--------------------------	-----------------------------

<b>Mechanical</b>	Plug-in socket
-------------------	----------------

<b>Mounting</b>	<b>H</b> 81.3 mm (3.2"); <b>W</b> 60.7 mm (2.39");
-----------------	--

<b>Dimensions</b>	<b>D</b> 45.2 mm (1.78")
-------------------	--------------------------

<b>Termination</b>	Octal 8-pin plug-in
--------------------	---------------------

<b>Environmental</b>	-20° to 65°C / -30° to 85°C
----------------------	-----------------------------

<b>Operating/Storage</b>	Temperature
--------------------------	-------------

<b>Weight</b>	≈ 6 oz (170 g)
---------------	----------------


<b>Operating/Storage</b>	Temperature
--------------------------	-------------

<b>Weight</b>	≈ 6 oz (170 g)
---------------	----------------


<b>Operating/Storage</b>	Temperature
--------------------------	-------------

<b>Weight</b>	≈ 6 oz (170 g)
---------------	----------------

## Binary Switch Operation

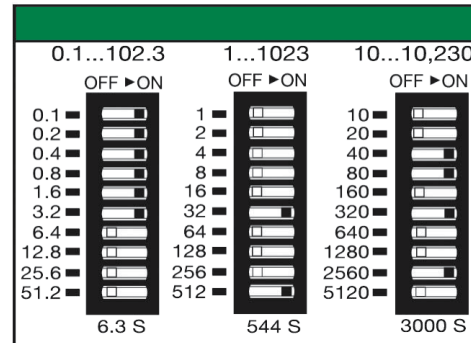

## Function Diagram

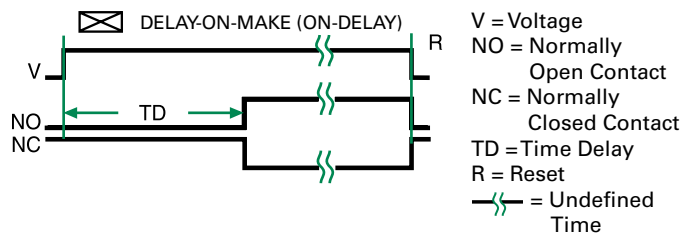

\*For CE approved applications, power must be removed from the unit when a switch position is changed.

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9