

Helping Customers Innovate, Improve & Grow




VT-803

## Description

Vectron's VT-803 Temperature Compensated Crystal Oscillator (TCXO) is a quartz stabilized, clipped sine wave or CMOS output, 5th order analog temperature compensated oscillator, operating off a 2.8 to 5.0 volt supply in a hermetically sealed 3.2x5 mm ceramic package.


## Features

- Clipped Sine Wave or CMOS Output
- 10.000-52.000 MHz Output
- $\pm 100$  ppb Temperature Stability
- Optional Enable/Disable Function
- Optional VCXO
- Fundamental Crystal Design
- Gold over nickel contact pads
- Hermetically Sealed Ceramic SMD package
- Product is compliant to RoHS directive  and fully compatible with lead free assembly

## Applications

- Stratum 3
- SyncE
- 1588
- Femto Cells
- Base Stations
- IP Networking
- GPS
- Point to Point Radio
- Manpack Radio
- Test and Measurement

## Block Diagram

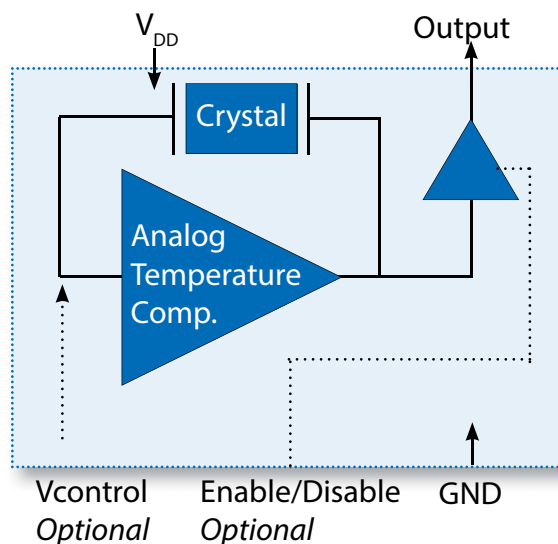


# Specifications

**Table 1. Electrical Performance, Clipped Sine Wave Option**

| Parameter  | Symbol    | Min  | Typ  | Max            | Units      |
|--|-----------|--|------|----------------|------------|
| Output Frequency, <sup>1</sup> <i>Ordering Option</i>                      | $f_o$     | 10   |      | 52             | MHz        |
| Supply Voltage <sup>2</sup> , <i>Ordering Option</i>                       | $V_{DD}$  | +2.8, +3.0, +3.3, +5.0                     |      |                | V          |
| Supply Current, 10-20.000MHz<br>20.001-52.000MHz                           | $I_{DD}$  |  |      | 2.0<br>3.4     | mA         |
| Operating Temperature, <i>Ordering Option</i>                              | $T_{OP}$  | -20/70, -40/85                             |      |                | °C         |
| Stability Over Operating Temperature <sup>3</sup> , <i>Ordering Option</i> |           | $\pm 0.100, \pm 0.200, \pm 0.280, \pm 1.0$ |      |                | ppm        |
| Initial Accuracy, "No Adjust" Option <sup>4</sup>                          |           |  |      | $\pm 1.5$      | ppm        |
| Power Supply Stability, $\pm 5\%$ change                                   |           |  |      | $\pm 0.05$     | ppm        |
| Load Stability, $\pm 10\%$ change  |           |  |      | $\pm 0.05$     | ppm        |
| Aging  |           |  |      | $\pm 0.5$      | ppm 1st yr |
| Stability, temperature and 24 hours <sup>5</sup>                           |           |  |      | $\pm 0.37$     | ppm        |
| Total Stability <sup>5</sup>   |           |  |      | $\pm 4.6$      | ppm        |
| Pull Range, <i>Ordering Option</i>   | PR        | $\pm 5, \pm 10$                            |      |                | ppm        |
| Control Voltage to reach Pull Range  |           | 0.5  |      | 2.5            | V          |
| Control Voltage Impedance  |           | 100  |      |                | Kohm       |
| Output Enable/Disable <sup>6</sup> , <i>Ordering Option</i>                |           |  |      | $0.8 * V_{DD}$ | V          |
| Output Enabled   | $V_{IH}$  |  |      |                | V          |
| Output Disabled (high impedance output)                                    | $V_{IL}$  | $0.2 * V_{DD}$                             |      |                | V          |
| Output Level   | $V_o$ p/p | 0.8  |      |                | V          |
| Output Load  |           |  |      | 10K    10pF    |            |
| Phase Noise, 26.000MHz   | $\phi_N$  |  |      |                | dBc/Hz     |
| 10Hz   |           |  | -91  |                |            |
| 100Hz  |           |  | -117 |                |            |
| 1kHz   |           |  | -136 |                |            |
| 10kHz  |           |  | -150 |                |            |
| 100kHz   |           |  | -158 |                |            |
| Start Up Time  | $t_{SU}$  |  |      | 2              | ms         |

1. The Output is DC coupled.
2. The VT-803 power supply pin should be filtered, eg, a 10uF, 0.1uF and 0.01uf capacitor.
3. Not all stabilities are available over all temperature ranges. Measured at mid Vc for parts with frequency tuning.
4. After 2 IR reflows and 24 hours.
5.  $\pm 100, \pm 200$  and  $\pm 280$  ppb temp stability parts, all inclusive with 10 years aging.
6. Output is Enabled if E/D is left open.

## Outline Drawing

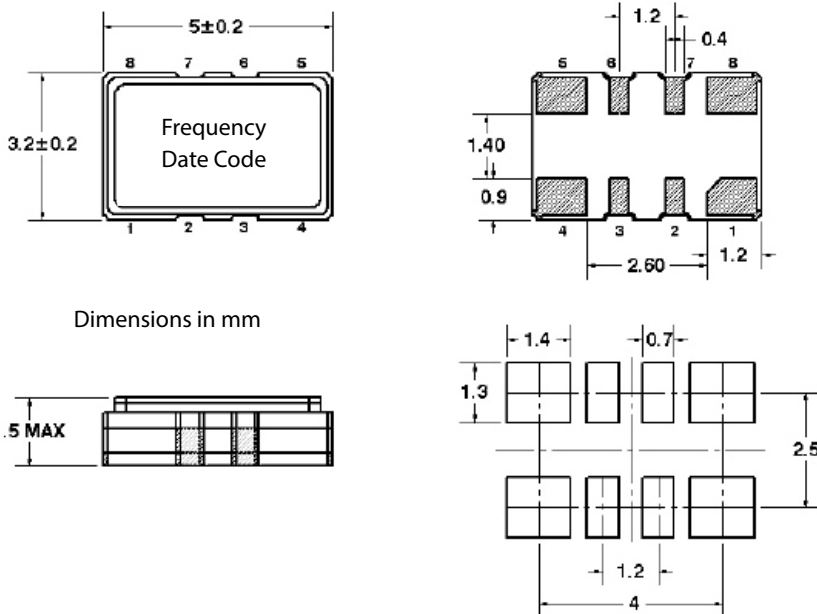

**Table 2. Pinout**

| Pin # | Symbol      | Function                              |
|-------|-------------|---------------------------------------|
| 1     | NC or $V_C$ | No Connection or TCXO Control Voltage |
| 2     | NC          | Make No Connection                    |
| 3     | NC          | Make No Connection                    |
| 4     | GND         | Ground                                |
| 5     | OUT         | Output                                |
| 6     | NC or E/D   | No Connection or Enable/Disable       |
| 7     | NC          | Make No Connection                    |
| 8     | $V_{DD}$    | Supply Voltage                        |

**Table 3. Enable Disable Function (optional)**

| Pin 6 | Pin 5 Output   |
|-------|----------------|
| High  | Clock Output   |
| Open  | Clock Output   |
| Low   | High Impedance |

# Specifications

| Table 4. Electrical Performance, CMOS Option   |                      |                              |                                     |                                  |                    |
|--|----------------------|------------------------------|-------------------------------------|----------------------------------|--------------------|
| Parameter  |                      | Min                          | Typ                                 | Max                              | Units              |
| Output Frequency <sup>1</sup> , <i>Ordering Option</i>   | $f_o$                | 10                           |                                     | 52                               | MHz                |
| Supply Voltage <sup>2</sup> , <i>Ordering Option</i>   | $V_{DD}$             | +2.8, +3.0, +3.3, +5.0       |                                     |                                  | V                  |
| Supply Current, 10-24.999MHz<br>25.000-39.000MHz<br>40.000- 49.999MHz<br>50.000- 52.000MHz   | $I_{DD}$             |                              |                                     | 3.0<br>3.5<br>5.0<br>6.0         | mA                 |
| Operating Temperature, <i>Ordering Option</i>  | $T_{OP}$             | -20/70, -40/85               |                                     |                                  | °C                 |
| Stability Over Operating Temperature <sup>3</sup> , <i>Ordering Option</i>   |                      | ±0.100, ±0.200, ±0.280, ±1.0 |                                     |                                  | ppm                |
| Initial Accuracy, "No Adjust" Option <sup>4</sup>  |                      |                              |                                     | ±1.5                             | ppm                |
| Power Supply Stability, ±5% change<br>10MHz-27MHz, 2.8V, 3.0V, and 3.3V<br>>27MHz-52MHz, 2.8V, 3.0V, and 3.3V<br>10MHz-27MHz, 5V<br>>27MHz-52MHz, 5V |                      | 1                            |                                     | ±0.10<br>±0.20<br>±0.20<br>±0.30 | ppm                |
| Load Stability, ±10% change  |                      |                              |                                     | ±0.10                            | ppm                |
| Aging  |                      |                              |                                     | ±0.5                             | ppm 1st yr         |
| Stability, temperature and 24 hours <sup>5</sup>   |                      |                              |                                     | ±0.37                            | ppm                |
| Total Stability <sup>5</sup>   |                      |                              |                                     | ±4.6                             | ppm                |
| Pull Range, <i>Ordering Option</i>   |                      | ±5, ±10                      |                                     |                                  | ppm                |
| Control Voltage to reach Pull Range  |                      | 0.5                          |                                     | 2.5                              | V                  |
| Control Voltage Impedance  |                      | 100                          |                                     |                                  | Kohm               |
| Output Enable/Disable <sup>6</sup> , <i>Ordering Option</i><br>Output Enabled<br>Output Disabled (high impedance output)                             | $V_{IH}$<br>$V_{IL}$ |                              | $0.2 \cdot V_{DD}$                  | $0.8 \cdot V_{DD}$               | V<br>V             |
| Output Level<br>Output Logic High<br>Output Logic Low<br>Output Logic High Drive<br>Output Logic Low Drive   | $V_{OH}$<br>$V_{OL}$ | $0.9 \cdot V_{DD}$<br>4      |                                     | $0.1 \cdot V_{DD}$<br>-4         | V<br>V<br>mA<br>mA |
| Output Load  |                      |                              |                                     | 15                               | pF                 |
| Phase Noise, 26.000MHz<br>10Hz<br>100Hz<br>1kHz<br>10kHz<br>100kHz   |                      |                              | -91<br>-117<br>-139<br>-153<br>-157 |                                  | dBc/Hz             |
| Period Jitter <sup>7</sup><br>rms<br>peak-peak   |                      |                              | 2.5<br>21.0                         |                                  | ps<br>ps           |
| Start Up Time  | $t_{SU}$             |                              |                                     | 2                                | ms                 |

1. The Output is DC coupled.
2. The VT-803 power supply pin should be filtered, eg, a 10uF, 0.1uF and 0.01uF capacitor.
3. Not all stabilities are available over all temperatures. Measured at mid Vc for parts with frequency tuning
4. After 2 IR reflows and 24 hours.
5. ±100, ±200 and ±280 ppb temp stability parts, all inclusive with 10 years aging.
6. Output is Enabled if E/D is left open.
7. Measured using a Wavecrest SIA3300C, 90K samples.

## Warm Up Time

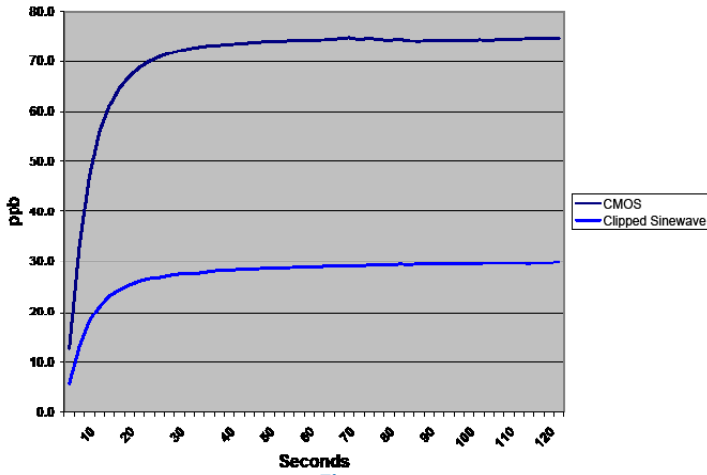


Figure 1

The VT-803 start up time is rated at 2ms. Figure 1 shows the Output Frequency versus time in seconds which shows the output reaching a steady state frequency within 60 seconds.

## Frequency versus Vc Over Temperature

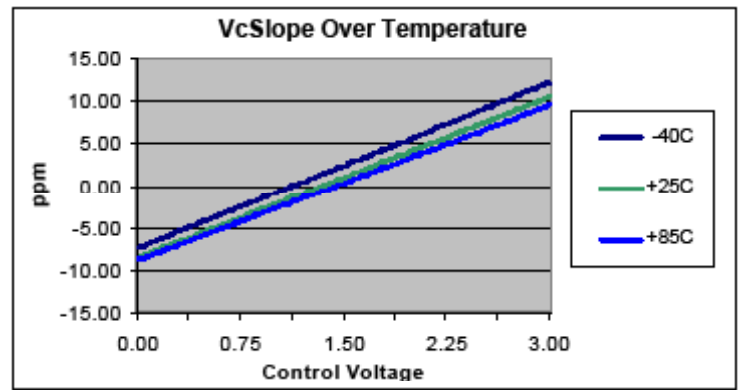


Figure 2

The VT-803 output frequency change versus control voltage is very linear and Figure 2 show the typical performance over temperature.

## Allan Deviation, Clipped Sine Wave Output

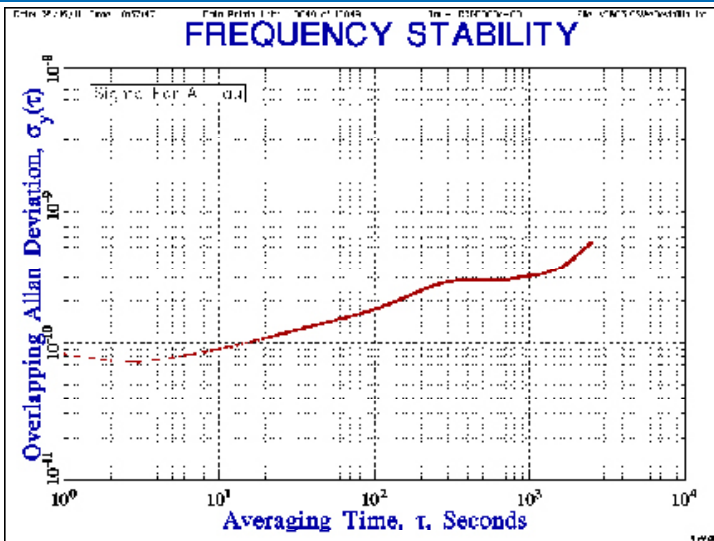


Figure 3

Test Conditions are under room ambient air flow (non insulated conditions).

## Allan Deviation, CMOS Output

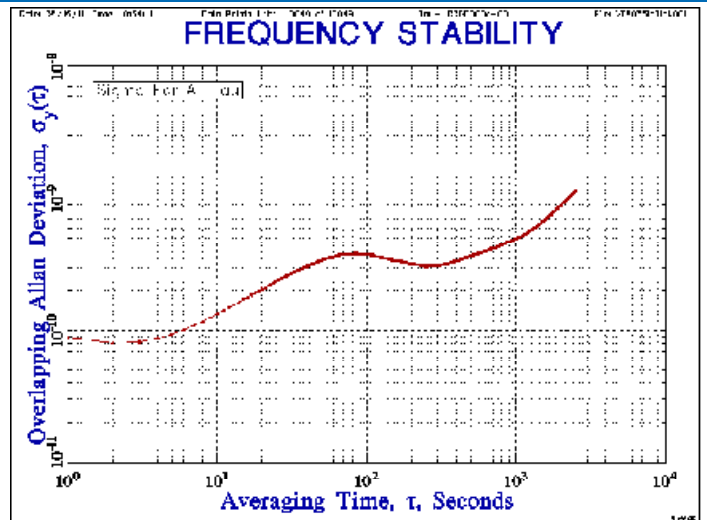


Figure 4

Test Conditions are under room ambient air flow (non insulated conditions).

## Aging


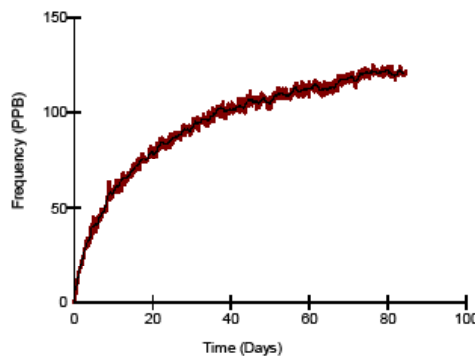


Figure 5

Figure 5 shows an output frequency change of 125ppb typical over 85 days at 85°C which would be equivalent to 125ppb over 2.25 years at 40°C.


## Temperature Stability Graph

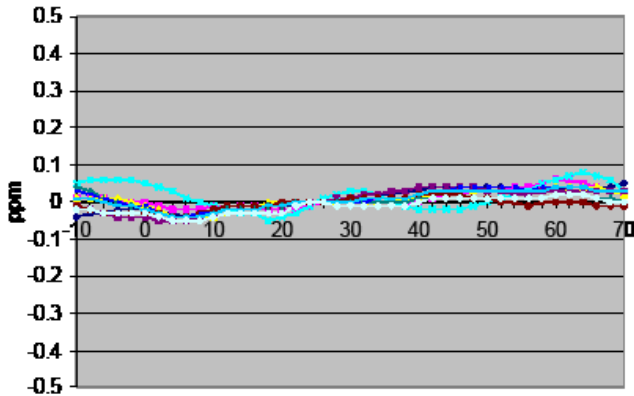

Temperature °C

Figure 6

## Delta Frequency vs. Temperature

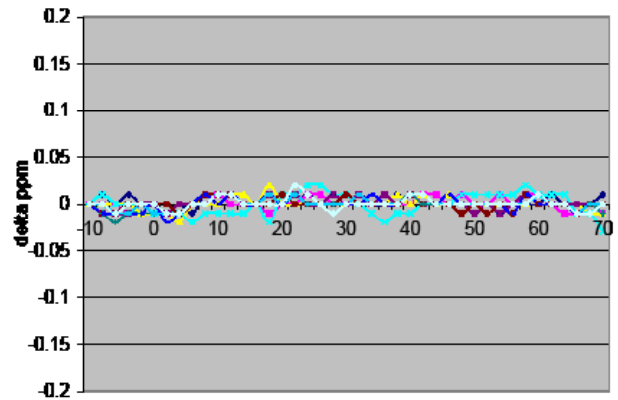

Temperature °C

Figure 7

Figure 7 shows the change in frequency reading between every adjacent 2°C readings.

## Phase Noise Performance, Clipped Sine Wave

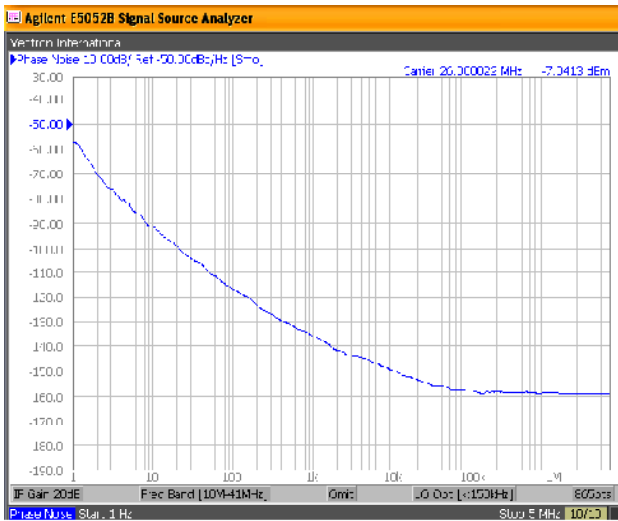


Figure 8

## Phase Noise Performance, CMOS

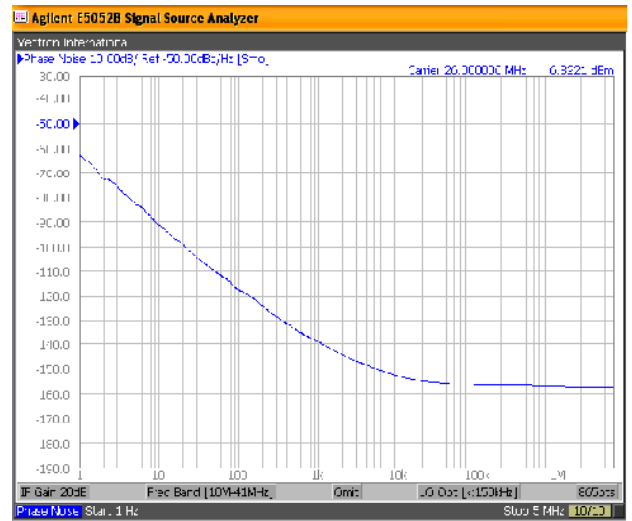


Figure 9

## Phase Noise Over Temperature

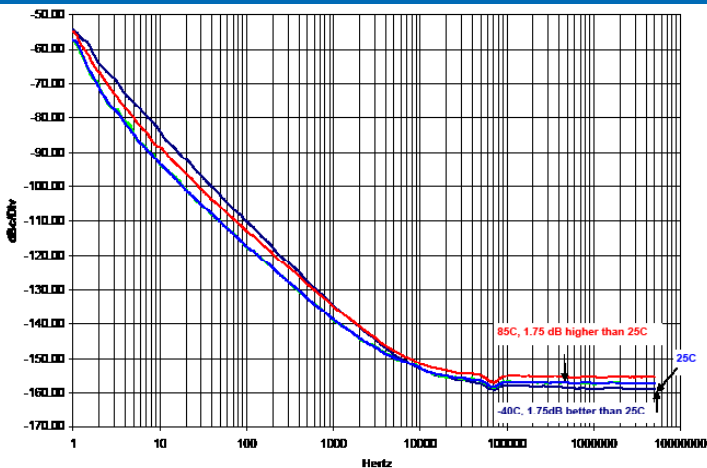


Figure 10

Figure 10 shows the difference in the phase noise at 85°C, 25°C and -40°C.

## Phase Noise Over Power Supply Variation

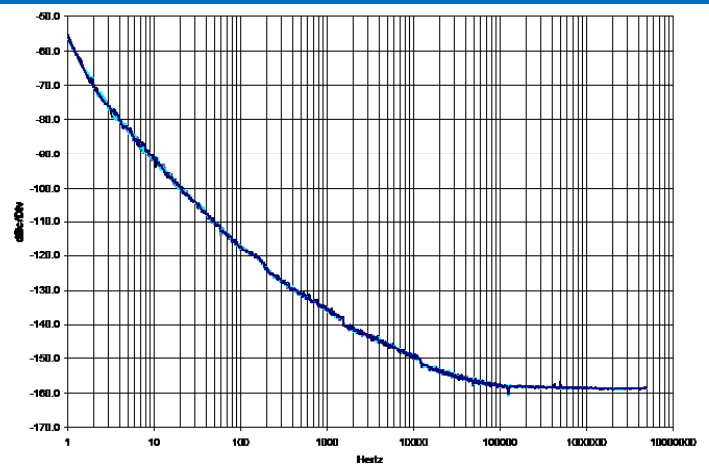


Figure 11

Figure 11 is a phase noise plot at a 2.8, 3.0, 3.3 and 3.6 volt power supply which demonstrates there is no significant change in performance.

## VCXO Function

**VCXO Feature:** The VT-803 is supplied with a VCXO function for applications where it will be used in a PLL, or the output frequency needs fine tune or calibration adjustments. This is a high impedance input, 100 Kohm, and can be driven with an op-amp or terminated with adjustable resistors etc. **Pin 1 should not be left floating on the VCXO optional device.**

## Maximum Ratings

### Absolute Maximum Ratings and Handling Precautions

Stresses in excess of the absolute maximum ratings can permanently damage the device. Functional operation is not implied or any other excess of conditions represented in the operational sections of this data sheet. Exposure to absolute maximum ratings for extended periods may adversely affect device reliability.

Although ESD protection circuitry has been designed into the VT-803, proper precautions should be taken when handling and mounting, Vectron employs a Human Body Model and Charged Device Model for ESD susceptibility testing and design evaluation. ESD thresholds are dependent on the circuit parameters used to define the model. Although no industry standard has been adopted for the CDM a standard resistance of 1.5kOhms and capacitance of 100pF is widely used and therefore can be used for comparison purposes.

| Parameter                 | Symbol      | Rating              | Unit |
|---------------------------|-------------|---------------------|------|
| Storage Temperature       | $T_{STORE}$ | -55/125             | °C   |
| Supply Voltage            | $V_{DD}$    | -0.6/6              | V    |
| Control Voltage           | $V_C$       | -0.6/ $V_{DD}$ +0.6 | V    |
| Enable/Disable Voltage    | E/D         | -0.6/ $V_{DD}$ +0.6 | V    |
| ESD, Human Body Model     |             | 1500                | V    |
| ESD, Charged Device Model |             | 1000                | V    |

## Reliability

| Parameter                  | Condition  |
|----------------------------|--|
| Mechanical Shock           | MIL-STD-883 Method 2002 (1500 G, 0.5 msec)       |
| Mechanical Vibration       | MIL-STD-883 Method 2007 (20 G Peak Acceleration) |
| Temperature Cycle          | MIL-STD-883 Method 1010 (-55/85°C)               |
| Solderability              | MIL-STD-883 Method 2003 (Lead free solder)       |
| Fine and Gross Leak        | MIL-STD-883 Method 1014 (Crystal )               |
| Resistance to Solvents     | MIL-STD-883 Method 2015 (IPA solvent)            |
| Moisture Sensitivity Level | MSL1   |
| Termination Finish         | Gold (0.3-1.0um) over Nickel                     |
| Weight                     | 70 mg  |
| ThetaJC                    | 6 °C/W   |

Test conditions: ±2.0 ppm change limit.


## IR Reflow

### Suggested IR Profile

Devices are built using lead free epoxy and can be subjected to standard lead free IR reflow conditions shown in Table 7. Contact pads are gold over nickel and lower maximum temperatures can also be used, such as 220°C.

| Table 7 Reflow Profile           |                           |                               |
|----------------------------------|---------------------------|-------------------------------|
| Parameter                        | Symbol                    | Value                         |
| PreHeat Time<br>Ts-min<br>Ts-max | $t_s$                     | 200 sec Max<br>150°C<br>200°C |
| Ramp Up                          | $R_{UP}$                  | 3°C/sec Max                   |
| Time above 217C                  | $t_L$                     | 150 sec Max                   |
| Time to Peak Temperature         | $t_{25C \text{ to peak}}$ | 480 sec Max                   |
| Time at 260C                     | $t_p$                     | 30 sec Max                    |
| Time at 240C                     | $t_{p2}$                  | 60 sec Max                    |
| Ramp down                        | $R_{DN}$                  | 6°C/sec Max                   |




### Solderprofile:

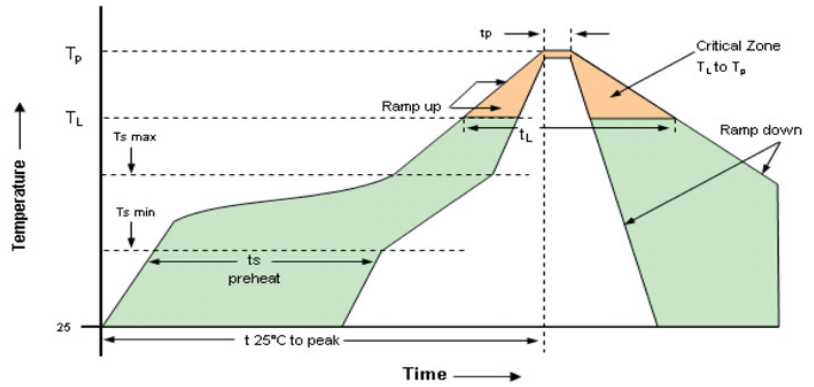

## Tape & Reel

**Table 8. Tape and Reel Information**

| Tape Dimensions (mm) |     |     |    |    |     | Reel Dimensions (mm) |    |    |     |      |      |        |
|----------------------|-----|-----|----|----|-----|----------------------|----|----|-----|------|------|--------|
| W                    | F   | Do  | Po | P1 | A   | B                    | C  | D  | N   | W1   | W2   | #/Reel |
| 12                   | 5.5 | 1.5 | 4  | 8  | 254 | 2.5                  | 13 | 21 | 100 | 13.5 | 17.5 | 2000   |

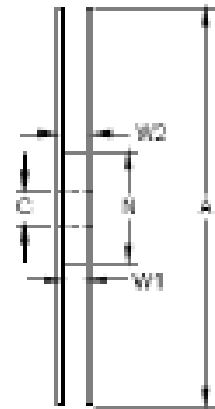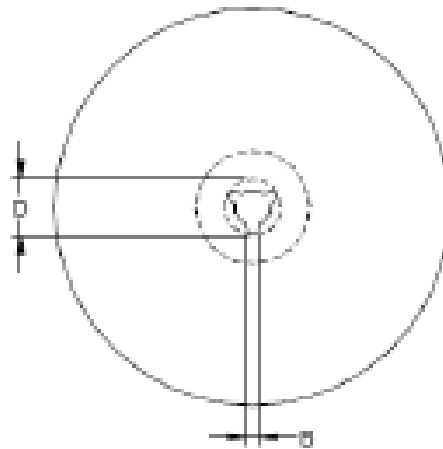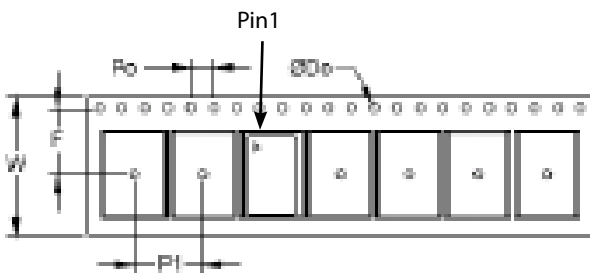


# Ordering Information

**Table 9. Standard Frequencies (MHz)**

|        |        |        |        |        |        |        |        |        |        |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 10.000 | 12.800 | 16.000 | 16.384 | 16.800 | 19.200 | 19.440 | 20.000 | 20.480 | 24.000 |
| 24.576 | 25.000 | 26.000 | 27.000 | 28.800 | 29.792 | 30.000 | 30.720 | 31.250 | 32.000 |
| 33.333 | 36.000 | 38.400 | 38.880 | 39.000 | 40.000 | 48.000 | 49.152 | 50.000 | 52.000 |

## VT-803- E A H - 507A- xxMxxxxxxx \*

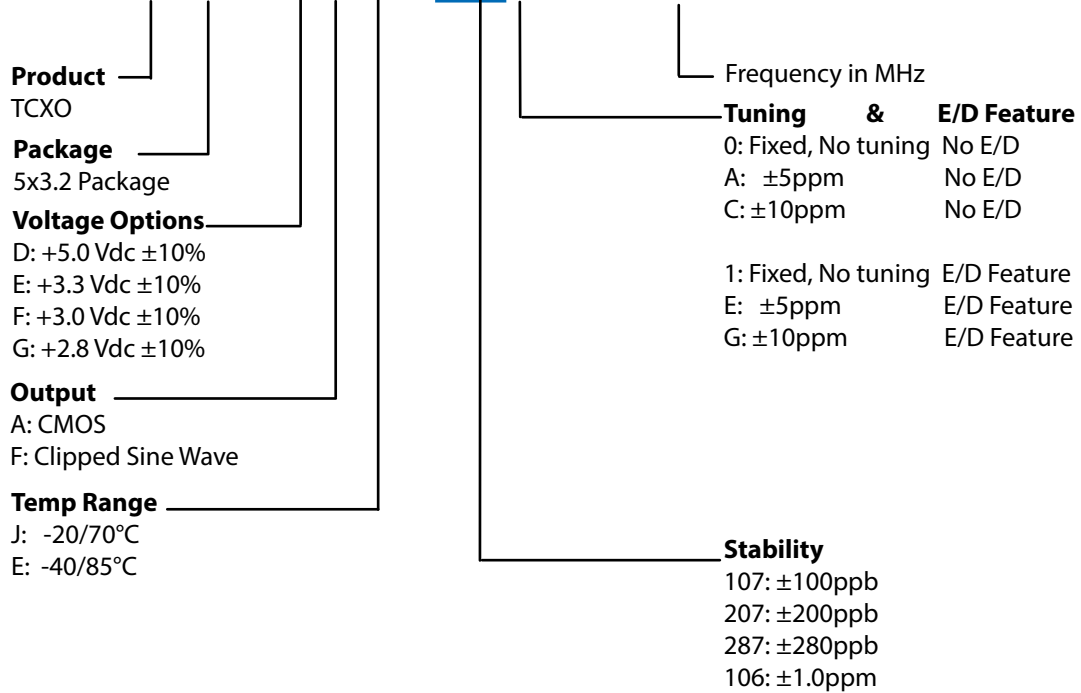

\* Add **\_SNPB** for tin lead solder dip

Example: VT-803-EAE-2870-40M0000000\_**\_SNPB**

| Revision Date | Description  |
|---------------|--|
| Nov 4, 2013   | Updated product capability chart (Table 9 & 10). Changed VI Asia contact information.  |
| Jan 7, 2014   | Added "temperature stability measurement at Mid Vc for parts with frequency tuning option".<br>Removed Delta 1s Frequency Plot.  |
| Feb 18, 2014  | Added temp stability measurement condition on parts with Vc feature. Changed Vectron logo and Hudson contact information.  |
| Sep 3, 2014   | Modified Package Drawing Orientation, added tuningI slope (positive), red bullet in Capability Chart   |
| June 28, 2018 | Add: E/D function, E/D specifications, E/D Table. New Frequencies, Stratum3/SyncE, ±4.6ppm overall stability, ±0.37ppm temperature plus 24 hours (for stabilities ≤ ±280ppb), weight and thetaJC. Updated CMOS load and power supply stability. Update test conditions and clipped sine wave current limit >26MHz to 52MHz. Add new Table 3; Enable/Disable Table. Deleted Capabilities Tables 9 and 10. Add <b>_SNPB</b> DIP ordering option and example. Change Vectron logo to Microsemi/Microchip. |
| May 24, 2019  | Update logo, contact information and ordering options.   |



## Contact Information

### **USA:**

100 Watts Street  
Mt Holly Springs, PA 17065  
Tel: 1.717.486.3411  
Fax: 1.717.486.5920

### **Europe:**

Landstrasse  
74924 Neckarbischofsheim  
Germany  
Tel: +49 (0) 7268.801.0  
Fax: +49 (0) 7268.801.281



Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATION OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING, BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly, or otherwise, under any Microchip intellectual property rights unless otherwise stated.

### **Trademarks**

The Microchip and Vectron names and logos are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9