

1.575GHz GPS Ceramic Chip Antenna

(Ground cleared under antenna, clearance area **7.80 mm x 5.25 mm**)


Pulse Part Number: W3062A

Features

- Omni directional radiation
- Low profile
- Compact size W x L x H (7 x 1.6 x 1.6 mm)
- Low weight (86 mg)
- Lead free materials
- Fully SMD compatible
- Lead free soldering compatible
- Tape and reel packing
- RoHS Compliant Product

Applications

- GPS L1 band
- 1.575 GHz

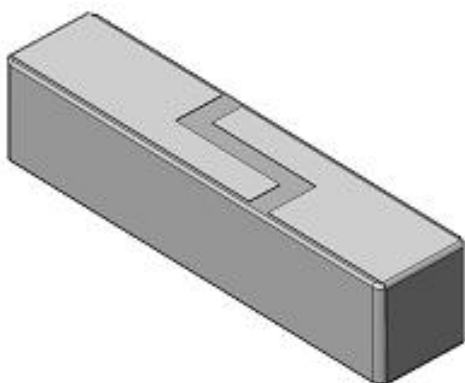

Electrical specifications @ +25 °C

Note: Electrical characteristics depend on test board (GP) size and antenna positioning on GP and Ground Clearance area size.

GPS

*Typical performance (testboard size 80 x 37 mm, PWB ground clearance area **7.80 mm x 5.25 mm**)*

Frequency Range [MHz]	RHCP Gain [dBic]	Linear Max Gain [dBi]	Efficiency [%] / [dB]	Return loss min. [dB]	Impedance [Ω]	Operating Temperature [°C]
1575.42 +/- 10	0 (peak) -0,5 (band edges)	2,5 (peak) 2 (band edges)	80 / -1 (peak) 75 / -1,25 (band edges)	-10	50	-40 to +85

Pulse Finland Oy

Takatie 6
90440 Kempele, Finland
Tel: +358 207 935 500
Fax: +358 207 935 501

Domicile: Kempele
Business ID: 1933992-8
firstname.lastname@pulseeng.com
www.pulseeng.com/antennas




© 2006. All Rights Reserved.

GPS Ceramic Chip Antenna

(Ground cleared under antenna, clearance area **7.80 mm x 5.25 mm**)

terminal configuration and dimensions

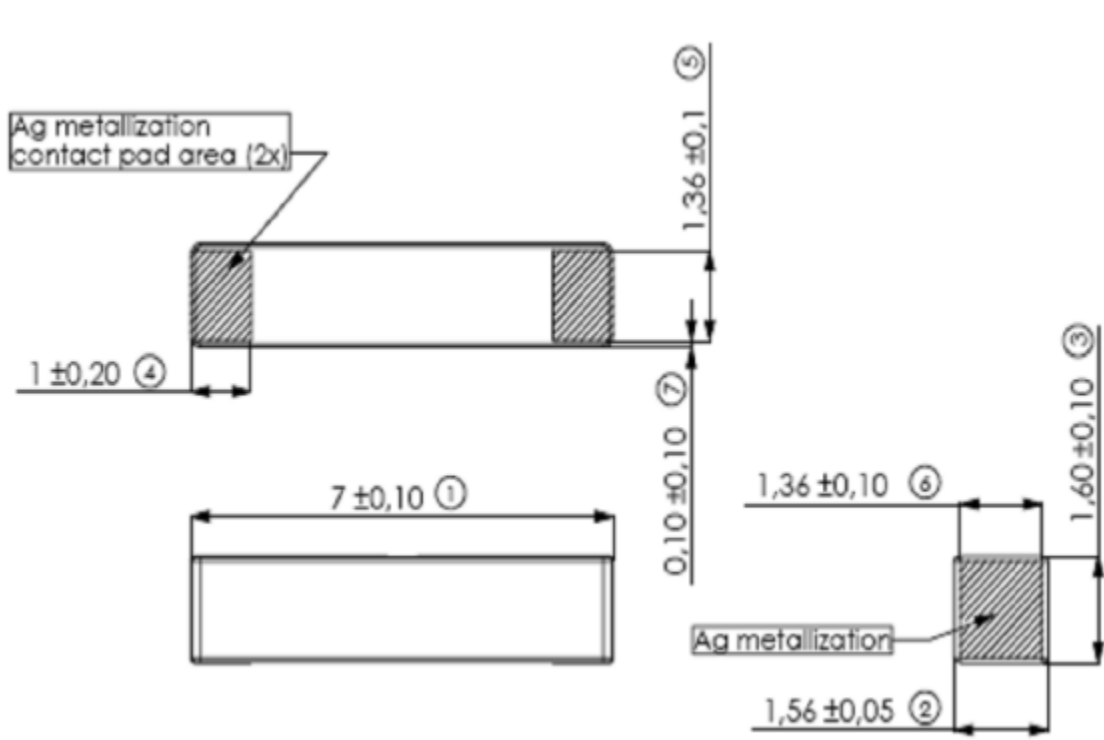

Antenna features		
No.	Terminal Name	Terminal Dimensions
1	Feed / GND	1.00 x 1.36 mm
2	Feed / GND	1.00 x 1.36 mm
Antenna is symmetrical. Either of terminals 1 or 2 can be Feed / GND		



GPS Ceramic Chip Antenna

(Ground cleared under antenna, clearance area 7.80 mm x 5.25 mm)



Typical Electrical Characteristics (T=25 °C)

Measured on the 80 x 37mm test board. Matched with 2.2pF shunt capacitor

Typical Return Loss S11/ impedance

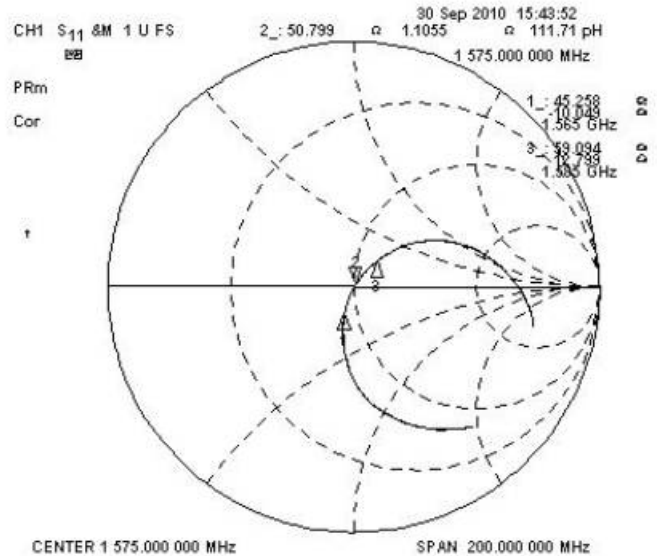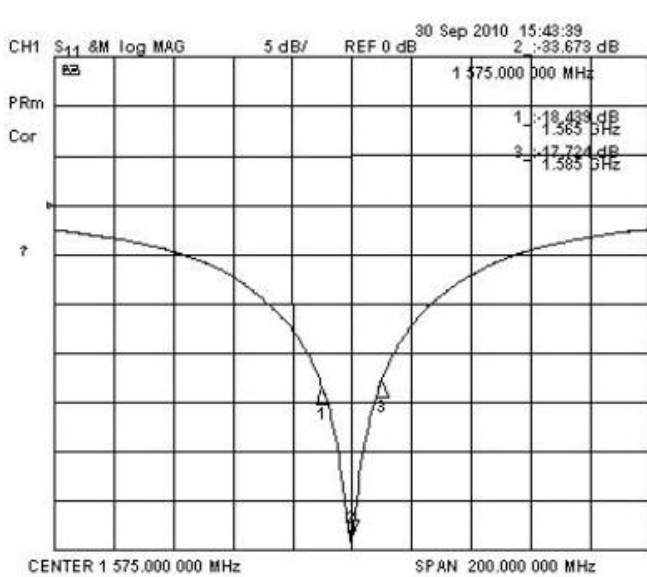

Free space efficiency, maximum gain and RHCP

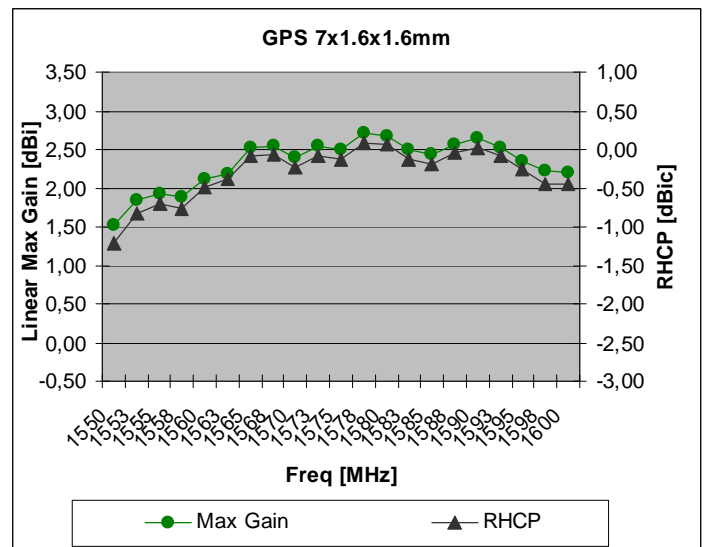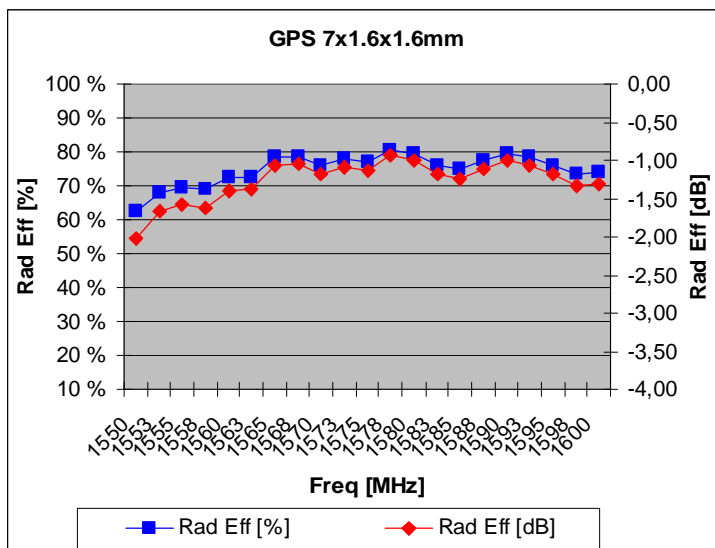

Pulse Finland Oy

Takatie 6
 90440 Kempele, Finland
 Tel: +358 207 935 500
 Fax: +358 207 935 501

Domicile: Kempele
 Business ID: 1933992-8
firstname.lastname@pulseeng.com
www.pulseeng.com/antennas




GPS Ceramic Chip Antenna


(Ground cleared under antenna, clearance area 7.80 mm x 5.25 mm)

Typical Free space Radiation Patterns



XZ-PLANE

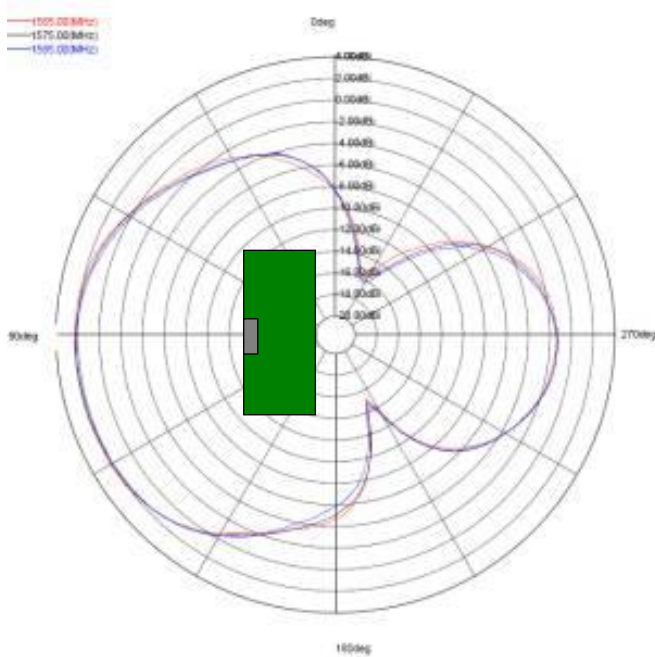


ZY-PLANE

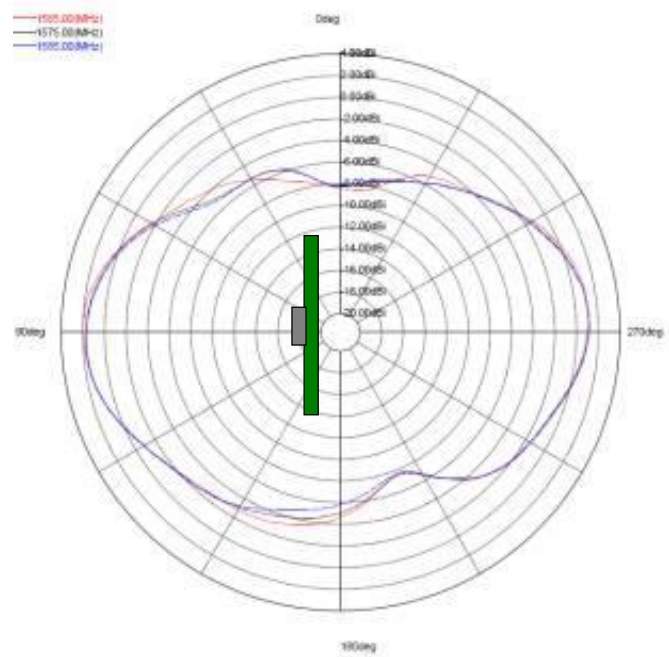

XY-PLANE

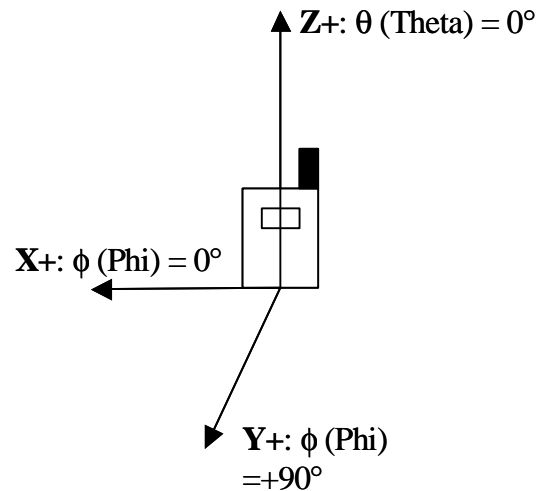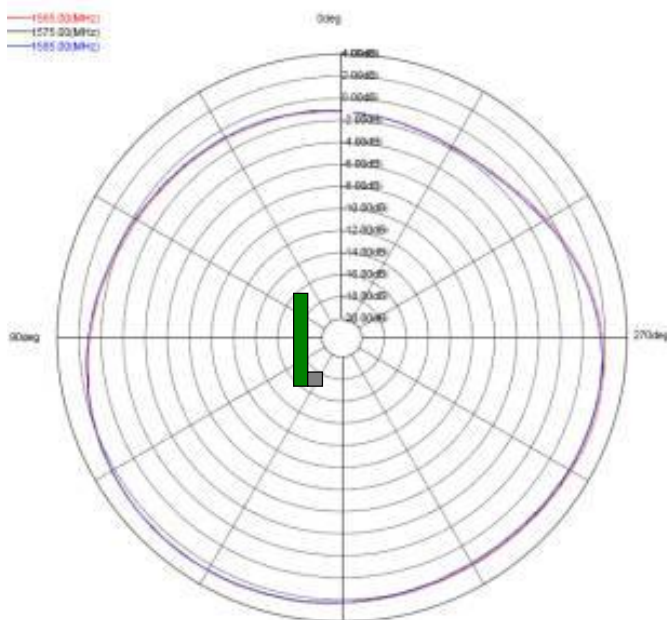

Packing form

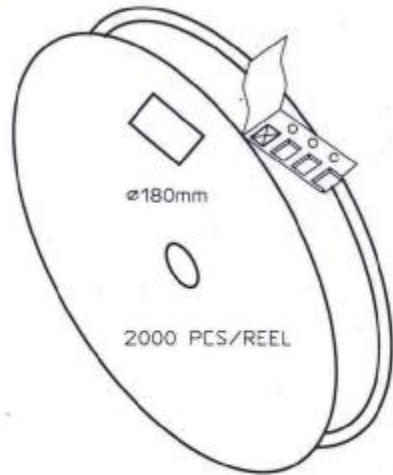


CARRIER TAPE H85-00192
width=16,00 depth=1.70
COVER TAPE H85-00193
width=13.40



LENGTH OF TAPE:

- Leader section: min 350 mm before component section
- Trailer section: min 40 mm after component section.

Empty part cavities at leader and trailer section of the tape must be sealed with top cover tape.

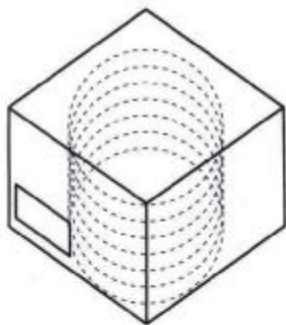

- BOX H85-00128 1 pcs
(182x182x125)
- LABEL 1 pcs/BOX
- REEL H85-00164 6 pcs
(D180, W28)
- REEL LABEL 1 pcs/REEL

MATERIAL					
HANDLINGS					
		RATIO	DRWN	161007 PeHa	H
			DGNER		G
PRODUCT H90-0Y838			CHKD		F
			APPRD		E
DENOMINATION PACKING FORM			APPRD BY		D
					C
					B
					A
		VERSION	MOD/DATE/NAME		

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9