



### Overview

The QuickServer is a high performance, fully configurable, cost effective Building and Industrial Automation gateway for integrators to easily interface devices to networks in commercial buildings and industrial plants.

System integrators world-wide have benefitted from the value of the powerful line of interoperability gateways offered by FieldServer. Now, QuickServer adds to that value by running the same robust FieldServer protocol conversion software on a highly cost effective platform backed by the experience, engineering expertise and proven technical support that integrators have come to expect from FieldServer.

The QuickServer FS-QS-2X10 series is available at four different point capacities. Each QuickServer is preloaded with two drivers (serial and/or Ethernet) from a customer's choice of 140 different drivers, E.G. Modbus, BACnet, SNMP, EtherNet/IP and many more.

The FS-QS-2010 can support up to 250 points. The FS-QS-2210 can support up to 500 points. The FS-QS-2310 can support up to 3,000 points. The FS-QS-2410 can support up to 5,000 points.

Every QuickServer includes browser-based tools to make it easy to set-up QuickServer and perform diagnostics including determination of status, network settings, node information, map descriptors and more. The USB flash drive also includes the Discovery utility to determine what FieldServers are on a network.

### QuickServer Features and Benefits


- Interface 250 – 5,000 data points.
- DIN rail mount standard.
- BACnet COV support for fast data communication while reducing the traffic over a BACnet network.
- **SMC Cloud** registration connects your devices to the cloud, allowing secure remote access for diagnostics, monitoring and firmware updates.
- On-board diagnostics allow easy troubleshooting for both serial and Ethernet communications.

### FieldServer Offers

- Largest protocol driver library in the industry, providing the solution to your integration needs.
- Over 20 years of experience in design and manufacture of building automation gateways with thousands of installations, over 700 translation paths using over 100 protocol drivers.
- Trusted, proven technical support before and after shipment.
- SMC partners with BAS and Fire Alarm Panel manufacturers and trade associations to ensure that the drivers and hardware meet your highest industry expectations.

### Accessories

- Optional Accessory Kit includes AC power supply, Ethernet cable, mini-screwdriver and a USB flash drive with all data sheets, manuals, notes, the discovery tool and more.

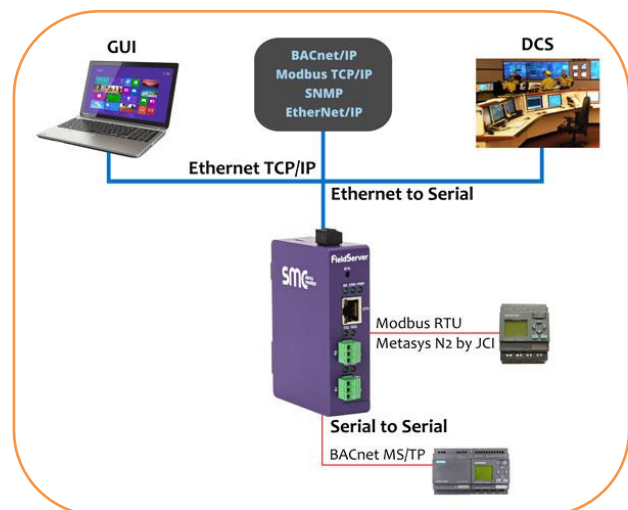

		Field Connections							
		Interface Connections							
		RS-232 <sup>1</sup>	RS-485 <sup>2</sup>	RS-422 <sup>3</sup>	KNX <sup>6</sup>	RS-485	M-Bus	Ethernet <sup>4</sup>	LonWorks <sup>5</sup>
QuickServer	FS-QS-2X10	1	2					1	
	FS-QS-1X11		1					1	1
	FS-QS-1221	1						1	1
	FS-QS-1230		1	1				1	
	FS-QS-1231			1				1	1
	FS-QS-1240		1		1			1	
	FS-QS-1241				1			1	1
	FS-QS-1X50					1	1	1	
	FS-QS-1X51						1	1	1

<sup>1</sup> TX/Rx/GND

<sup>2</sup> +/-/Frame Ground

<sup>3</sup> See Manual

<sup>4</sup> 10/100 Base T

<sup>5</sup> FTT10

<sup>6</sup> KNX/EIB TP1

**Hardware Specifications \***

**Communication**

**Serial (Galvanic Isolation):**

1 x RS-485/RS-232 & 1 x RS-485

**Baud:** 9600, 19200, 34800, 57600, 76800

**Ethernet**

10/100BaseT

MDIX

DHCP

**Environment**

**Operating Temperature:** -20 to 70°C (-4 to 158°F)

**Relative Humidity:** 10-95% RH non-condensing

**Other**

Web configuration

On-board diagnostics

DIN rail mount included

**Construction**

**Dimensions (HxWxD)**

4 x 1.1 x 2.7 in (10.16 x 2.8 x 6.8cm)

**Weight:** 0.4 lbs (0.2 Kg)

**Power Requirements**

**Input:** 24VAC 0.125A

12-24VDC 0.25A @12 VDC

**Max Power:** 3W

**Approvals**

**CE**

FCC class B & C part 15

**UL 60950**

**IC Canada**

**RoHS and WEEE compliant**



\* Specifications subject to change without notice

**Ordering Information**

- FS-QS-2010: 250 data points
- FS-QS-2210: 500 data points
- FS-QS-2310: 3,000 data points
- FS-QS-2410: 5,000 data points

**Options**

The Accessory Kit consists of a power supply, Ethernet cable, screwdriver and a USB flash drive that includes all manuals, data sheets, notes and the discovery tool.

- FS-8915-38-QS                      Accessory Kit, 110/220V

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9