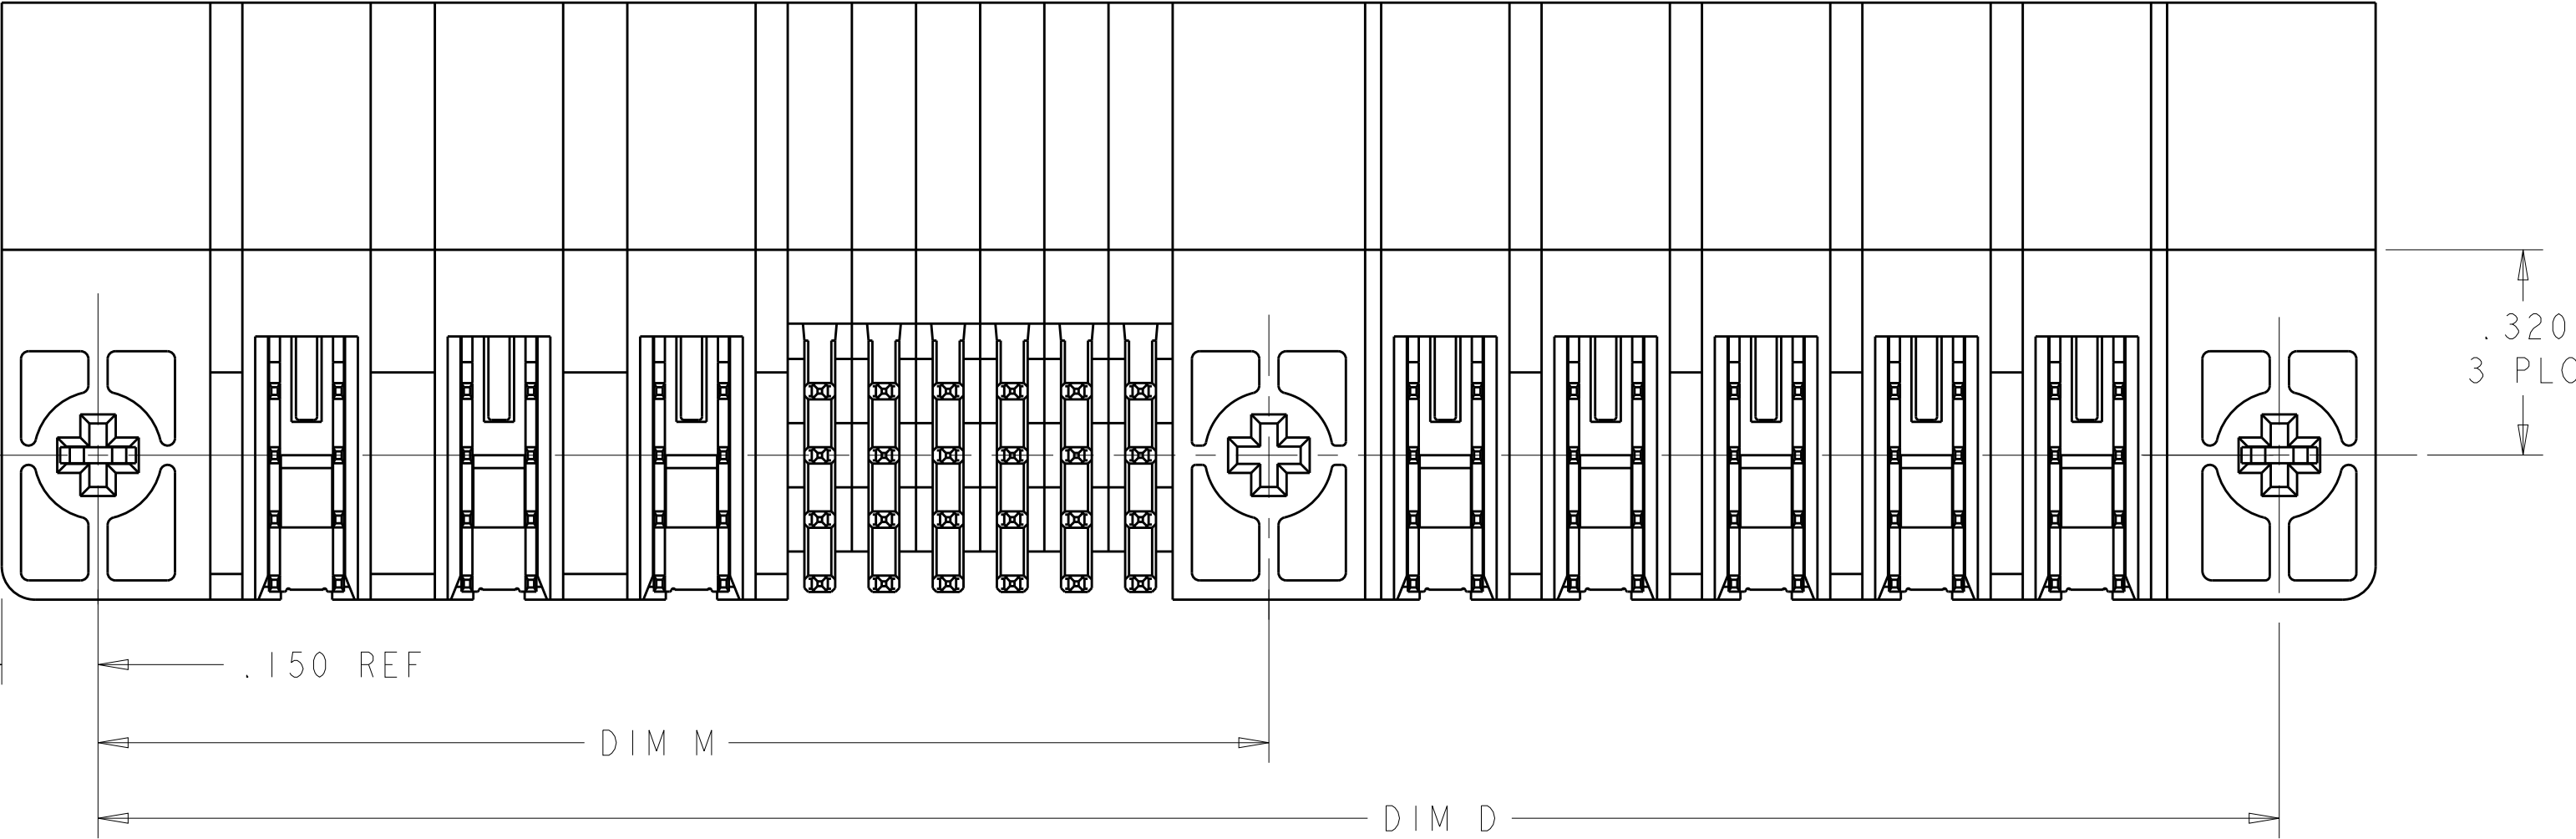
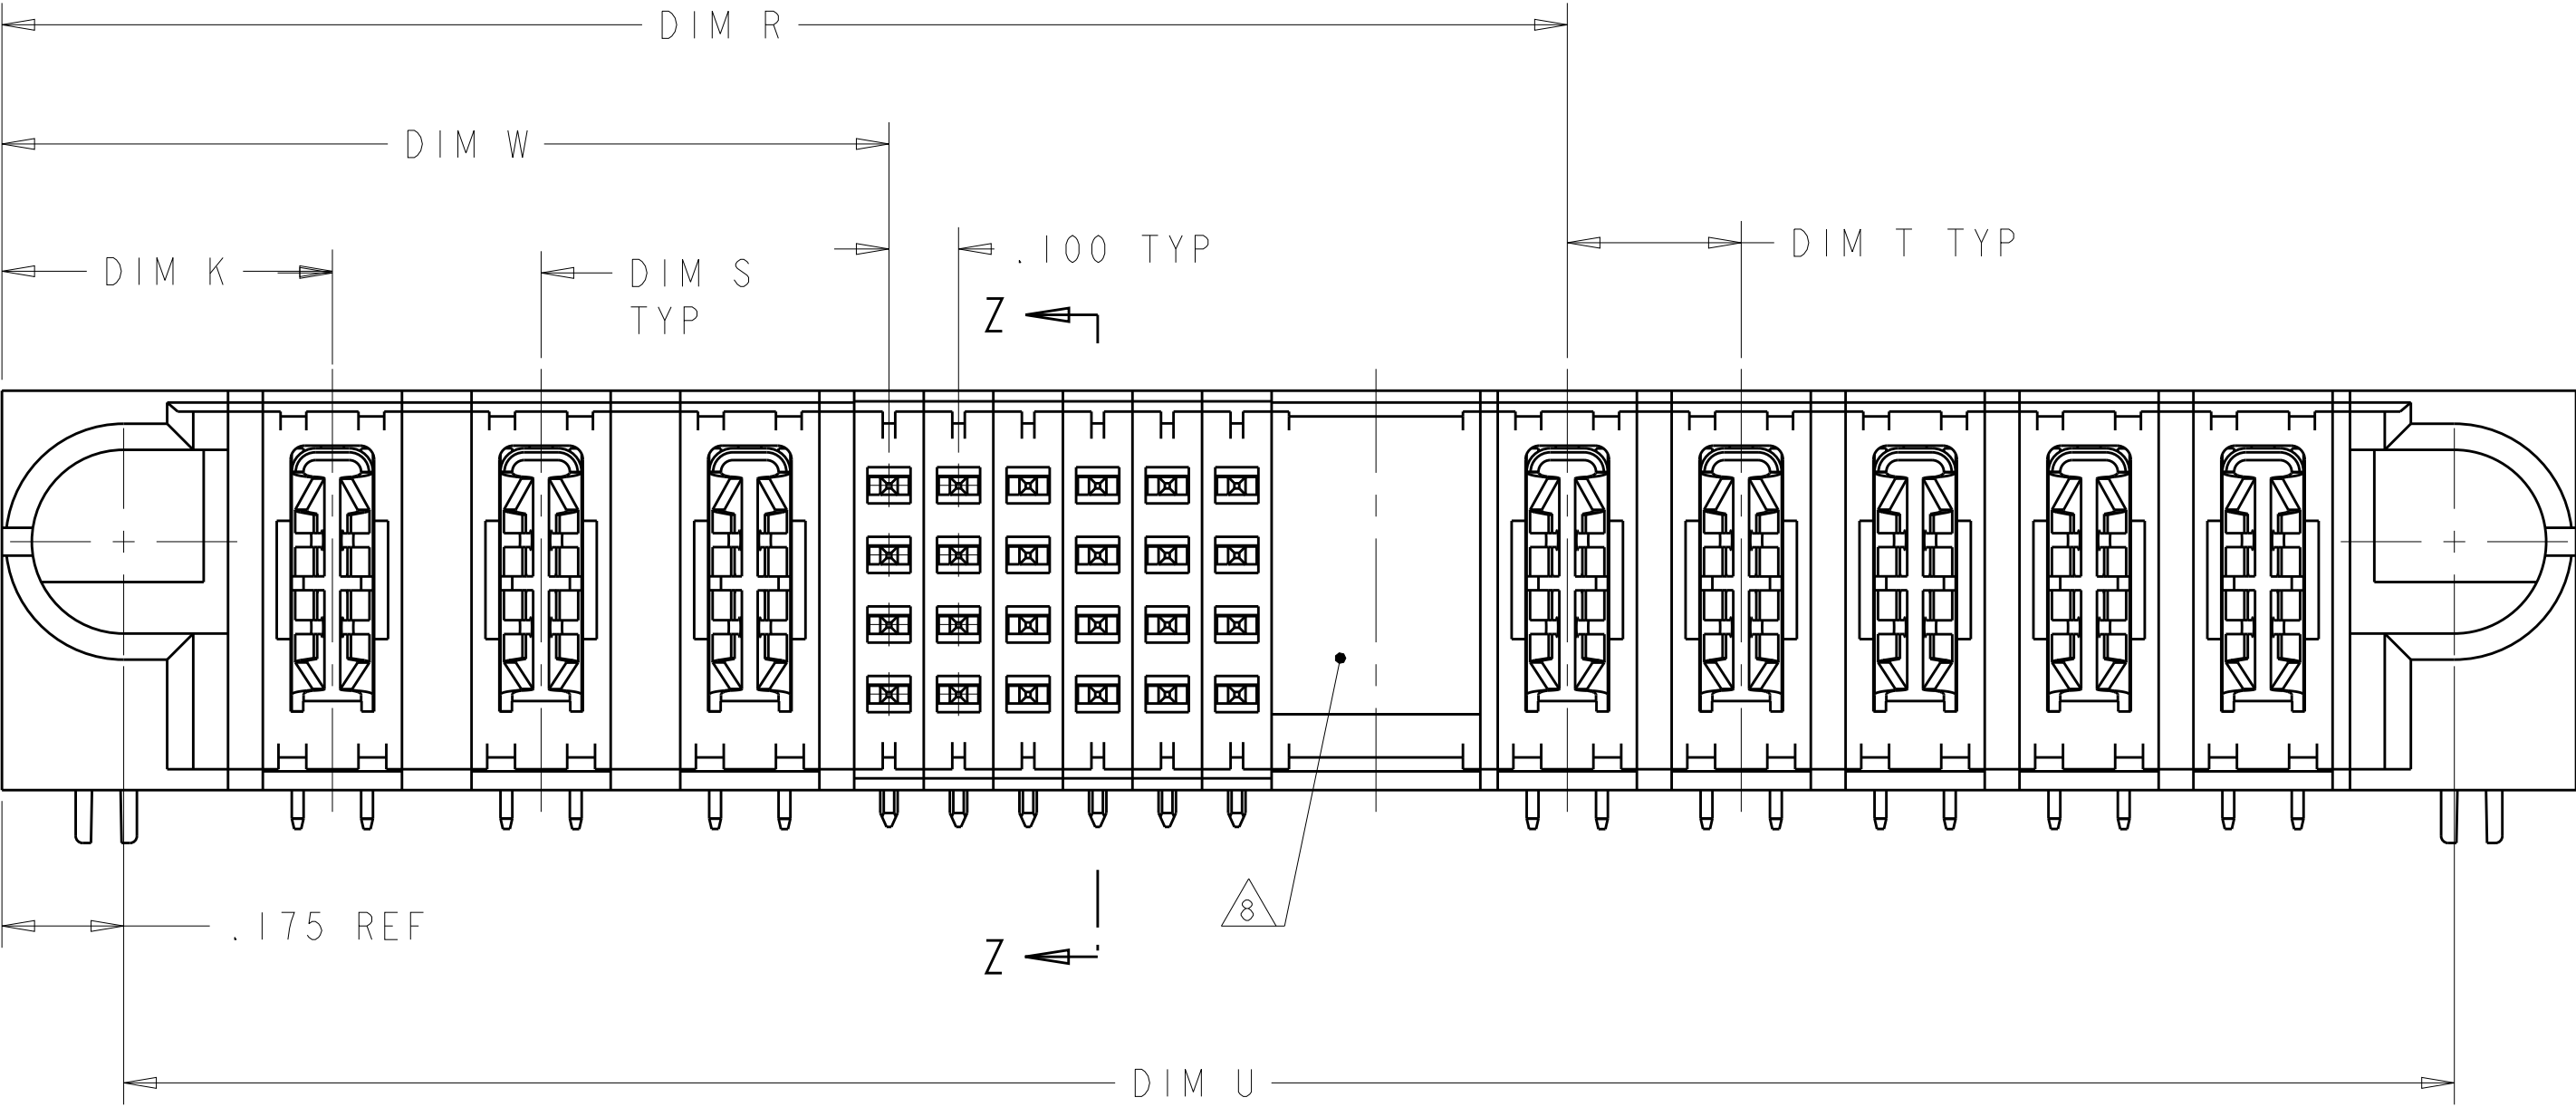
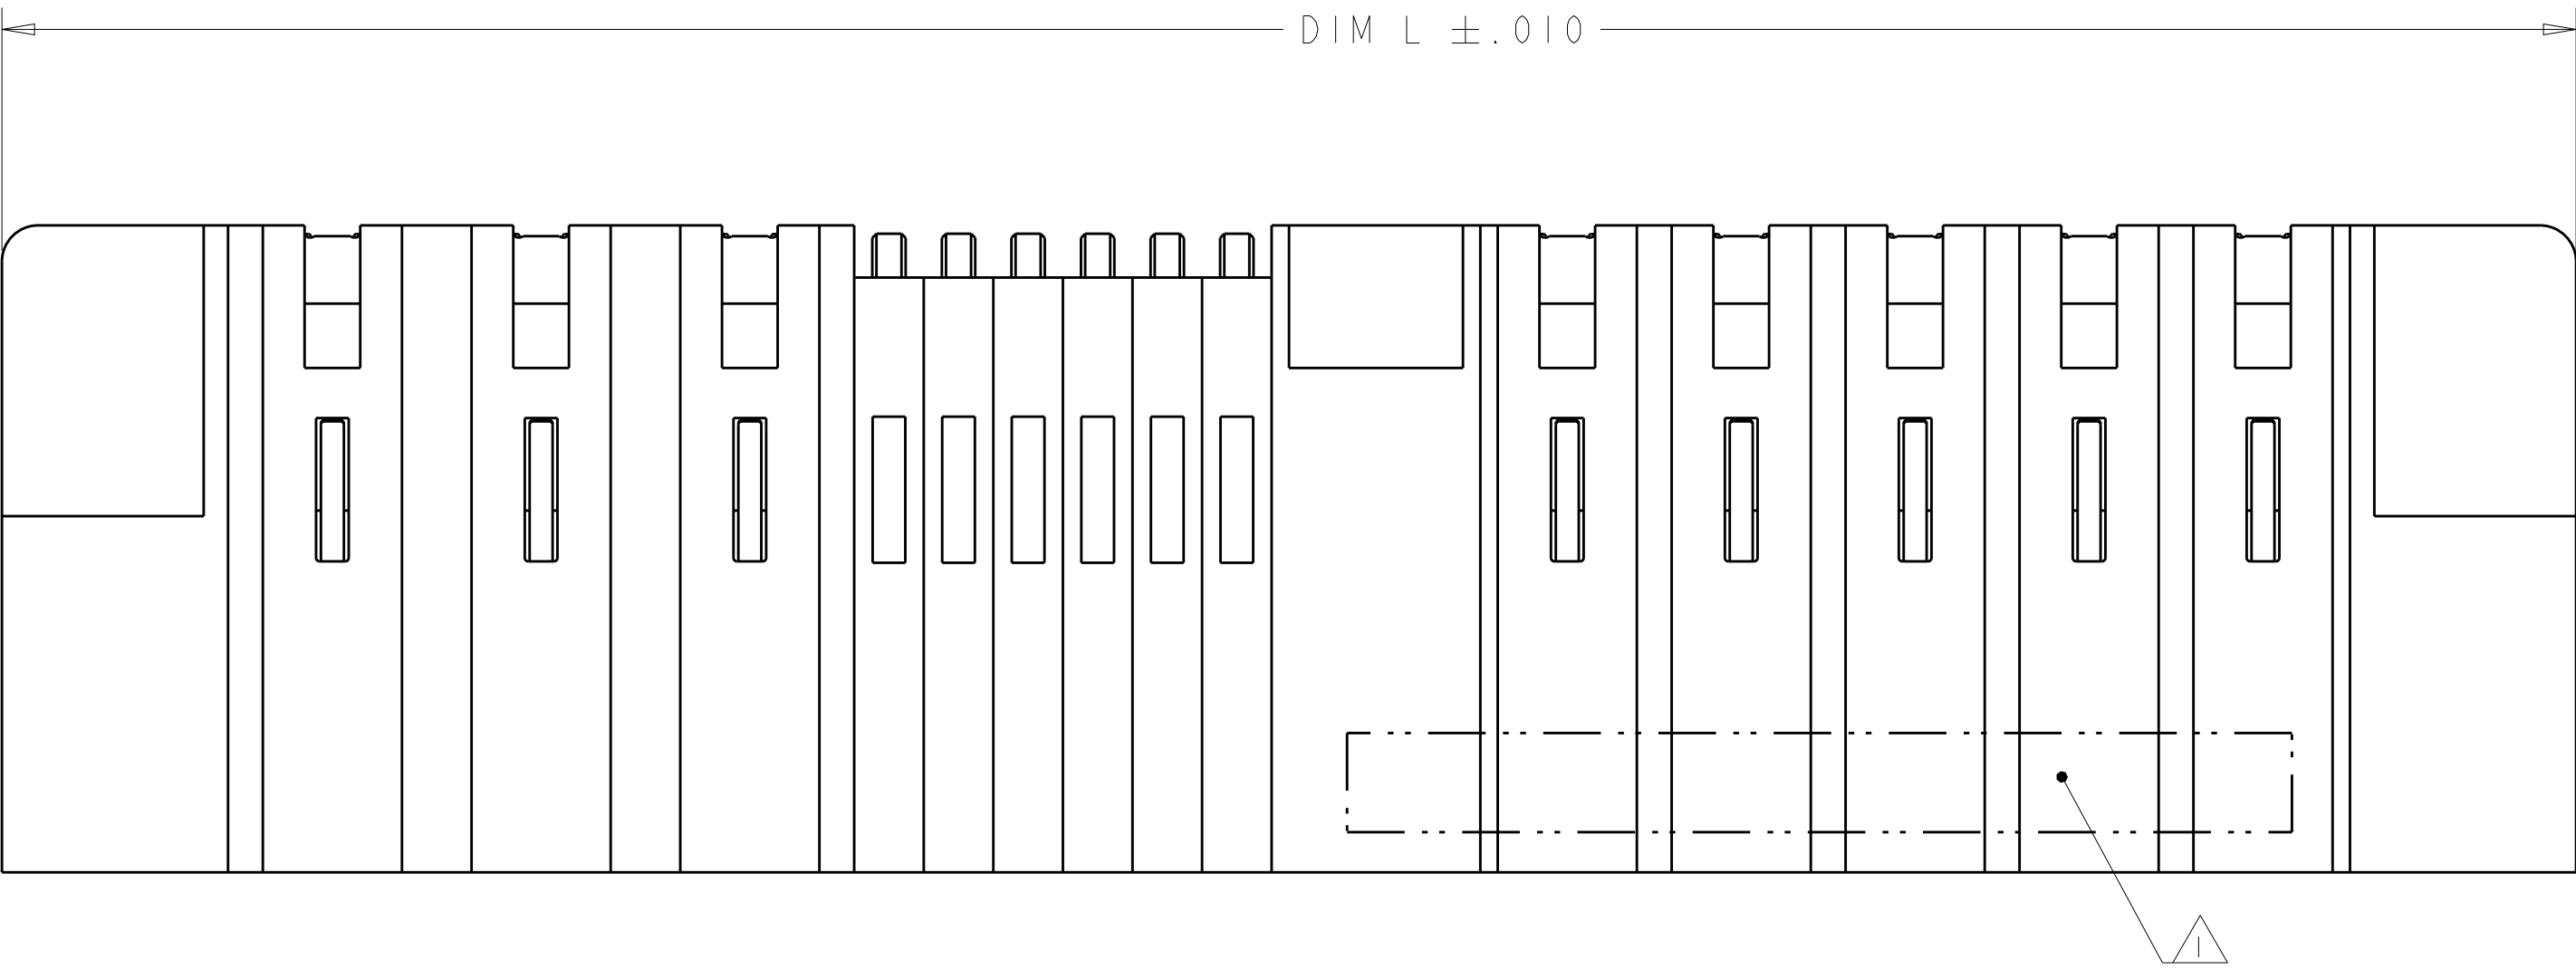
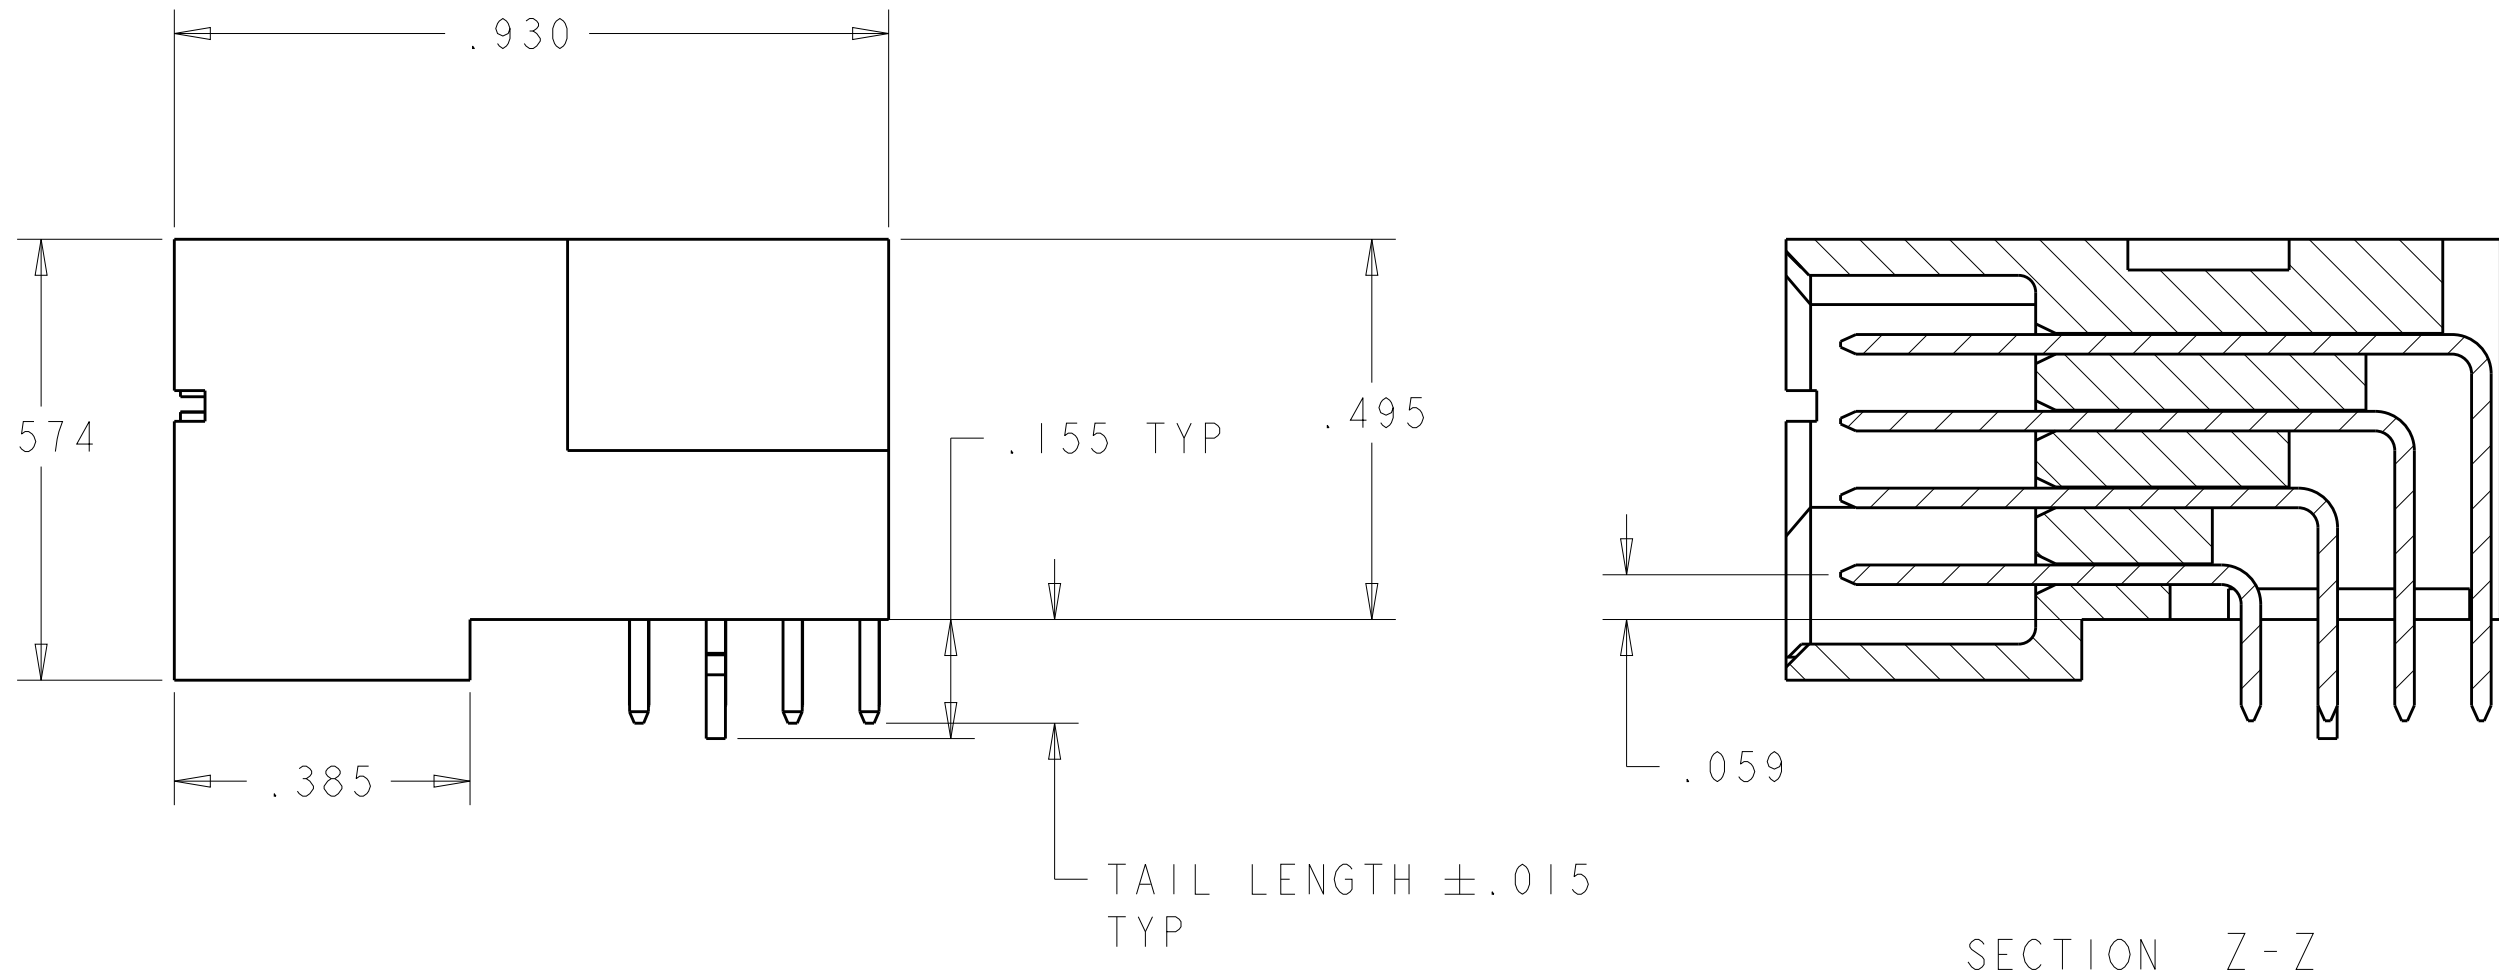


LOC	DIST	REVISIONS						
		P	LTR	DESCRIPTION	DATE	DWN	APVD	
ES	00		M1	ADD NEW DASH NUMBER 7-0	08FEB2014	AL	SZ	
			M2	ADD NEW DASH NUMBER	21MAR2014	AL	SZ	

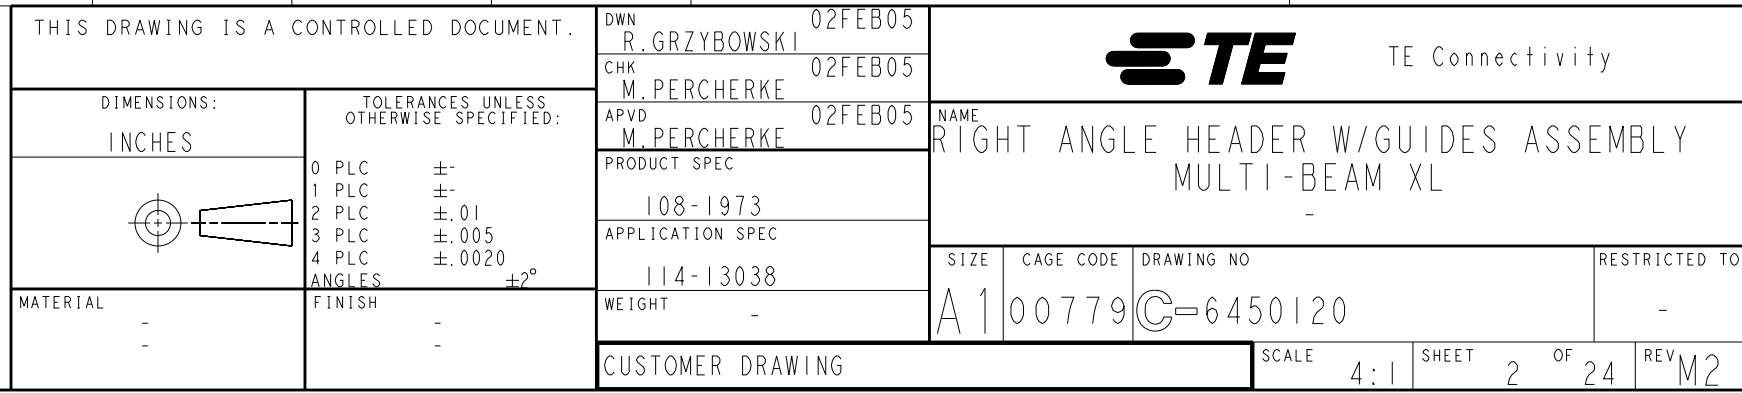


- 1 "AMP" PART NUMBER AND DATE CODE TO BE MARKED IN AREA SHOWN. PARTS UNDER 2.500 LONG MAY BE MARKED ON BOTH SIDES.
- 2 MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, UL 94 V-0
SIGNAL CONTACT - COPPER ALLOY
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3 CONTACT FINISHE:
NOBLE METAL PLATED ON THE CONTACT FUNCTIONAL AREA OF POWER AND SIGNAL CONTACTS.
- 4 MECHANICAL CONNECTOR KEEP OUT ZONE. WHEN PLACING CONNECTORS END-TO-END, ALLOW ADDITIONAL 0.1 CLEARANCE BETWEEN CONNECTORS FOR LATCH ACTIVATION.
- 5 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 6 PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7 PCB - .0453±.0010 DRILLED HOLES PLATED WITH .0003 MIN Sn OVER .001 TO .003 Cu PLATING TO ACHIEVE A .040 DIA HOLE.
- 8 OPTIONAL CENTER MODULE WITH Ø.150 THRU HOLE OR HOLD DOWN FEATURE.

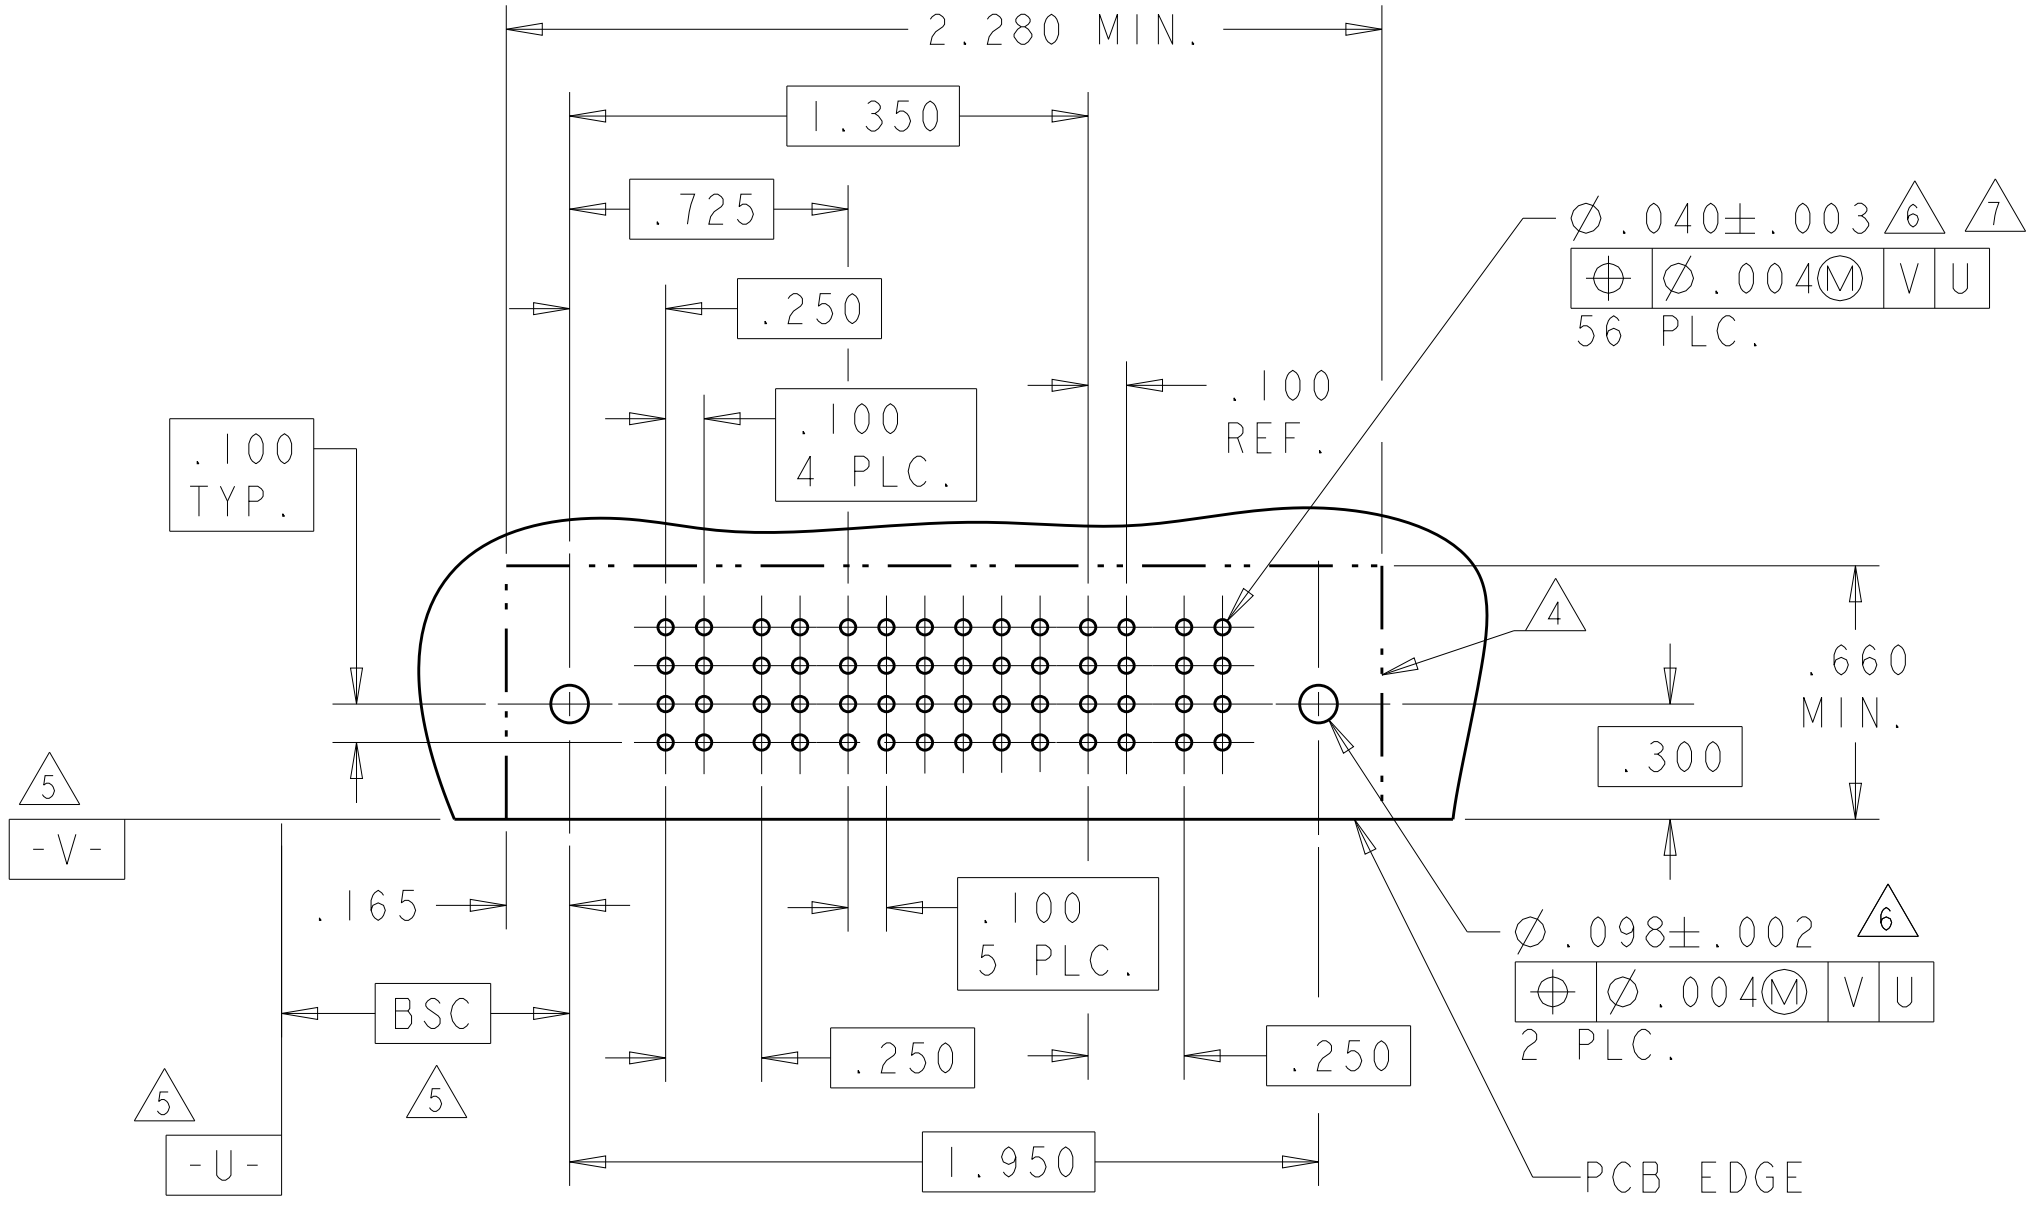


SECTION Z-Z

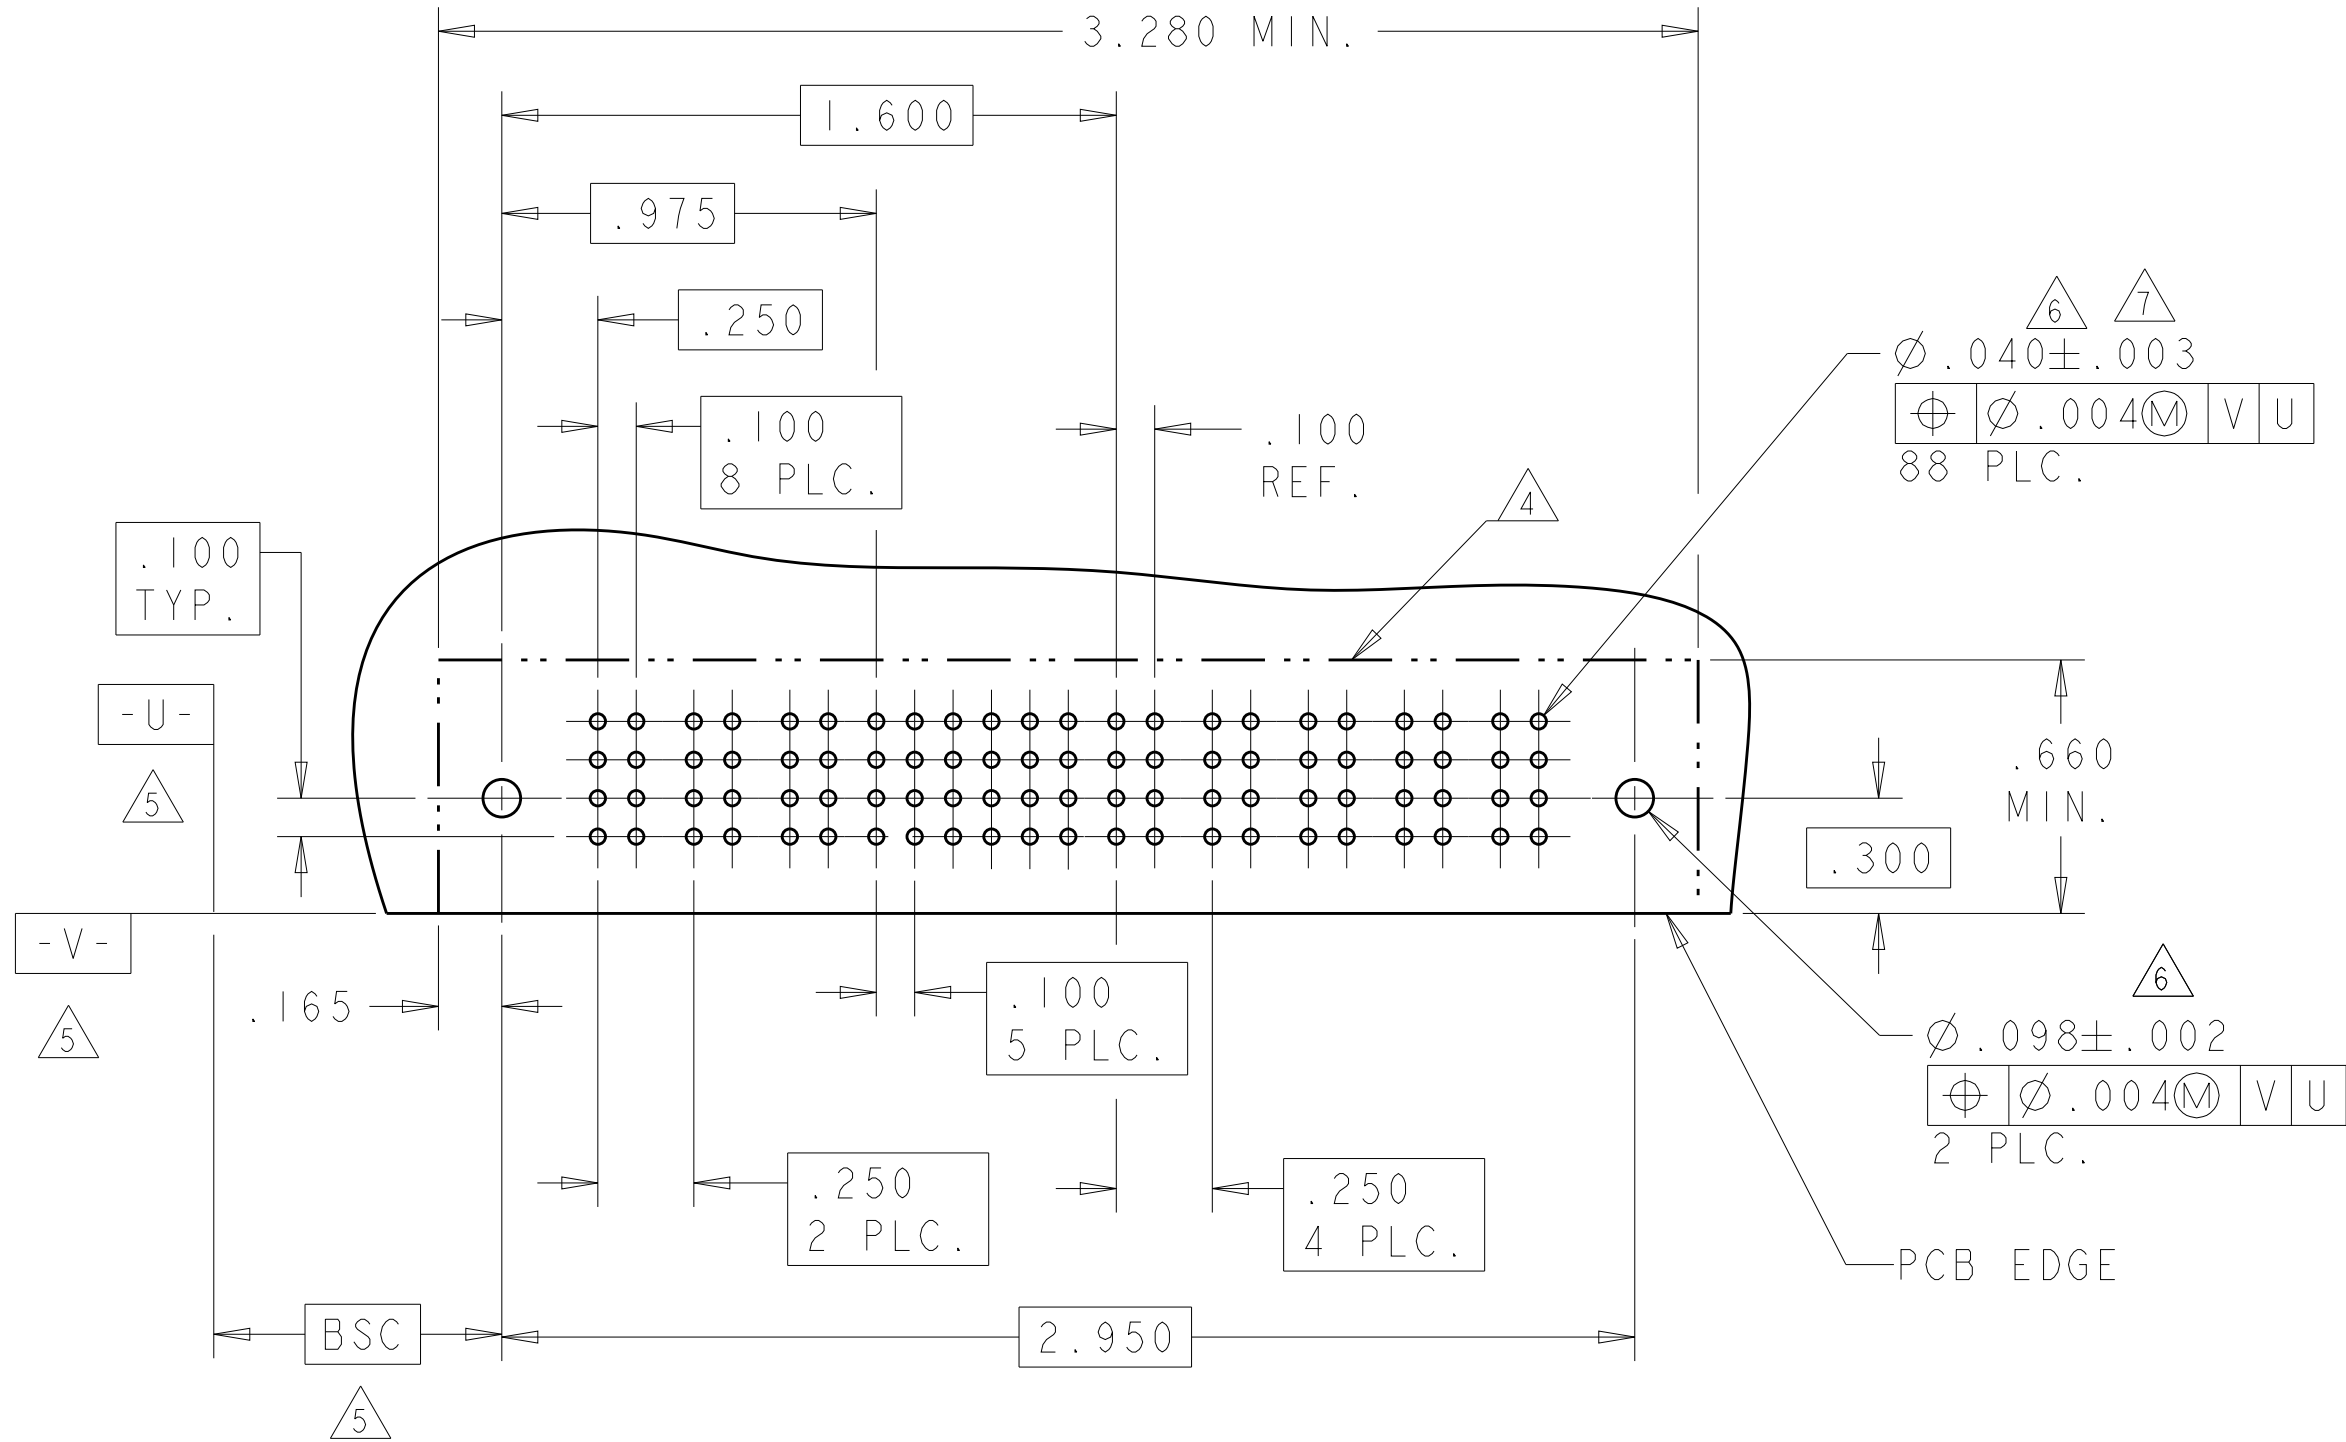
1.700	.250	.250	1.300	.875	1.750	-	2.050	.450	2P+16S+2P	7-6450120-1
2.700	.200	-	2.600	1.425	2.750	-	3.050	.450	5P + 44S + 1P	7-6450120-0
1.100	-	-	1.000	.625	1.150	-	1.450	.450	1P+12S+1P	6-6450120-9
1.000	-	-	.900	.625	1.050	-	1.350	.450	1P + 8S + 1P	6-6450120-8
2.850	.300	.200	2.125	1.825	2.900	-	3.200	.450	7HDP + 8S + 3ACP	6-6450120-7
2.650	.250	.200	1.550	.875	2.700	-	3.000	.450	2P + 24S + 6P	6-6450120-6
2.300	.300	.250	1.950	1.275	2.350	-	2.650	.475	3ACP + 24S + 2P	6-6450120-5
3.100	.250	.250	2.250	1.875	3.150	-	3.450	.450	6P + 12S + 4P	6-6450120-4
2.400	.250	.250	1.800	1.125	2.450	-	2.750	.475	3P + 24S + 3P	6-6450120-1
3.000	.300	.250	1.650	1.325	3.050	-	3.350	.475	3ACP + 8S + 6P	6-6450120-0
1.900	.300	.250	1.550	1.275	1.950	-	2.250	.475	3ACP + 8S + 2P	5-6450120-9
2.800	-	-	-	0.375	2.850	-	3.150	-	100S	5-6450120-8
2.700	.250	.250	2.100	1.125	2.750	-	3.050	.450	3P + 36S + 3P	5-6450120-7
1.100	-	-	1.000	.625	1.150	-	1.450	.450	1P + 12S + 1P	5-6450120-6
3.250	.300	.250	2.525	2.175	3.300	-	3.600	.450	7P + 8S + 3ACP	5-6450120-5
2.400	.250	.250	1.550	.875	2.450	-	2.750	.450	2P + 24S + 4P	5-6450120-3
5.400	.300	.300	2.875	2.175	5.450	-	5.750	.475	6P + 24S + 9P	5-6450120-2
3.800	.250	.300	1.875	1.375	3.850	-	4.150	.450	4P + 16S + 7ACP	5-6450120-0
1.600	.250	.250	1.250	.875	1.650	-	1.950	.450	2P + 12S + 2P	4-6450120-9
2.900	.250	.250	2.050	1.375	2.950	-	3.250	.450	4P + 24S + 4P	4-6450120-8
1.900	.250	.250	1.550	0.875	1.950	-	2.250	.450	2P + 24S + 2P	4-6450120-7
2.000	.250	.250	1.400	1.125	2.050	-	2.350	.450	3P + 8S + 3P	4-6450120-6
2.900	.250	.250	3.550	2.875	5.950	-	6.250	.450	10P + 24S + 10P	4-6450120-5
3.700	.200	.300	2.700	2.025	3.750	-	4.050	.450	8P + 24S + 4ACP	4-6450120-4
2.900	.300	.250	2.050	1.575	2.950	-	3.250	.475	4ACP+16S+4P	4-6450120-3
4.375	.250	.300	3.375	2.375	4.425	3.100	4.725	.450	8P + 24S + 1M + 4ACP	4-6450120-2
4.100	.300	.250	2.250	1.575	4.150	-	4.450	.475	4ACP + 24S + 8P	4-6450120-0
3.800	.250	.250	3.450	.875	3.850	-	4.150	.450	2P + 100S + 2P	3-6450120-6
4.600	.250	.250	3.250	1.875	4.650	-	4.950	.450	6P + 52S + 6P	3-6450120-5
5.100	.250	.250	3.500	2.175	5.150	-	5.450	.450	7P + 48S + 7P	3-6450120-4
3.500	.250	.300	2.775	2.375	3.550	-	3.850	.450	8P + 12S + 3ACP	3-6450120-3
4.000	.200	.200	2.700	1.825	4.050	-	4.350	.450	7HDP + 32S + 7HDP	3-6450120-0
3.900	.250	.250	2.550	1.875	3.950	-	4.250	.450	6P + 24S + 6P	2-6450120-7
5.200	.300	.250	2.350	1.625	5.250	-	5.550	.475	4ACP + 24S + 12P	2-6450120-6
2.500	.250	.250	2.150	1.425	2.550	-	2.850	.450	4P + 24S + 2P	2-6450120-5
3.600	.250	.250	2.500	1.625	3.650	-	3.950	.450	5P + 32S + 5P	2-6450120-4
2.500	.250	.250	2.150	.875	2.550	-	2.850	.450	2P + 48S + 2P	2-6450120-3
4.500	.300	.250	1.650	.975	4.550	-	4.850	.475	2ACP + 24S + 12P	2-6450120-2
2.850	.250	.250	2.000	1.125	2.900	-	3.200	.450	3P + 32S + 4P	2-6450120-1
3.950	.200	.250	2.125	1.025	4.000	-	4.300	.425	3P + 40S + 8P	2-6450120-0
1.400	-	-	1.300	.625	1.450	-	1.750	.450	1P + 24S + 1P	1-6450120-6
2.000	.300	.300	1.575	.975	2.050	-	2.350	.475	2P + 20S + 2P	1-6450120-4
1.200	-	-	1.100	.625	1.250	-	1.550	.450	1P + 16S + 1P	1-6450120-3
2.400	.250	.250	1.800	1.125	2.450	-	2.750	.450	3P + 24S + 3P	1-6450120-2
2.675	.200	.200	2.375	1.650	2.725	-	3.025	.450	5P + 24S + 2P	1-6450120-1
4.350	.250	.250	3.500	2.625	4.400	-	4.700	.450	9P + 32S + 4P	1-6450120-0
4.150	.250	.250	2.800	2.125	4.200	-	4.500	.450	7P + 24S + 6P	6450120-9
2.800	.250	.300	2.075	1.375	2.850	-	3.150	.450	4P + 24S + 3ACP	6450120-8
3.050	.300	.250	1.950	1.275	3.100	-	3.400	.475	3ACP + 24S + 5P	6450120-7
7.400	.250	.250	5.050	2.875	7.450	-	7.750	.450	10P + 84S + 10P	6450120-6
4.350	.250	.250	3.000	2.125	4.400	-	4.700	.450	7P + 32S + 6P	6450120-5
3.650	.250	.250	2.550	1.875	3.700	-	4.000	.450	6P + 24S + 5P	6450120-4
2.900	.250	.250	1.800	1.125	2.950	-	3.250	.450	3P + 24S + 5P	6450120-3
1.900	.250	.250	1.550	0.875	1.950	-	2.250	.450	2P + 24S + 2P	6450120-2
5.100	.250	.250	3.250	2.375	5.150	-	5.450	.450	8P + 32S + 8P	6450120-1
U	S	T	R	W	D	M	L	K	DESCRIPTION	PART NUMBER



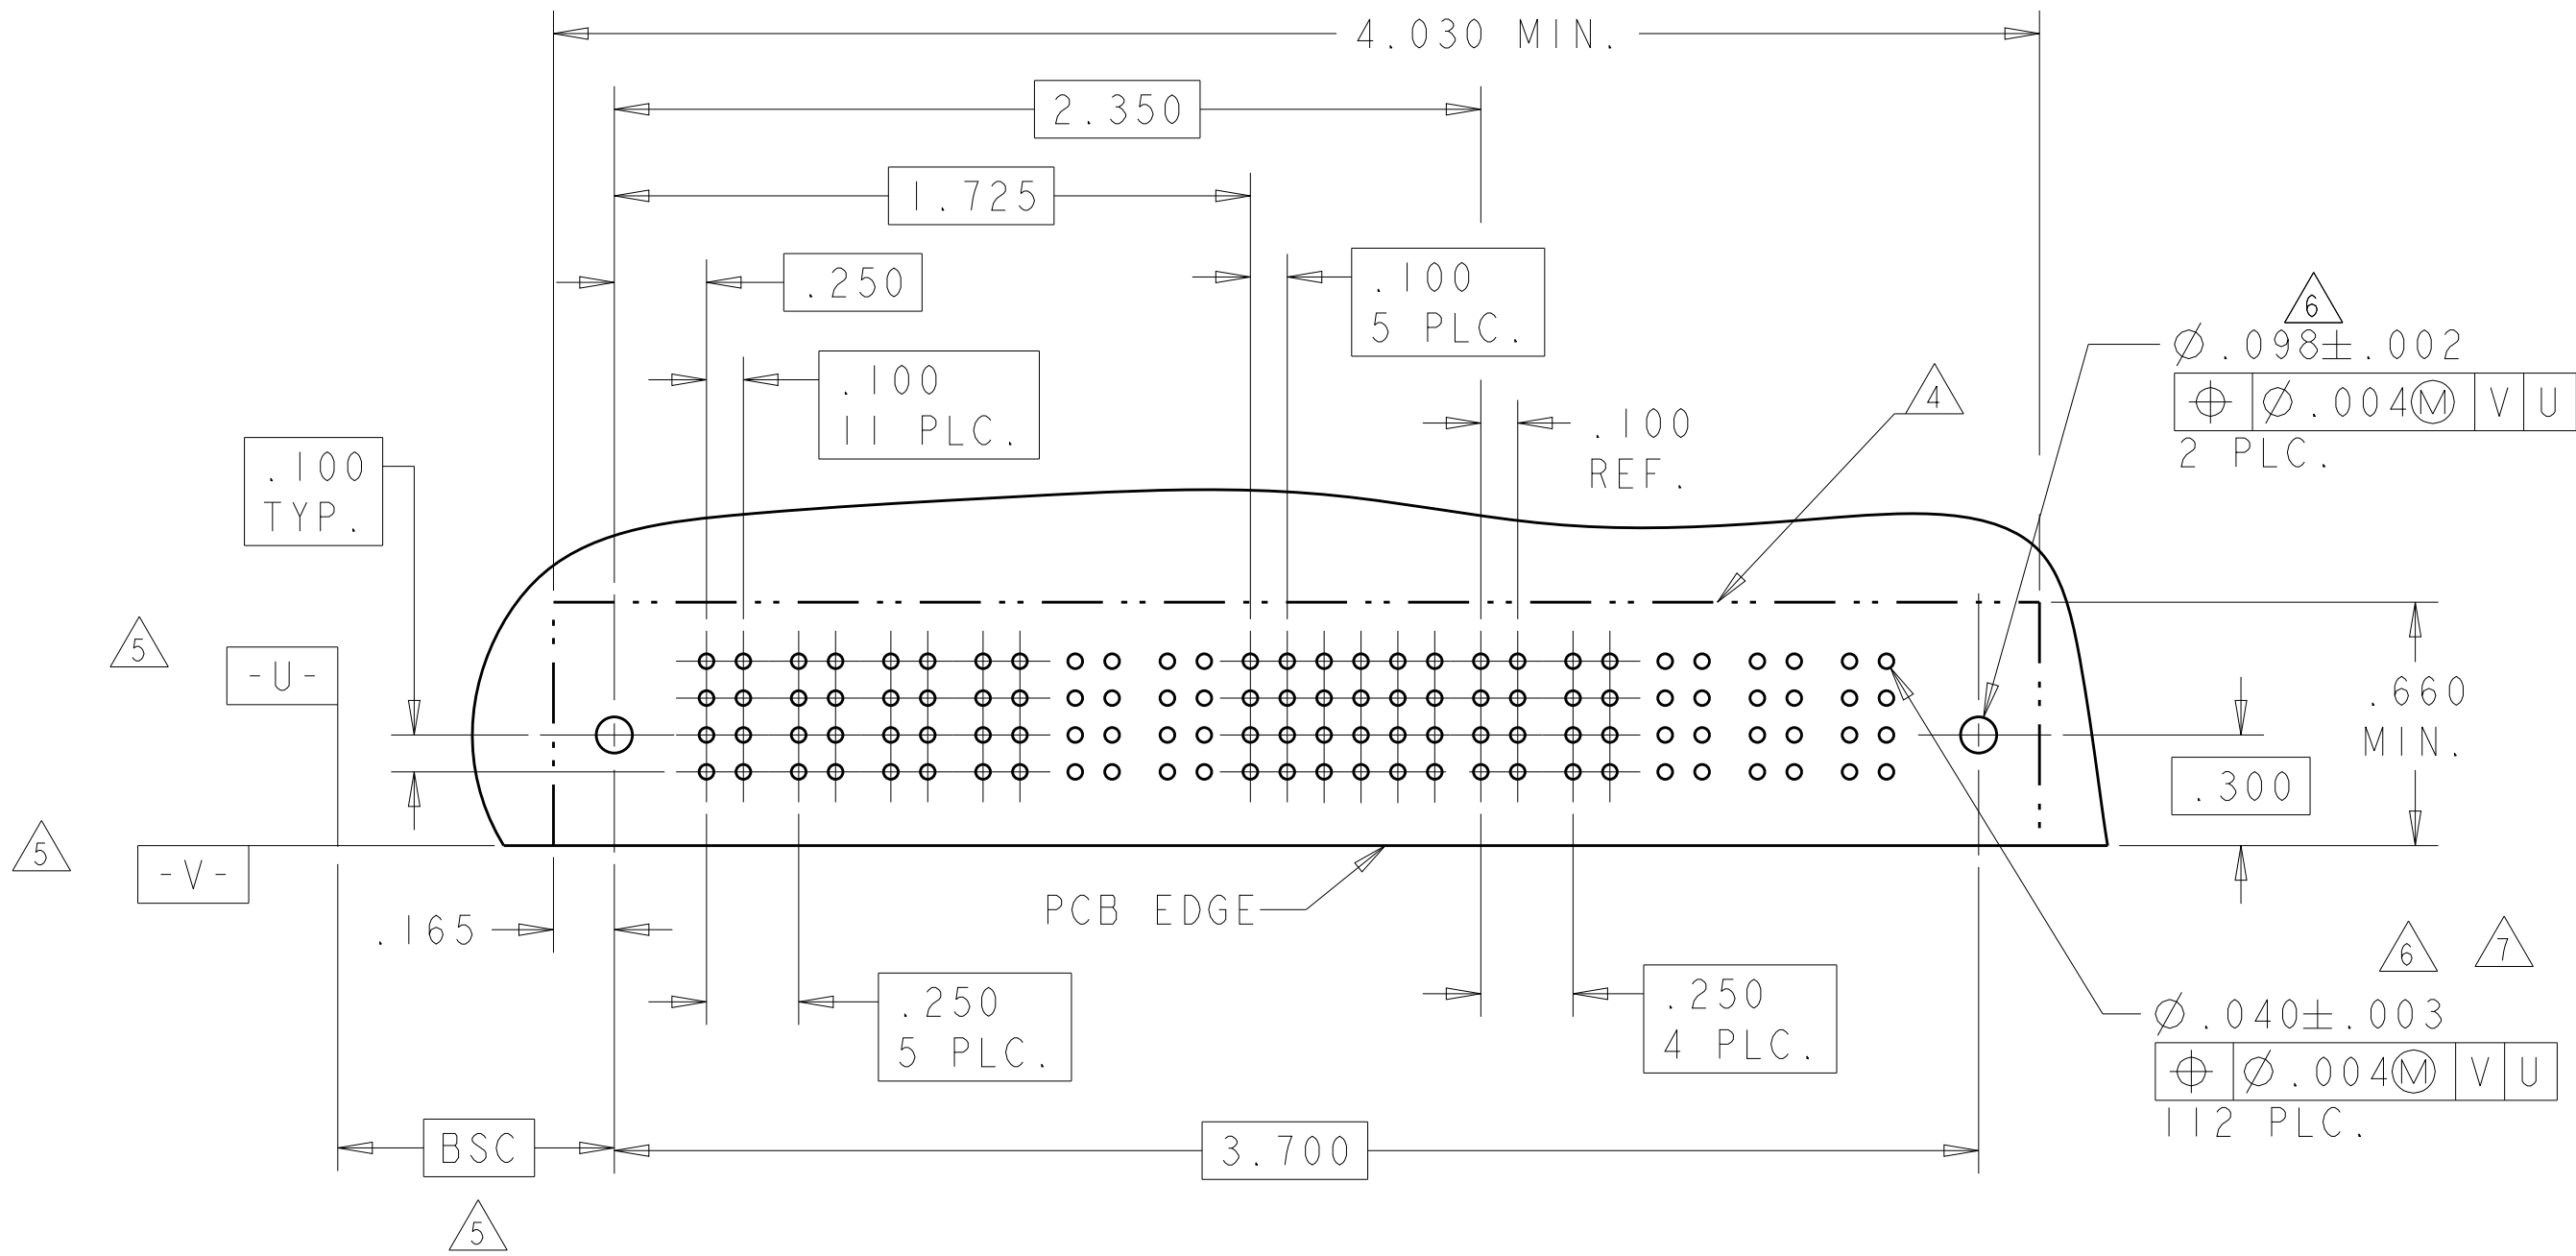
PART NUMBER	ROWS		POWER		SIGNAL						POWER		
			P1	P2	1	2	3	4	5	6	P3	P4	
6450120-2	D C B A		PM	PM	J	J	J	J	J	J	PM	PM	
					K	K	K	K	K	K			
					N	N	N	N	N	N			
					S	S	S	S	S	S			
2P + 24S + 2P													



PART NUMBER	ROWS		POWER			SIGNAL						POWER					
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	P7	P8	
6450120-3	D C B A		PM	PM	PM	J	J	J	J	J	J	PM	PM	PM	PM	PM	
						K	K	K	K	K	K						
						N	N	N	N	N	N						
						S	S	S	S	S	S						
3P + 24S + 5P																	



PART NUMBER	ROWS		POWER						SIGNAL						POWER					
			P1	P2	P3	P4	P5	P6	1	2	3	4	5	6	P7	P8	P9	P10	P11	
6450120-4	D C B A							J	J	J	J	J	J							
								K	K	K	K	K	K							
								N	N	N	N	N	N							
								S	S	S	S	S	S							
6P + 24S + 5P																				



H	MLBF	.135	A
G	MLBF	.135	B
F	MLBF	.135	C
E	MLBF	.135	D
L4	STD	.165	D
L3	STD	.165	B
L2	STD	.165	C
L1	STD	.165	A
Z	STD	.090	D
Y	STD	.090	C
R	STD	.090	B
O	STD	.090	A
F	MLBF	.135	C
G	MLBF	.135	B
J	STD	.135	D
K	STD	.135	C
N	STD	.135	B
S	STD	.135	A
CODE	MATING SEQUENCE	TAIL LENGTH	ROW
SIGNAL CONTACT			

PD	.165
PA	.090
PM	.135
CODE	TAIL LENGTH
POWER CONTACT	

THIS DRAWING IS A CONTROLLED DOCUMENT.

OWN: R. GRZYBOWSKI 02FEB05
CHK: M. PERCHERKE 02FEB05
APVD: M. PERCHERKE 02FEB05

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.002
ANGLES ±.2°

MATERIAL: -

FINISH: -

PRODUCT SPEC: 108-1973

APPLICATION SPEC: 114-13038

WEIGHT: -

CUSTOMER DRAWING

NAME: RIGHT ANGLE HEADER W/GUIDES ASSEMBLY MULTI-BEAM XL

SIZE: A100779

CAGE CODE: -

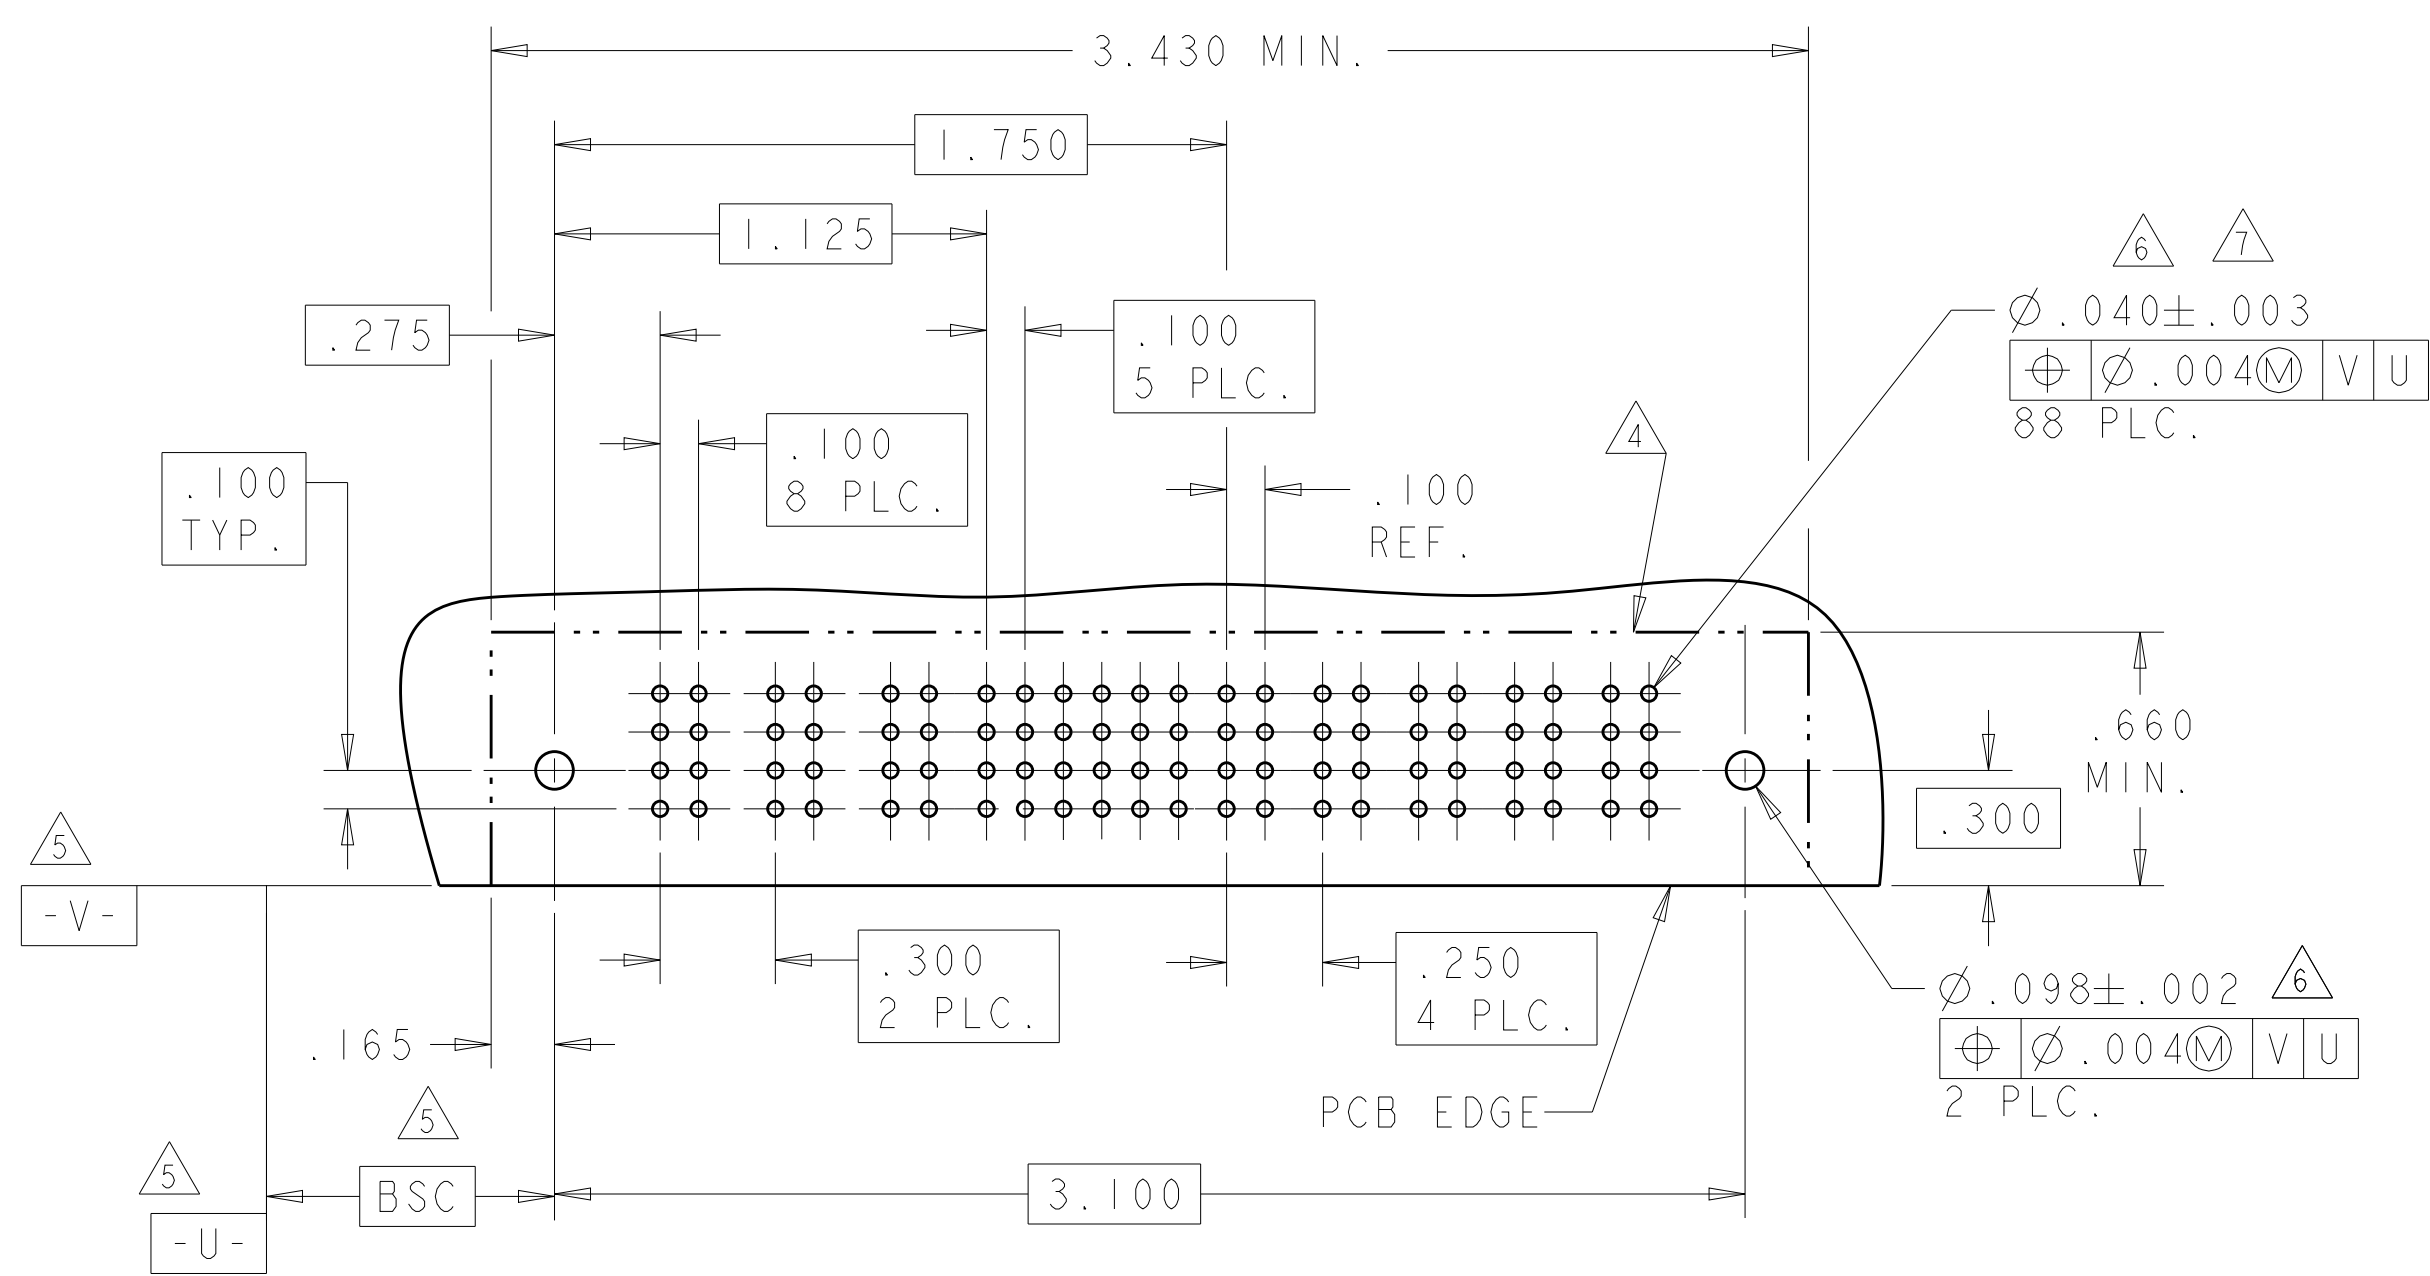
DRAWING NO: 6450120

RESTRICTED TO: -

SCALE: 4:1

SHEET: 3 OF 24

REV: M2

[illegible]

This mechanical drawing illustrates the dimensions and tolerances for a PCB edge connector. The drawing includes the following features and specifications:

- Overall Dimensions:**
 - Top horizontal dimension: 7.780 MIN.
 - Bottom horizontal dimension: 7.450
 - Left vertical dimension: .165
 - Right vertical dimension: .660 MIN.
- Feature Callouts and Tolerances:**
 - Top Edge:**
 - Feature 4: $\varnothing .040 \pm .003$ (244 PLC.)
 - Feature 7: $\varnothing .098 \pm .002$ (2 PLC.)
 - Internal Features:**
 - Feature 5: .100 TYP.
 - Feature 6: .250 (9 PLC.)
 - Feature 7: .250 (20 PLC.)
 - Feature 8: .100 (20 PLC.)
 - Feature 9: .100 REF.
 - Feature 10: .250 (9 PLC.)
- Other Labels:**
 - PCB EDGE
 - BSC (Basic Surface Center)
 - U, V, W, X, Y, Z (Coordinate System)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN GRZYBOWSKI 02FEB05 CHG M. PERCHERKE 02FEB05 APP'D M. PERCHERKE 02FEB05		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME: RIGHT ANGLE HEADER W/GUIDES ASSEMBLY MULTI-BEAM XL	
		0 PLC ±. 1 PLC ±. 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±0°		PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038	
MATERIAL -		FINISH -		SIZE CAGE CODE DRAWING NO RESTRICTED TO A100779C6450120 -	
WEIGHT -		CUSTOMER DRAWING		SCALE 4:1 SHEET 4 of 24 REV M	

[illegible]

Top view drawing of a PCB showing dimensions and features. The drawing includes a grid of 128 vias (13x5) and 2 vias (2x1). Dimensions are provided in inches. Key features include:

- Overall width: 4.530 MIN.
- Overall length: 4.200
- Top edge dimensions: 2.600, 1.975, .250, .100 REF.
- Bottom edge dimensions: .100 TYP., .100 13 PLC., .100 5 PLC., .250 6 PLC., .250 5 PLC., .165, BSC, .300, .660 MIN.
- Right edge dimensions: .040 ± .003 (128 PLC.), .098 ± .002 (2 PLC.), .004 (M), V, U, 6, 7.
- Internal features: .100 REF., .100 13 PLC., .100 5 PLC., .250 6 PLC., .250 5 PLC., .165, BSC, .300, .660 MIN.
- Labels: PCB EDGE, .040 ± .003 (128 PLC.), .098 ± .002 (2 PLC.), .004 (M), V, U, 6, 7.

[illegible]

Technical drawing of a PCB layout showing dimensions, tolerances, and surface finish requirements.

Dimensions and Tolerances:

- Overall length: 4.730 MIN.
- Overall width: .660 MIN.
- Top edge dimensions: 3.300, 2.475, .250, .100 (13 PLC.), .100 (7 PLC.), .100 REF.
- Bottom edge dimensions: .165, .250 (8 PLC.), .250 (3 PLC.), .300
- Internal dimensions: 4.400, .100 TYP.

Surface Finish Requirements:

- Top edge: $\phi .040 \pm .003$ (136 PLC.)
- Bottom edge: $\phi .098 \pm .002$ (2 PLC.)

Other Features:

- PCB EDGE
- Surface finish callouts: 4, 5, 6, 7
- Material callouts: -U-, -V-, BSC

[illegible]

THIS DRAWING IS A CONTROLLED DOCUMENT.		PWN 02FEB05 CHK M PERCHERKE 02FEB05 M PERCHERKE 02FEB05		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±.01 2 PLC ±.005 3 PLC ±.0020 ANGLES ±.3°		NAME RIGHT ANGLE HEADER W/GUIDES ASSEMBLY MULTI-BEAM XL	
		PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038		SIZE A1	
MATERIAL -		FINISH -		CASE CODE C-6450120	
WEIGHT -		CUSTOMER DRAWING -		RESTRICTED TO -	
				SCALE 4:1 SHEET 5 OF 24 REV M2	

.165
 2.175
 1.500
 .850
 .275
 .100
 7 PLC
 .100
 5 PLC
 3.055 MIN
 72 PLC
 $\phi .040 \pm .003$
 $\phi .004 (M)$ V U
 .660 MIN
 .300
 .200
 2 PLC
 .200
 .200
 PCB EDGE
 $\phi .098 \pm .002$
 $\phi .004 (M)$ V U
 2 PLC
 .725
 .100
 7 PLC
 .100
 5 PLC
 .660 MIN
 .300
 .200
 2 PLC
 .200
 .200
 PCB EDGE
 $\phi .098 \pm .002$
 $\phi .004 (M)$ V U
 2 PLC
 .725

[illegible]

Mechanical drawing of a PCB edge connector showing dimensions and tolerances. The drawing includes the following features:

- Overall Dimensions:**
 - Overall width: 1.580 MIN
 - Overall height: .660 MIN
- Internal Dimensions and Tolerances:**
 - Top edge: .165 (from left edge), 1.250 (from .165 to center of top hole), .900 (between top and bottom holes), .475 (from center of bottom hole to left edge), .250 (from center of bottom hole to right edge).
 - Bottom edge: .100 TYP (from bottom edge to center of bottom hole), .300 (from center of bottom hole to bottom edge), .100 (from center of bottom hole to left edge), .100 (from center of bottom hole to right edge).
- Plating and Surface Finish:**
 - Top surface: $\Delta 6$, $\Delta 7$, $\varnothing .040 \pm .003$, $\oplus \varnothing .004 \text{ M}$, V, U, 32 PLC.
 - Bottom surface: $\Delta 5$, $\Delta 5$, $\Delta 5$, BSC, $\Delta 5$, .100 3 PLC, -U-.
- Other Features:**
 - Two circular holes on the top edge, each with a diameter of $\varnothing .098 \pm .002$ and a surface finish of $\Delta 6$.
 - Two circular holes on the bottom edge, each with a diameter of $\varnothing .098 \pm .002$ and a surface finish of $\Delta 6$.
 - PCB EDGE label pointing to the bottom edge.

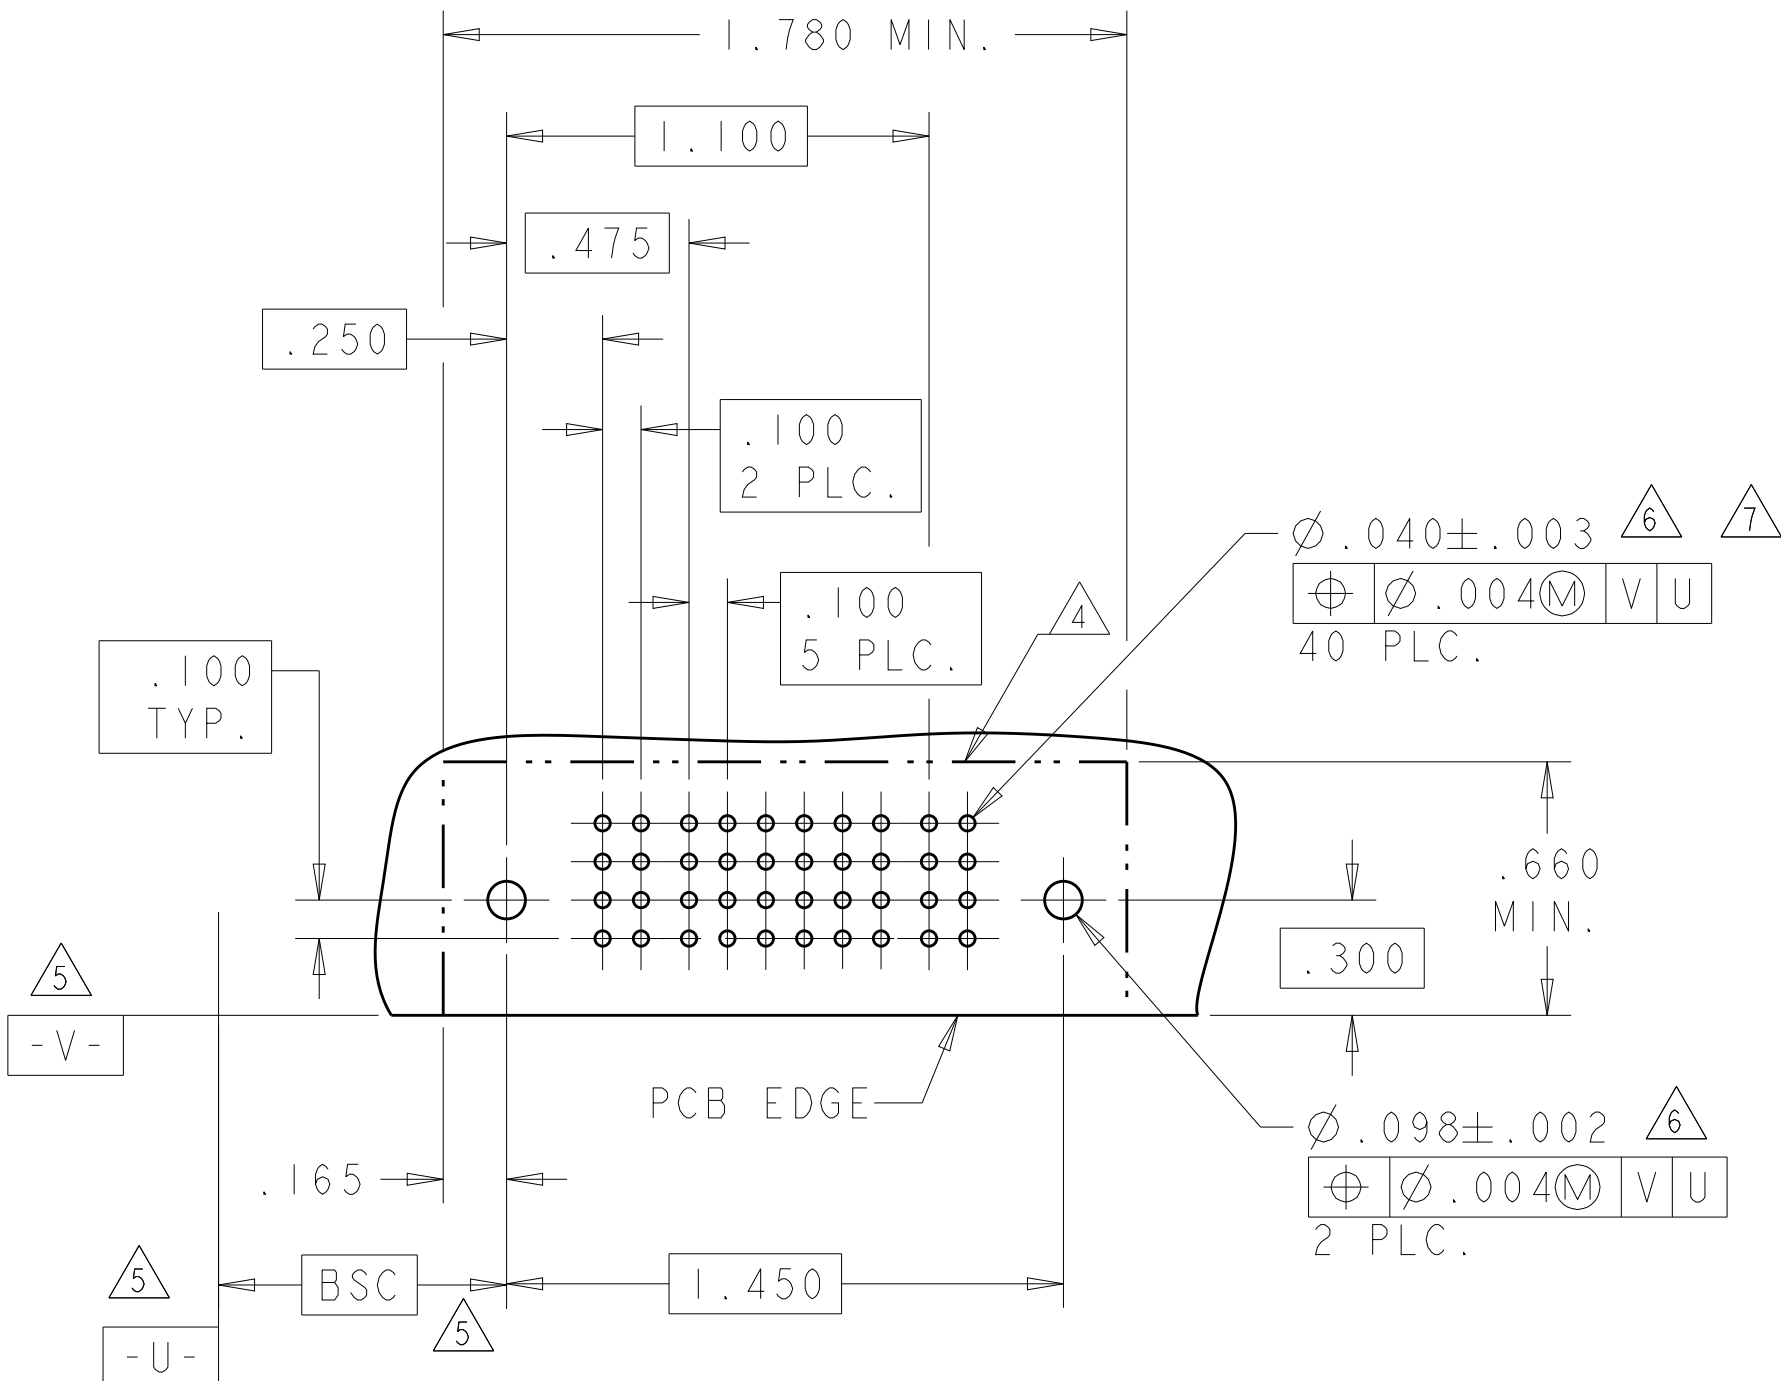
THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:
INCHES		
	0 PLC	$\pm .$
	1 PLC	$\pm .$
	2 PLC	$\pm .01$
	3 PLC	$\pm .005$
	4 PLC	$\pm .0020$
ANGLES		$\pm 2^\circ$
MATERIAL	FINISH	
-	-	

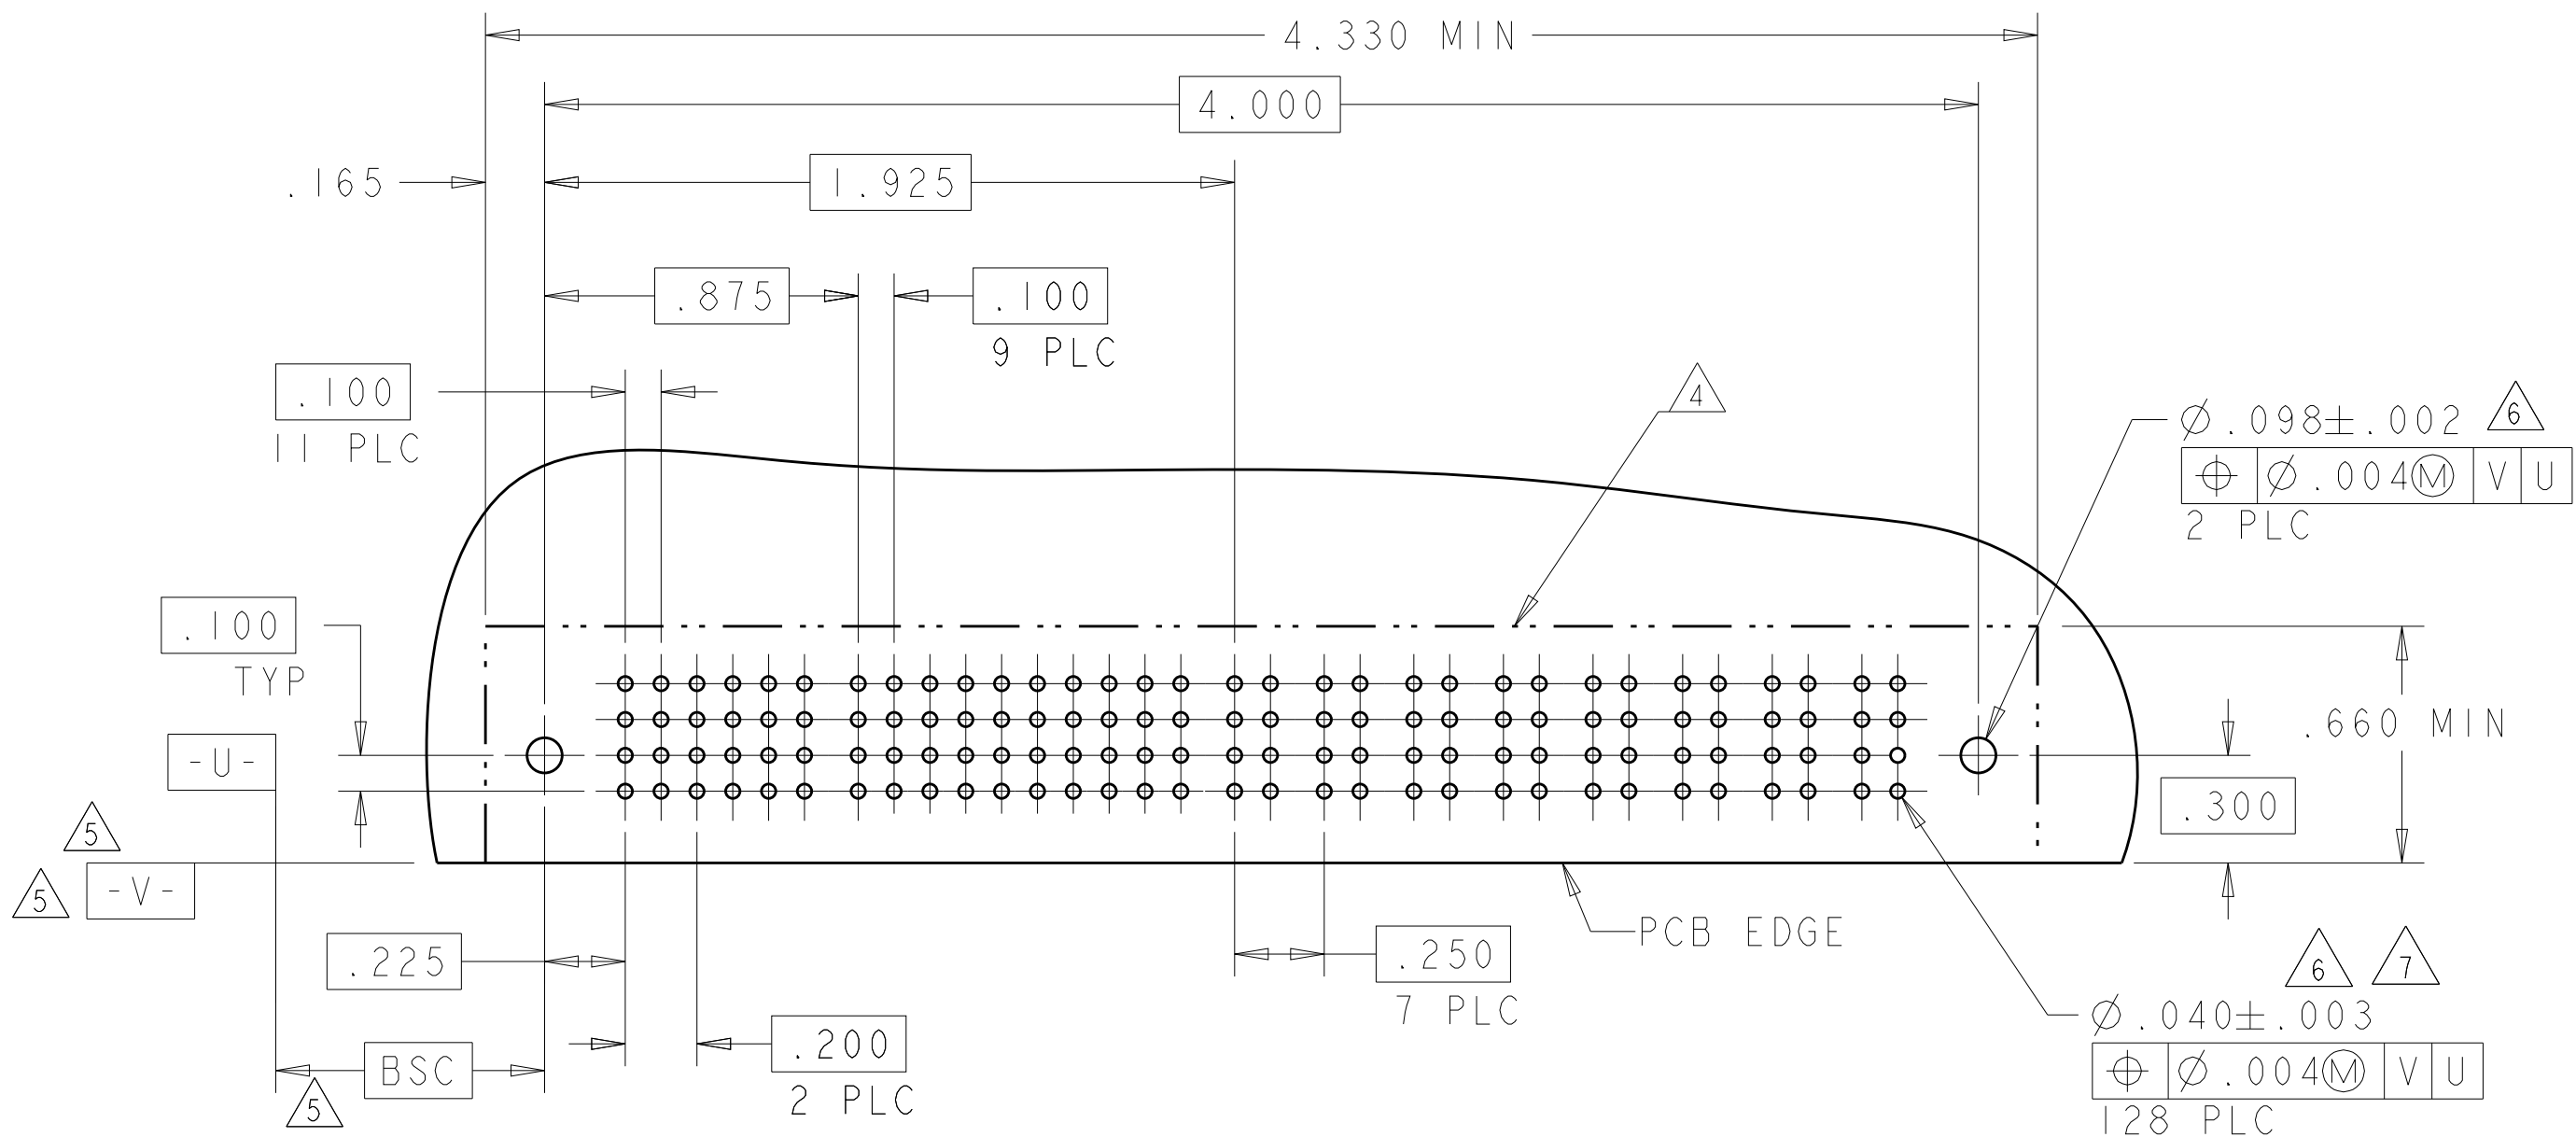
DWN R.GRZYBOWSKI	02FEB05
CHK M.PERCHERRE	02FEB05
APP'D V.PERCHERRE	02FEB05
PRODUCT SPEC	
108-1973	
APPLICATION SPEC	
114-13038	
WEIGHT	
-	
CUSTOMER DRAWING	

NAM	SIZE	CAGE CODE	DRAW
RIGHT ANGLE	A100779		

PART NUMBER	ROWS	POWER		SIGNAL						POWER	
		PI	P2	1	2	3	4	5	6	P2	PI
1-6450120-6	D C B A		PA	Z	Z	Z	Z	Z	Z	PA	
				Y	Y	Y	Y	Y	Y		
				R	R	R	R	R	R		
				O	O	O	O	O	O		
IP + 24S + IP		HD									HD

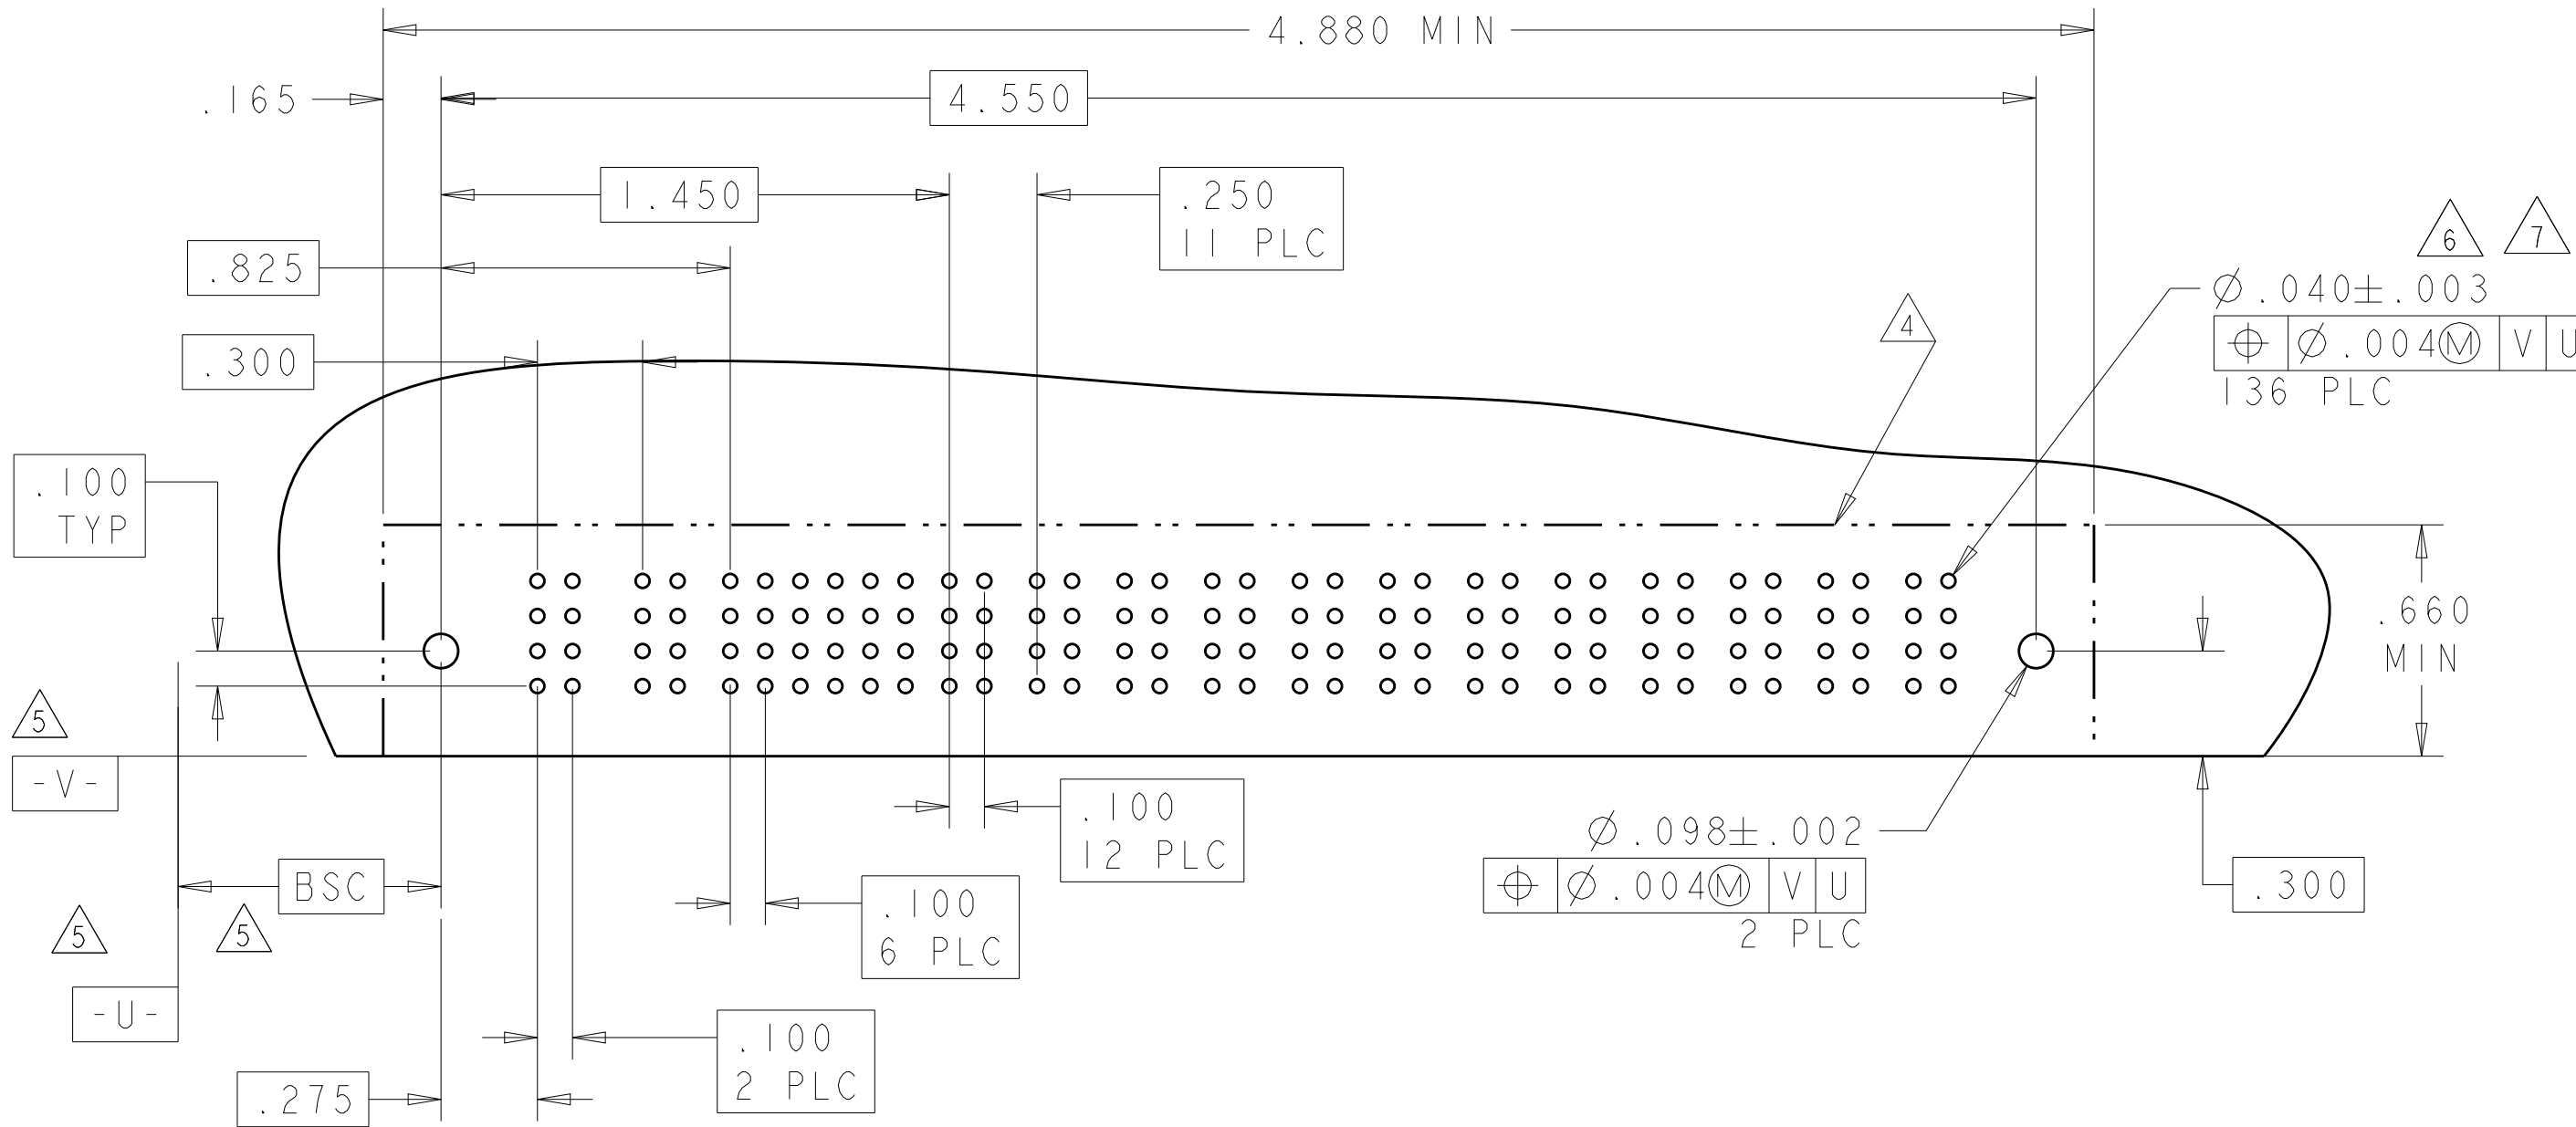


PART NUMBER	ROWS		POWER			SIGNAL										POWER									
			P1	P2	P3	1	2	3	4	5	6	7	8	9	10	P4	P5	P6	P7	P8	P9	P10	P11		
2-6450120-0	D C B A		PM	PM	PM	J	J	J	J	J	J	J	J	J	J	PM	PM	PM	PM	PM	PM	PM	PM		
						K	K	K	K	K	K	K	K	K	K									K	
						N	N	N	N	N	N	N	N	N	N									N	N
						S	S	S	S	S	S	S	S	S	S									S	S
3P + 40S + 8P			HD																					HD	

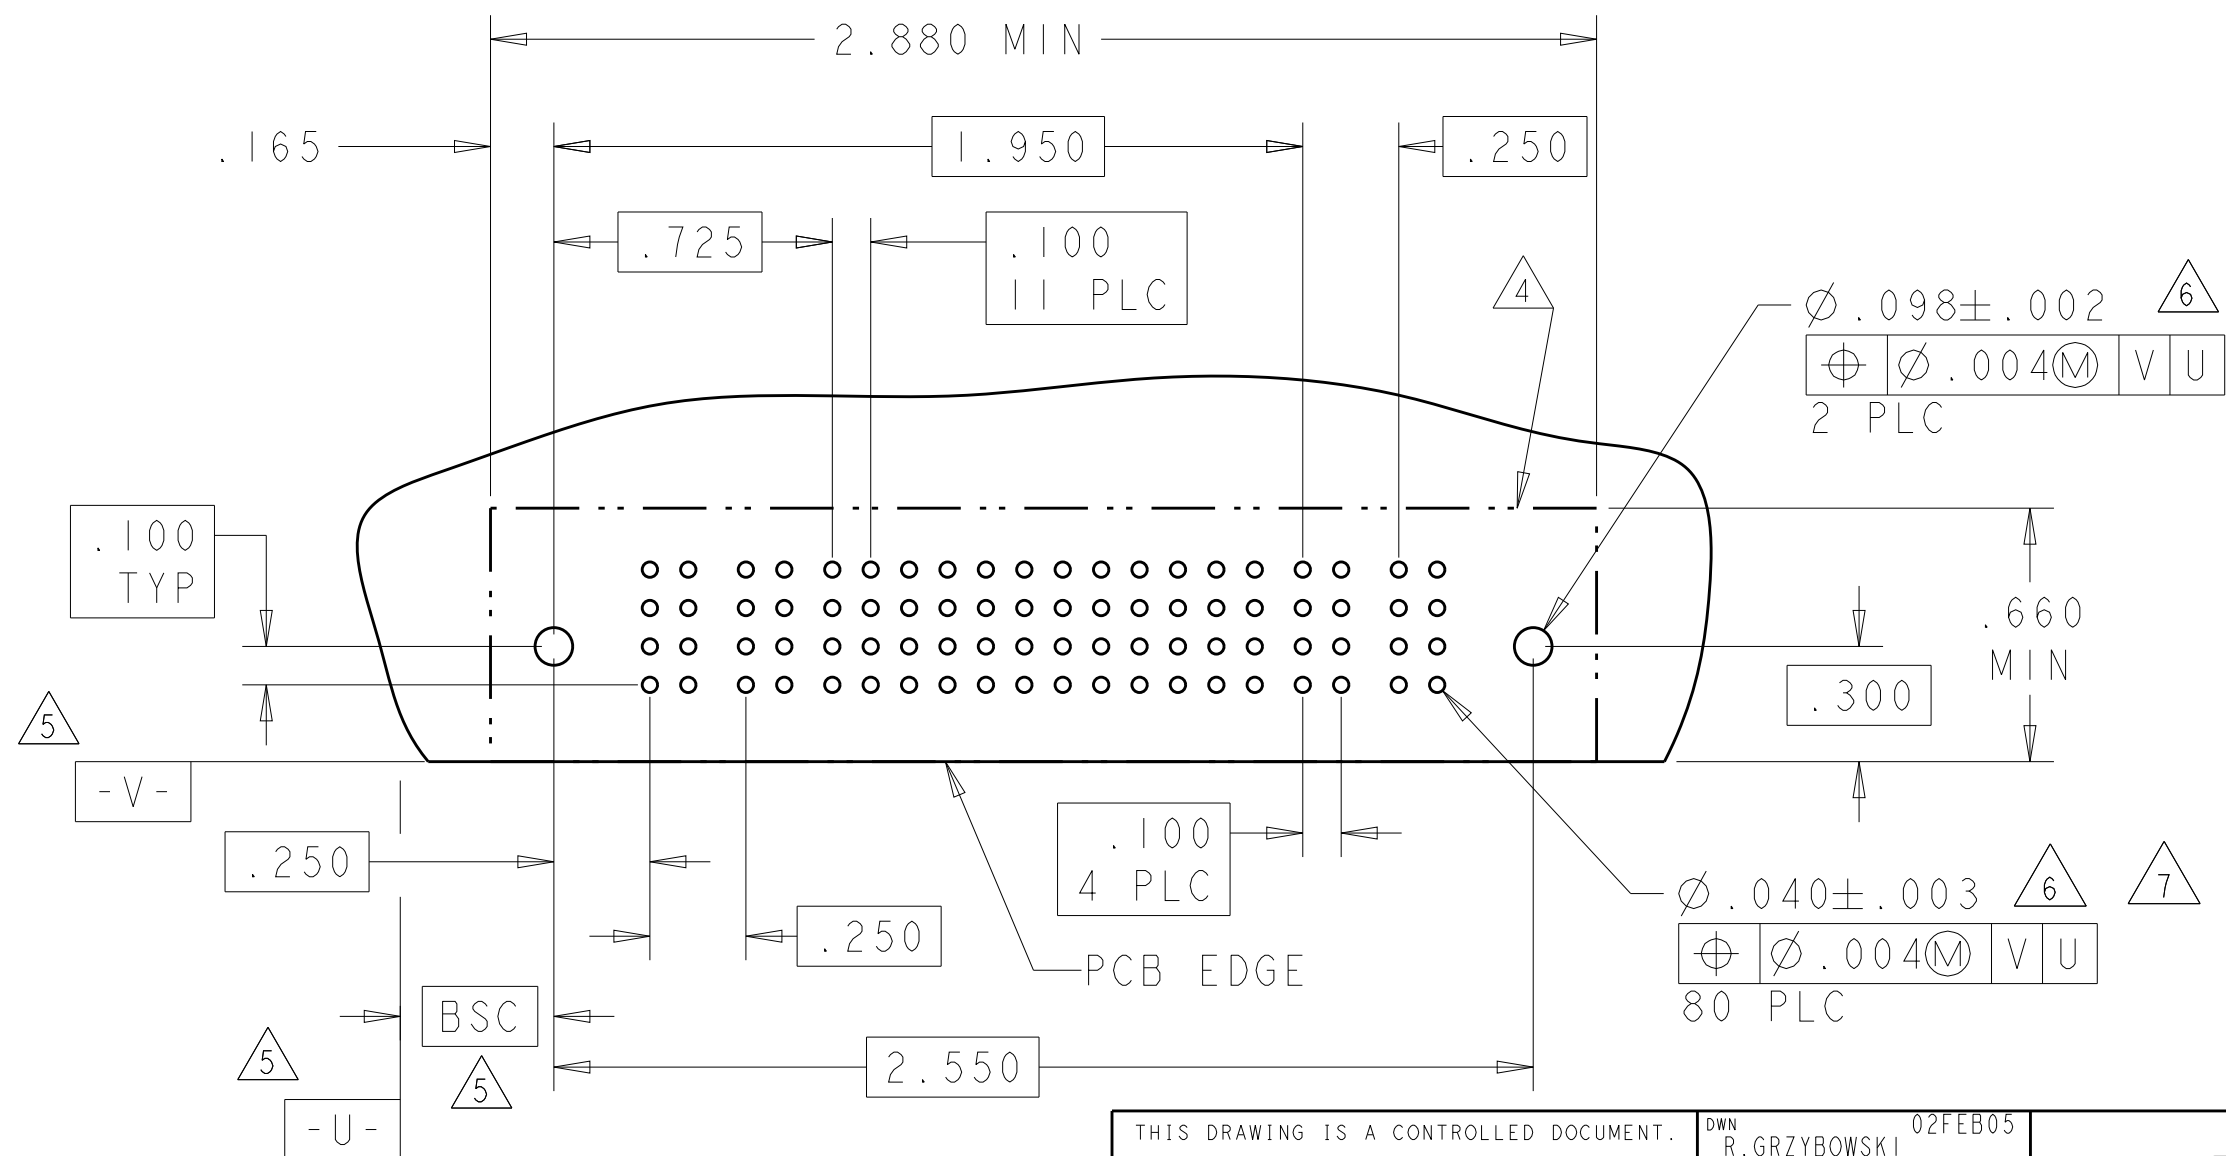


LOC		DIST		REVISIONS			
P	LYR	DESCRIPTION		DATE	DWN	APVD	
ES	00	-	SEE SHEET 1	-	-	-	

PART NUMBER	ROWS		POWER		SIGNAL						POWER																																																																																																																																																																																																																																																																																																																															
			P1	P2	1	2	3	4	5	6	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	P14																																																																																																																																																																																																																																																																																																																				
2-6450120-2	D C B A																																																																																																																																																																																																																																																																																																																																									

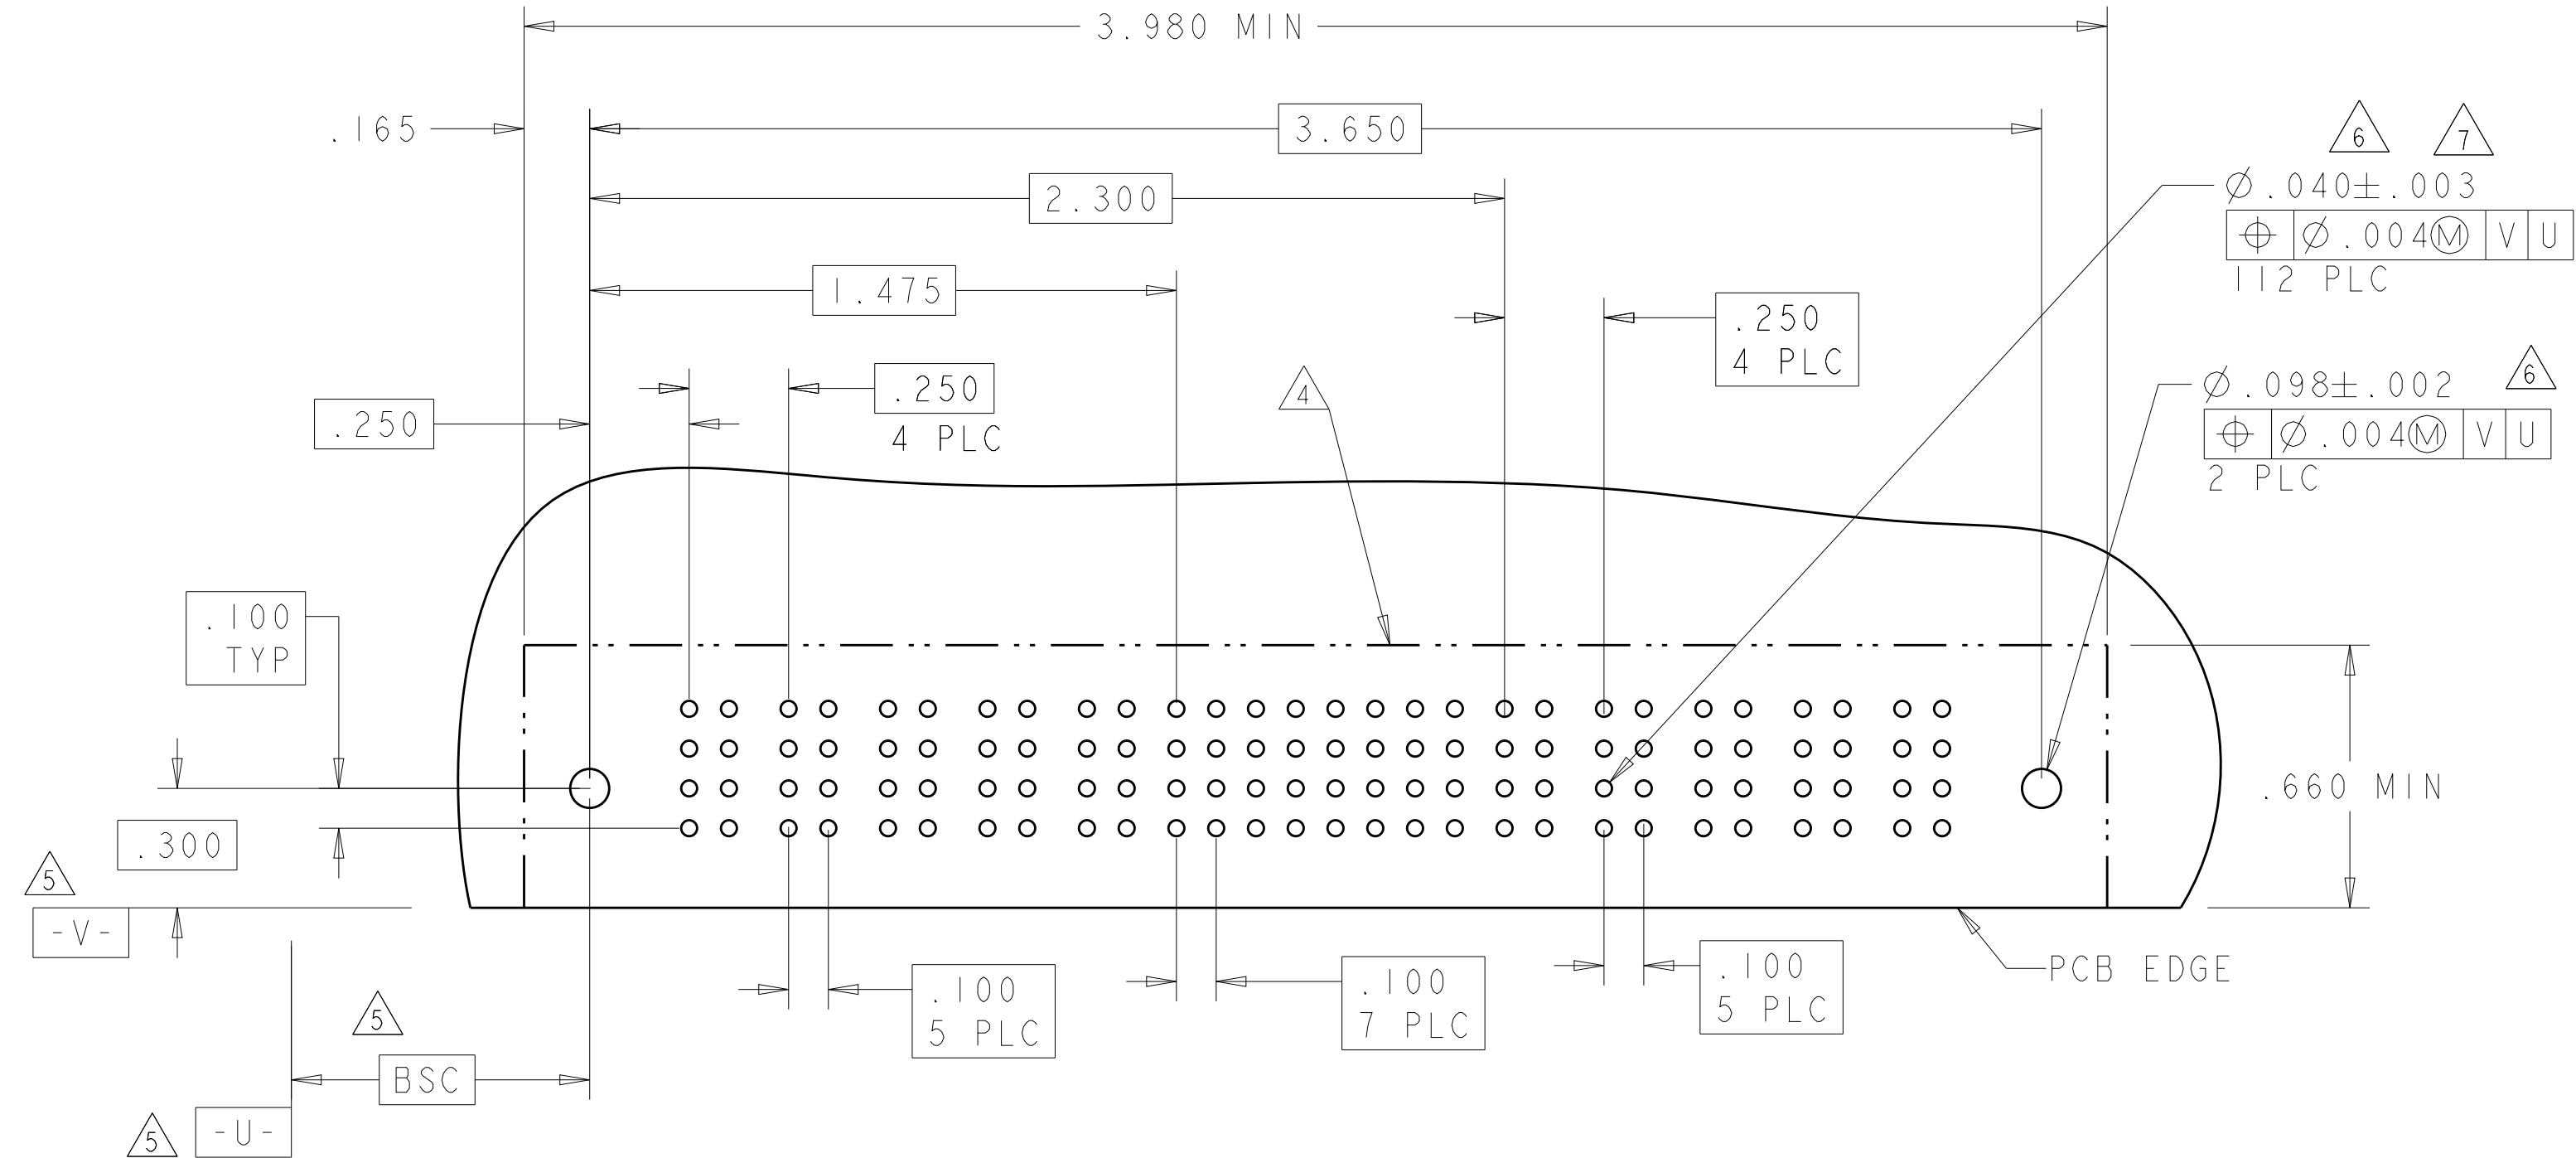



PART NUMBER	ROWS		POWER		SIGNAL												POWER			
			P1	P2	1	2	3	4	5	6	7	8	9	10	11	12	P3	P4		
2-6450120-3	D C B A		PM	PM	J	J	J	J	J	J	J	J	J	J	J	PM	PM			
					K	K	K	K	K	K	K	K	K	K	K				K	
					N	N	N	N	N	N	N	N	N	N	N				N	N
					S	S	S	S	S	S	S	S	S	S	S				S	S
2P + 48S + 2P			HD														HD			

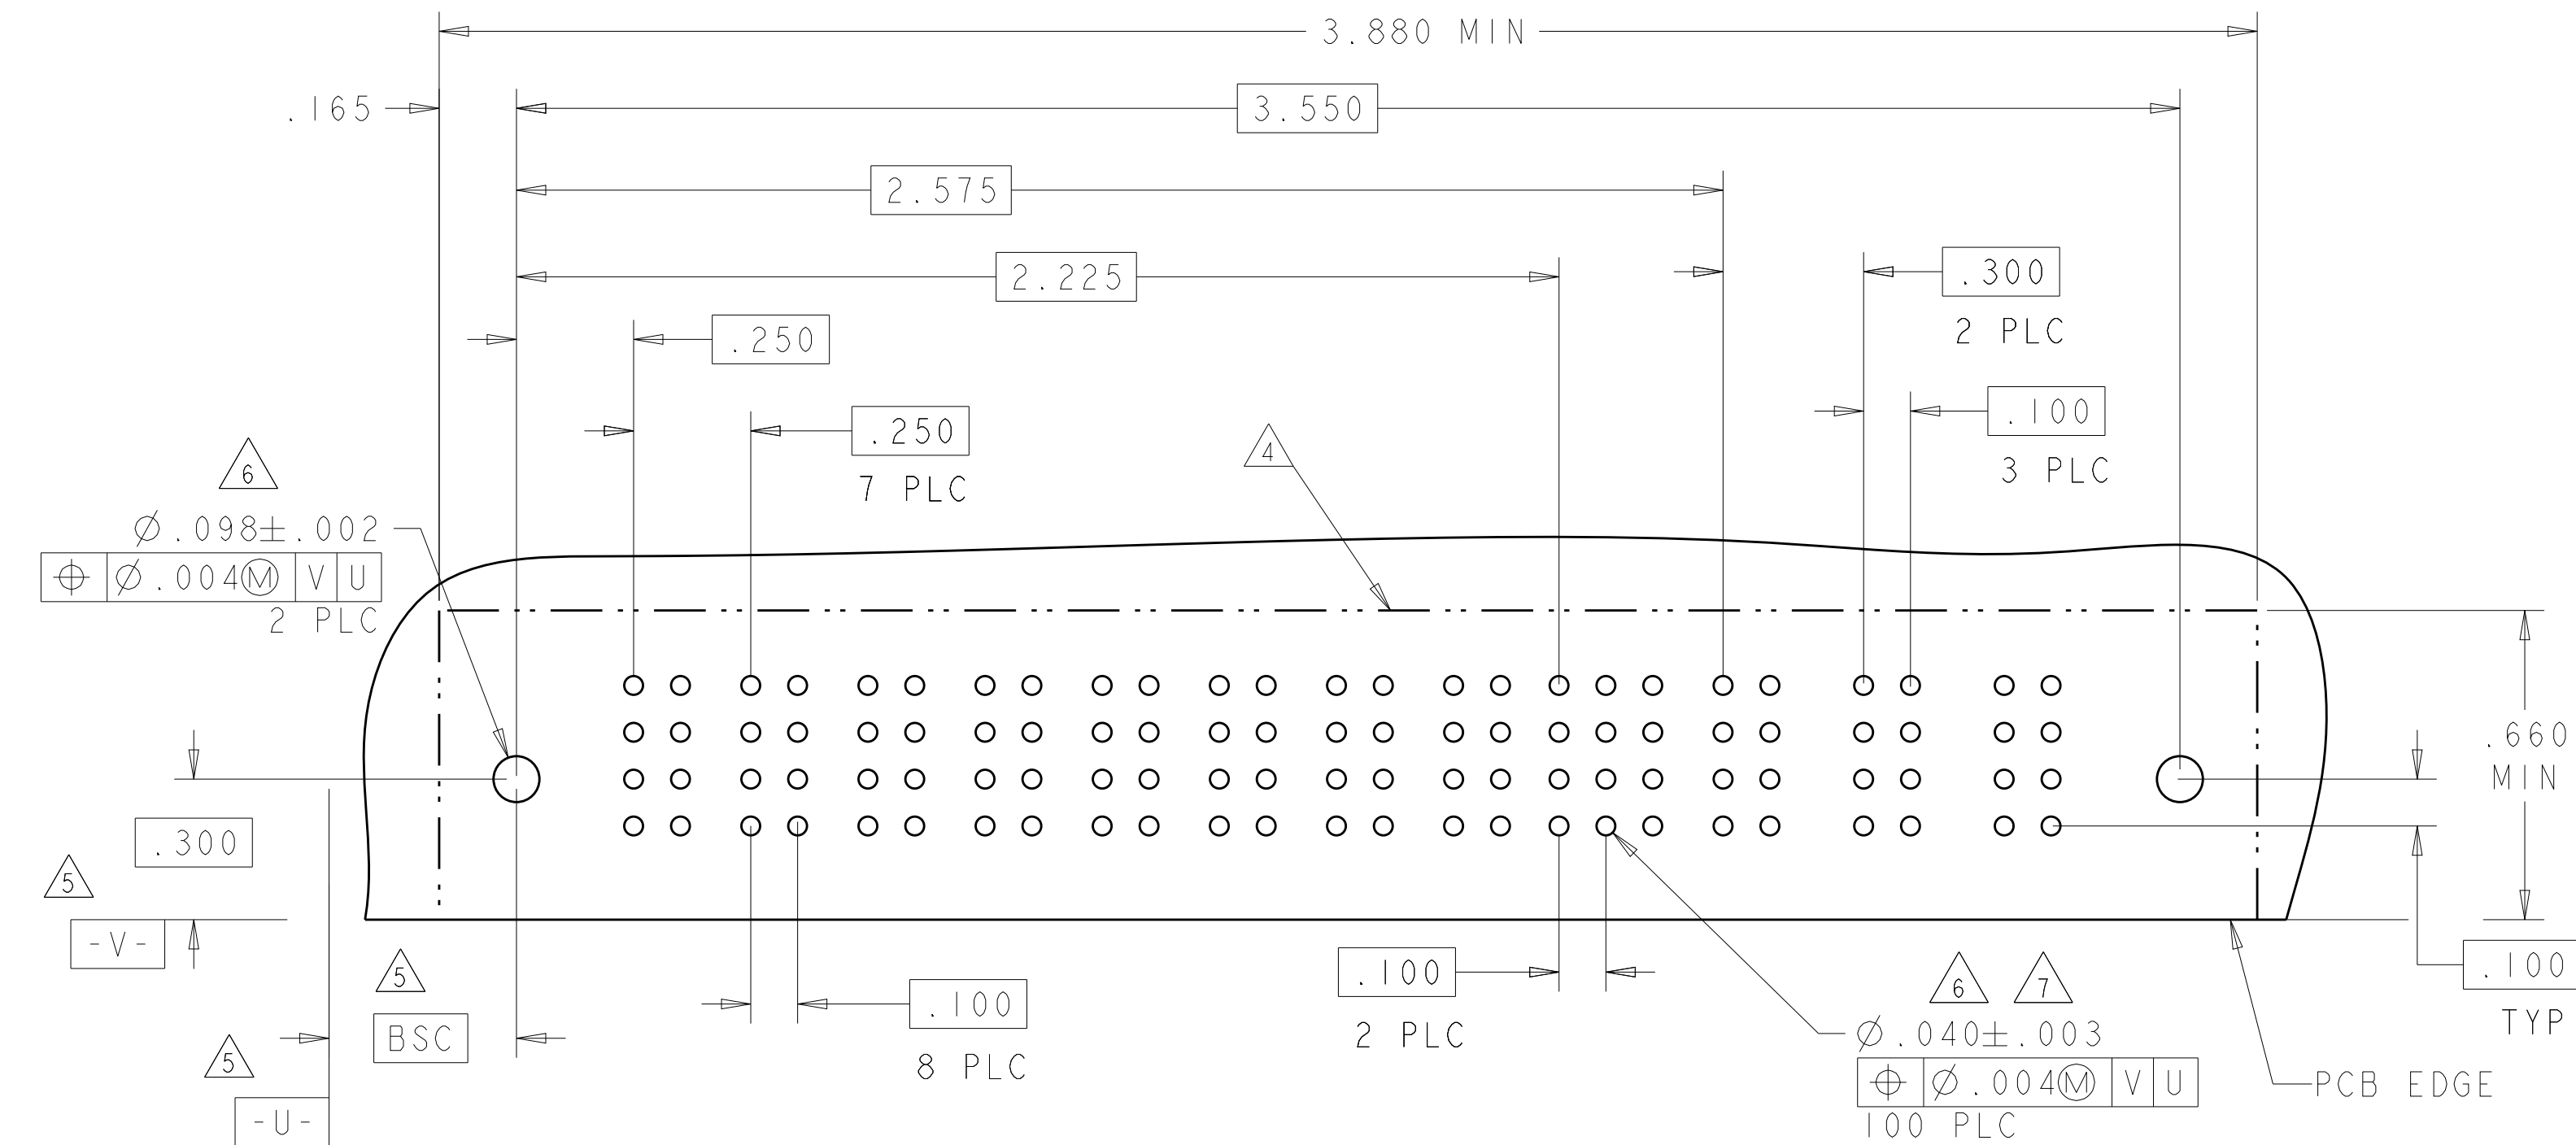


THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN	R. GRZYBOWSKI	02FEB05	 TE Connectivity																						
DIMENSIONS: INCHES				TOLERANCES UNLESS OTHERWISE SPECIFIED:				CHK	M. PERCHERKE	02FEB05	RIGHT ANGLE HEADER W/GUIDES ASSEMBLY MULTI-BEAM XL																		
								APVD	M. PERCHERKE	02FEB05		NAME																	
				PRODUCT SPEC				SIZE				CAGE CODE	DRAWING NO	RESTRICTED TO															
				108-1973																									
				APPLICATION SPEC																									
				114-13038																									
				WEIGHT																									
MATERIAL				FINISH				CUSTOMER DRAWING				SCALE			SHEET			7 of 24			REV			M2					
-				-				A1				100779			©=6450120			-											

PART NUMBER	ROWS		POWER					SIGNAL								POWER					
			P1	P2	P3	P4	P5	1	2	3	4	5	6	7	8	P6	P7	P8	P9	P10	
2-6450120-4	D C B A		PM	PM	PM	PM	PM	J	J	J	J	J	J	J	J	PM	PM	PM	PM	PM	
								K	K	K	K	K	K	K	K						
								N	N	N	N	N	N	N	N						
								S	S	S	S	S	S	S	S						
5P + 32S + 5P																					

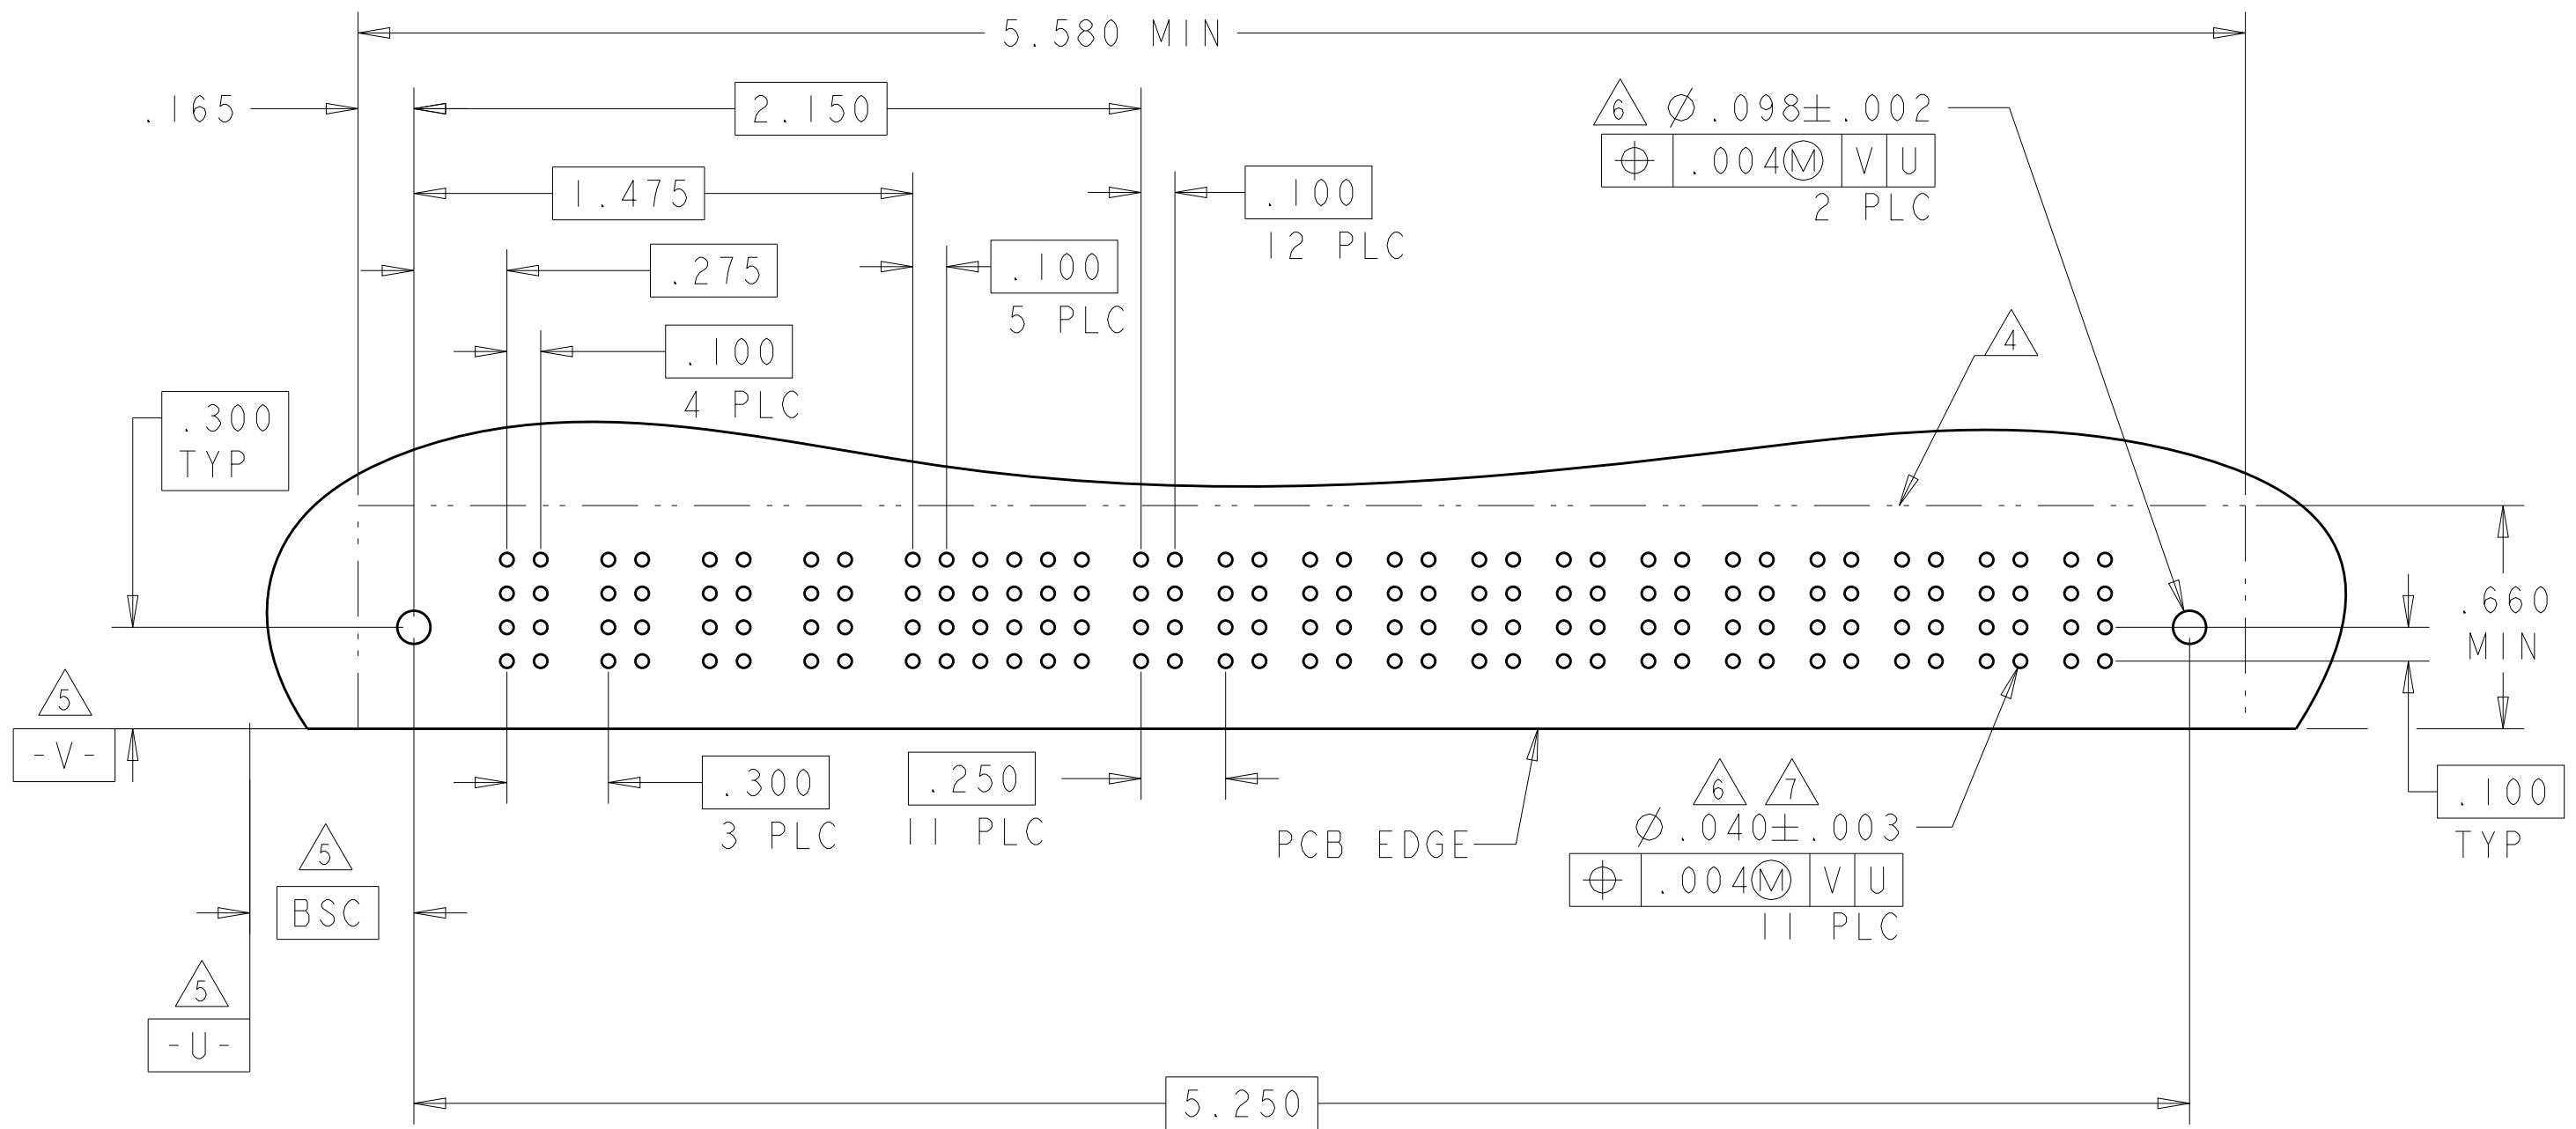


PART NUMBER	ROWS		POWER								SIGNAL			POWER			
			P1	P2	P3	P4	P5	P6	P7	P8	1	2	3	P9	P10	P11	
3-6450120-3	D C B A																
																	
																	
																	
8P + 12S + 3ACP																	

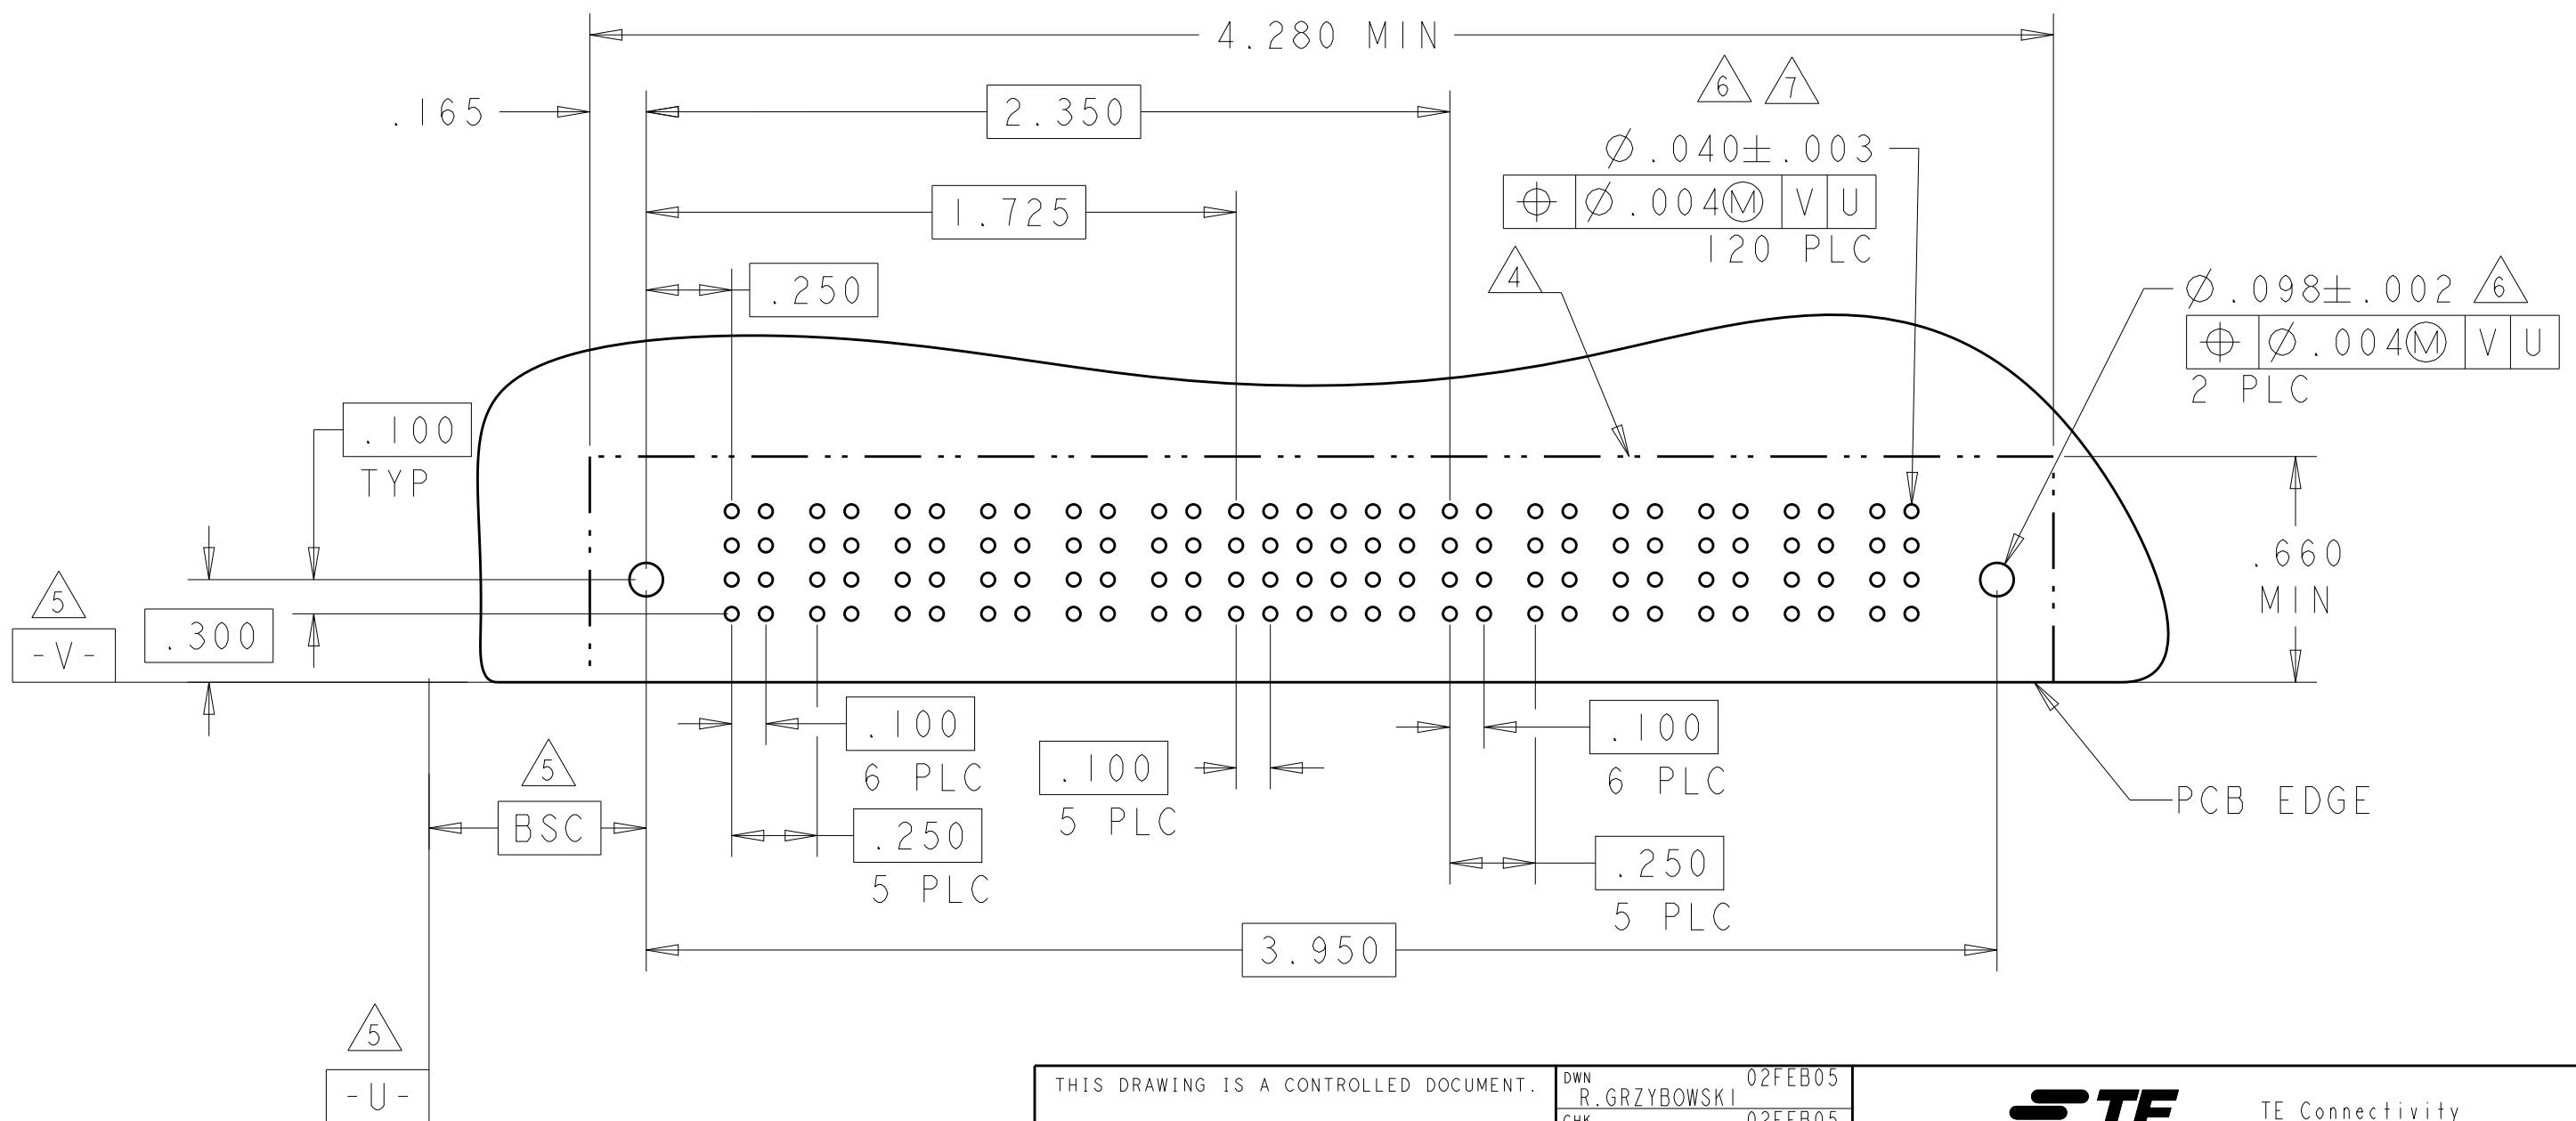


LOC	DIST	REVISONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS		AC POWER				SIGNAL						POWER											
			P1	P2	P3	P4	1	2	3	4	5	6	P5	P6	P7	P8	P9	P10	P11	P12		P13	P14	P15
2-6450120-6	D C B A					J	J	J	J	J	J													
						K	K	K	K	K	K													
						N	N	N	N	N	N													
						S	S	S	S	S	S													
4ACP + 24S + 12P																								



PART NUMBER	ROWS		POWER						SIGNAL						POWER						
			P1	P2	P3	P4	P5	P6	1	2	3	4	5	6	P7	P8	P9	P10	P11	P12	
2-6450120-7	D C B A	HD	PM	PM	PM	PM	PM	J	J	J	J	J	J	PM	PM	PM	PM	PM	PM		
								K	K	K	K	K	K								
								N	N	N	N	N	N								
								S	S	S	S	S	S								
6P + 24S + 6P																					



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI	02FEB05	 TE Connectivity					
DIMENSIONS: INCHES		CHK M. PERCHERKE	02FEB05						
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. PERCHERKE	02FEB05	NAME					
		PRODUCT SPEC		RIGHT ANGLE HEADER W/GUIDES ASSEMBLY MULTI-BEAM XL					
		108-1973							
		APPLICATION SPEC							
		114-13038							
MATERIAL		WEIGHT		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
FINISH		CUSTOMER DRAWING		A1	100779	C6450120	-		
				SCALE	4:1	SHEET	8 OF 24	REV	M2

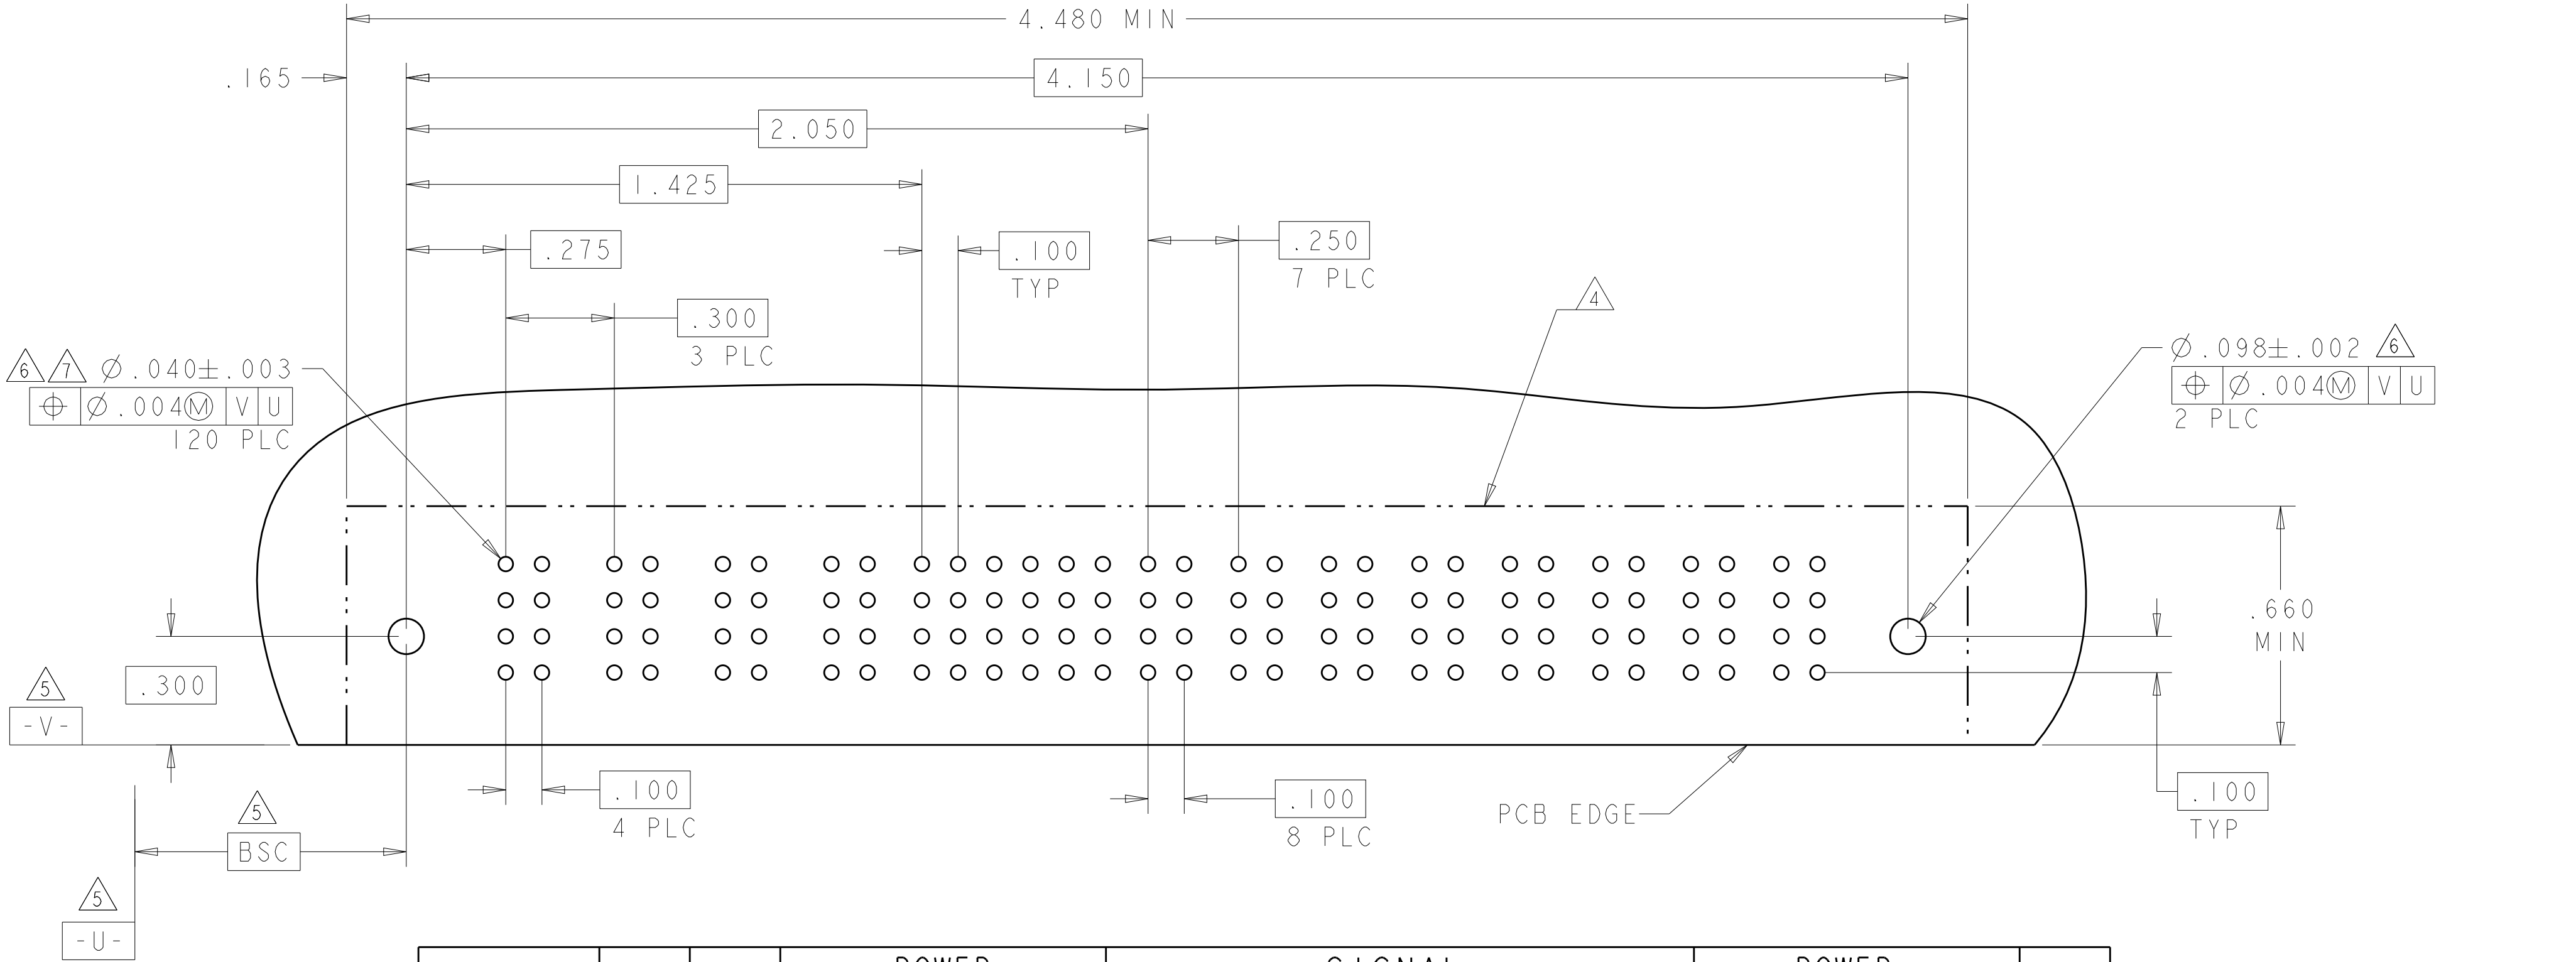
[illegible]

Technical drawing of a PCB layout for a 24 PLC and 132 PLC assembly. The drawing shows a rectangular PCB with a central array of 24 PLCs and a larger array of 132 PLCs. Dimensions are provided in inches, including overall length (4.180 MIN), width (.165), and various spacing dimensions. Callouts include 'PCB EDGE', '24 PLC', '132 PLC', and various tolerance specifications like $\phi .098 \pm .002$ and $\phi .040 \pm .003$.

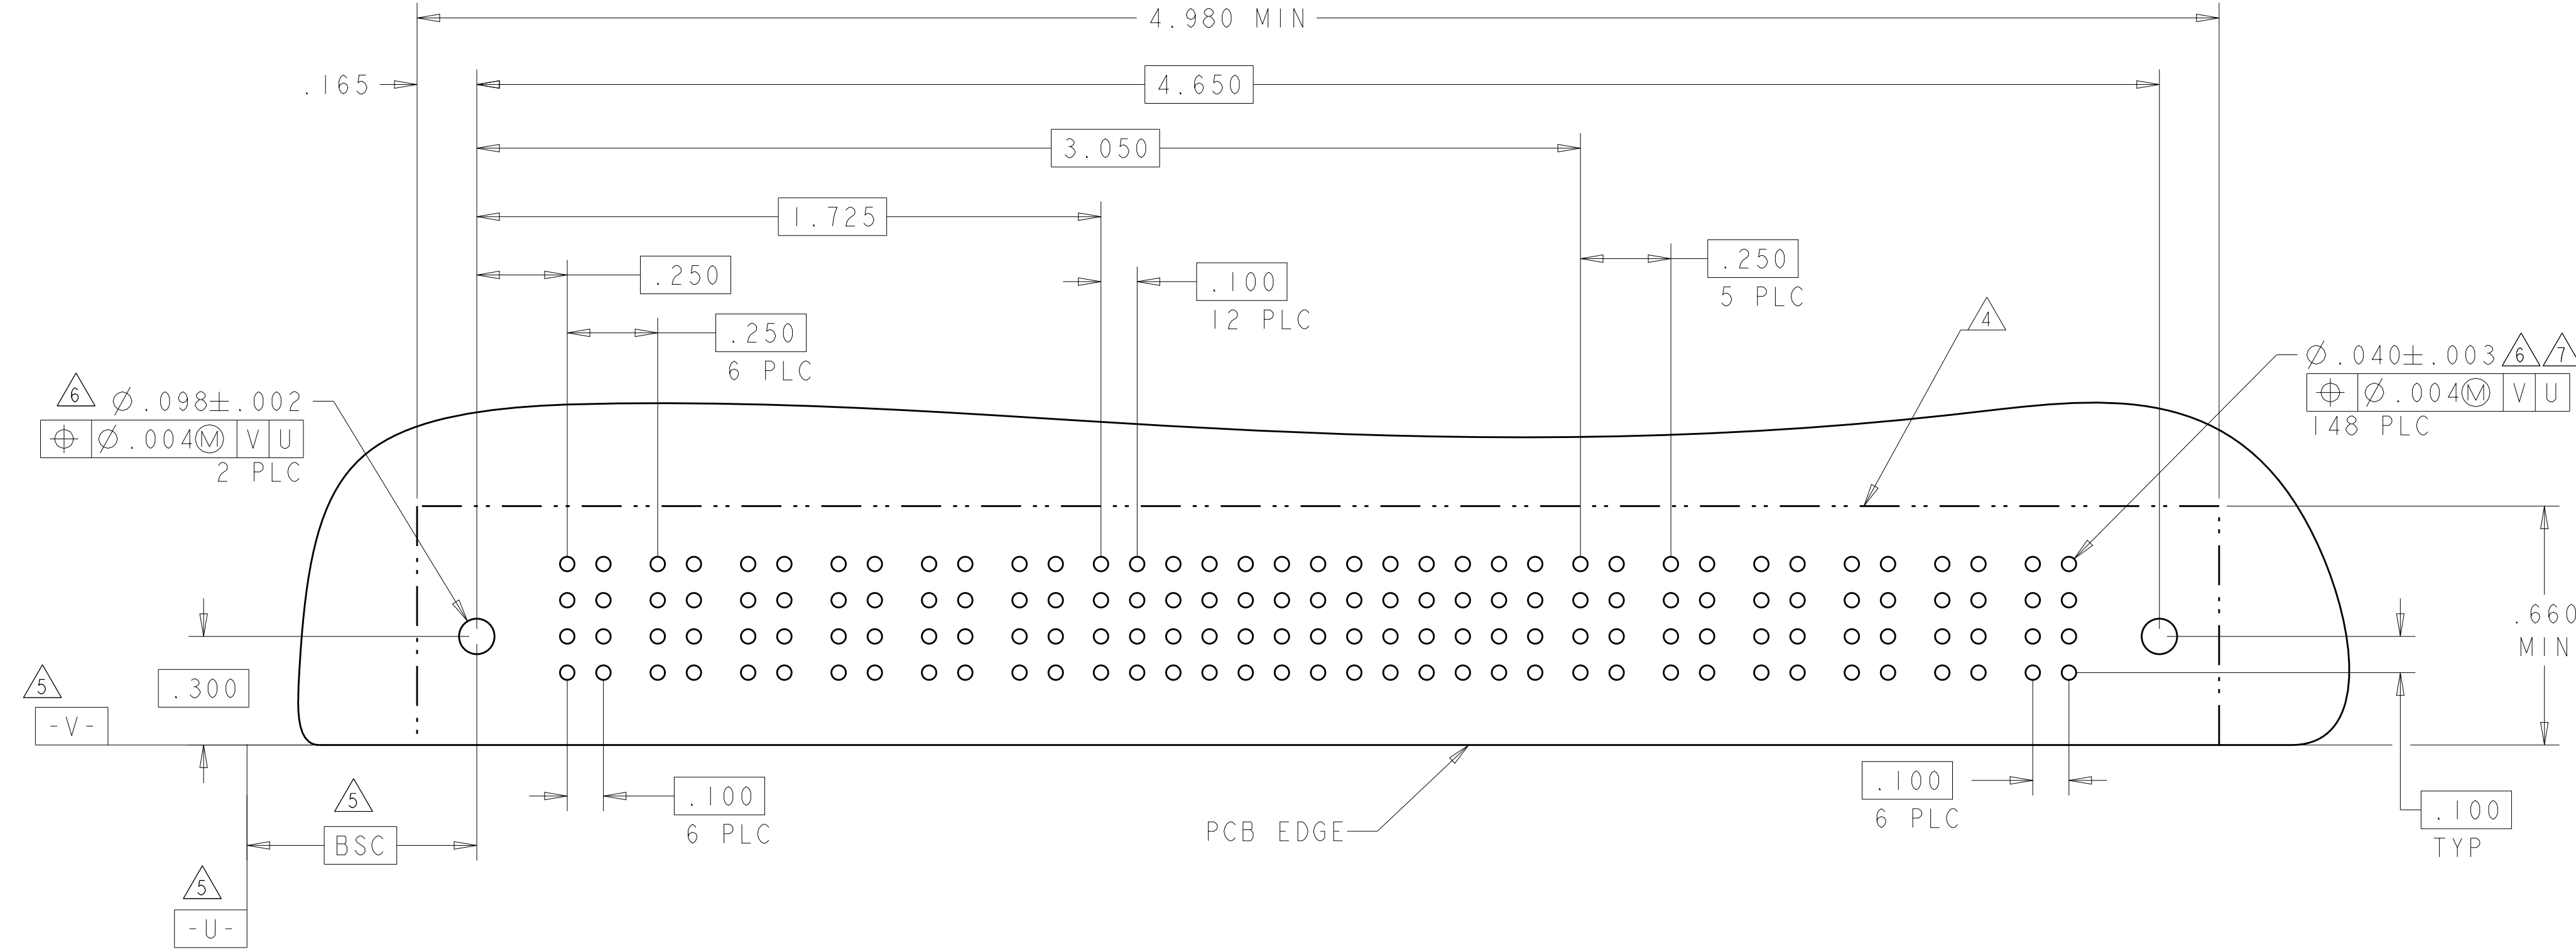
4805 (3/11)

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS		POWER				SIGNAL						POWER								
			P1	P2	P3	P4	1	2	3	4	5	6	P5	P6	P7	P8	P9	P10	P11	P12	
4-6450120-0	D C B A			PM	PM	PM	PM	J	J	J	J	J	J	PM	PM	PM	PM	PM	PM	PM	
								K	K	K	K	K	K								
								N	N	N	N	N	N								
								S	S	S	S	S	S								
4ACP + 24S + 8P																					



PART NUMBER	ROWS		POWER						SIGNAL													POWER									
			P1	P2	P3	P4	P5	P6	1	2	3	4	5	6	7	8	9	10	11	12	13	P7	P8	P9	P10	P11	P12				
3-6450120-5	D C B A			PM	PM	PM	PM	PM	PM	J	J	J	J	J	J	J	J	J	J	J	J	J	PM	PM	PM	PM	PM	PM			
										K	K	K	K	K	K	K	K	K	K	K	K	K								K	
										N	N	N	N	N	N	N	N	N	N	N	N	N								N	N
										S	S	S	S	S	S	S	S	S	S	S	S	S								S	S
6P + 52S + 6P																															



THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN R.GRZYBOWSKI 02FEB05
CHK M.PERCHEKKE 02FEB05
APVD M.PERCHEKKE 02FEB05

DIMENSIONS:
INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH

MATERIAL

-

PRODUCT SPEC

108-1973

APPLICATION SPEC

114-13038

WEIGHT

-

CUSTOMER DRAWING

SCALE 4:1 SHEET 10 OF 24 REV M2

TE Connectivity

RIGHT ANGLE HEADER W/GUIDES ASSEMBLY MULTI-BEAM XL

SIZE

A100779

CAGE CODE

C=6450120


DRAWING NO

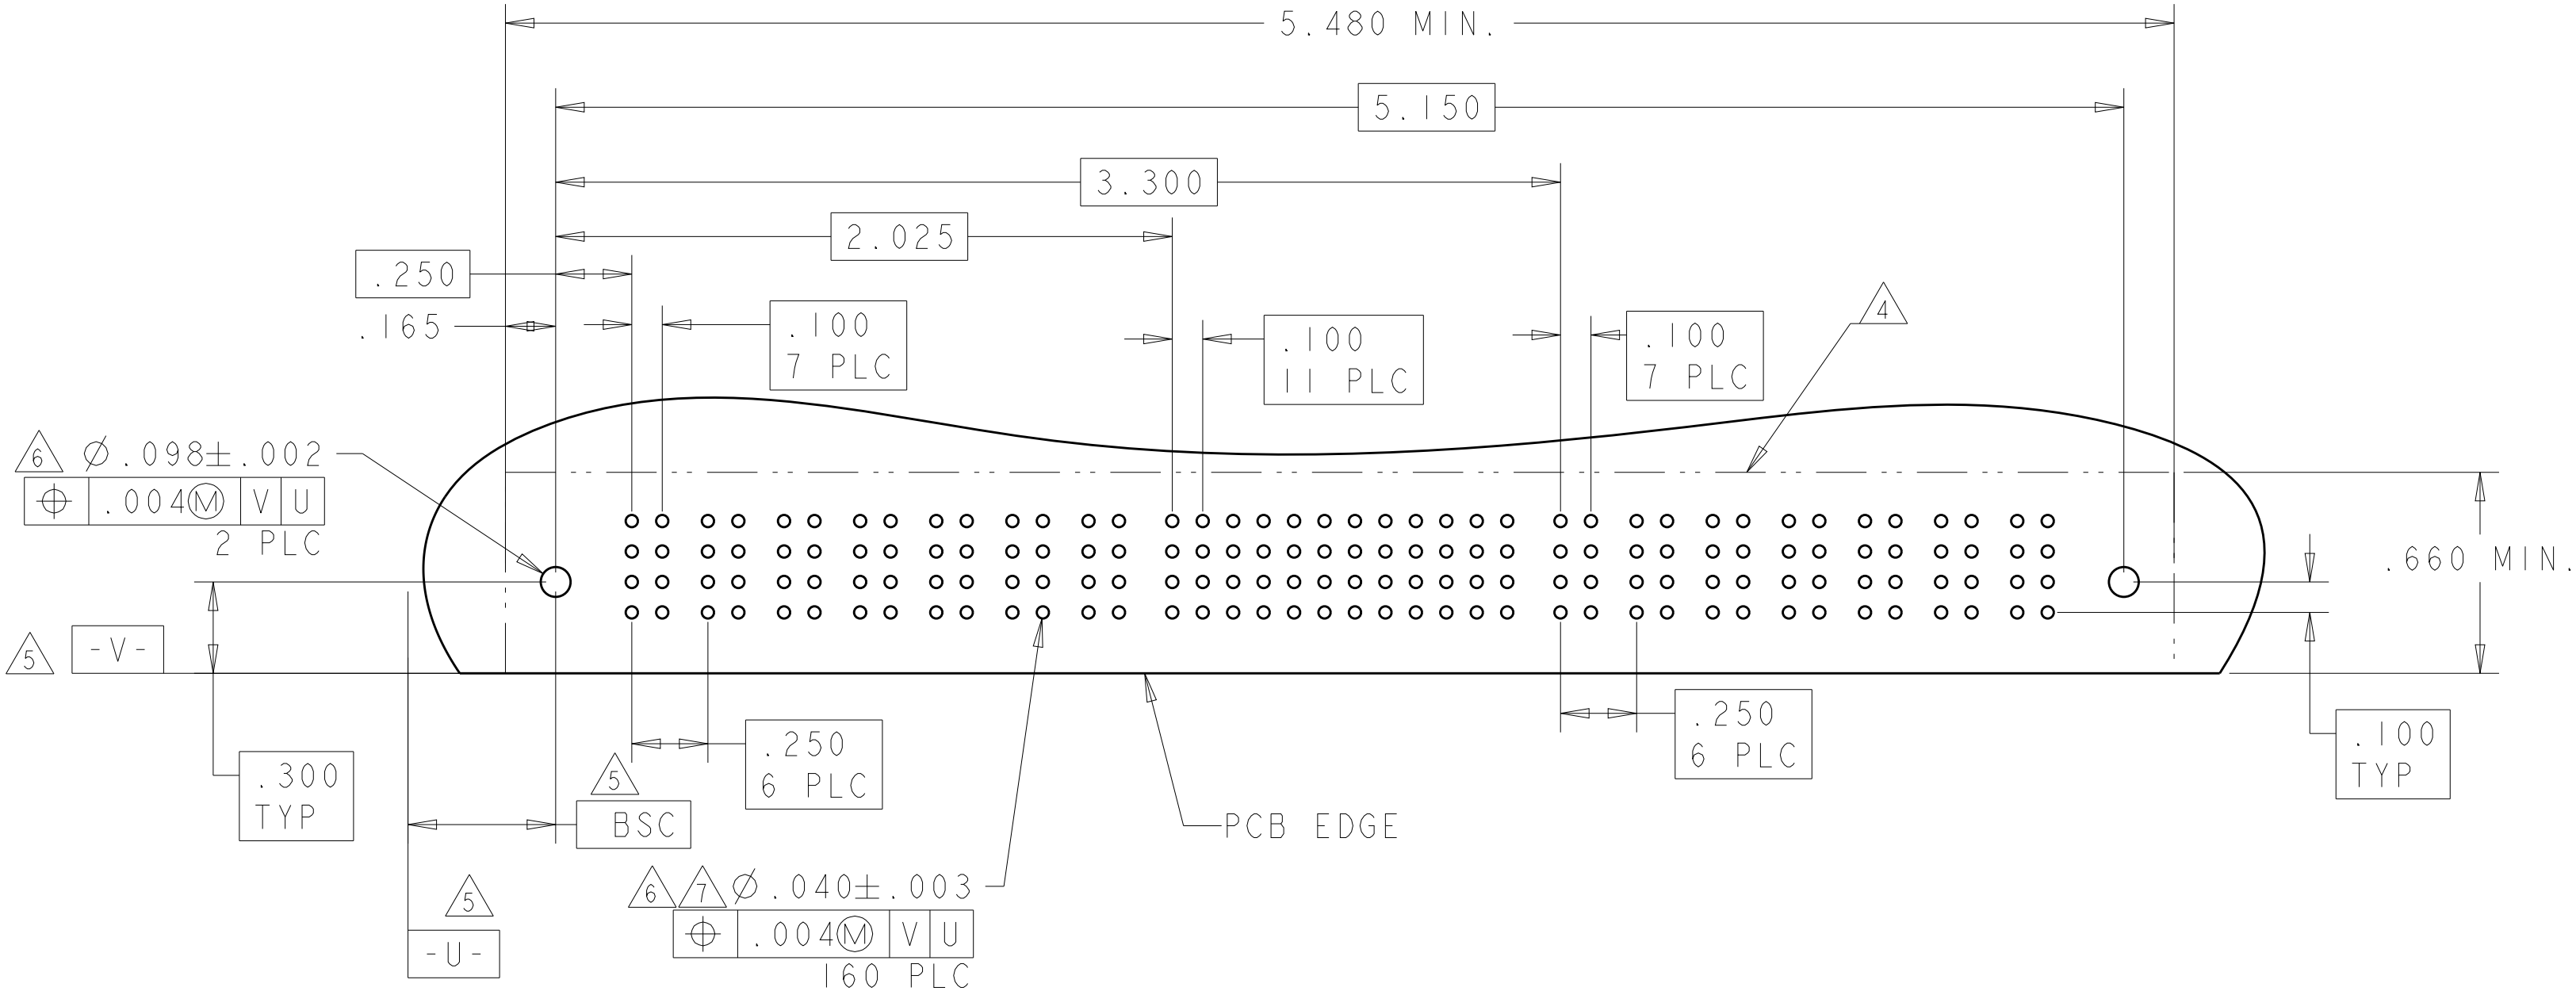
-









RESTRICTED TO

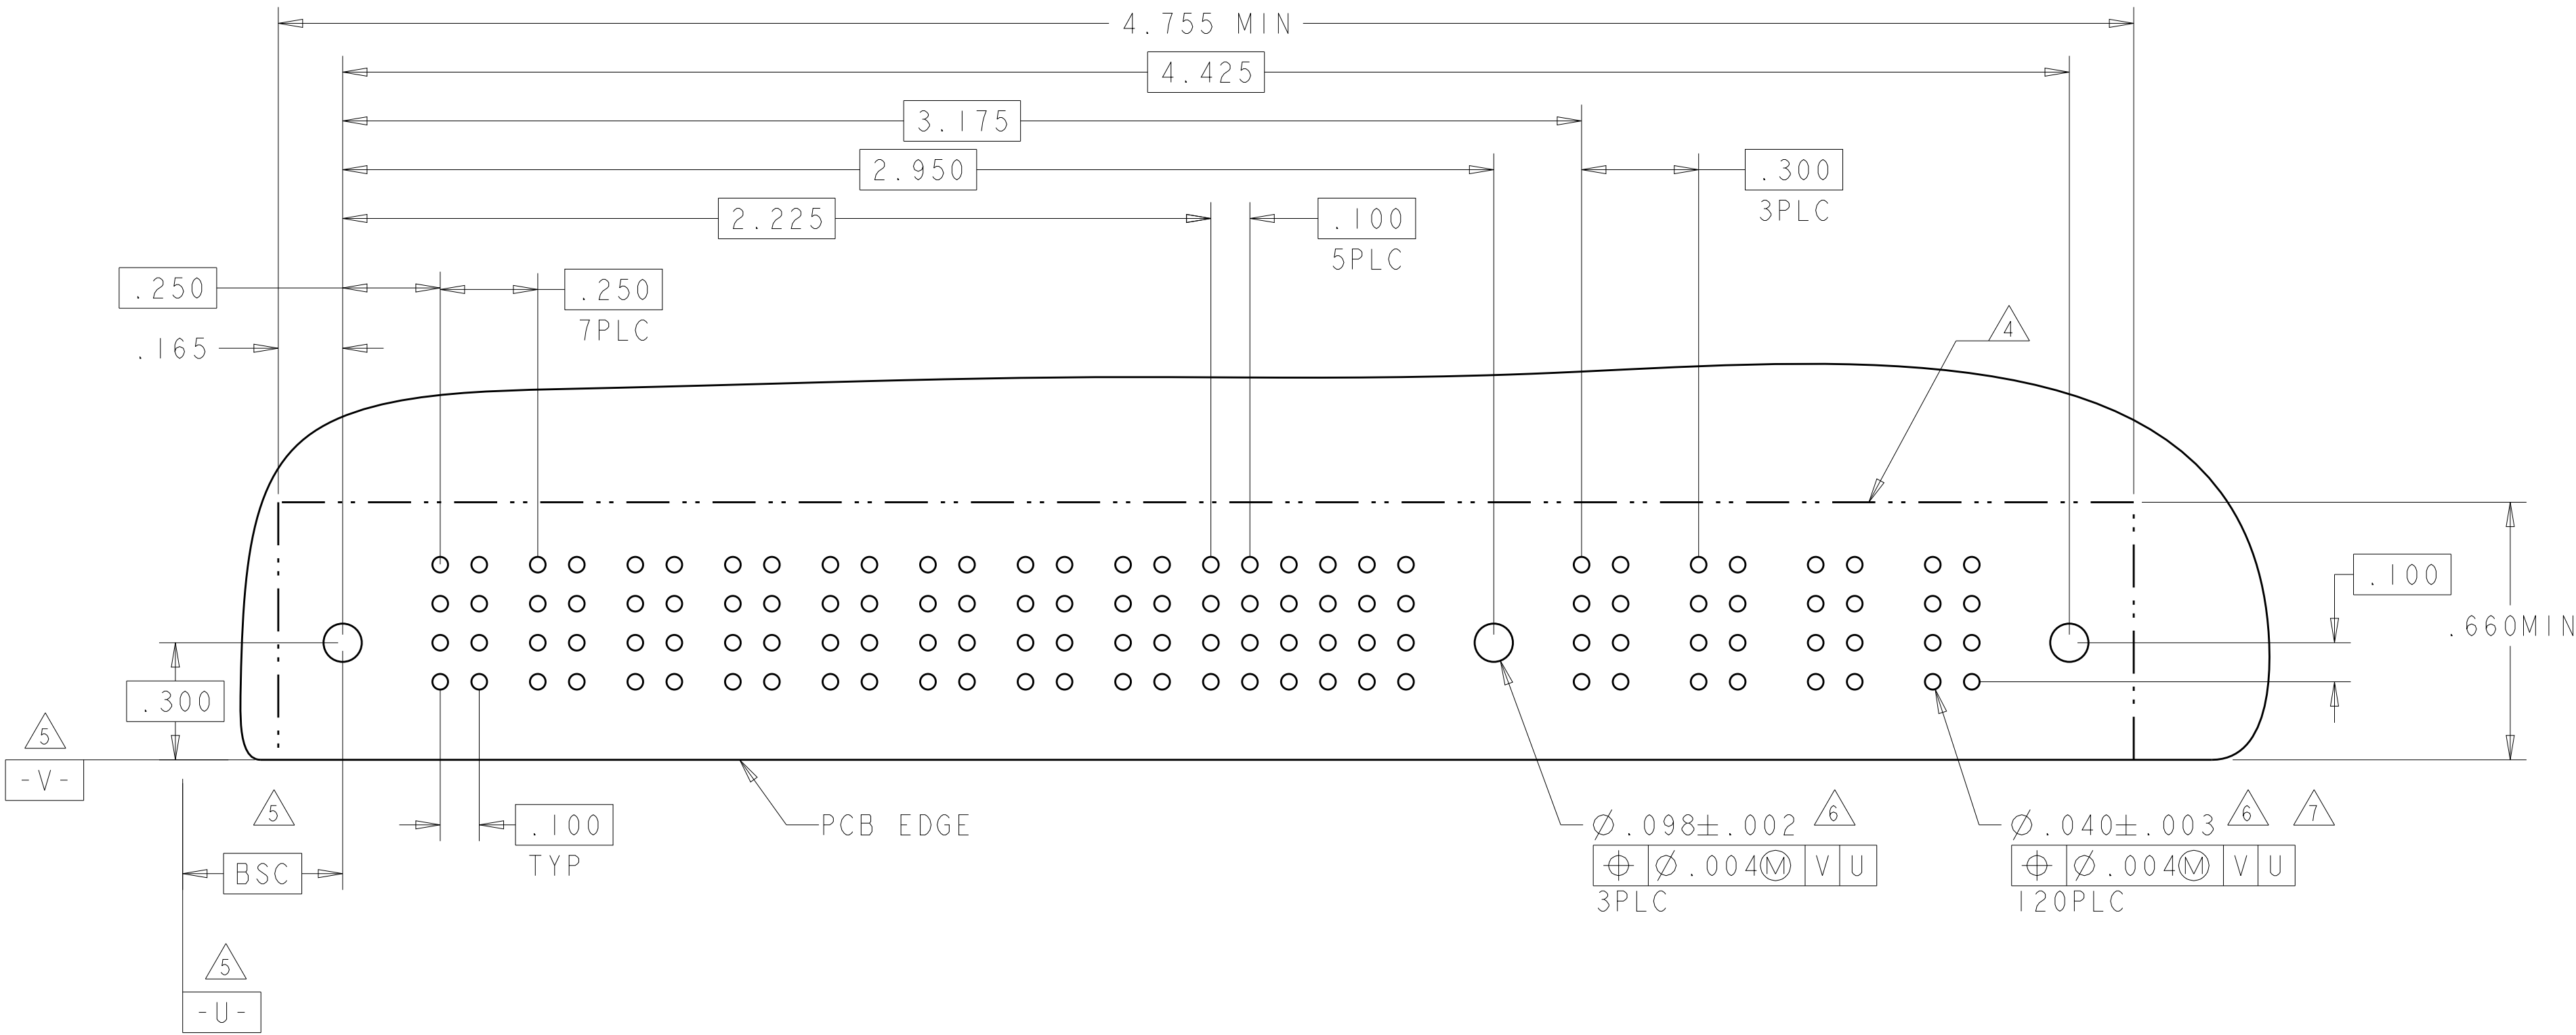
-


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-





PART NUMBER	ROWS		POWER							SIGNAL												POWER										
			P1	P2	P3	P4	P5	P6	P7	1	2	3	4	5	6	7	8	9	10	11	12	P8	P9	P10	P11	P12	P13	P14				
3-6450120-4	D C B A									J	J	J	J	J	J	J	J	J	J	J	J											
										K	K	K	K	K	K	K	K	K	K	K	K									K	K	
										N	N	N	N	N	N	N	N	N	N	N	N									N	N	N
										S	S	S	S	S	S	S	S	S	S	S	S									S	S	S
7P + 48S + 7P																																


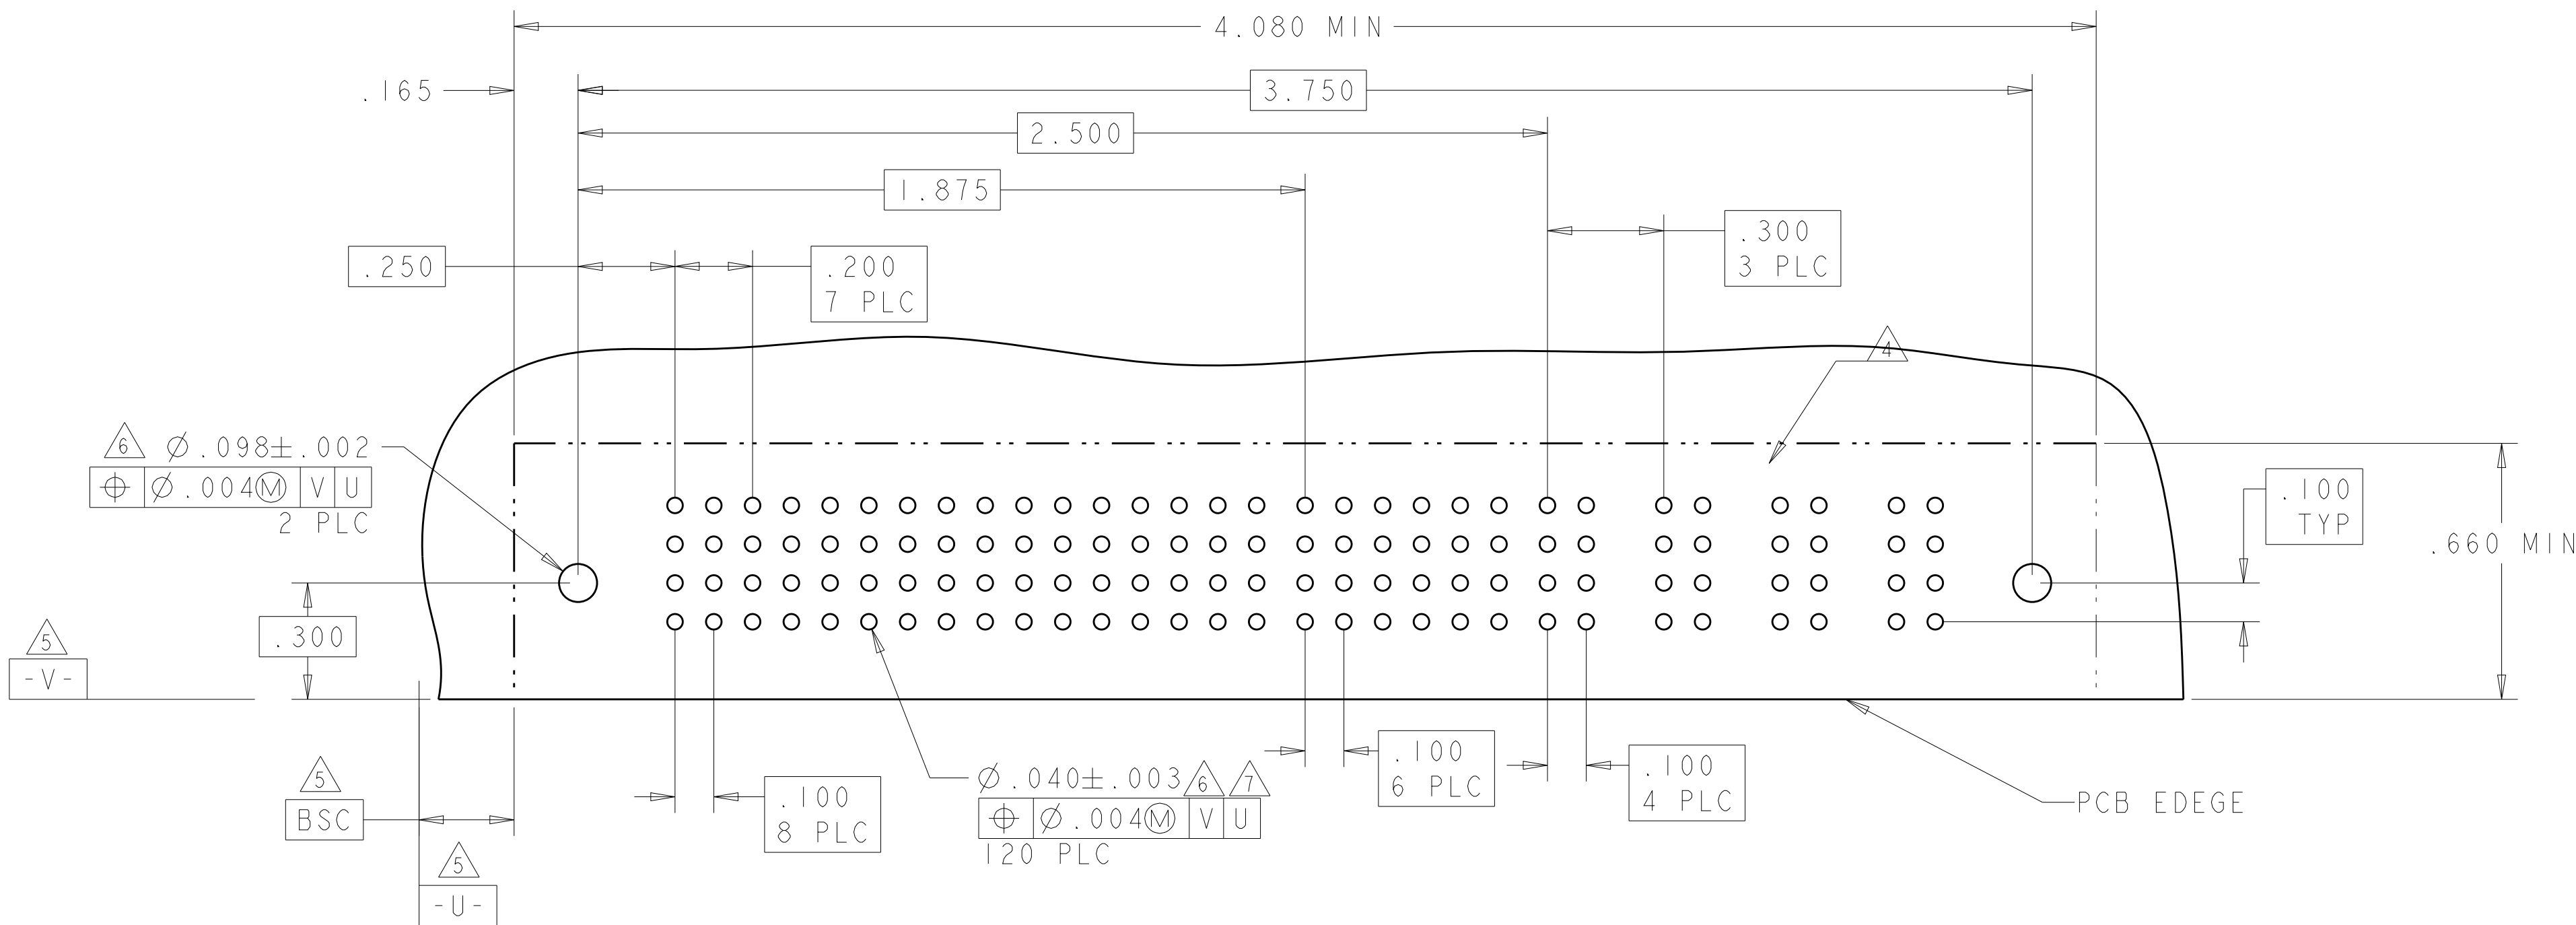


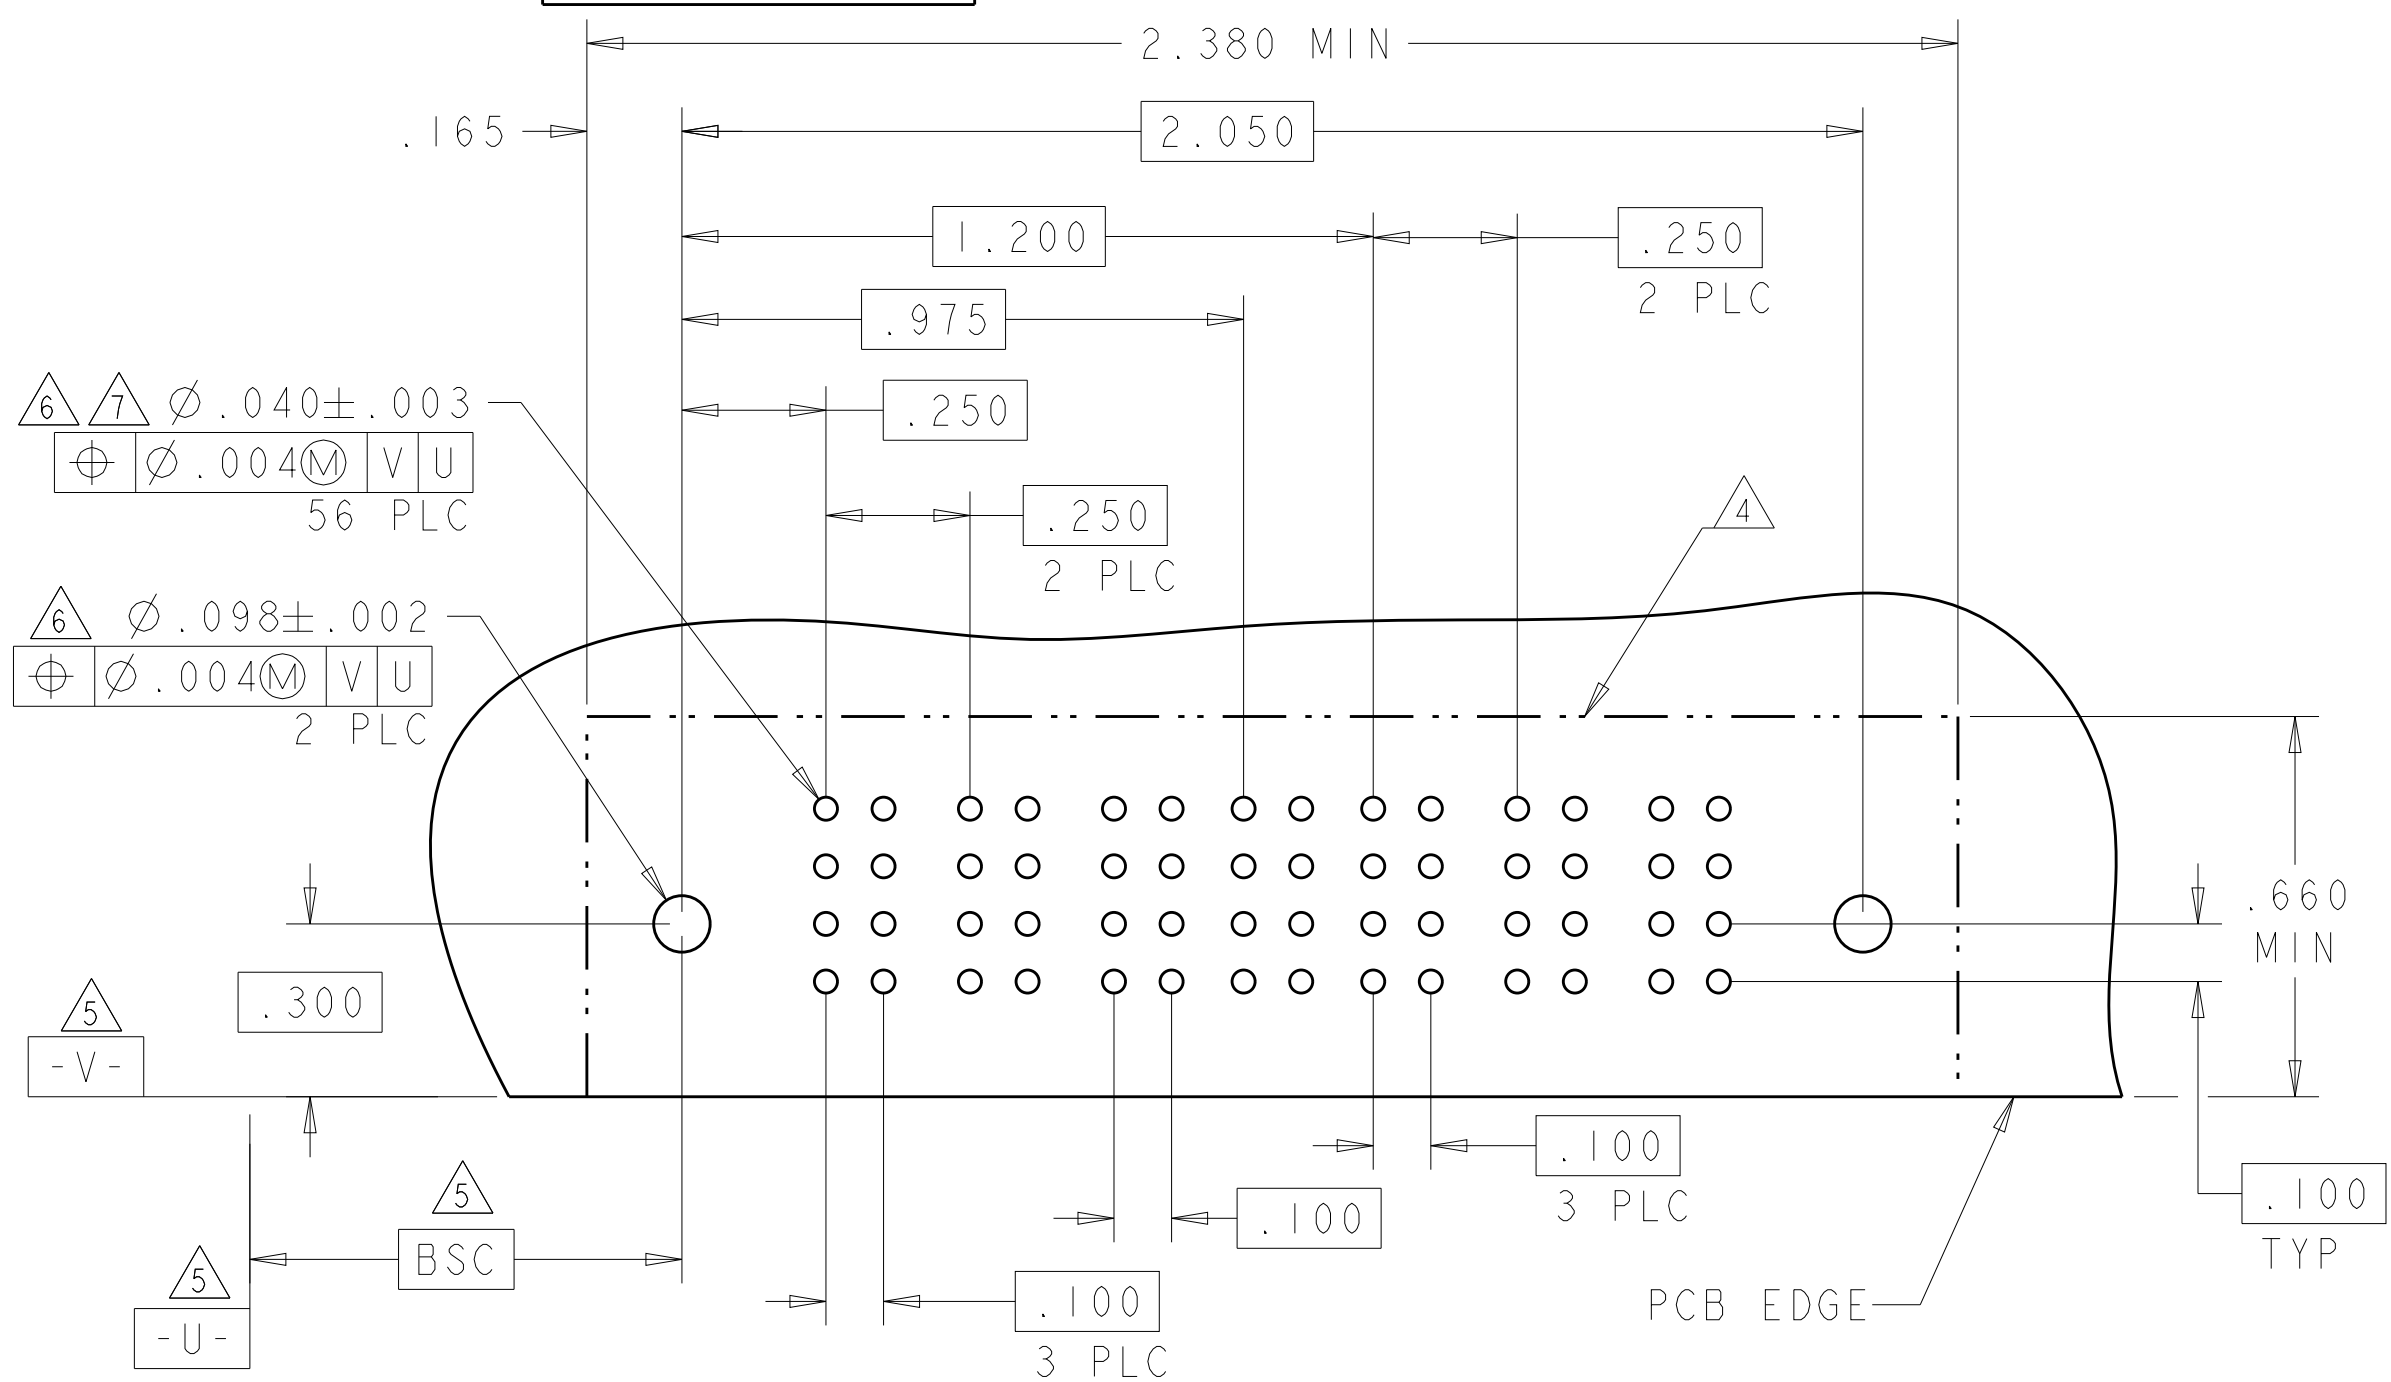
PART NUMBER	ROWS		POWER								SIGNAL							POWER				
			P1	P2	P3	P4	P5	P6	P7	P8	1	2	3	4	5	6		P9	P10	P11	P12	
4-6450120-2	D C B A										J	J	J	J	J	J						
											K	K	K	K	K	K						
											N	N	N	N	N	N						
											S	S	S	S	S	S						
8P + 24S + 1M + 4ACP																						



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI	02FEB05	 TE Connectivity	
DIMENSIONS: INCHES		CHK M. PERCHERKE	02FEB05		
		APVD M. PERCHERKE	02FEB05	NAME RIGHT ANGLE HEADER W/GUIDES ASSEMBLY MULTI-BEAM XL	
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	
				108-1973	
				APPLICATION SPEC	
				114-13038	
MATERIAL		FINISH		WEIGHT	
-		-		-	
CUSTOMER DRAWING				SCALE 4:1 SHEET 11 OF 24 REV M2	

PART NUMBER	ROWS		POWER								SIGNAL						POWER					
			P1	P2	P3	P4	P5	P6	P7	P8	1	2	3	4	5	6	P9	P10	P11	P12		
4-6450120-4	D C B A									J	J	J	J	J	J							
										K	K	K	K	K	K							
										N	N	N	N	N	N							
										S	S	S	S	S	S							
8P + 24S + 4ACP																						



[illegible]

2.280 MIN.

1.350

.725

.250

.100
4 PLC

Ø .040 ± .003
56 PLC.

.100 TYP.

4

.660 MIN.

.300

Ø .098 ± .002
2 PLC.

PCB EDGE

.165

5
-V-


5
BSC

.250

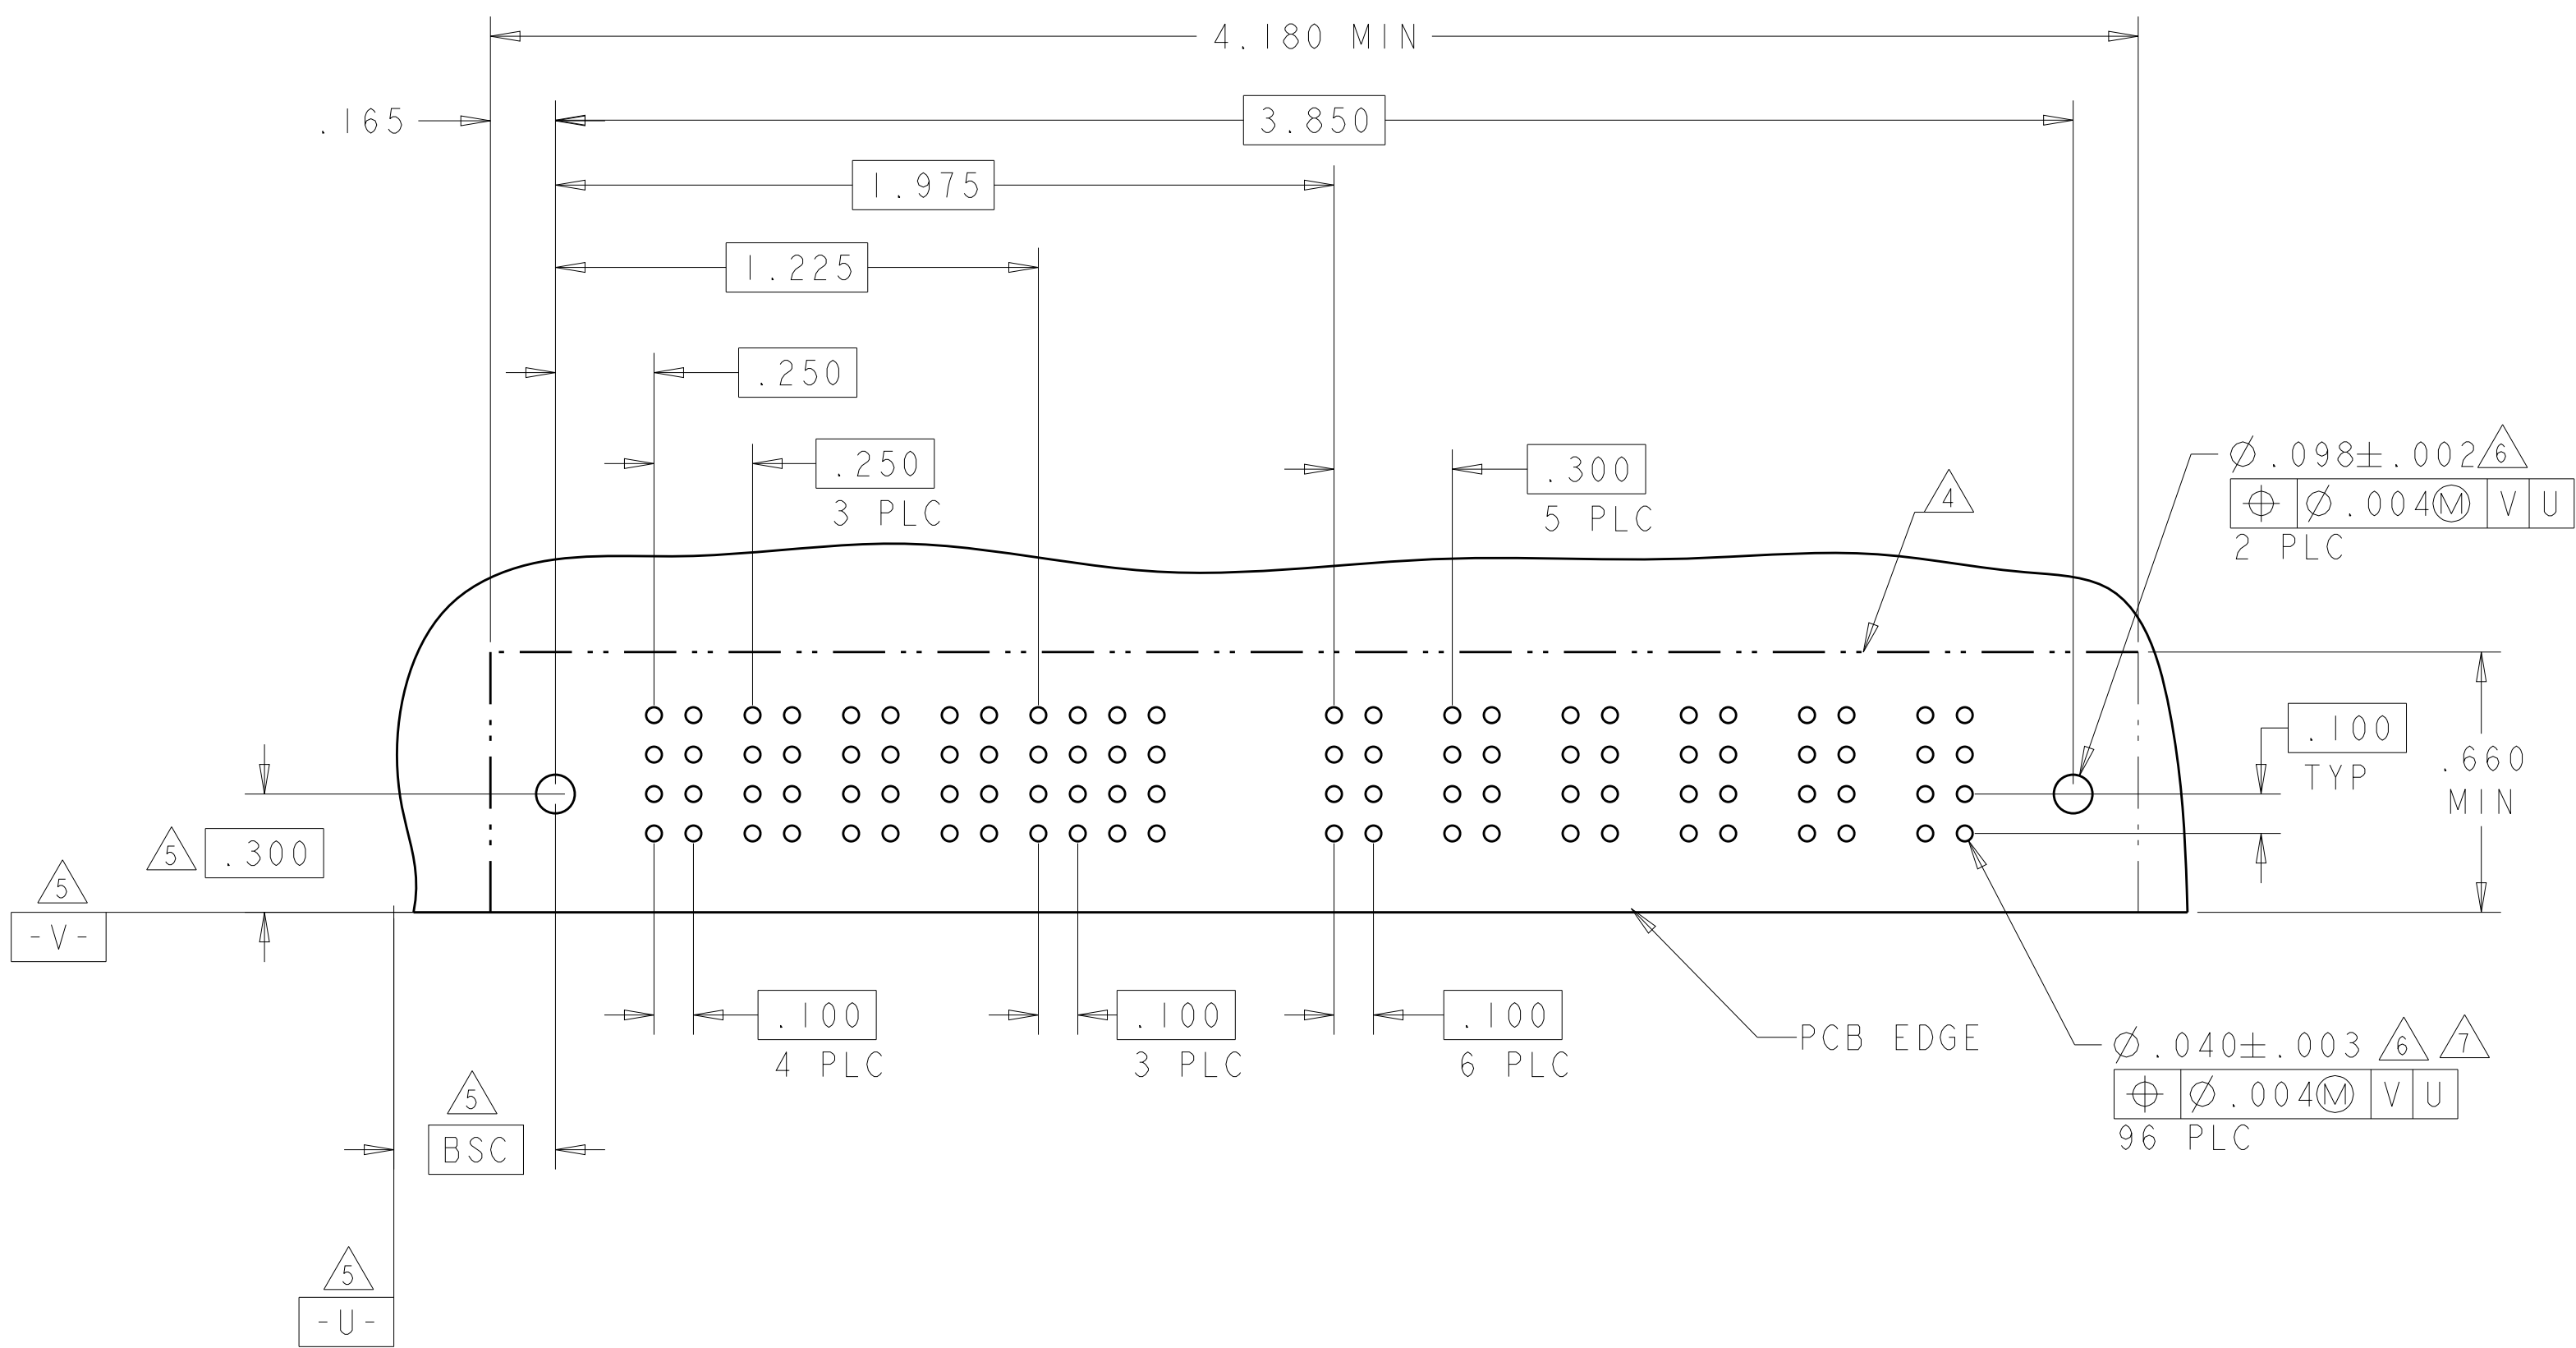
.250


1.950

5
-U-

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN GRZYBOWSKI 02FEB05 CHG M. PERCHERKE 02FEB05 APP M. PERCHERKE 02FEB05		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME: RIGHT ANGLE HEADER W/GUIDES ASSEMBLY MULTI-BEAM XL	
		0 PLC ±. 1 PLC ±. 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±0°		PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038	
MATERIAL -		FINISH -		SIZE CAGE CODE DRAWING NO RESTRICTED TO A100779C6450120 -	
CUSTOMER DRAWING		WEIGHT -		SCALE 4:1 SHEET 13 OF 24 REV M	

PART NUMBER	ROWS		POWER				SIGNAL				POWER							
			P1	P2	P3	P4	I	2	3	4	P5	P6	P7	P8	P9	P10		
5-6450120-0	D		PM	PM	PM	PM	J	J	J	J		PM	PM	PM	PM	PM	PM	
	C						K	K	K	K								
	B						N	N	N	N								
	A						S	S	S	S								
4P + 16S + TACP																		

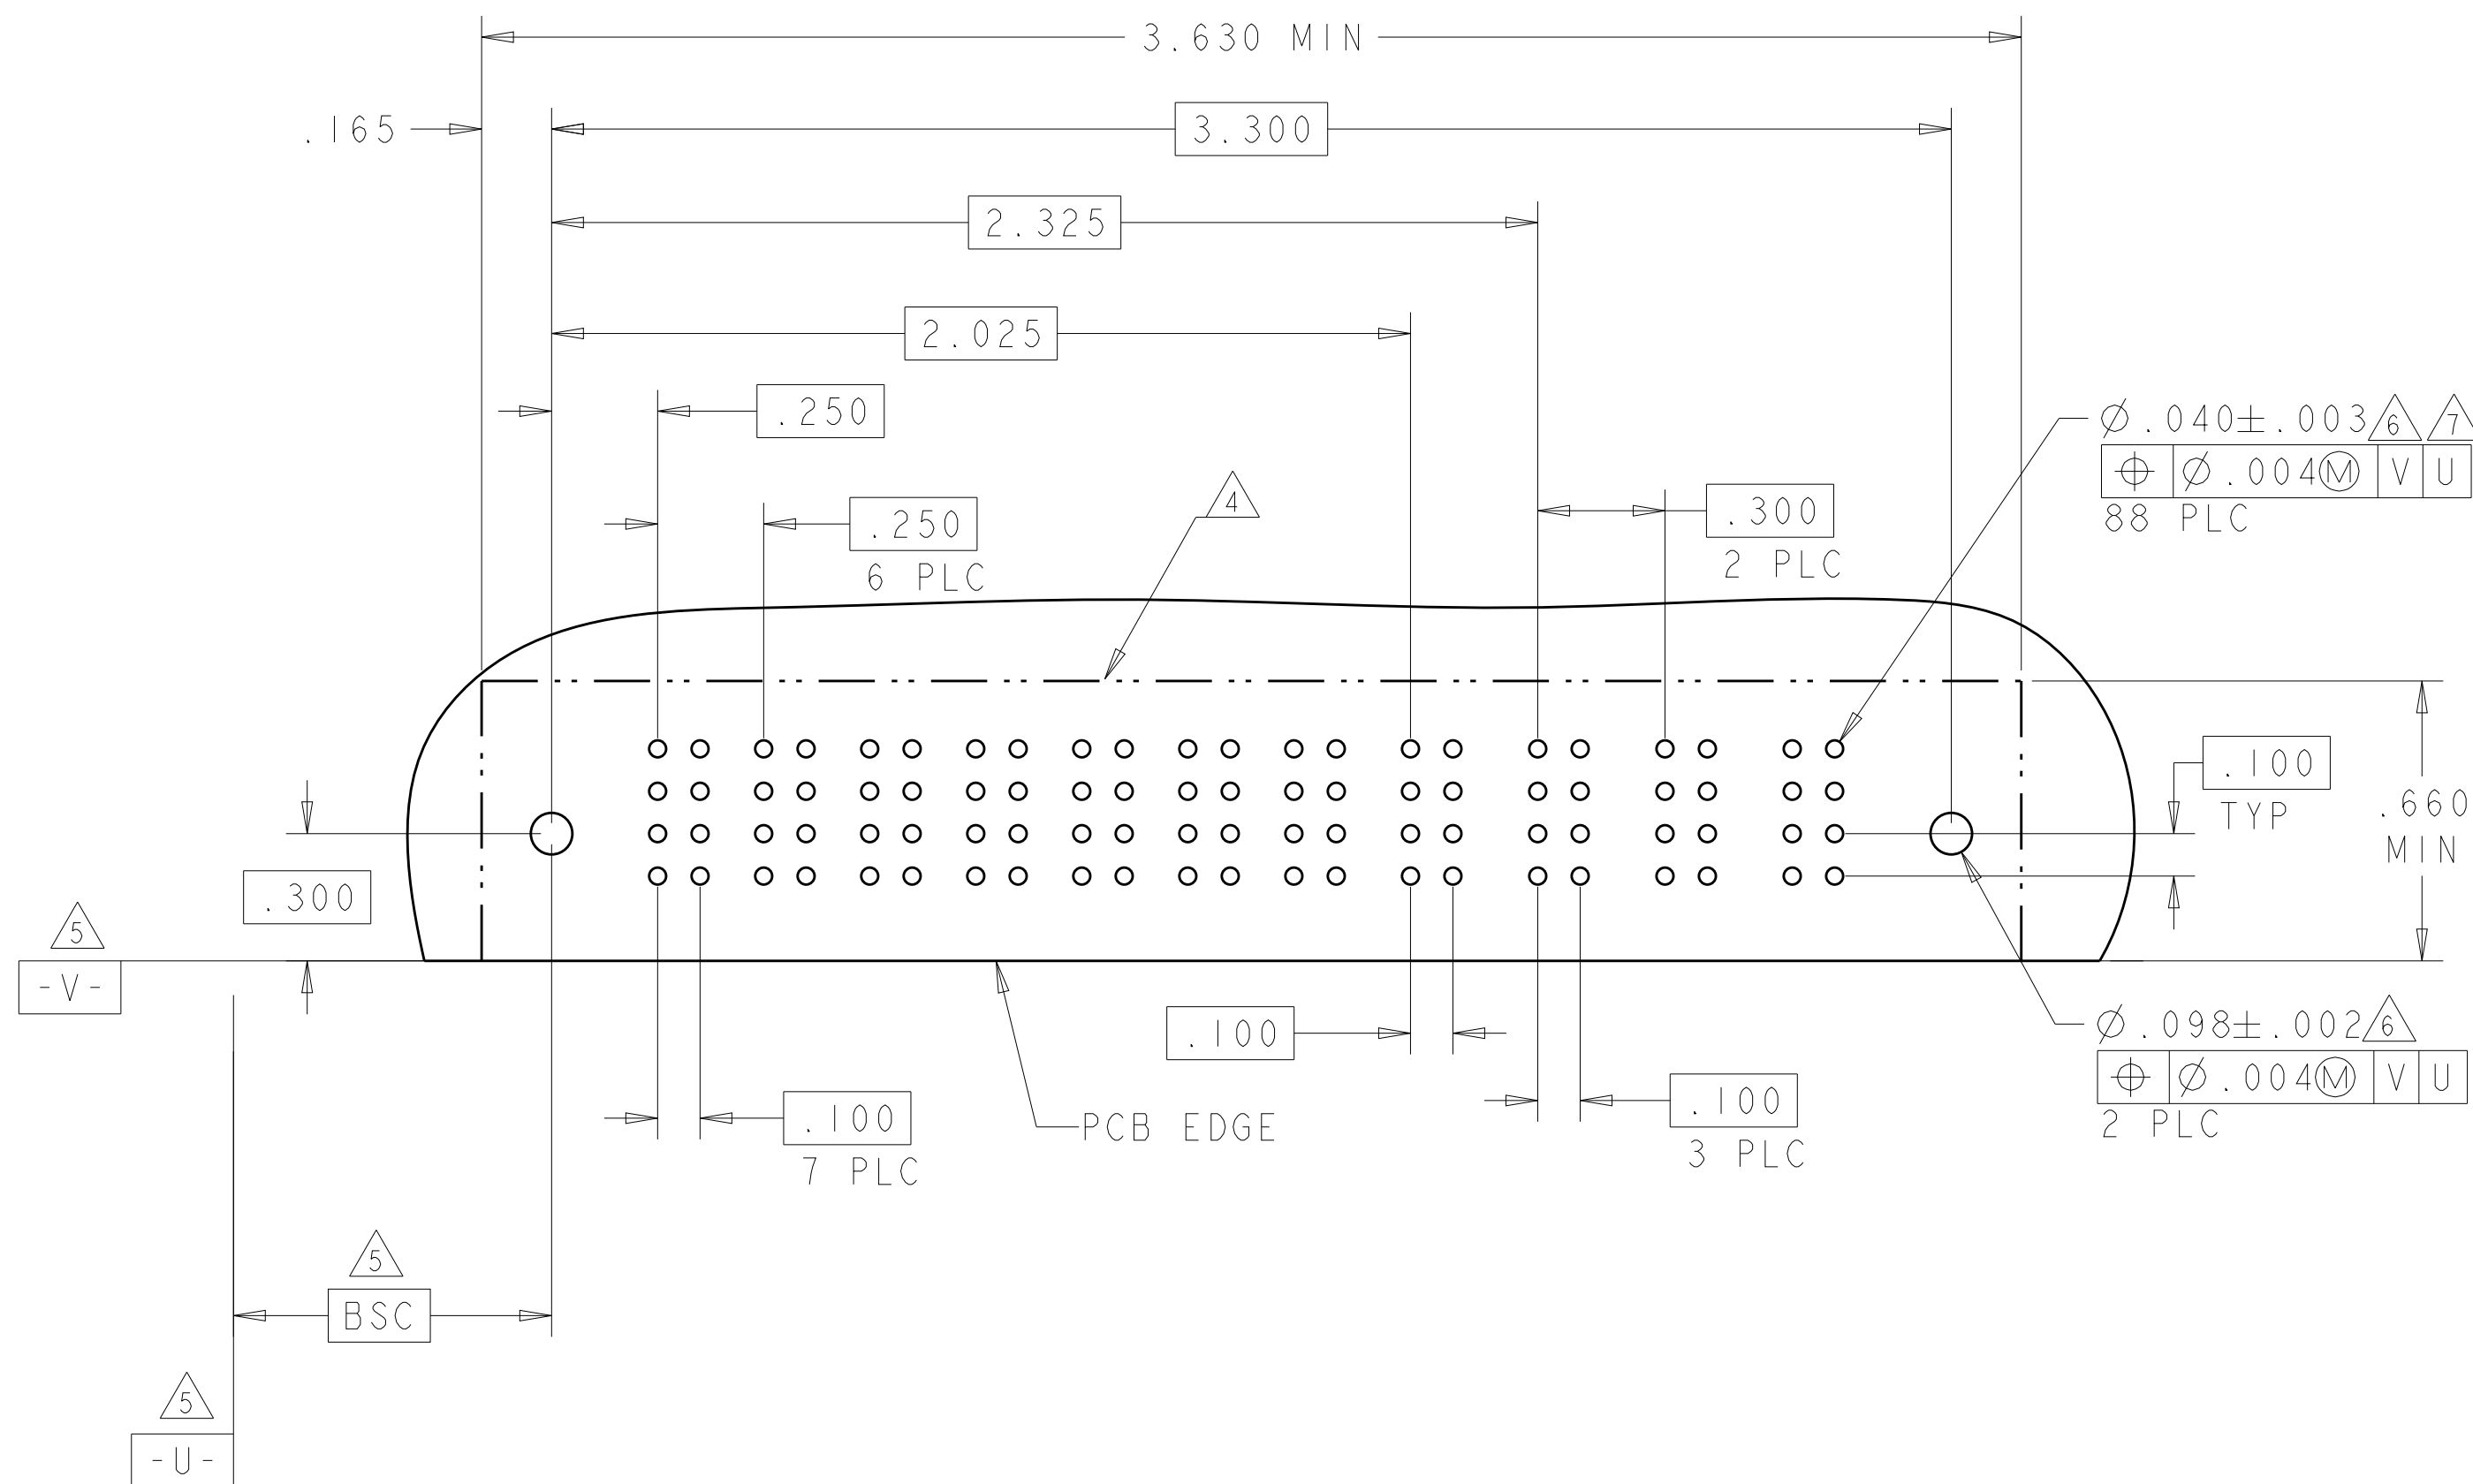






THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI 02FE805	 TE Connectivity	
DIMENSIONS:		CHK M. PERCHERRE 02FE805		
INCHES		APVD M. PERCHERRE 02FE805	NAME	
		RIGHT ANGLE HEADER W/GUIDE MULTI-BEAM XL		
		PRODUCT SPEC		
		108-1973		
		APPLICATION SPEC		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		SIZE CAGE CODE DRAWING NO RESTRICTED TO		
0 PLC ±.01 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±.0°		114-13038		
FINISH		WEIGHT		
-		-		
MATERIAL		CUSTOMER DRAWING		
-		SCALE 4:1 SHEET 14 OF 24 REV. M2		

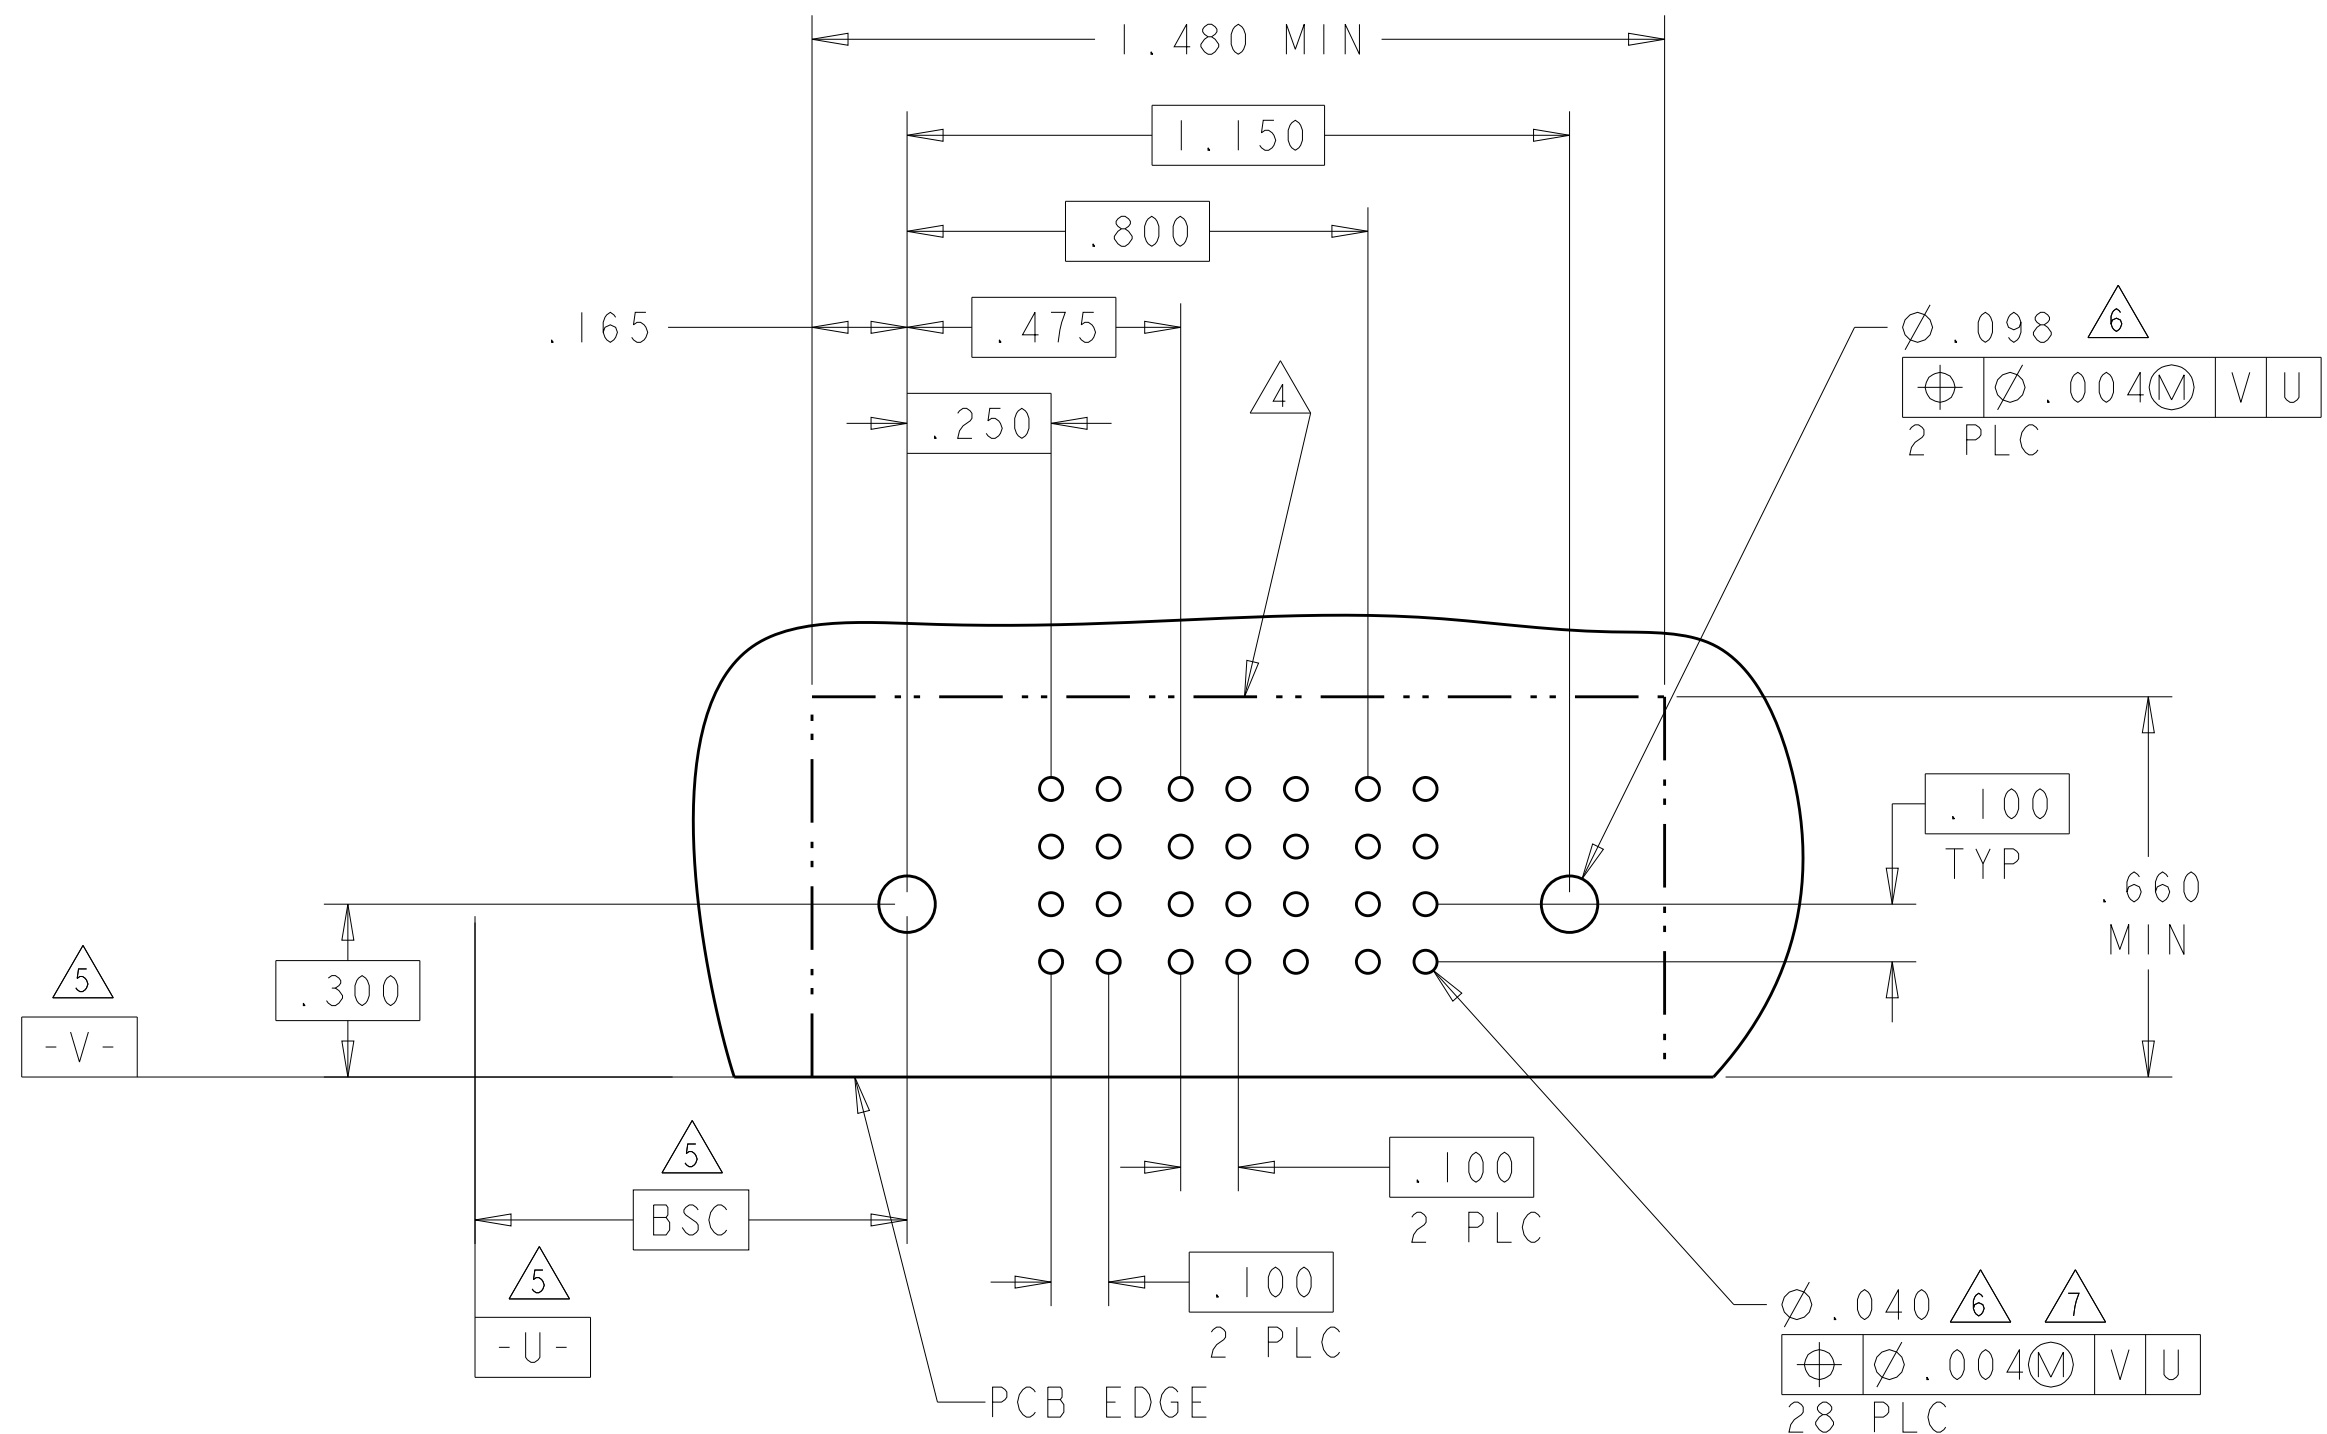
Ⓜ

4805 (3/11)

PART NUMBER	ROWS		POWER							SIGNAL		POWER			
			P1	P2	P3	P4	P5	P6	P7	1	2	P8	P9	P10	
5-6450120-5	D		PM	PM	PM	PM	PM	PM	PM	J	J	PM	PM	PM	
	K									K					
	N									N					
	A	HD													
7P + 8S + 3ACP															

4805 (3/11)

PART NUMBER	ROWS		POWER			SIGNAL									POWER			
			P1	P2	P3	1	2	3	4	5	6	7	8	9	P4	P5	P6	
5-6450120-7	D C B A	 HD	 PM	 PM	 PM	J	J	J	J	J	J	J	J	J	 PM	 PM	 PM	 HD
						K	K	K	K	K	K	K	K	K				
						N	N	N	N	N	N	N	N	N				
						S	S	S	S	S	S	S	S	S				
3P + 36S + 3P																		

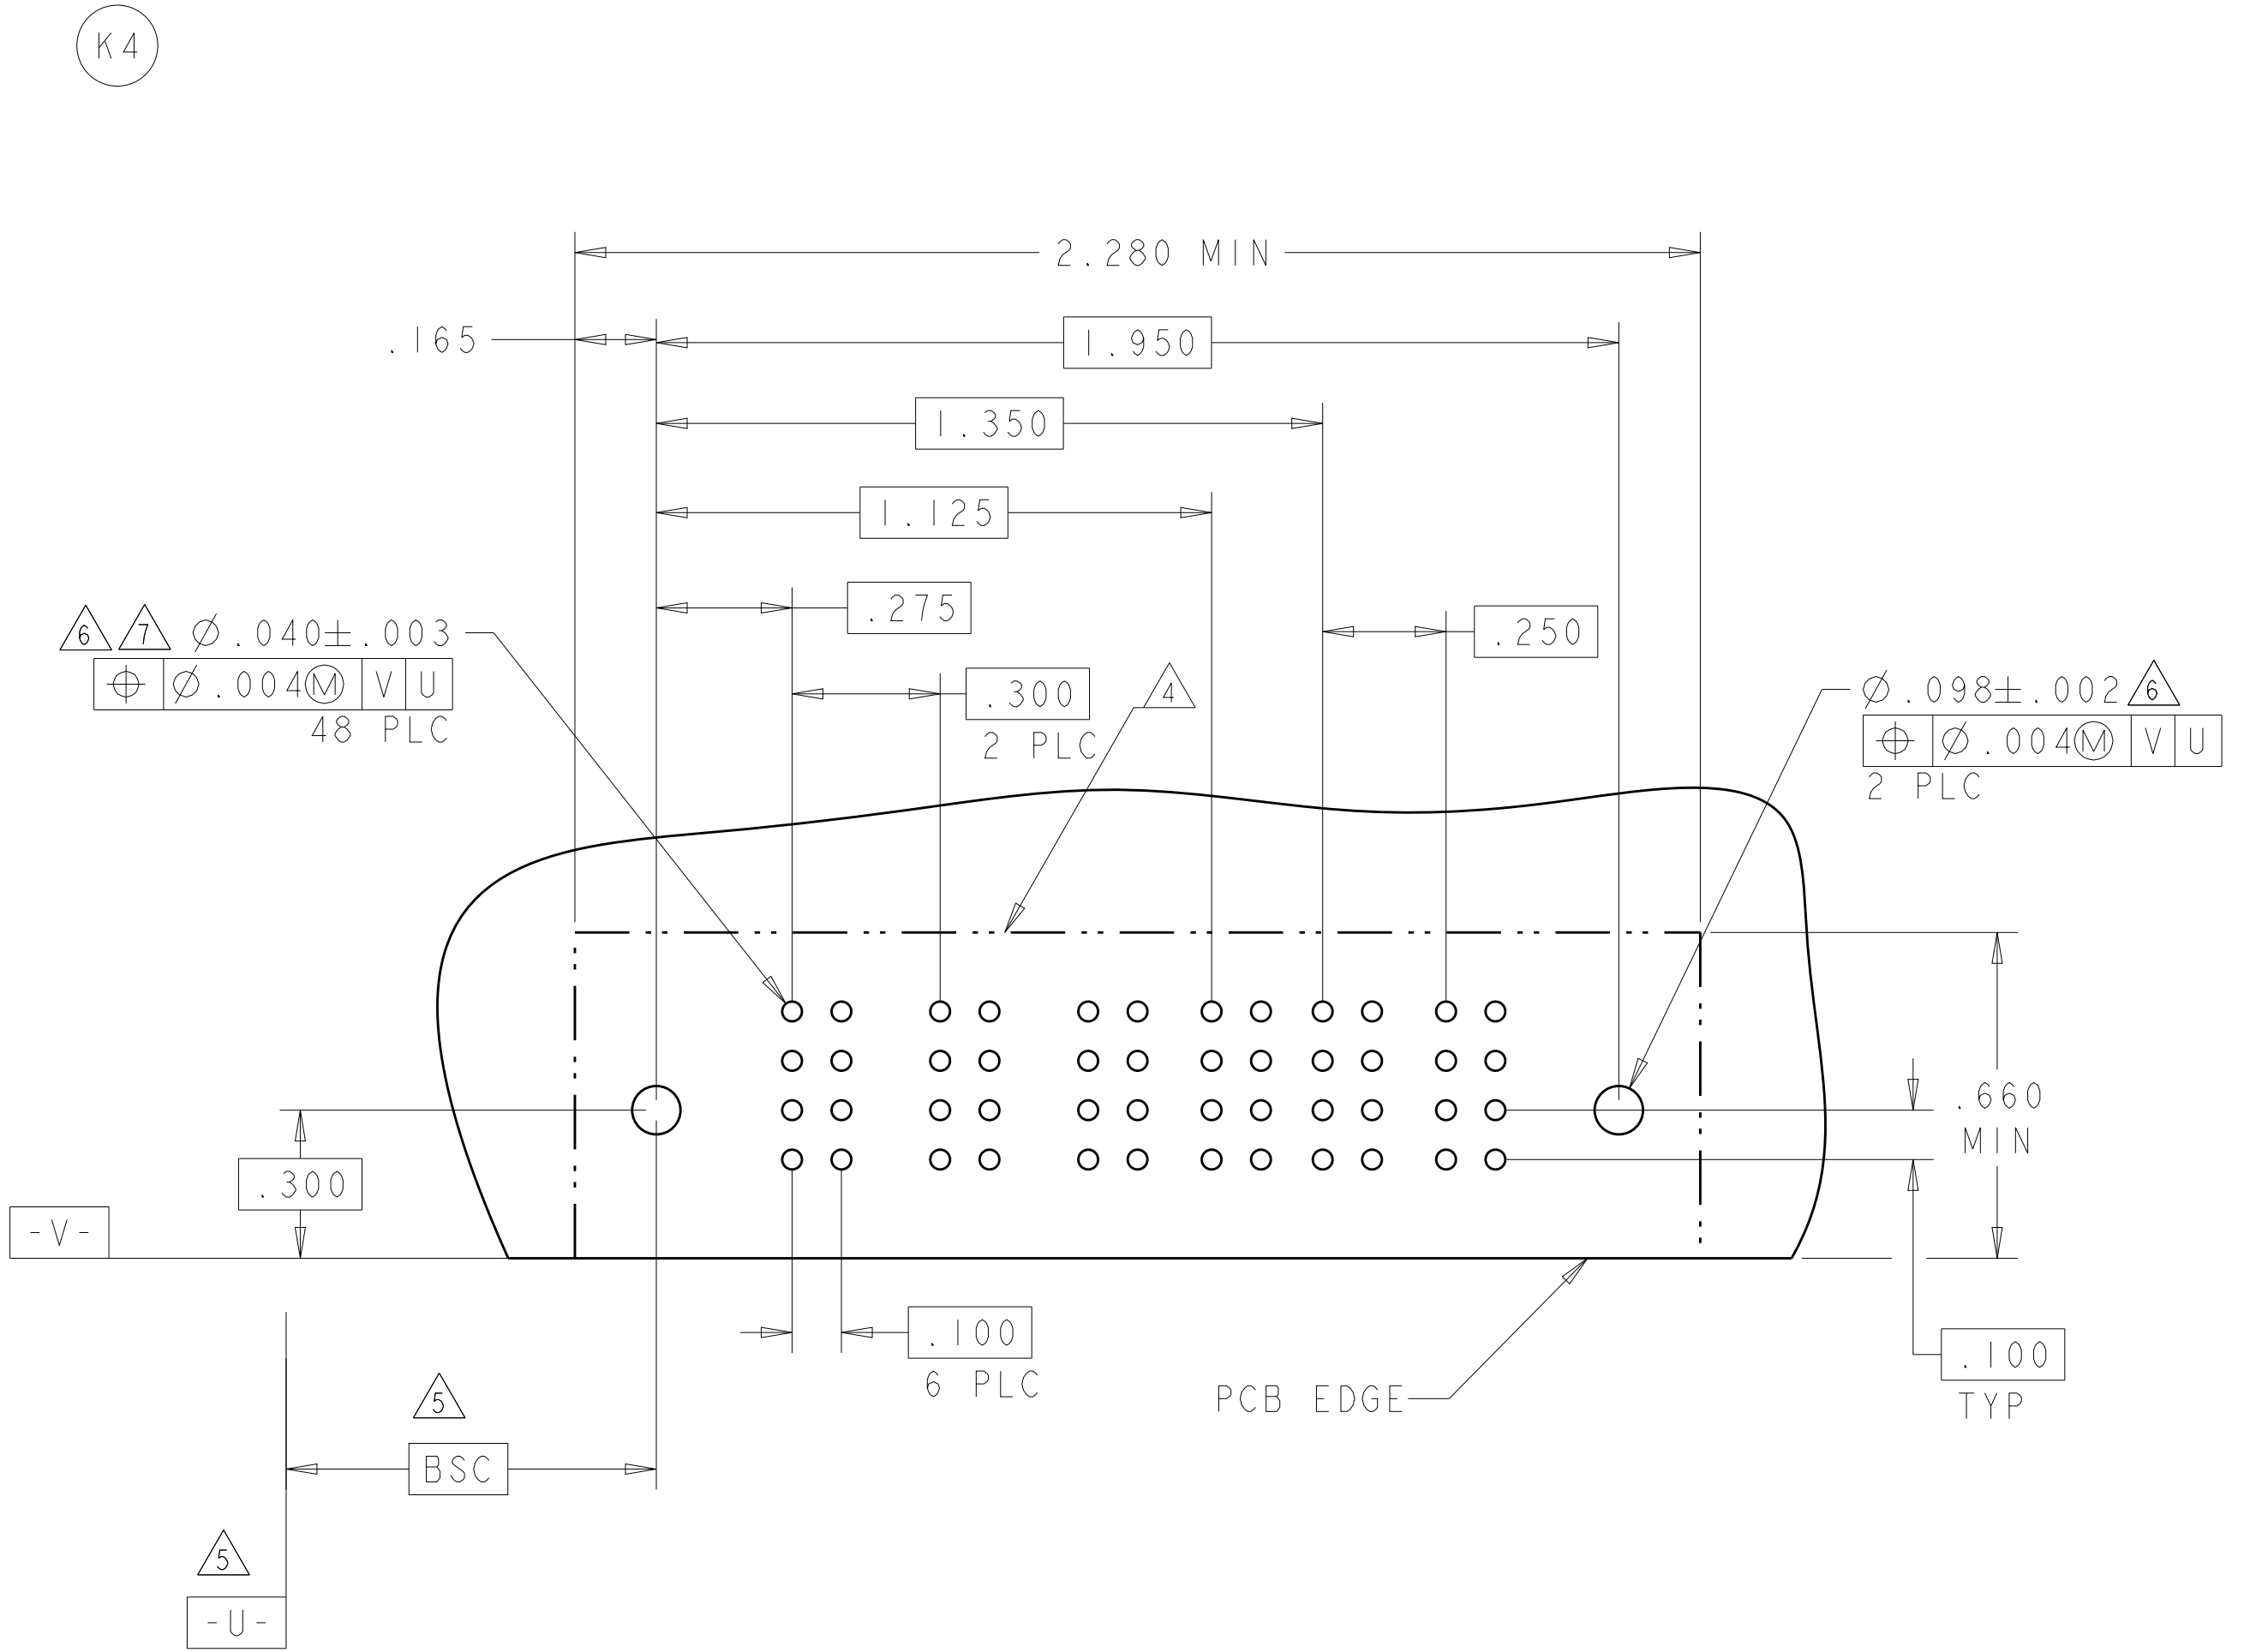
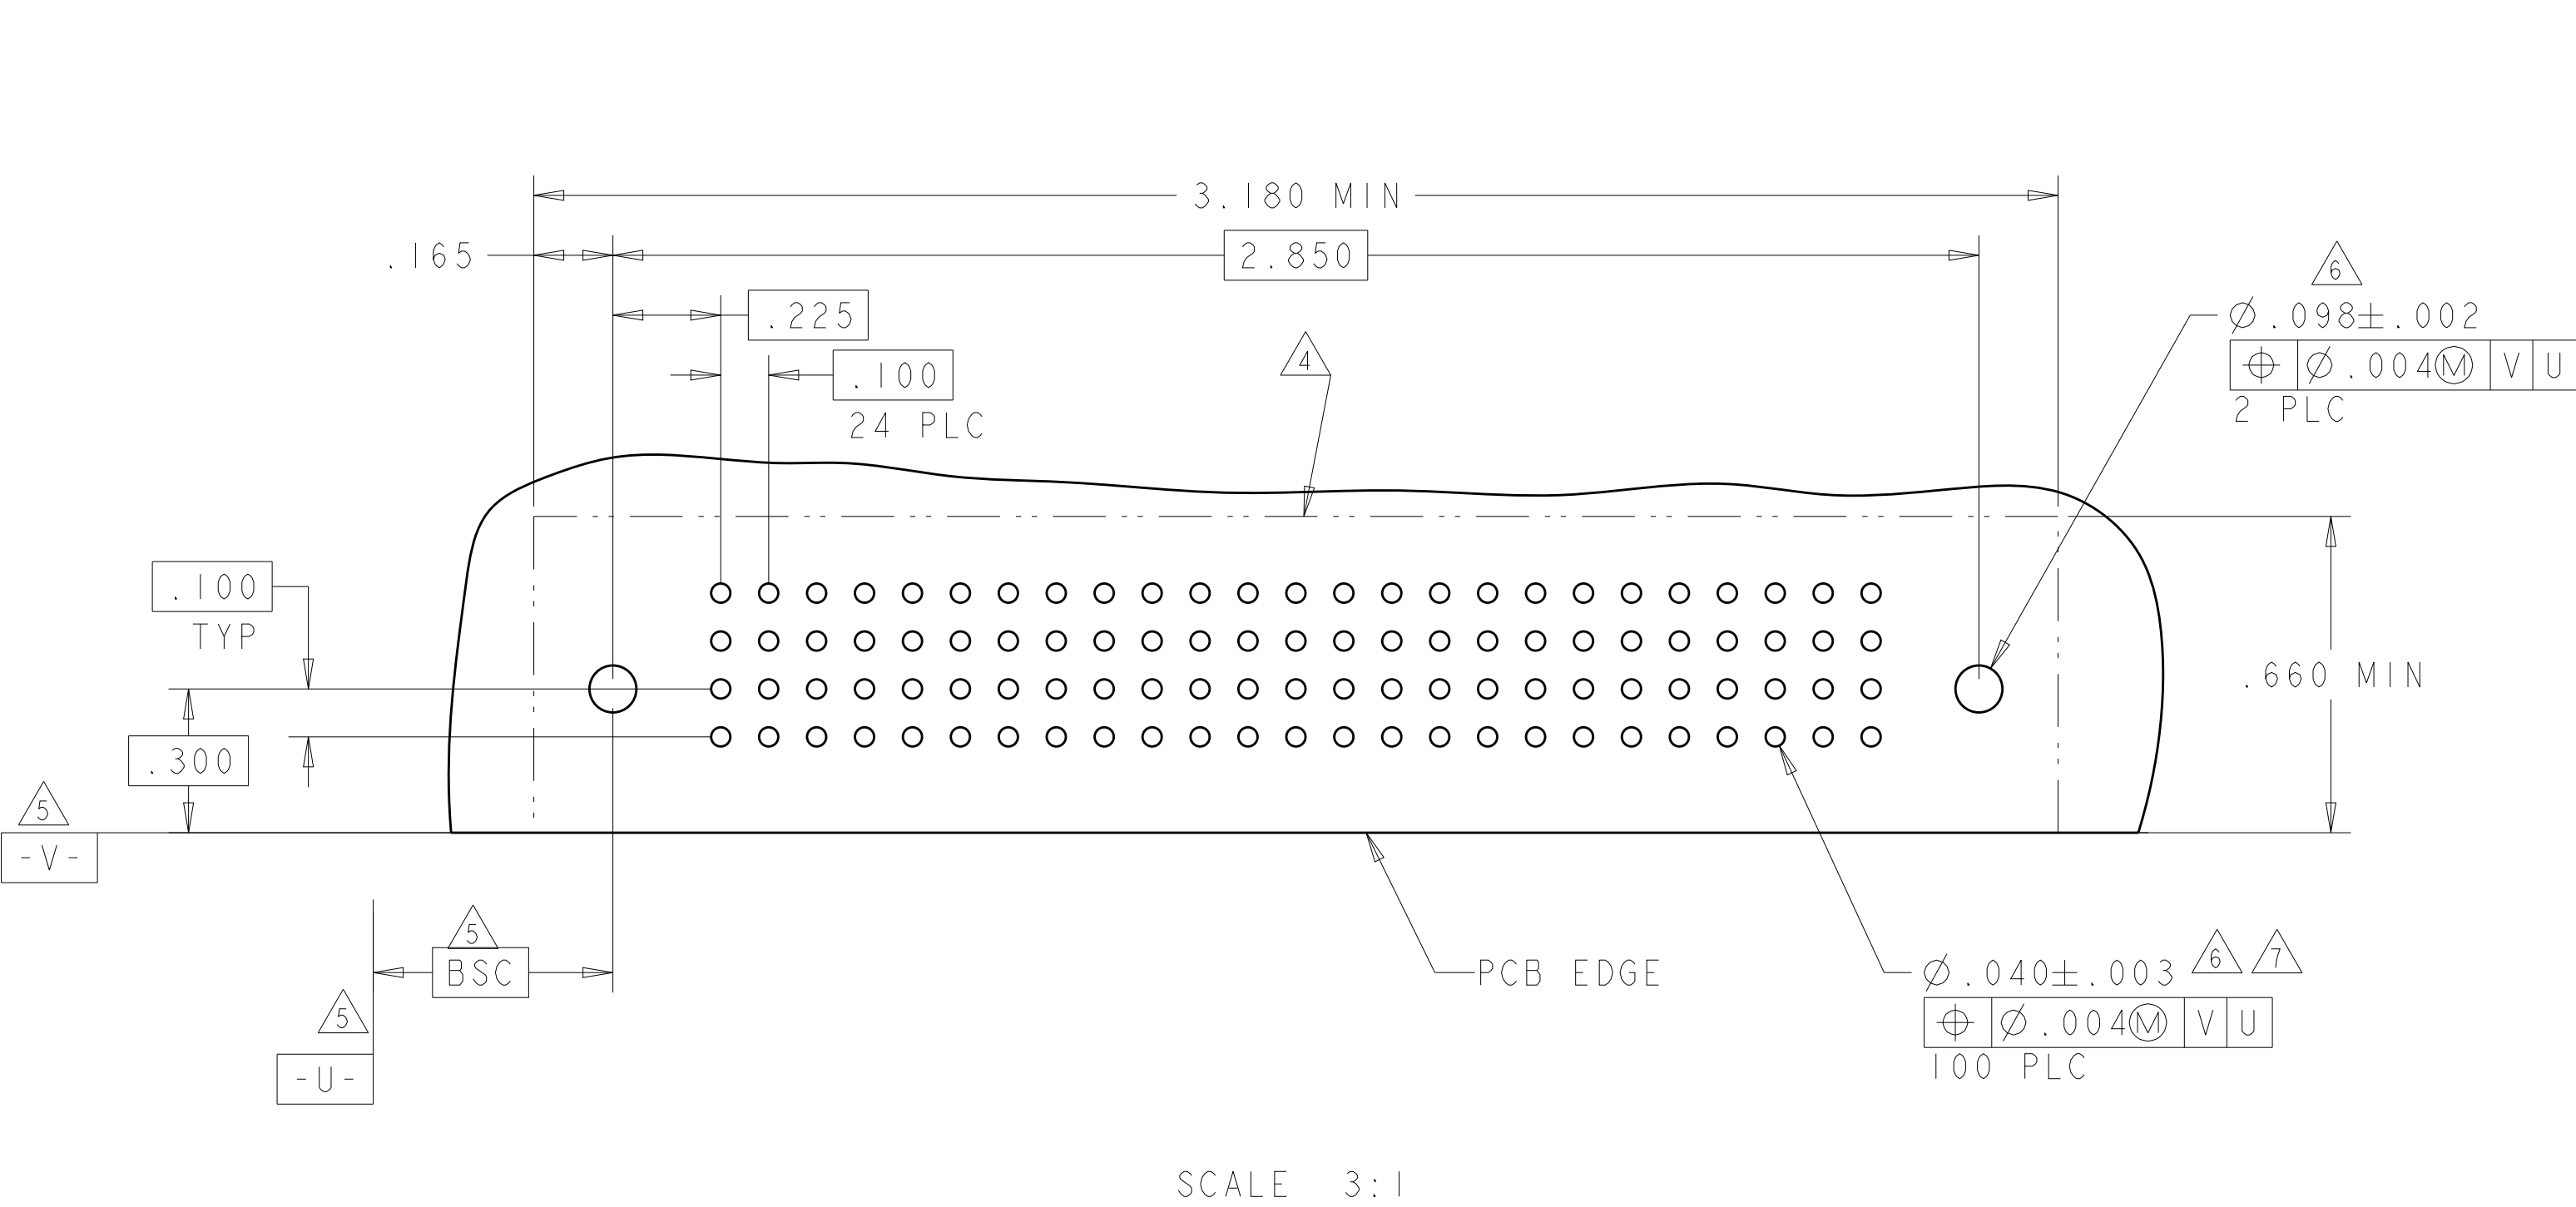
[illegible]

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI 02FEB05		 TE Connectivity	
DIMENSIONS:		CWN M. PERCHERKE 02FEB05		NAME	
INCHES		APVD M. PERCHERKE 02FEB05		RIGHT ANGLE HEADER W/GUIDES ASSEMBLY MULTI-BEAM XL	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		-	
0 PLC ±: 1 PLC ±: 2 PLC ±:01 3 PLC ±:005 4 PLC ±:0020 ANGLES		108-1973		-	
		APPLICATION SPEC		-	
		114-13038		-	
FINISH		WEIGHT		SIZE CAGE CODE DRAWING NO	
-		-		A100779 C=6450120	
MATERIAL		CUSTOMER DRAWING		RESTRICTED TO	
-		-		-	
		SCALE 4:1		SHEET 18 of 24 REV M2	

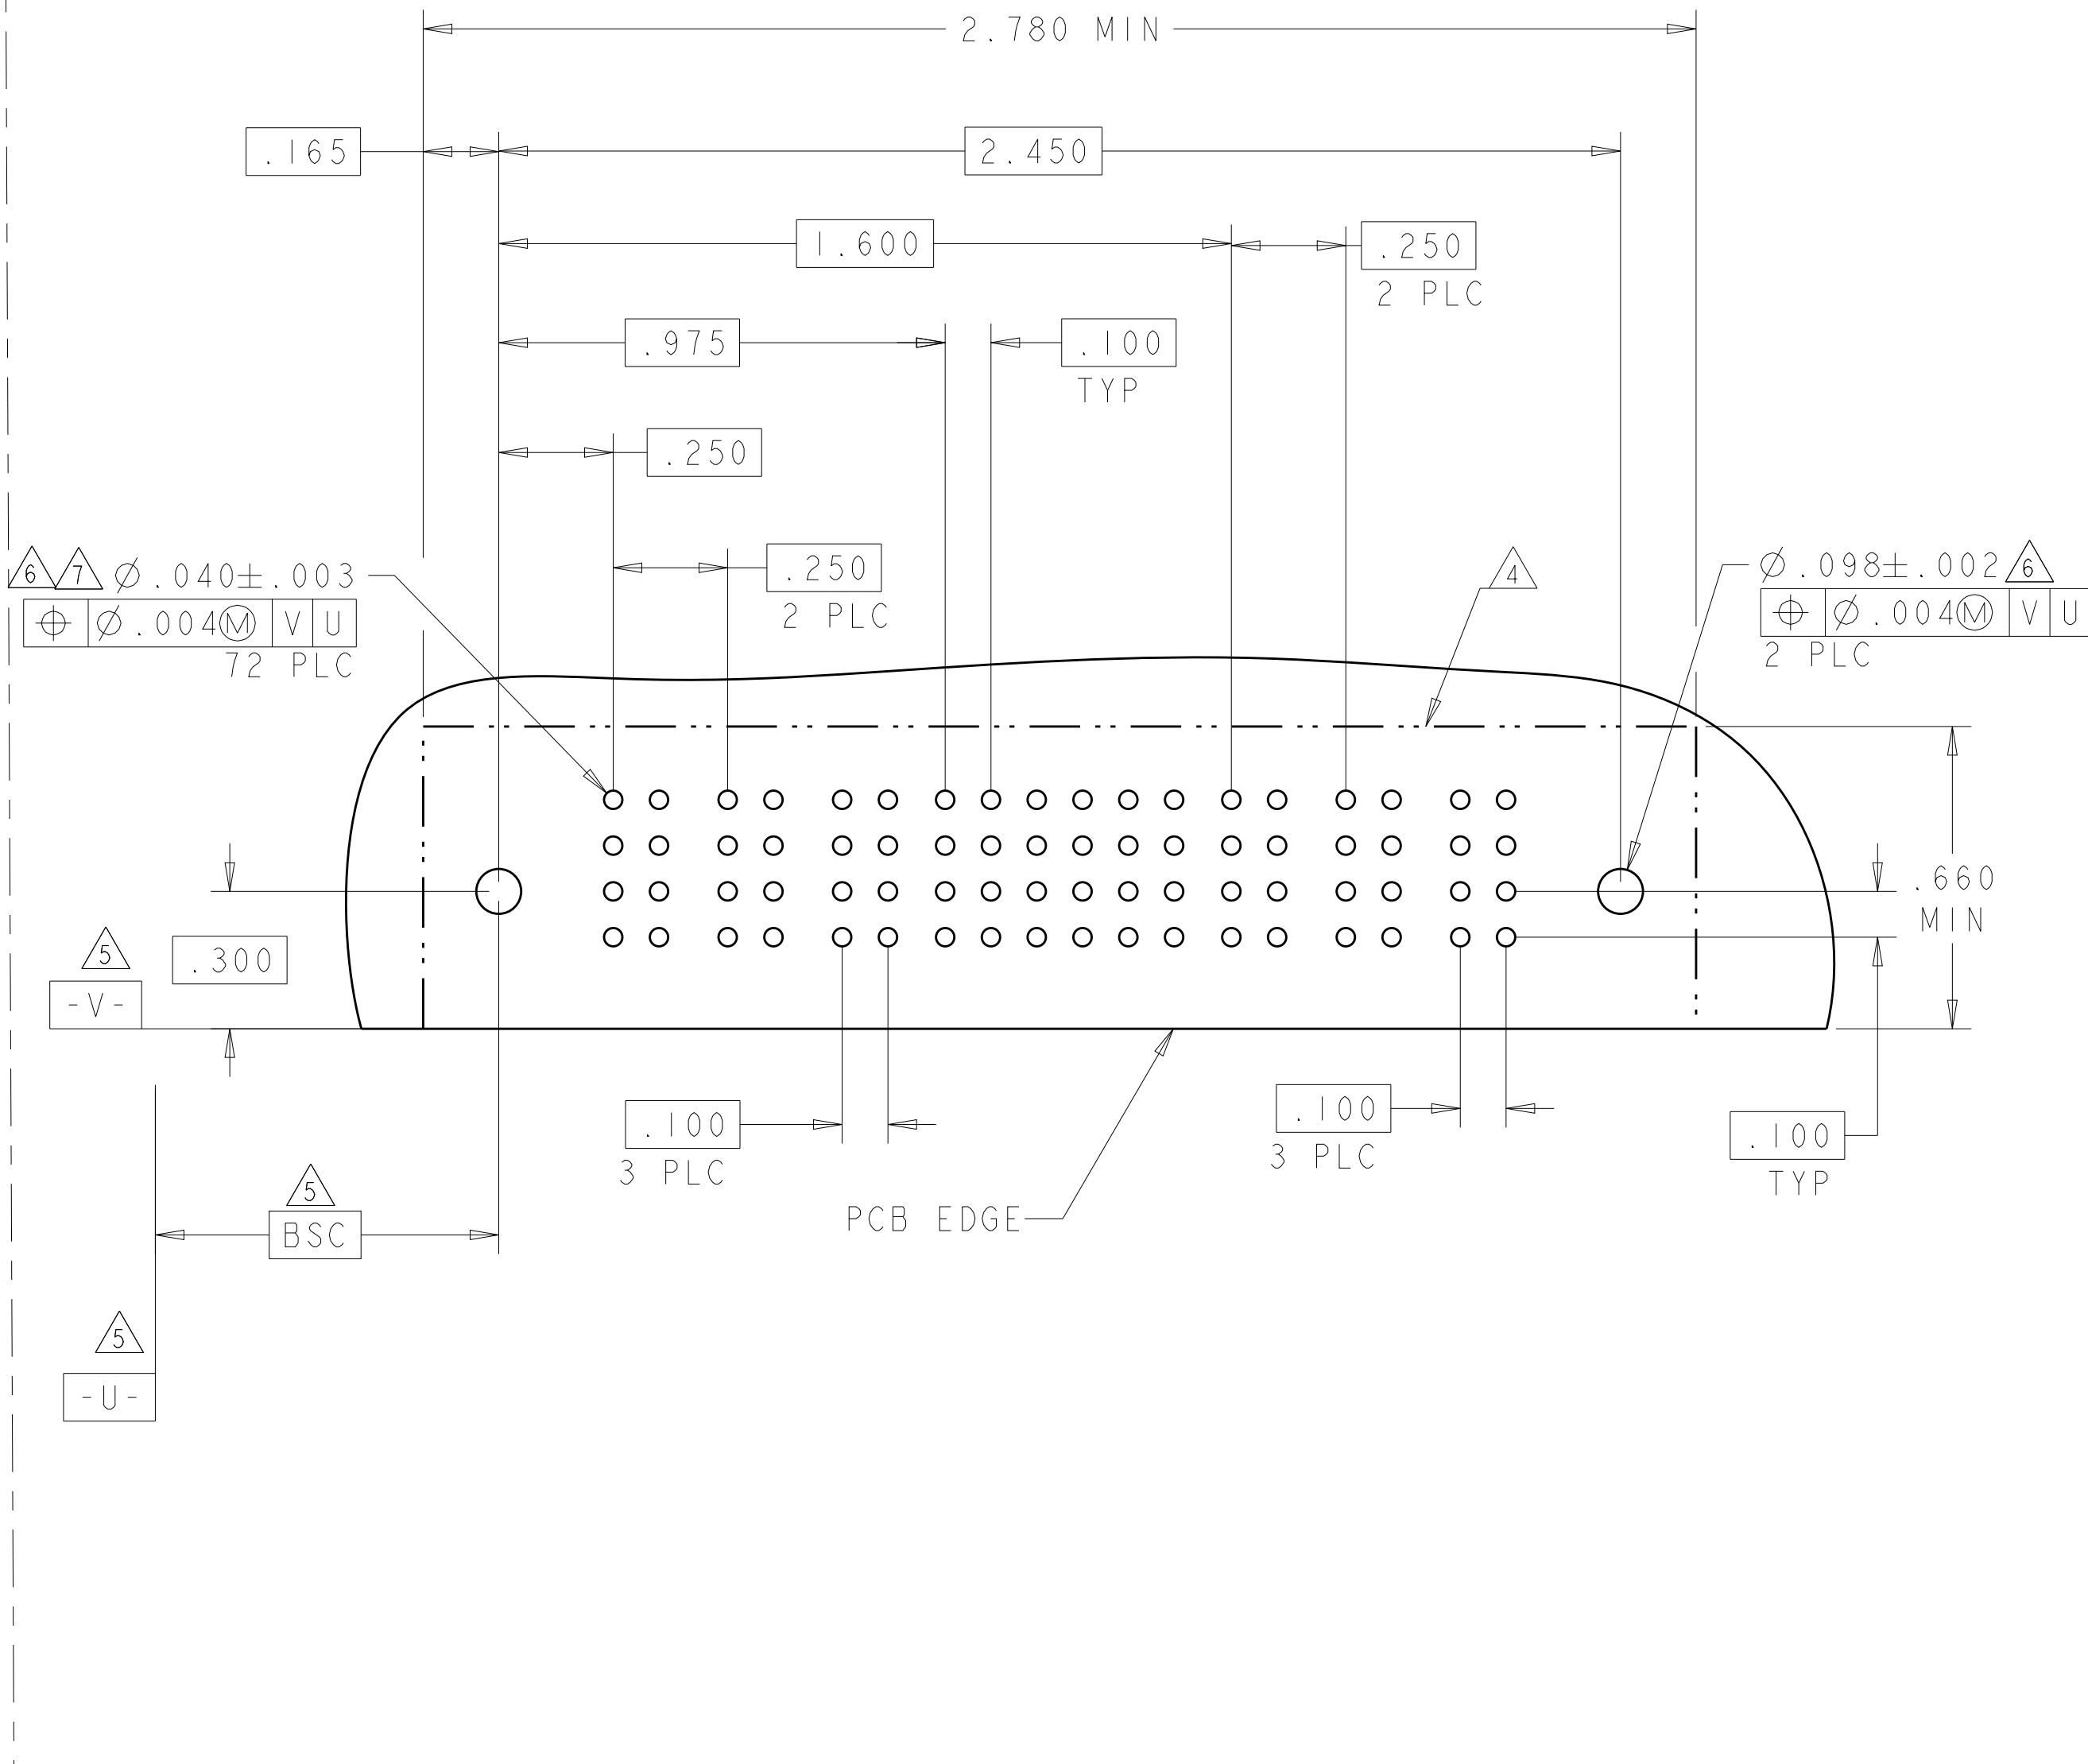
LOC		DIST		REVISIONS					
ES		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
					-	SEE SHEET I	-	-	-

PART NUMBER	ROWS		SIGNAL																									
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	
5-6450120-8	D C B A		J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J		
			K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K		
			N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N		N
			S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S		
100S																												

PART NUMBER	ROWS		POWER			SIGNAL		POWER		
			P1	P2	P3	1	2	P4	P5	
5-6450120-9	D C B A									
										
										
										
3ACP + 8S + 2P										

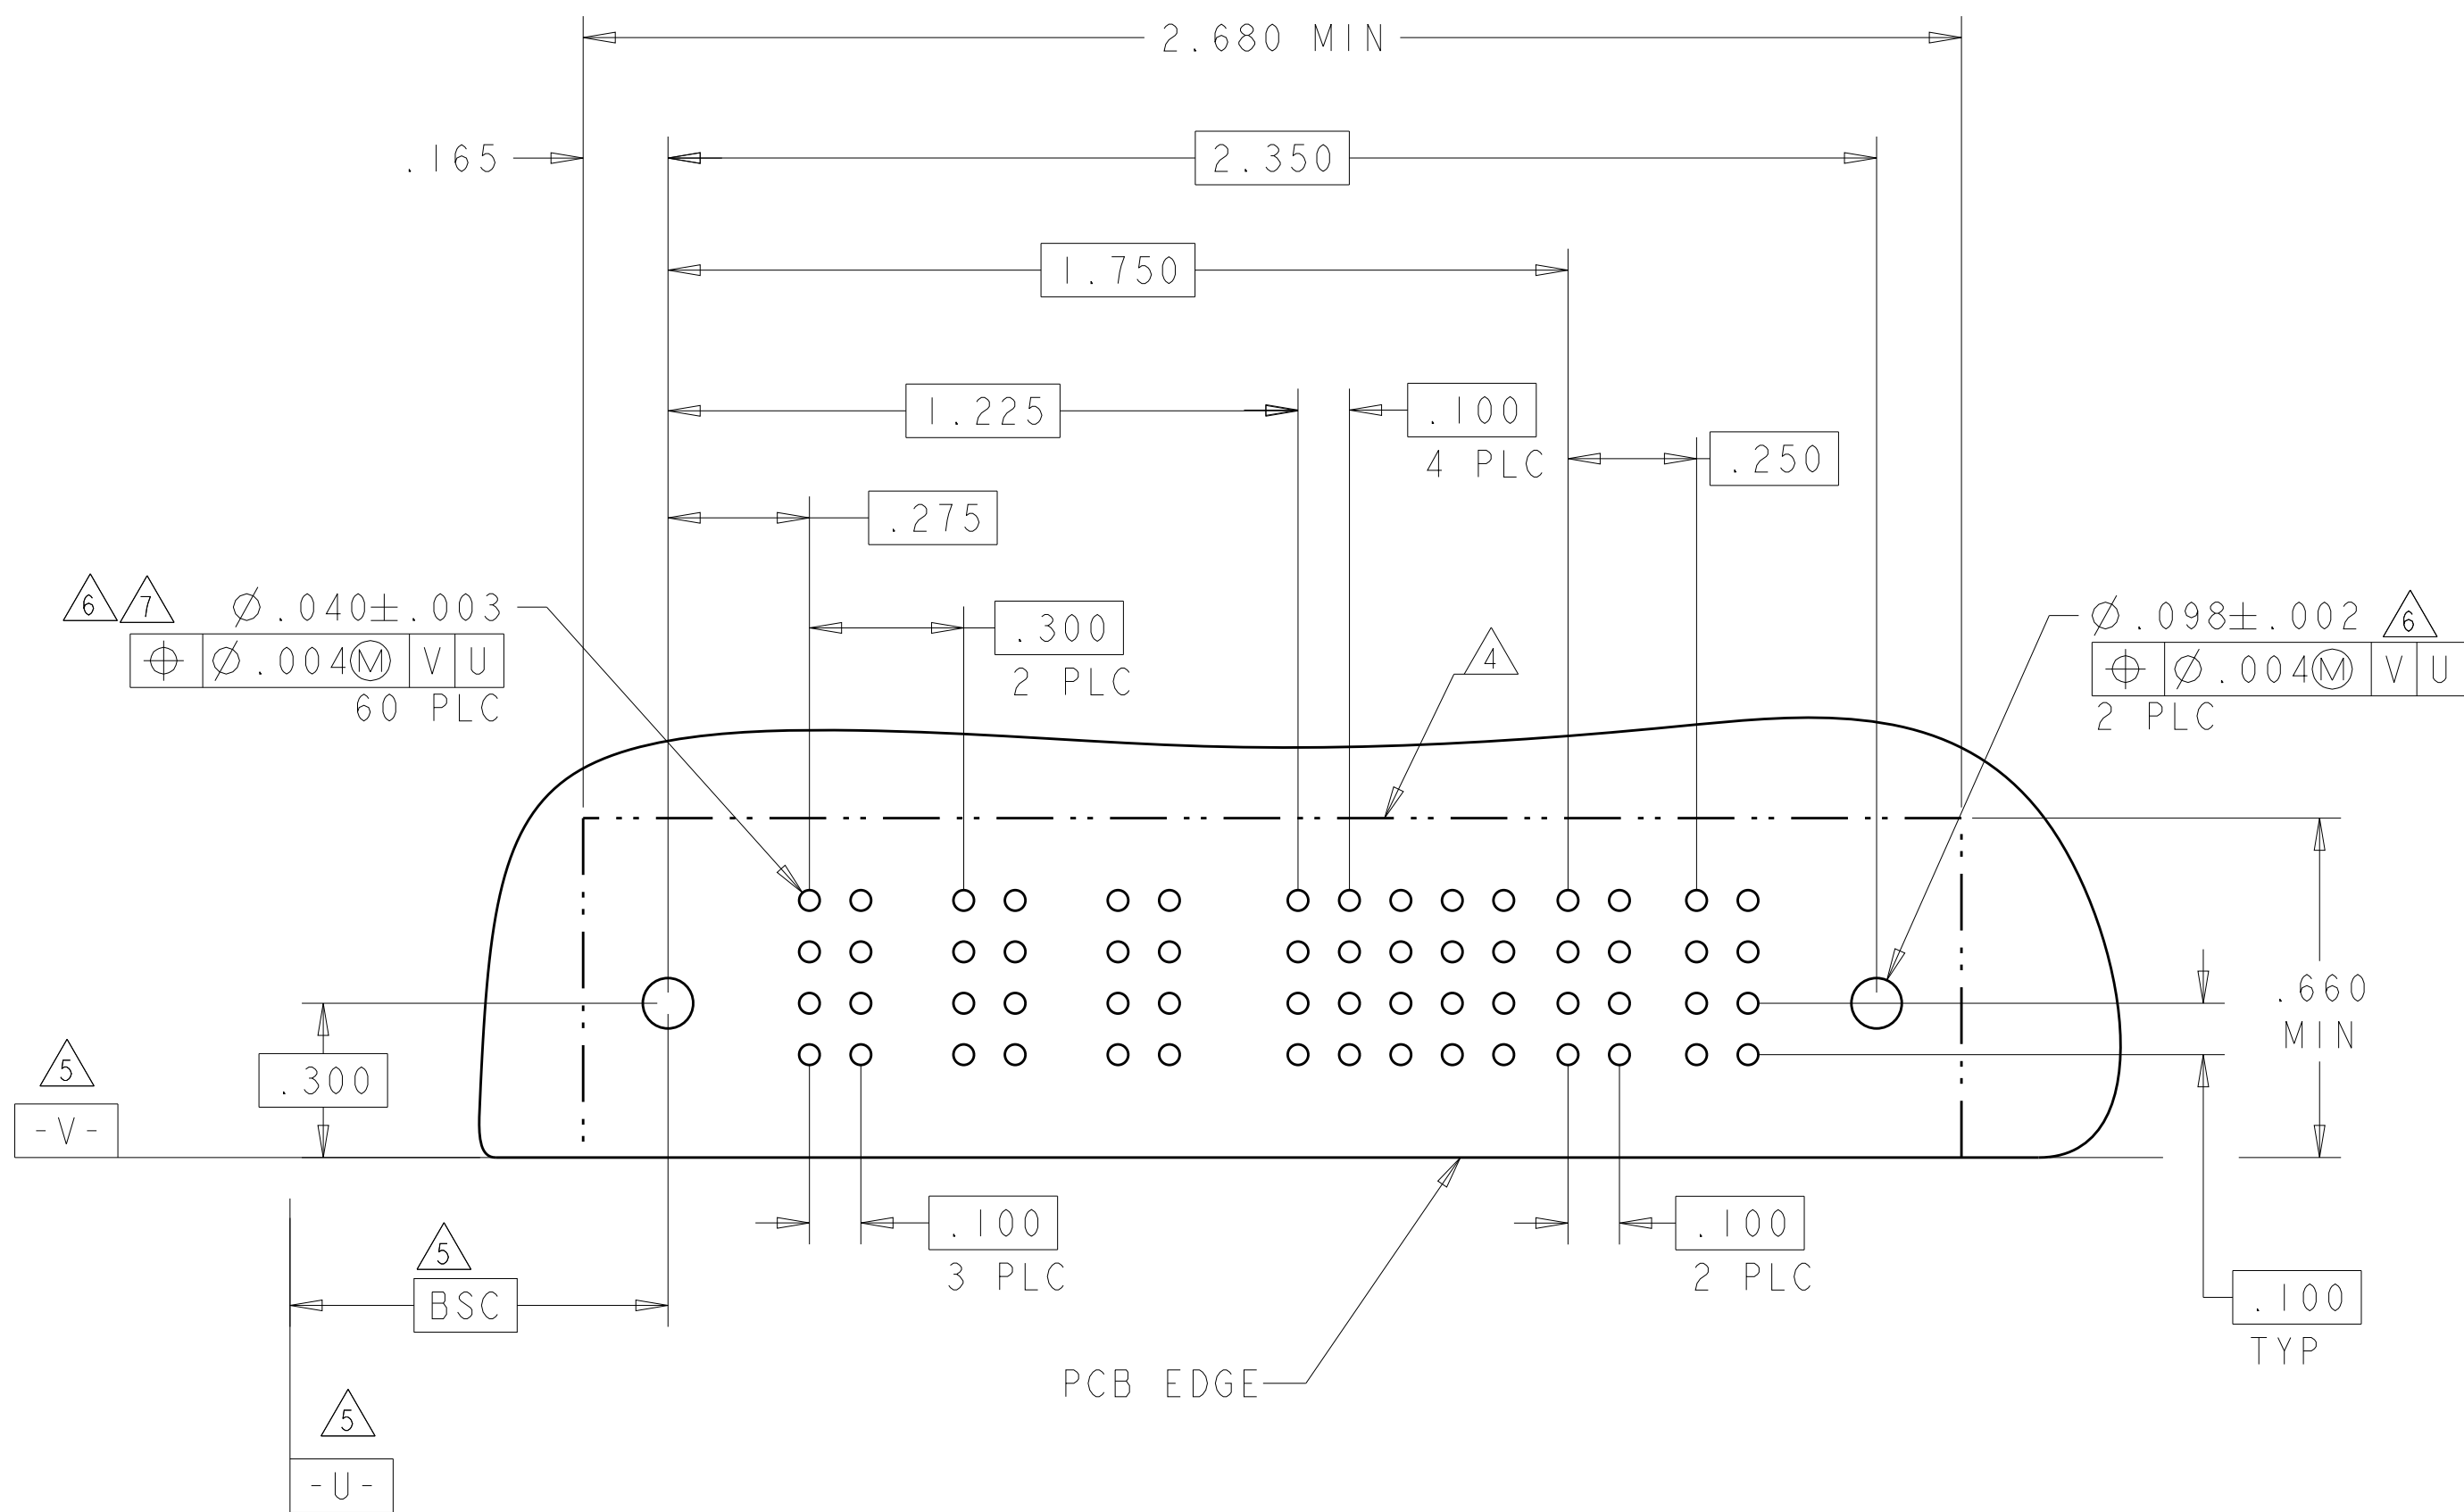


PART NUMBER	ROWS		POWER			SIGNAL						POWER				
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6		
6-6450120-1	D			PM	PM	PM	J	J	J	J	J	J	PM	PM	PM	
	K						K	F	F	K	K					
	N						N	G	G	N	N					
	S						S	S	S	S	S					
A	HD															HD
3P + 24S + 3P																

4805 (3/11)

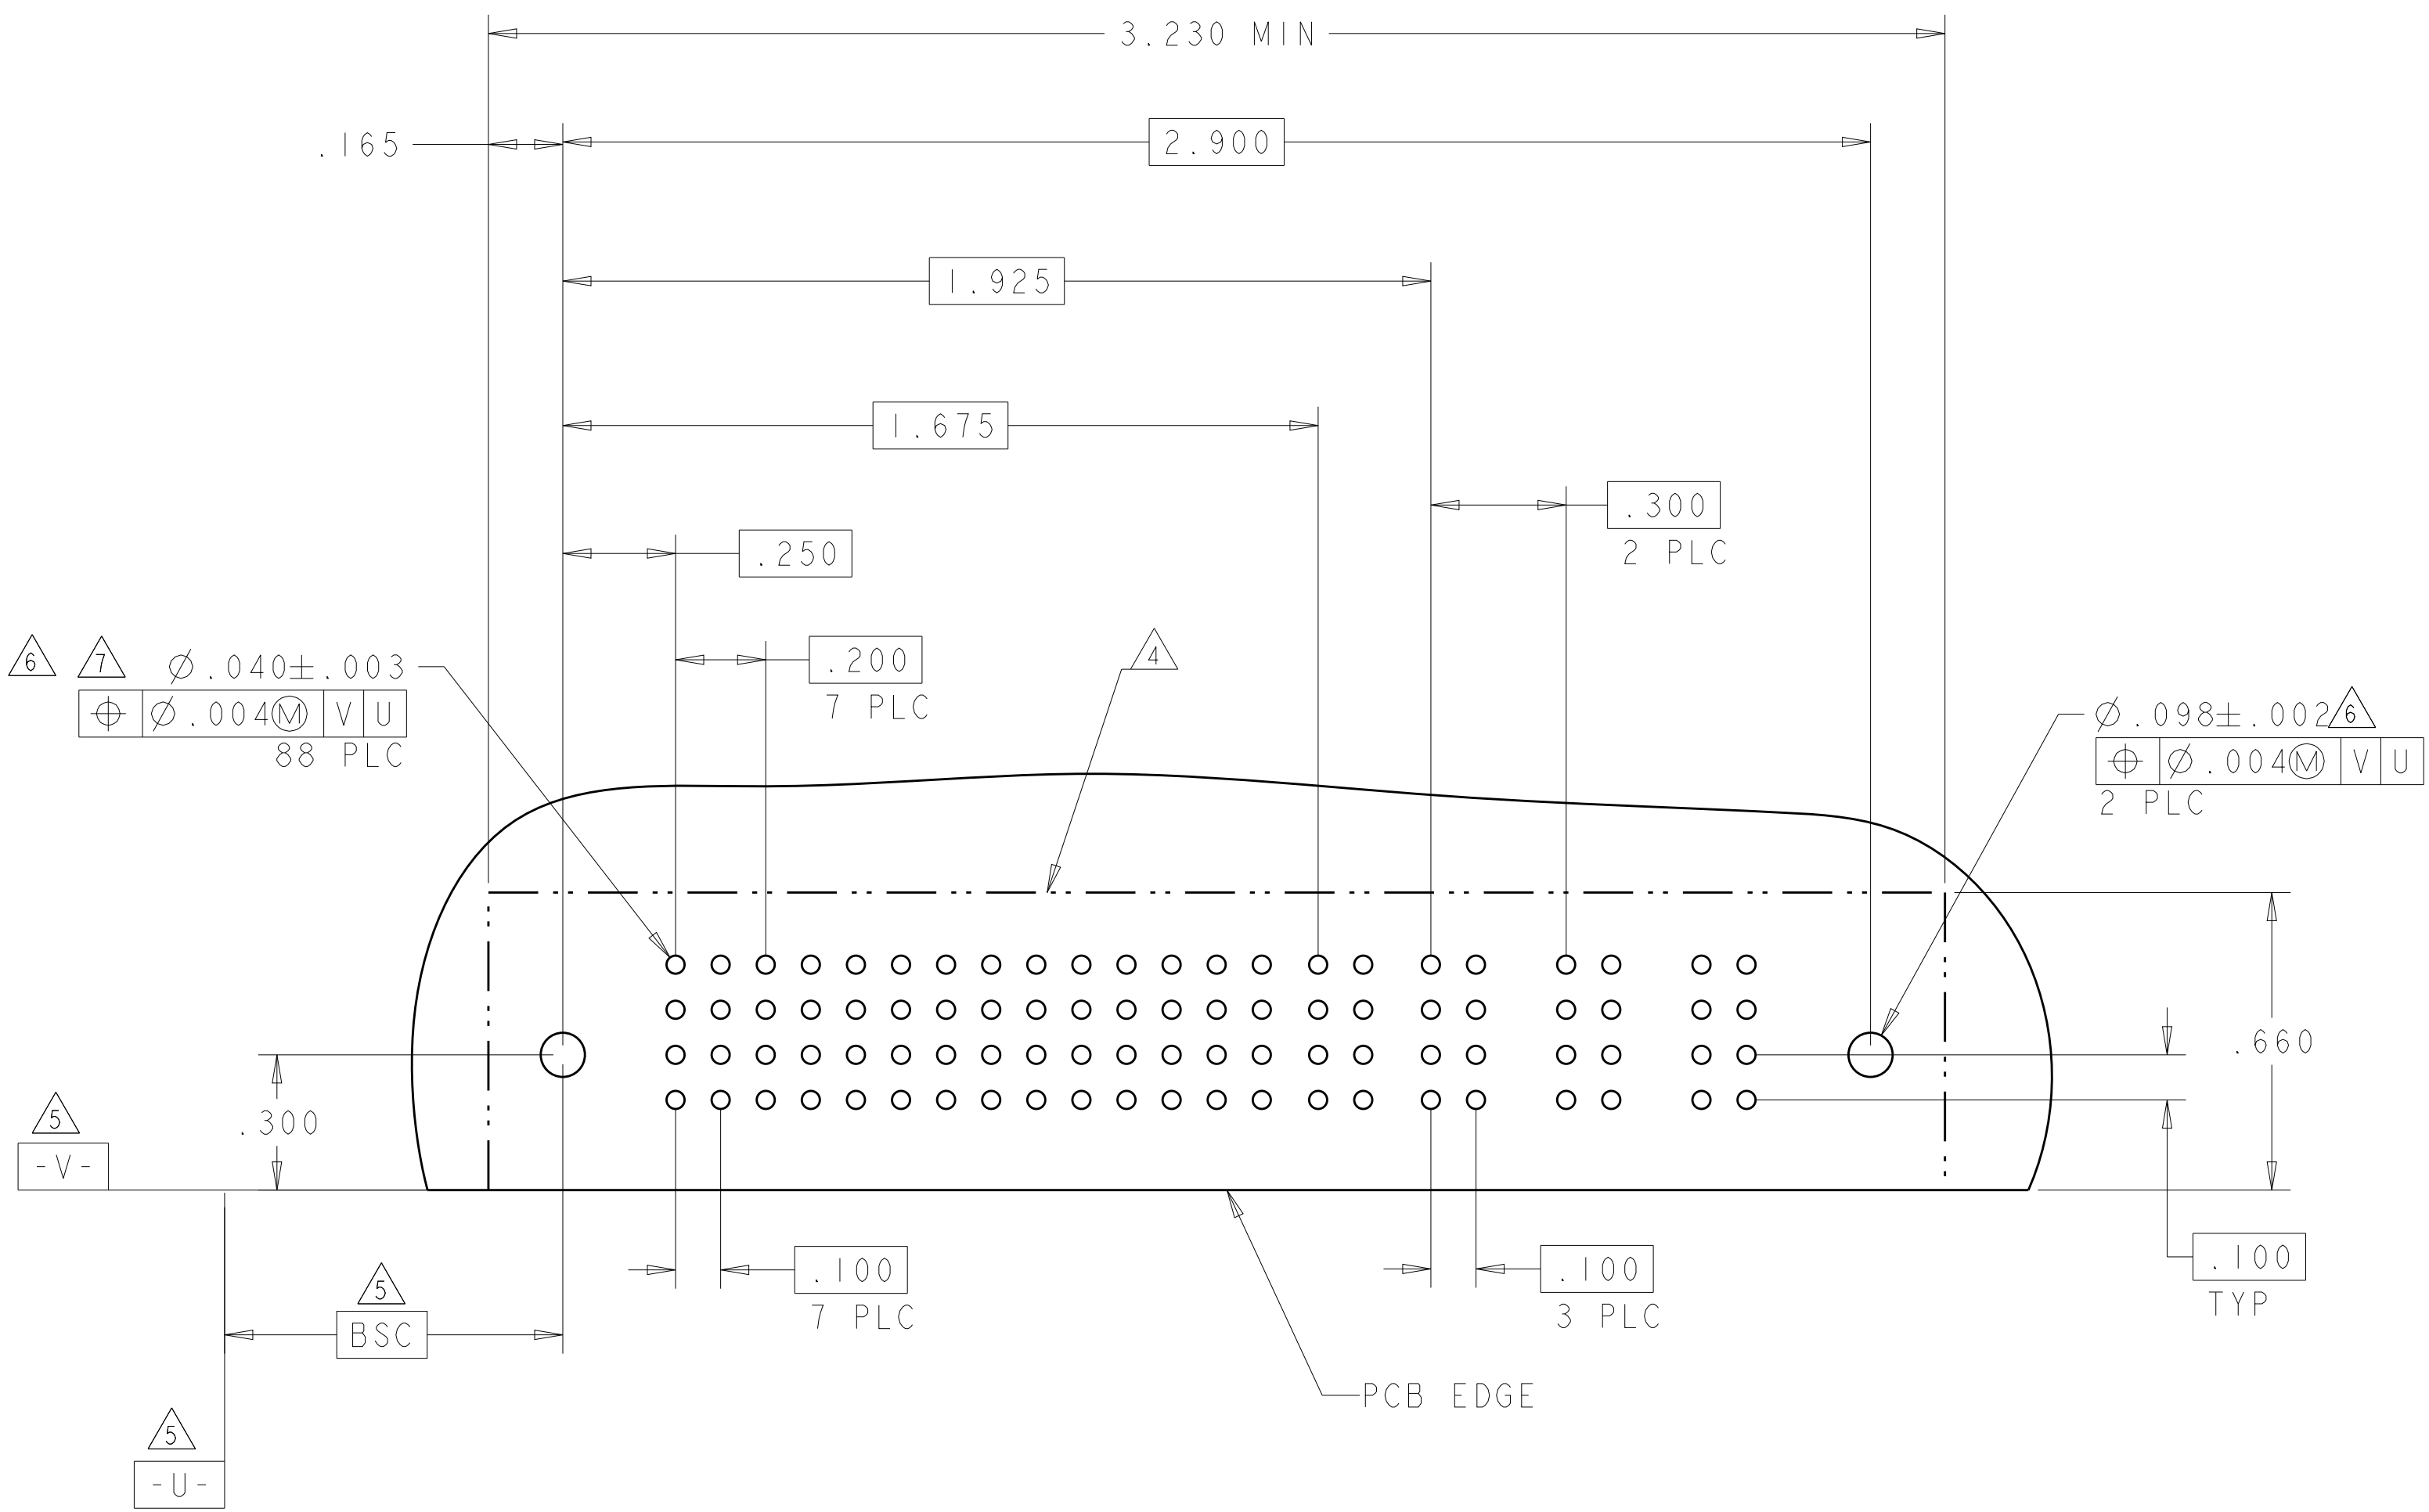
PART NUMBER	ROWS		POWER			SIGNAL						POWER		
			P1	P2	P3	1	2	3	4	5	6	P4	P5	
6-6450120-5	D C B A	 HD1	 PM	 PM	 PM	 J	 K	 K	 K	 K	 PM	 PM	 HD	
3ACP + 24S + 2P														

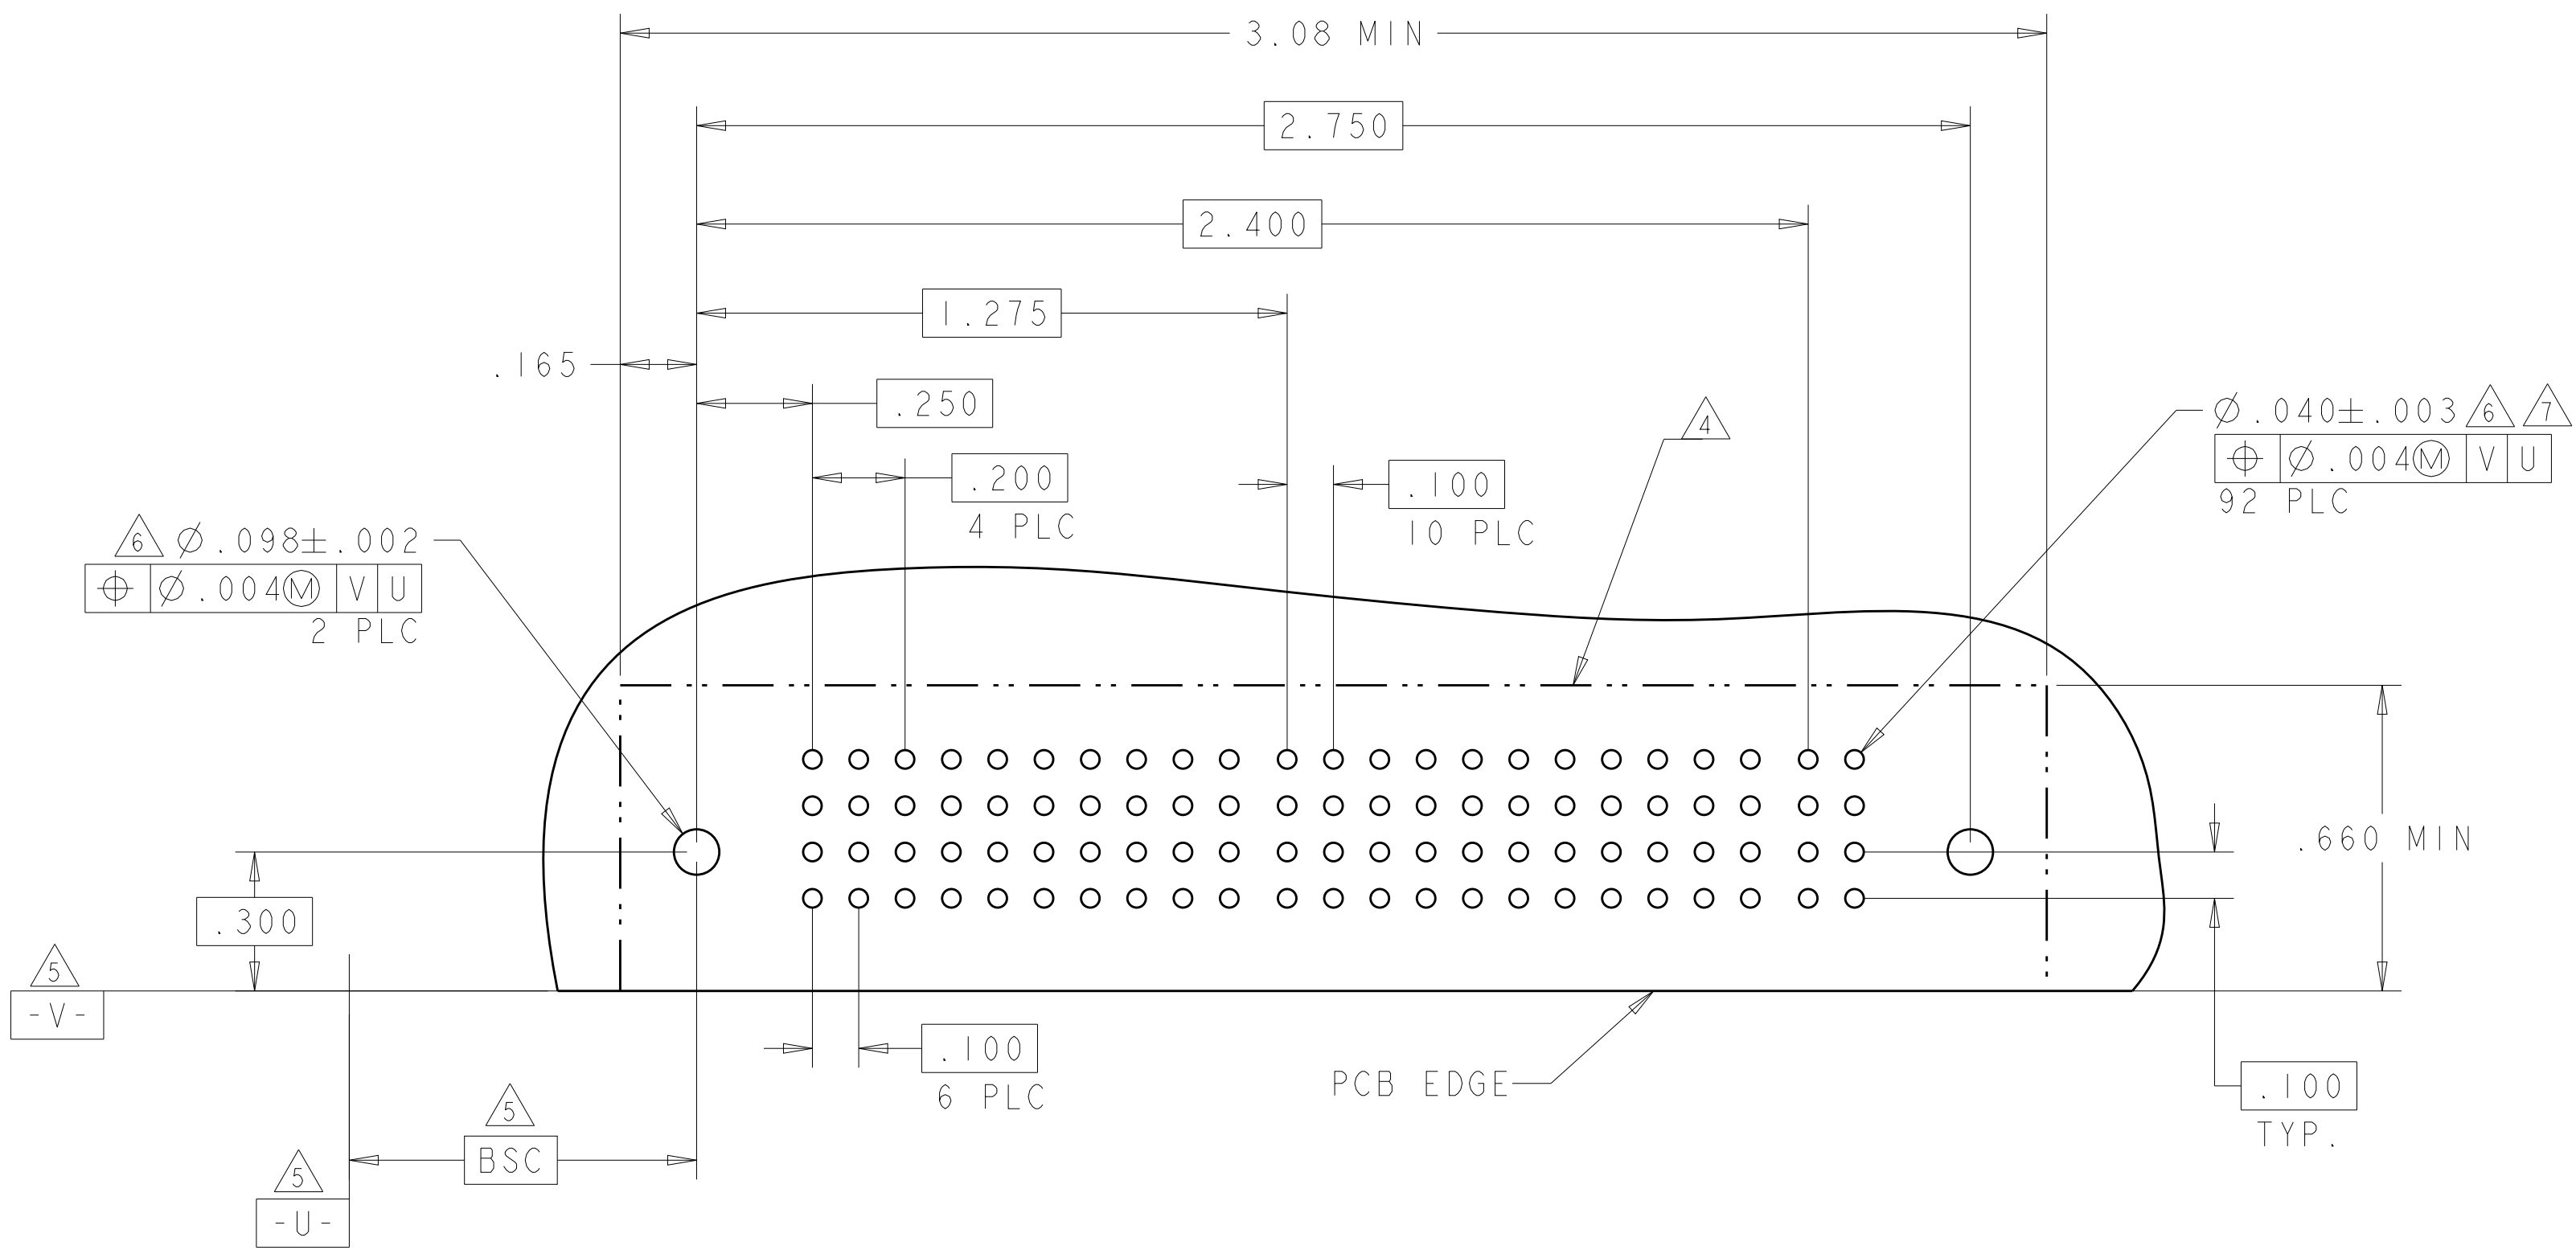
L 3

4805 (3/11)

PART NUMBER	ROWS		POWER							SIGNAL		POWER			
			P1	P2	P3	P4	P5	P6	P7	1	2	P8	P9	P10	
6-6450120-7	D C B A		PM	PM	PM	PM	PM	PM	PM	E	E	PM	PM	PM	
										F	F				
										G	G				
										H	H				
7HDP + 8S + 3ACP															

L5

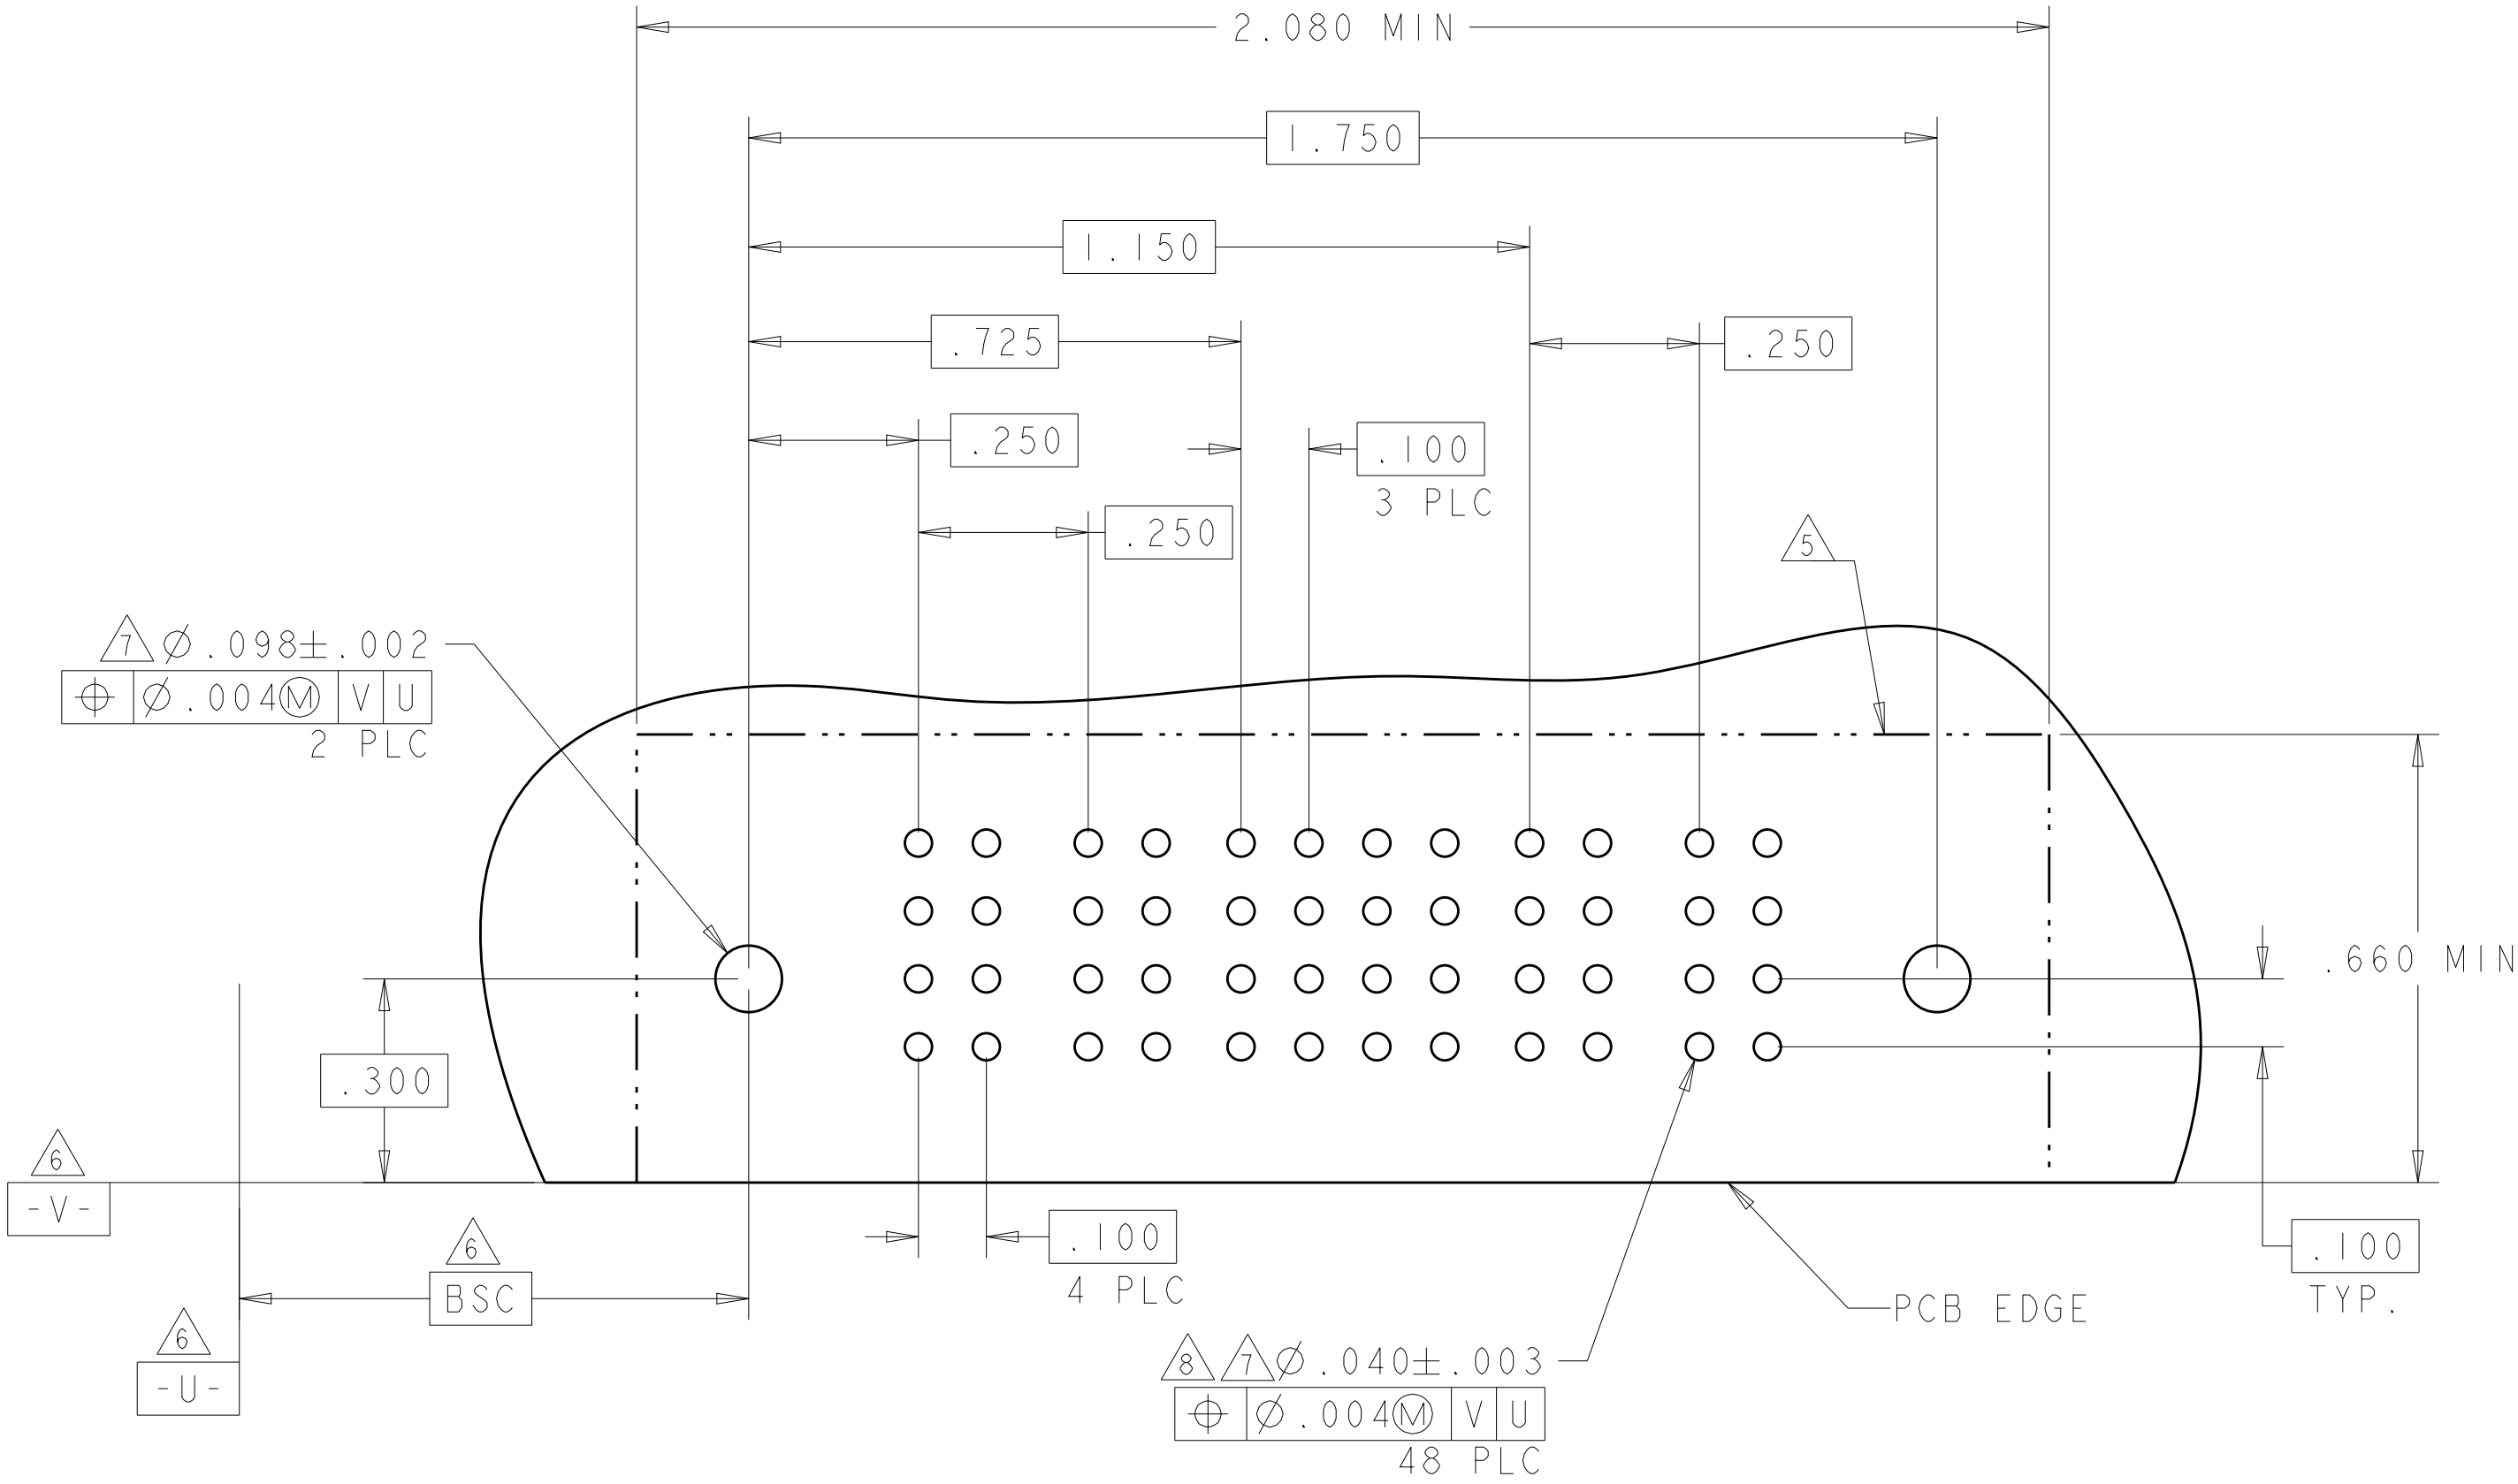
4805 (3/11)

[illegible]4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

M2

PART NUMBER	ROWS		POWER		SIGNAL				POWER		
			P1	P2	1	2	3	4	P3	P4	
7-6450120-1	D		PM	PM	E	E	E	E	PM	PM	
	C				F	F	F	F			
	B				N	N	N	N			
	A				H	H	H	H			
2P + 16S + 2P											



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.GRZYBOWSKI	02FEB05	 TE Connectivity			
DIMENSIONS: INCHES		CHK M.PERCHERKE	02FEB05				
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 P/LC ±.01 1 P/LC ±. 2 P/LC ±.005 3 P/LC ±.005 4 P/LC ±.0020 ANGLES ±°.75 FINISH - MATERIAL -	APVD M.PERCHERKE	02FEB05	NAME RIGHT ANGLE HEADER W/GUIDES ASSEMBLY MULTI-BEAM XL -			
		PRODUCT SPEC		SIZE A100779			
		APPLICATION SPEC		CAGE CODE C=6450120			
		FINISH		RESTRICTED TO			
		MATERIAL		WEIGHT		SCALE 4:1	
		CUSTOMER DRAWING		SHEET 24		REV M2	

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9