

D

C

B


A

D


C

B

A

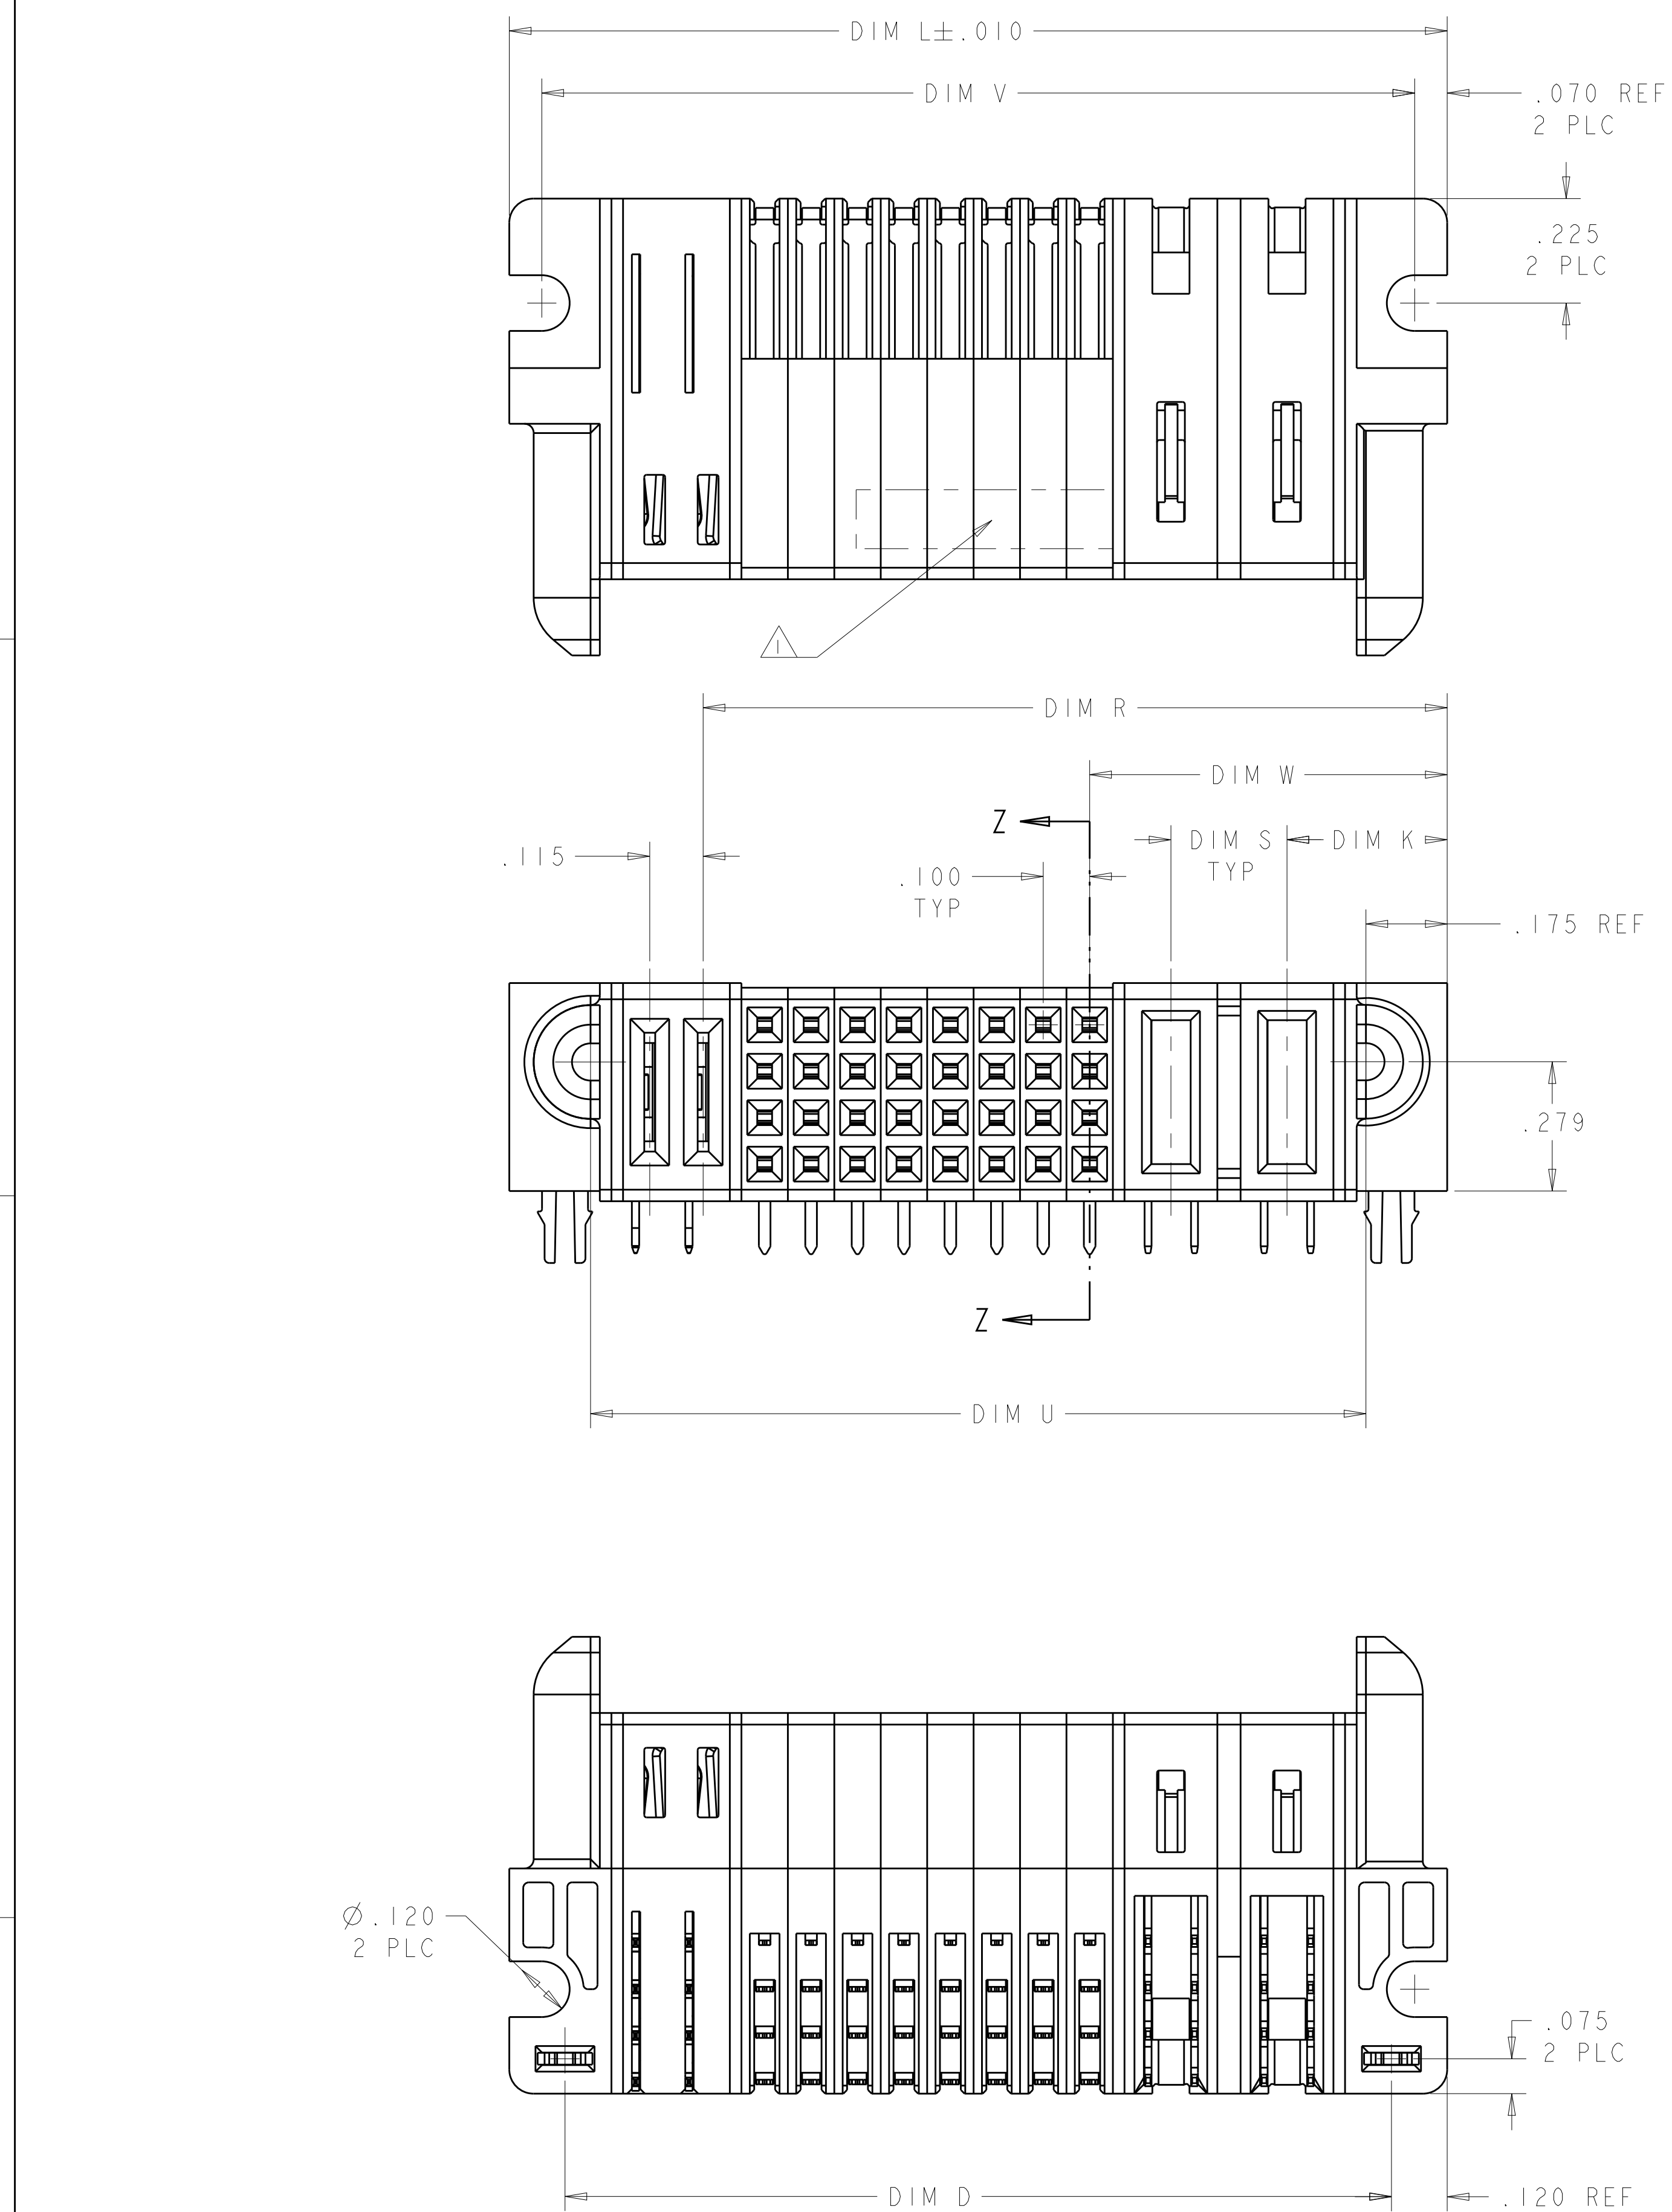

- 1 "AMP", PART NUMBER, AND DATECODE TO BE MARKED IN AREA SHOWN. PARTS UNDER 2.00 LONG MAY BE MARKED ON BOTH SIDES.
- 2 MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, BLACK, UL94 V-0
SIGNAL CONTACT - COPPER ALLOY
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- 3 PLATING : NOBLE METAL PLATING AT CONTACT FUNCTIONAL AREA OF POWER CONTACT AND SIGNAL CONTACT
- 4 MECHANICAL CONNECTOR KEEP OUT ZONE.
- 5 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 6 PCB - HOLE DIAMETERS ARE FINISHED HOLE SIZE.
- 7 PCB - $.0453 \pm .0010$ DRILLED HOLES PLATED WITH $.0003$ MIN Sn OVER $.001$ TO $.003$ Cu PLATING TO ACHIEVE A $.040$ DIA HOLE.
- 8 FOR P/S/P CONFIGURATION, THE DIMENSION PLEASE SEE SHEET 2
- 9 VARIABLE DIMENSION PLEASE SEE TABLE OR PART VIEW
- 10 FOR LP/S/P CONFIGURATION, THE DIMENSION PLEASE SEE SHEET 2

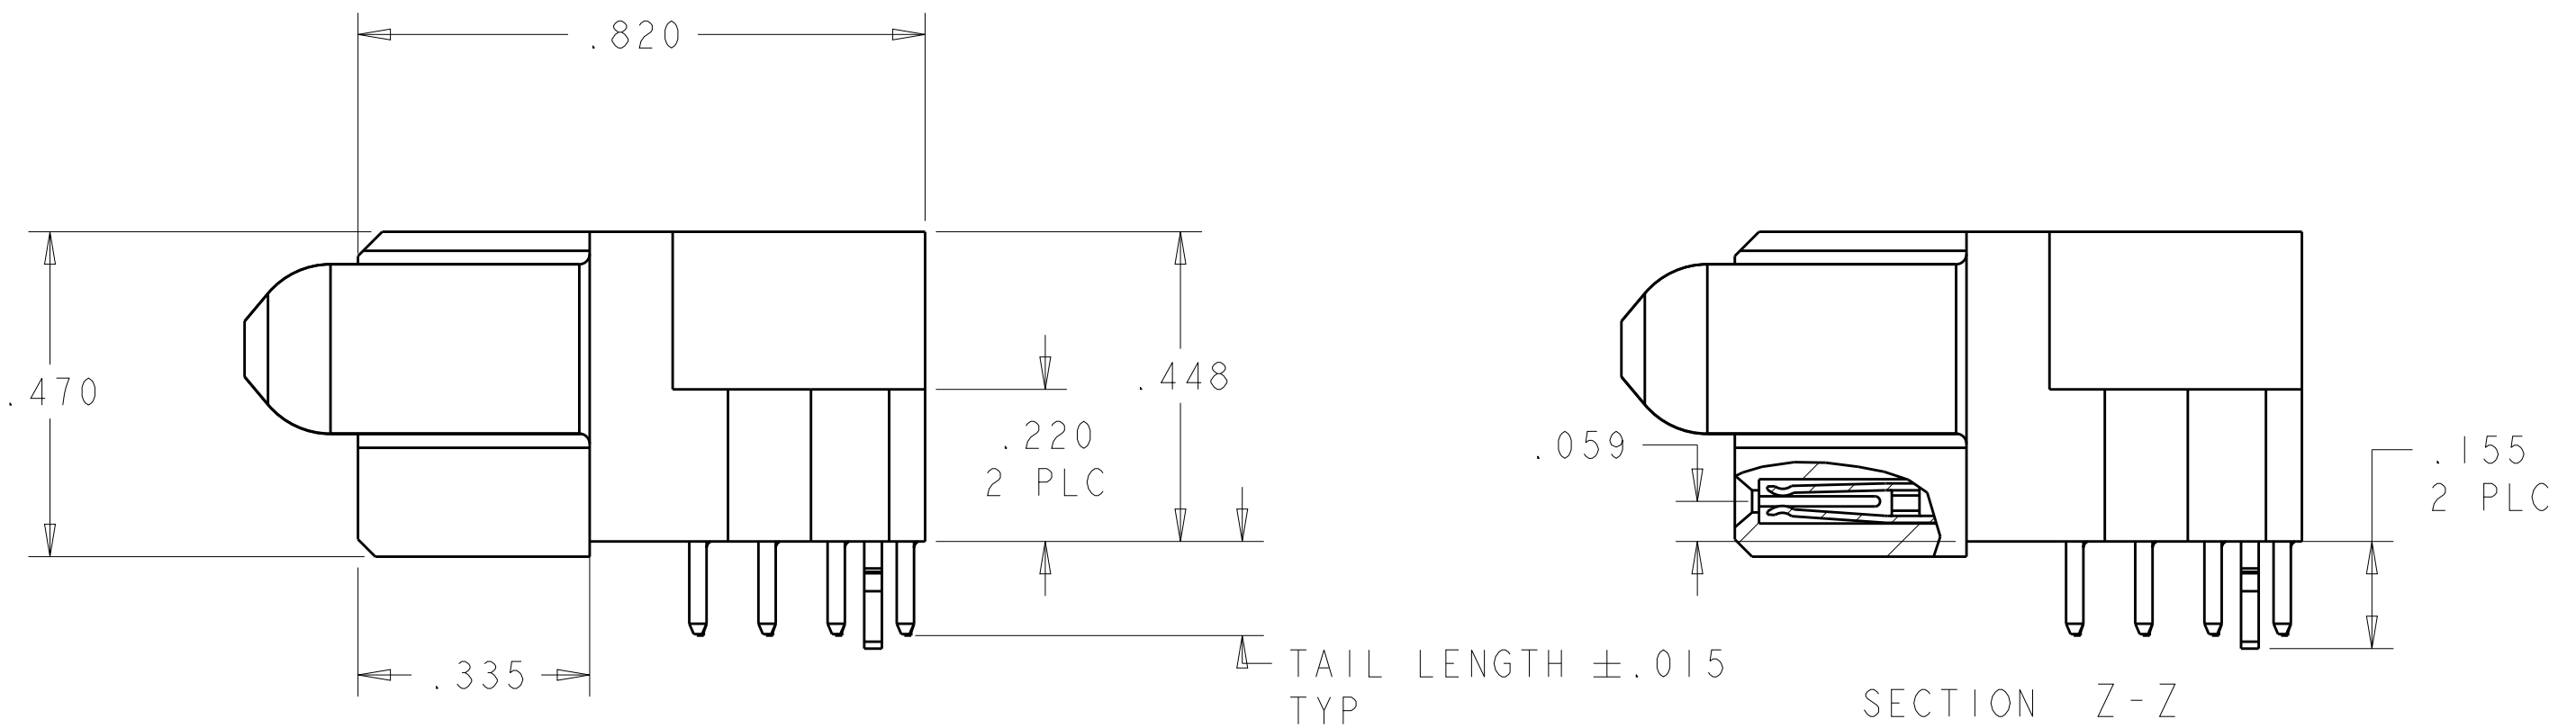

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
C. ZHOU
CHK
S. ZHAO
APVD
S. ZHAO

11OCT2007
11OCT2007
-

DIMENSIONS:
INCHES

0 PLC $\pm .1$
1 PLC $\pm .1$
2 PLC $\pm .01$
3 PLC $\pm .005$
4 PLC $\pm .0020$
ANGLES $\pm 2^\circ$
FINISH

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

PRODUCT SPEC
108-2292
APPLICATION SPEC
114-13251
WEIGHT
-

MATERIAL
-

Customer Drawing

NAME
RIGHT ANGLE RECEPTACLE
SHORT END MODULE
MULTI-BEAM XLE

SIZE
A1

CAGE CODE
00779

DRAWING NO
6450870

RESTRICTED TO
-

SCALE
4:1


SHEET
1

OF
20


REV
K2

TE Connectivity

LOC	DIST	REVISIONS					
		P.	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-

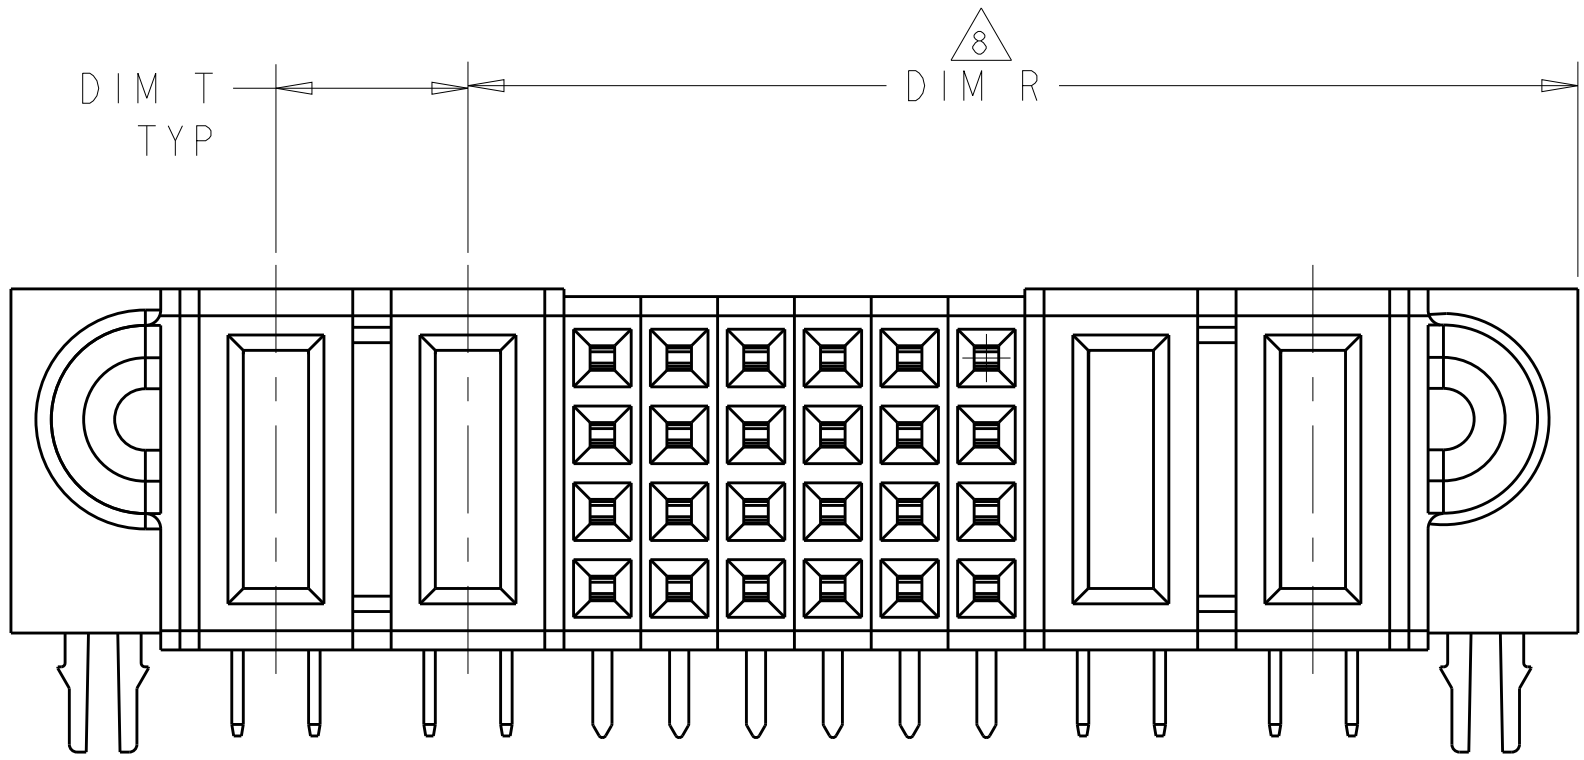

FOR PART NUMBER 6450870-2,6450870-3,6450870-4,6450870-5,THE OTHER DIMENSION REFER TO TABLE OF SHEET 1.

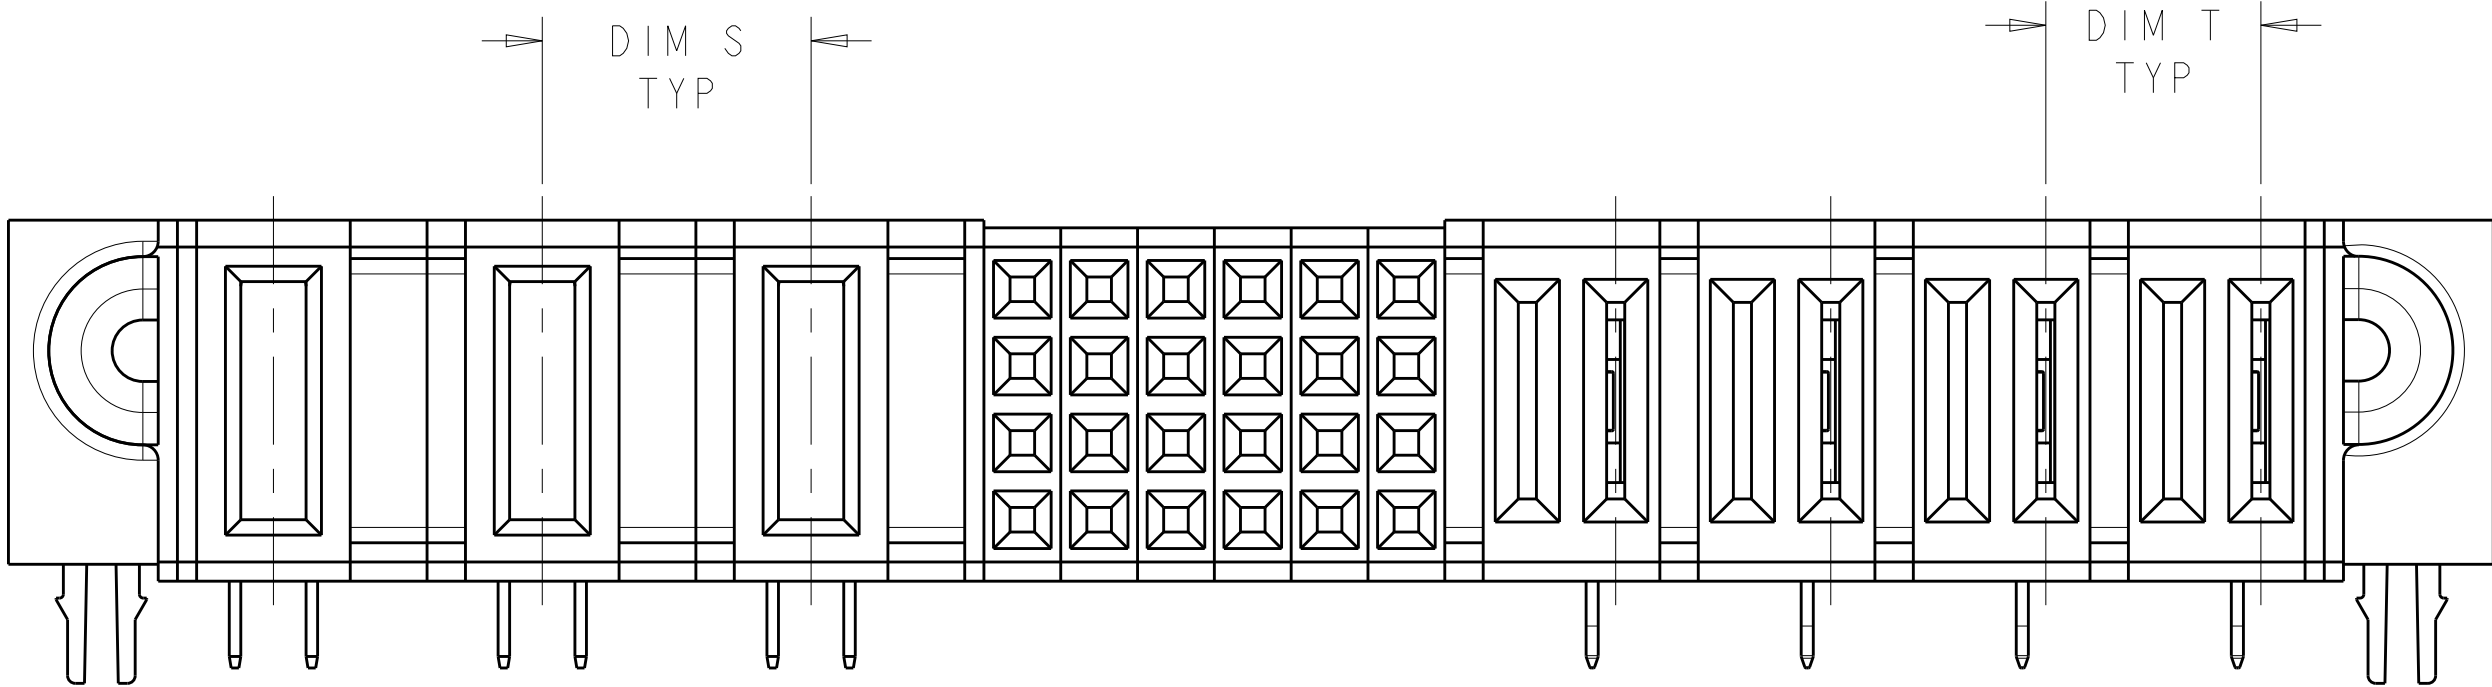

FOR LP/S/P CONFIGUTION (2-6450870-1),THE OTHER DIMENSION REFER TO TABLE OF SHEET 1.

K2	1.380	1.170	-	-	1.2425	.435	-	1.520	.2775	1LP + 32S + 1LP	3-6450870-4
	2.650	2.440	.250	.250	1.920	1.045	2.550	2.790	.370	3P + 32S + 3P	3-6450870-3
	2.650	2.540	-	.250	2.545	1.270	2.750	2.890	.345	4P + 48S + 1P	3-6450870-2
	1.850	1.640	.230	.230	1.3675	1.060	1.750	1.990	.2775	3LP + 12S + 4LP	3-6450870-1
	2.200	1.990	0.250	0.250	1.495	1.020	2.100	2.340	.345	3P + 16S + 3P	3-6450870-0
	1.100	.890	-	-	.895	.570	1.000	1.240	.345	1P + 8S + 1P	2-6450870-9
	3.300	3.090	-	.300	3.120	2.370	3.200	3.440	.320	7ACP + 24S + 1P	2-6450870-8
	2.550	2.340	.250	.300	1.595	1.120	2.450	2.690	.345	3ACP + 16S + 4P	2-6450870-6
	4.000	3.790	.250	.250	2.770	1.520	3.900	4.140	.320	5P + 48S + 5P	2-6450870-5
	1.975	1.765	.250	.300	1.520	1.195	1.875	2.115	.345	3ACP + 8S + 2P	2-6450870-4
	1.380	1.170	-	-	1.2425	.435	-	1.520	.2775	1LP + 32S + 1LP	2-6450870-3
	1.700	1.490	.250	.250	1.245	.770	1.600	1.840	.345	2P + 16S + 2P	2-6450870-2
	3.095	2.885	.280	.350	2.190	1.415	2.995	3.235	.3025	8LP + 24S + 3P [△]	2-6450870-1
	2.400	2.190	.250	.250	1.695 [△]	1.020	2.300	2.540	.345	3P + 24S + 3P	2-6450870-0
	2.400	2.190	.250	.250	1.695 [△]	1.020	2.300	2.540	.345	3P + 24S + 3P	1-6450870-9
	6.200	5.990	.250	.375	2.195 [△]	1.845	6.100	6.340	.395	4P + 12S + 16P	1-6450870-8
	3.775	3.565	.375	.375	2.445	2.045	3.675	3.915	.345	5ACP + 12S + 4ACP	1-6450870-6
	2.020	1.810	-	.300	1.0775	.870	1.920	2.160	.320	2ACP + 8S + 4LP	1-6450870-5
	2.295	2.085	[△] ₉	.215	1.465	.865	2.195	2.435	.2775	3LP + 20S + 4HDP	1-6450870-4
	4.500	4.290	[△] ₈	.300	3.220 [△]	2.695	4.400	4.640	.370	8ACP + 16S + 4ACP	1-6450870-3
	2.260	2.050	-	.300	1.7775	1.145	2.160	2.400	.345	3ACP + 24S + 4LP	1-6450870-2
	1.700	1.490	.200	.200	1.295 [△]	.720	1.600	1.840	.345	2P + 20S + 2P	1-6450870-1
	1.600	1.390	.200	.200	1.195 [△]	.720	1.500	1.740	.345	2P + 16S + 2P	1-6450870-0
	2.200	1.990	.200	.200	1.795 [△]	.720	2.100	2.340	.345	2P + 40S + 2P	6450870-9
	2.650	2.440	.250	.250	1.920	1.045	2.550	2.790	.370	3P + 32S + 3P	6450870-8
	3.100	2.890	.230	[△] ₉	2.5025	1.945	3.000	3.240	.320	8HDP + 20S + 5LP	6450870-7
	1.400	1.190	-	-	1.195 [△]	.520	1.300	1.540	.345	1P + 24S + 1P	6450870-5
	2.400	2.190	.250	.250	1.695 [△]	1.020	2.300	2.540	.345	3P + 24S + 3P	6450870-4
	1.900	1.690	.250	.250	1.445 [△]	.770	1.800	2.040	.345	2P + 24S + 2P	6450870-3
	1.575	1.365	-	-	1.320 [△]	.595	1.475	1.715	.370	1P + 24S + 1P	6450870-2
	1.880	1.670	-	.250	1.6025	.770	1.780	2.020	.345	2P + 32S + 2LP	6450870-1
	DIM V	DIM U	DIM T	DIM S	DIM R	DIM W	DIM D	DIM L	DIM K	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL

-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC
1 PLC
2 PLC
3 PLC
4 PLC
ANGLES
FINISH

±
±.1
±.01
±.005
±.0020
#2°

APVD

S. ZHAO

PRODUCT SPEC

108-2292

APPLICATION SPEC

114-13251

WEIGHT

-

Customer Drawing

DWN
C. ZHOU

CHK
S. ZHAO

11OCT2007

11OCT2007

NAME

RIGHT ANGLE RECEPTACLE
SHORT END MODULE
MULTI-BEAM XLE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A100779

6450870

-

SCALE

4:1

SHEET

2

OF


20

REV


K2

LOC		DIST		REVISIONS				
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		-		SEE SHEET 1	-	-	-	

PART NUMBER	ROWS		POWER		SIGNAL								POWER		
			LP2	LPI	8	7	6	5	4	3	2	1	P2	PI	
6450870-1	D		LM	LM	H	H	H	H	H	H	H	H	RM	RM	
	C				G	G	G	G	G	G	G				
	B				F	F	F	F	F	F	F				
	A				E	E	E	E	E	E	E				
2P + 32S + 2LP															

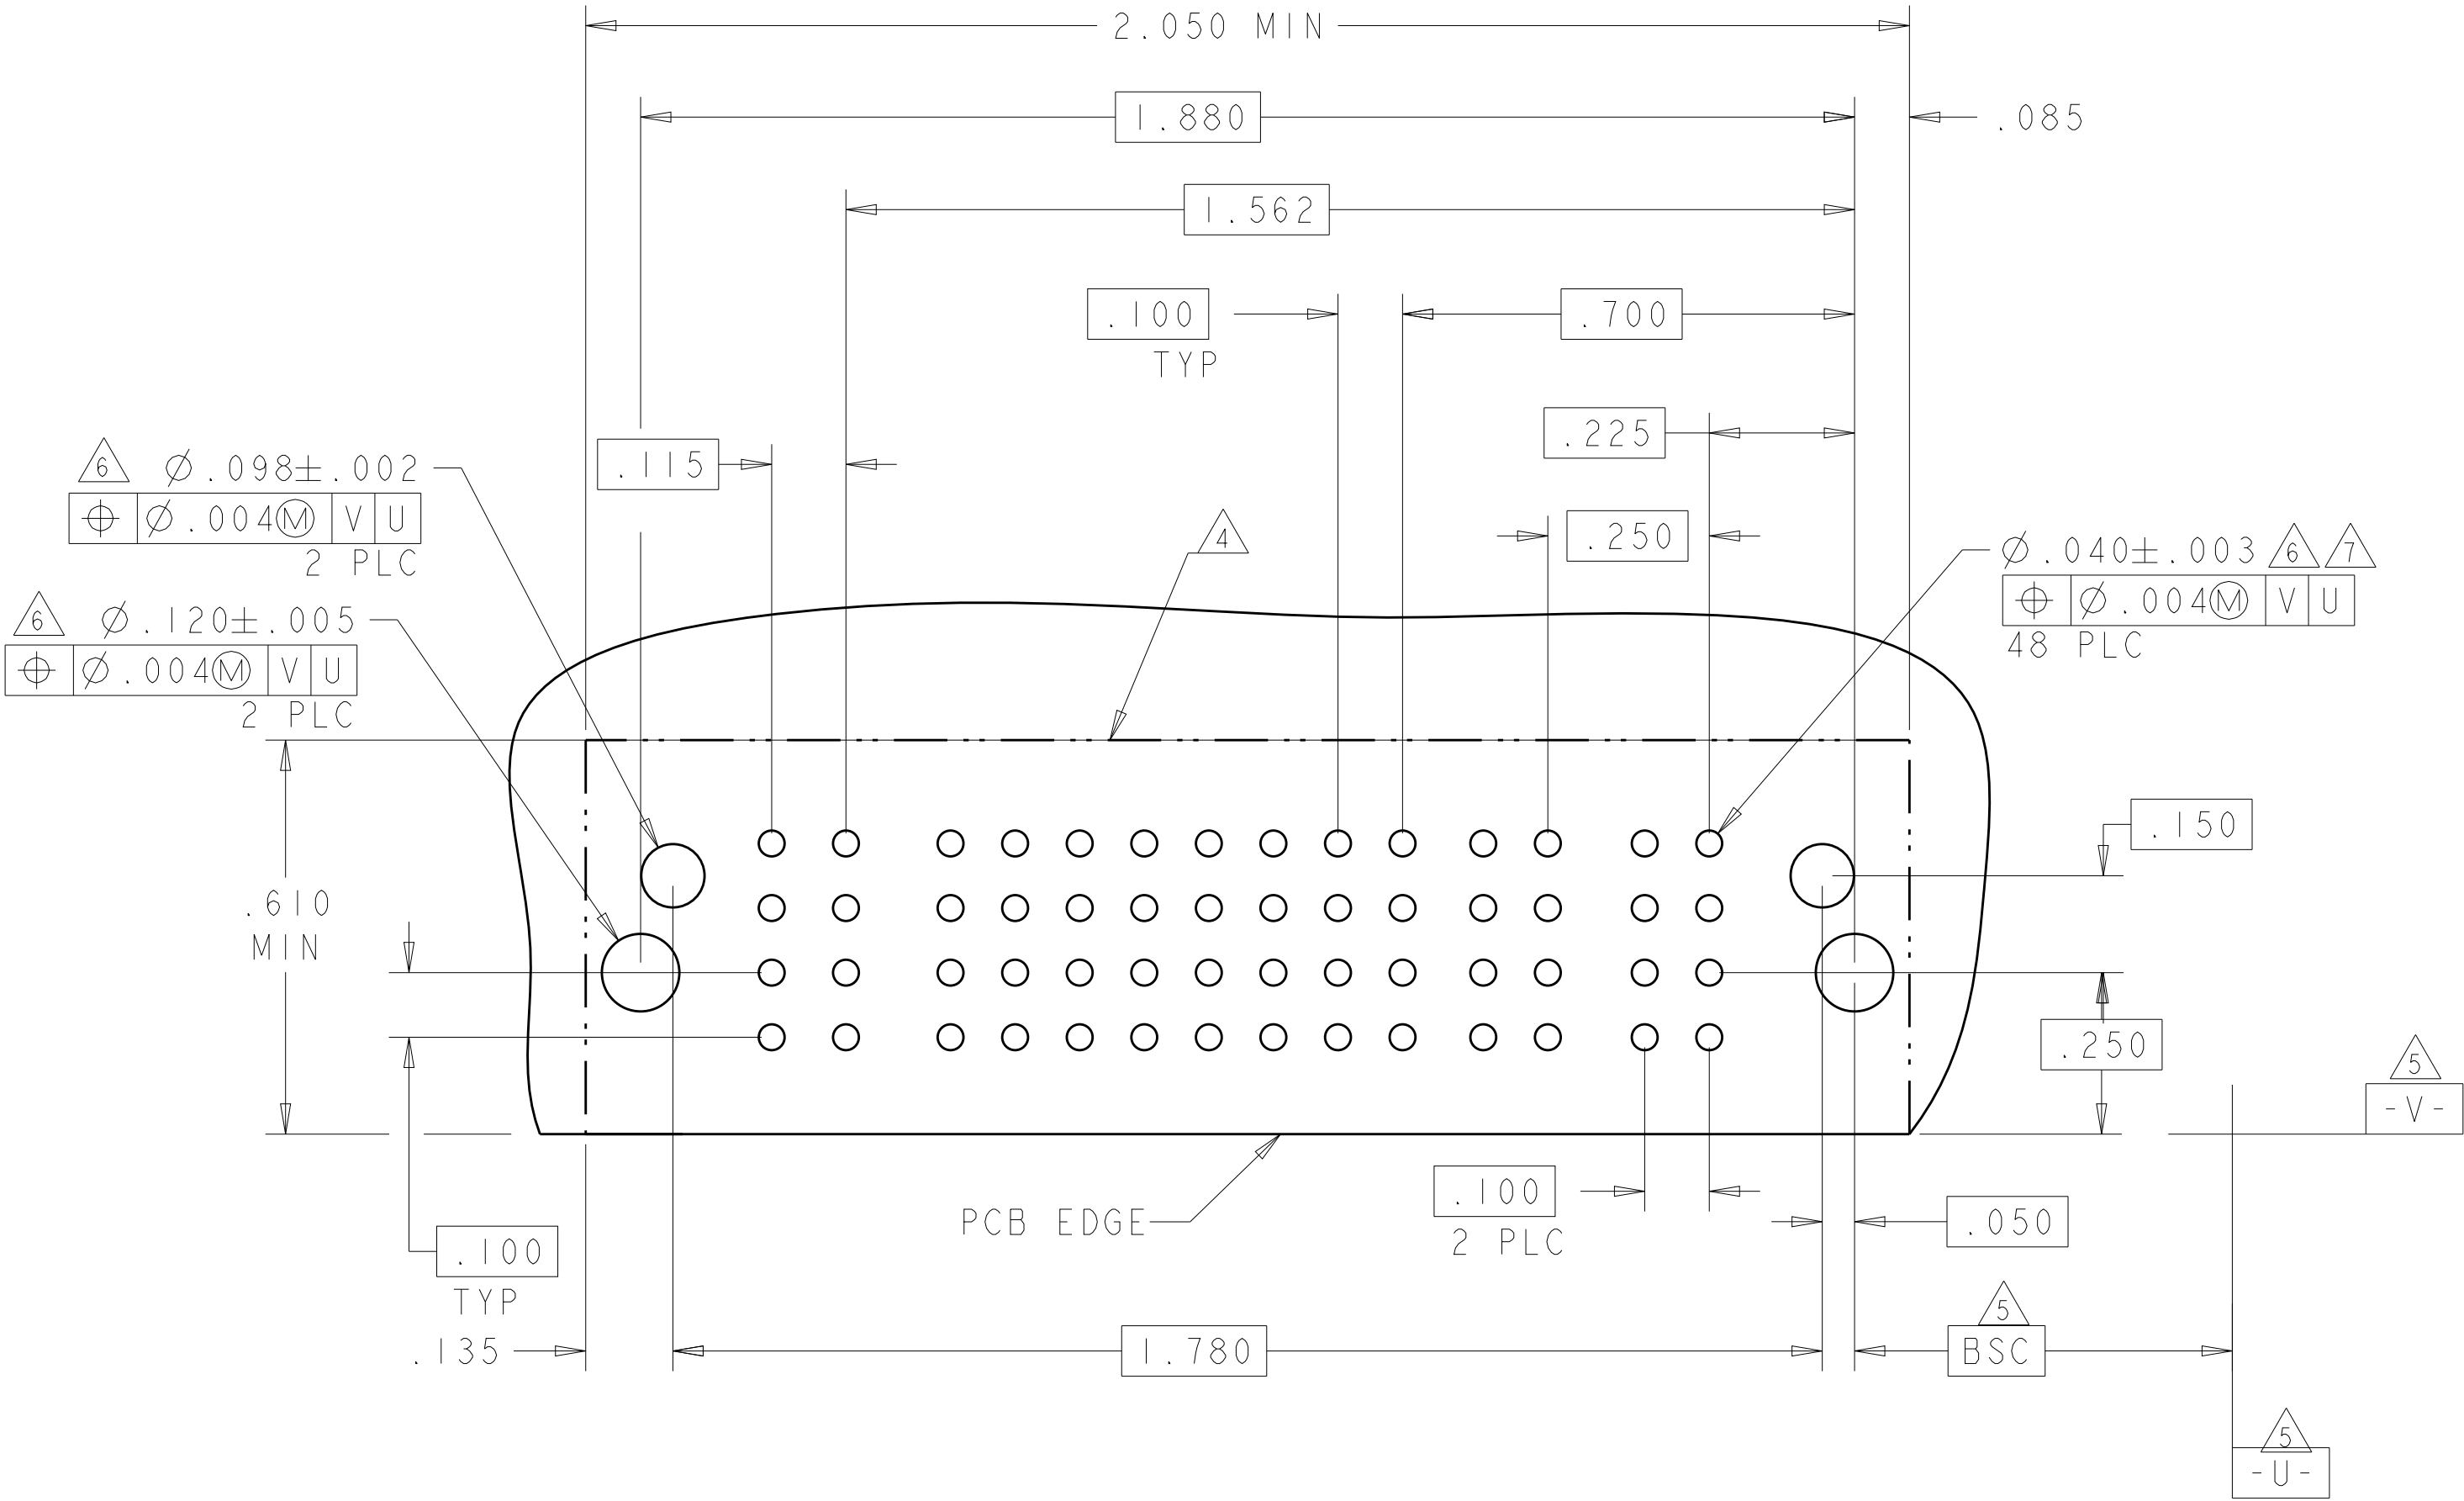


PART NUMBER	ROWS		POWER		SIGNAL							POWER			
			P2		6	5	4	3	2	1		P1			
6450870-2	D		RM											RM	
	C			H	H	H	H	H	H						
	B			G	G	G	G	G	G						
	A			F	F	F	F	F	F						
				E	E	E	E	E	E						
IP + 24S + IP															

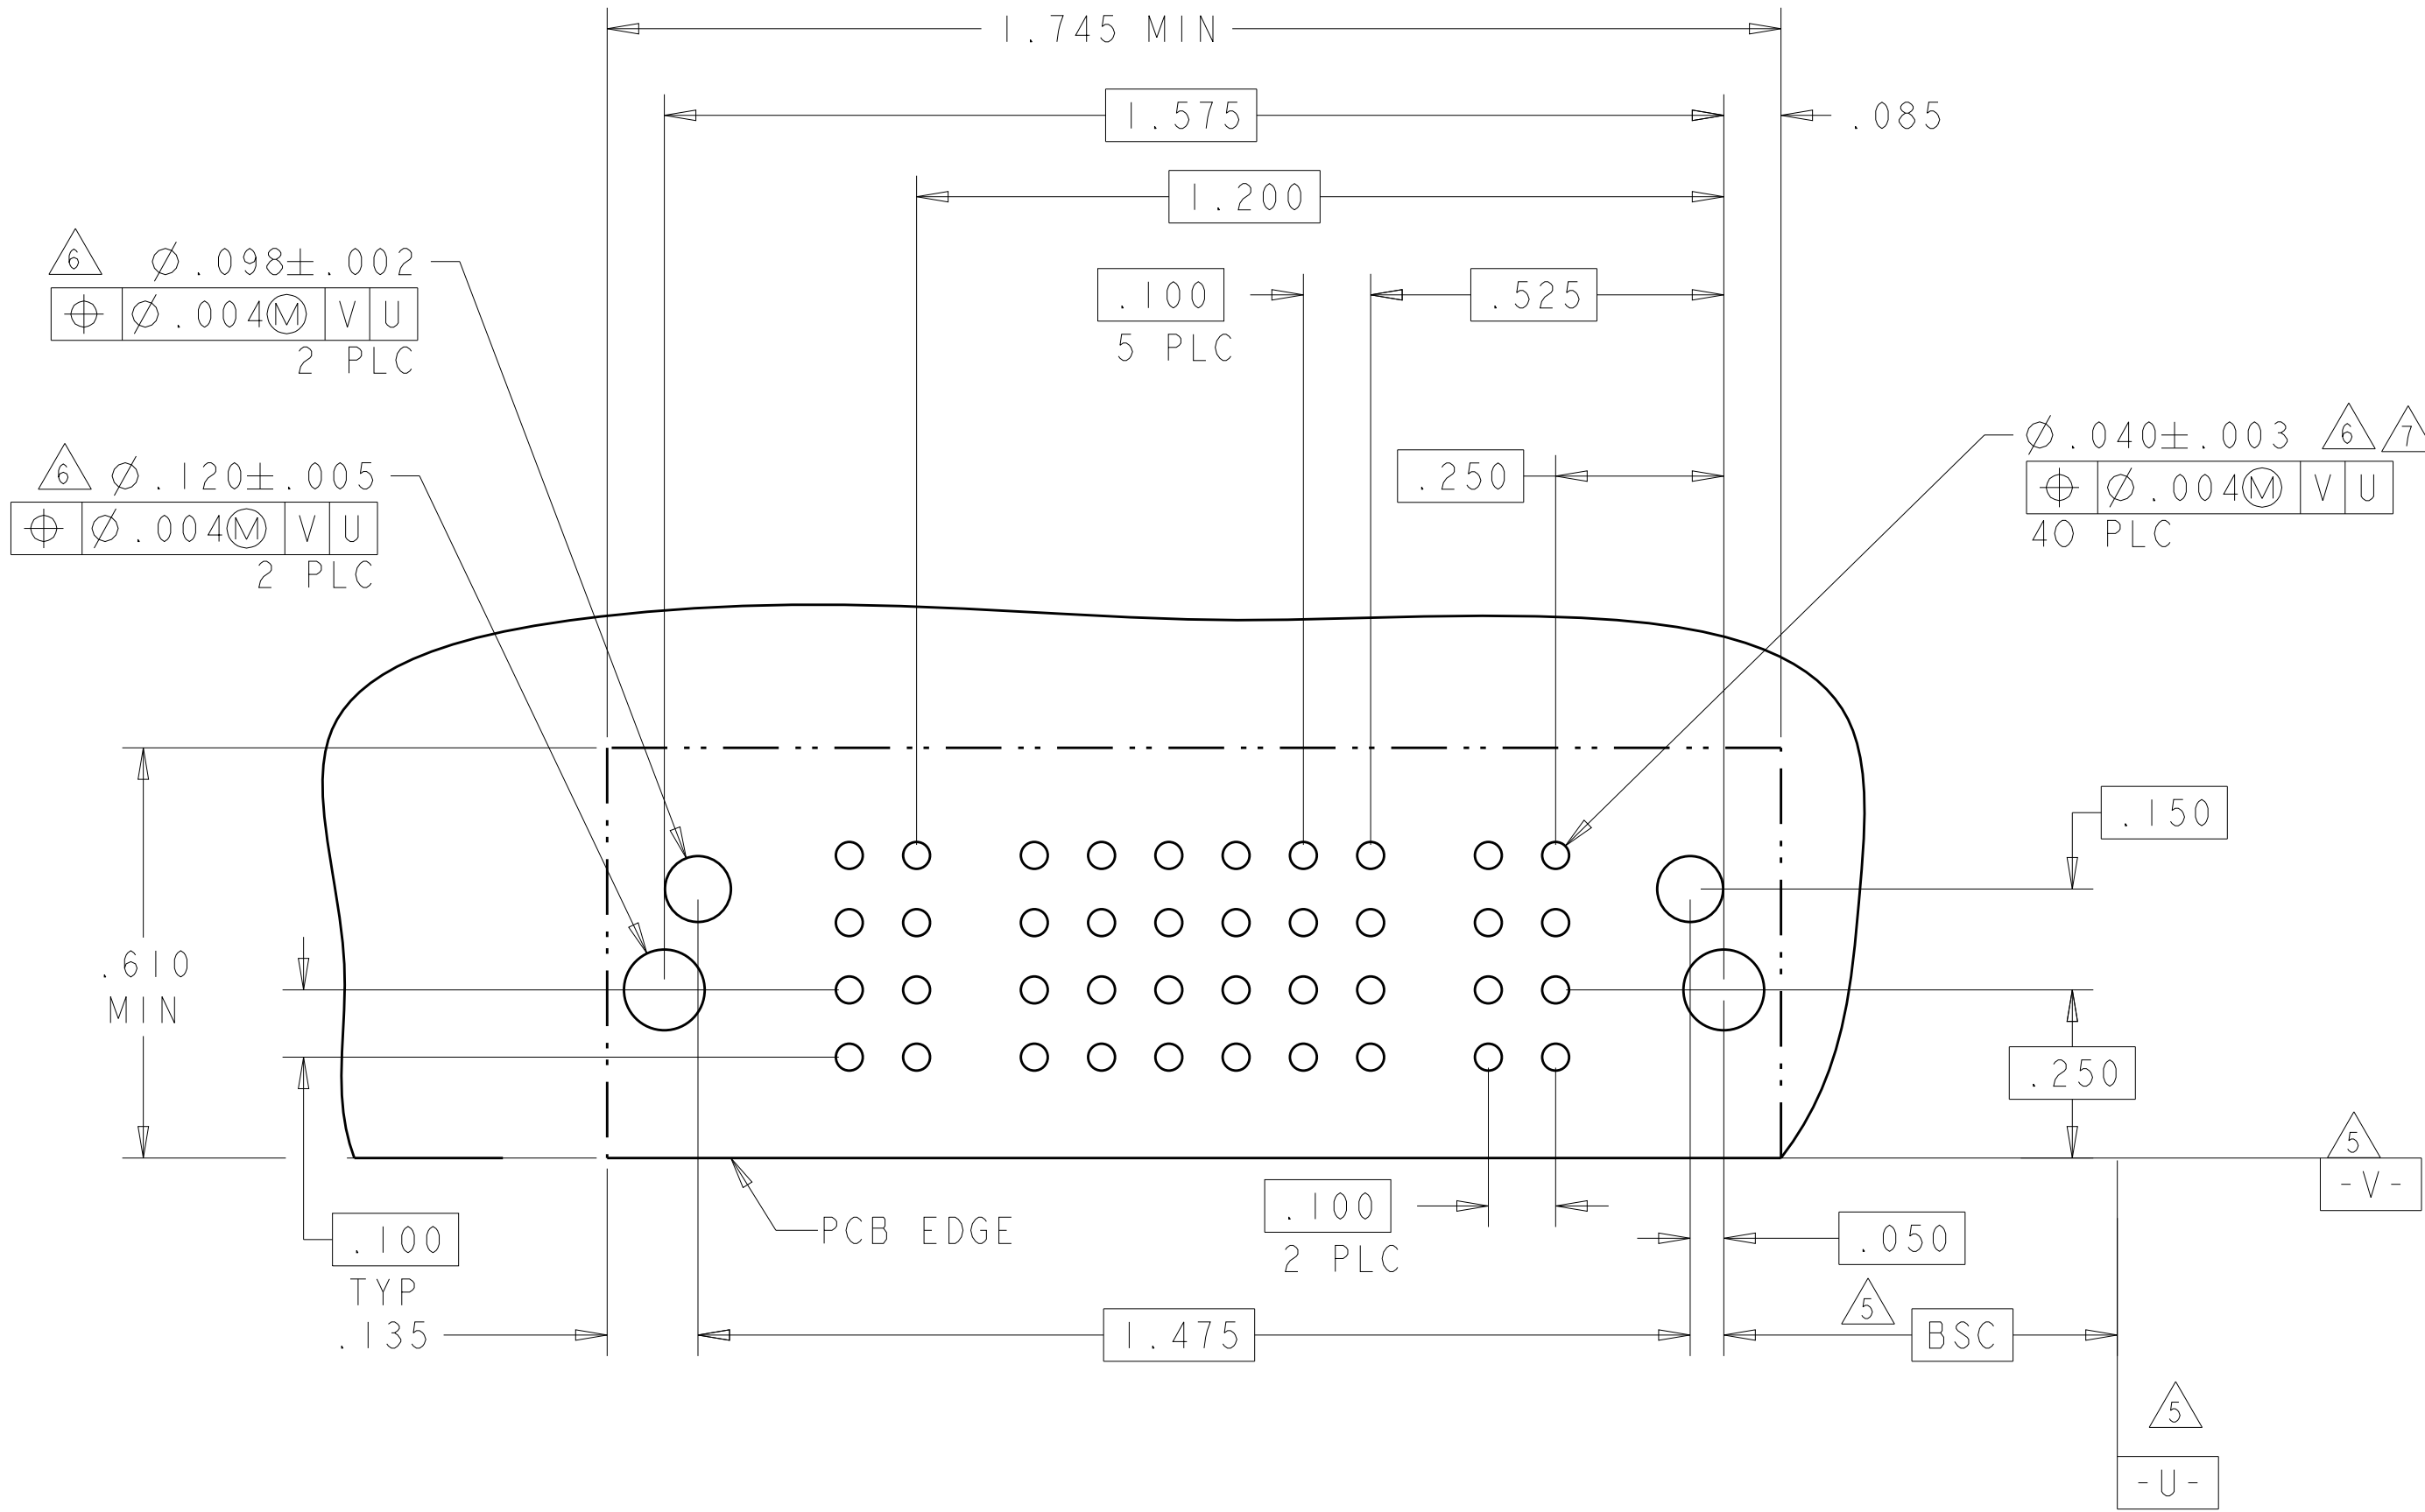

STANDARD SIGNAL CONTACT, .135 TAIL LENGTH, ROW D	H
STANDARD SIGNAL CONTACT, .135 TAIL LENGTH, ROW C	G
STANDARD SIGNAL CONTACT, .135 TAIL LENGTH, ROW B	F
STANDARD SIGNAL CONTACT, .135 TAIL LENGTH, ROW A	E
MFBL POWER CONTACT, .135 TAIL LENGTH	RA
STD POWER CONTACT, .135 TAIL LENGTH	RM
LOWER POWER CONTACT, .135 TAIL LENGTH	LM

DESCRIPTION				IDENTIFIER	
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C_ZHOU 110C12007		 TE Connectivity	
		CHK S_ZHAO 110C12007			
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.1 1 PLC ±.01 2 PLC ±.005 3 PLC ±.0020 4 PLC ANGLES ±.2°		NAME RIGHT ANGLE RECEPTACLE SHORT END MODULE MULTI-BEAM XLE	
		PRODUCT SPEC 108-2292 APPLICATION SPEC 114-13251		SIZE A1	
MATERIAL -		FINISH -		CAGE CODE 100779	
		WEIGHT -		DRAWING NO C=6450870	
Customer Drawing				RESTRICTED TO -	
				SCALE 4:1	
				SHEET 3 OF 20	
				REV K2	

PART NUMBER	ROWS		POWER			SIGNAL						POWER				
			P6	P5	P4	6	5	4	3	2	1	P3	P2	P1		
6450870-4	D C B A			RM	RM	RM	H	H	H	H	H	H	RM	RM	RM	
							G	G	G	G	G	G				
							F	F	F	F	F	F				
							E	E	E	E	E	E				
3P + 24S + 3P																


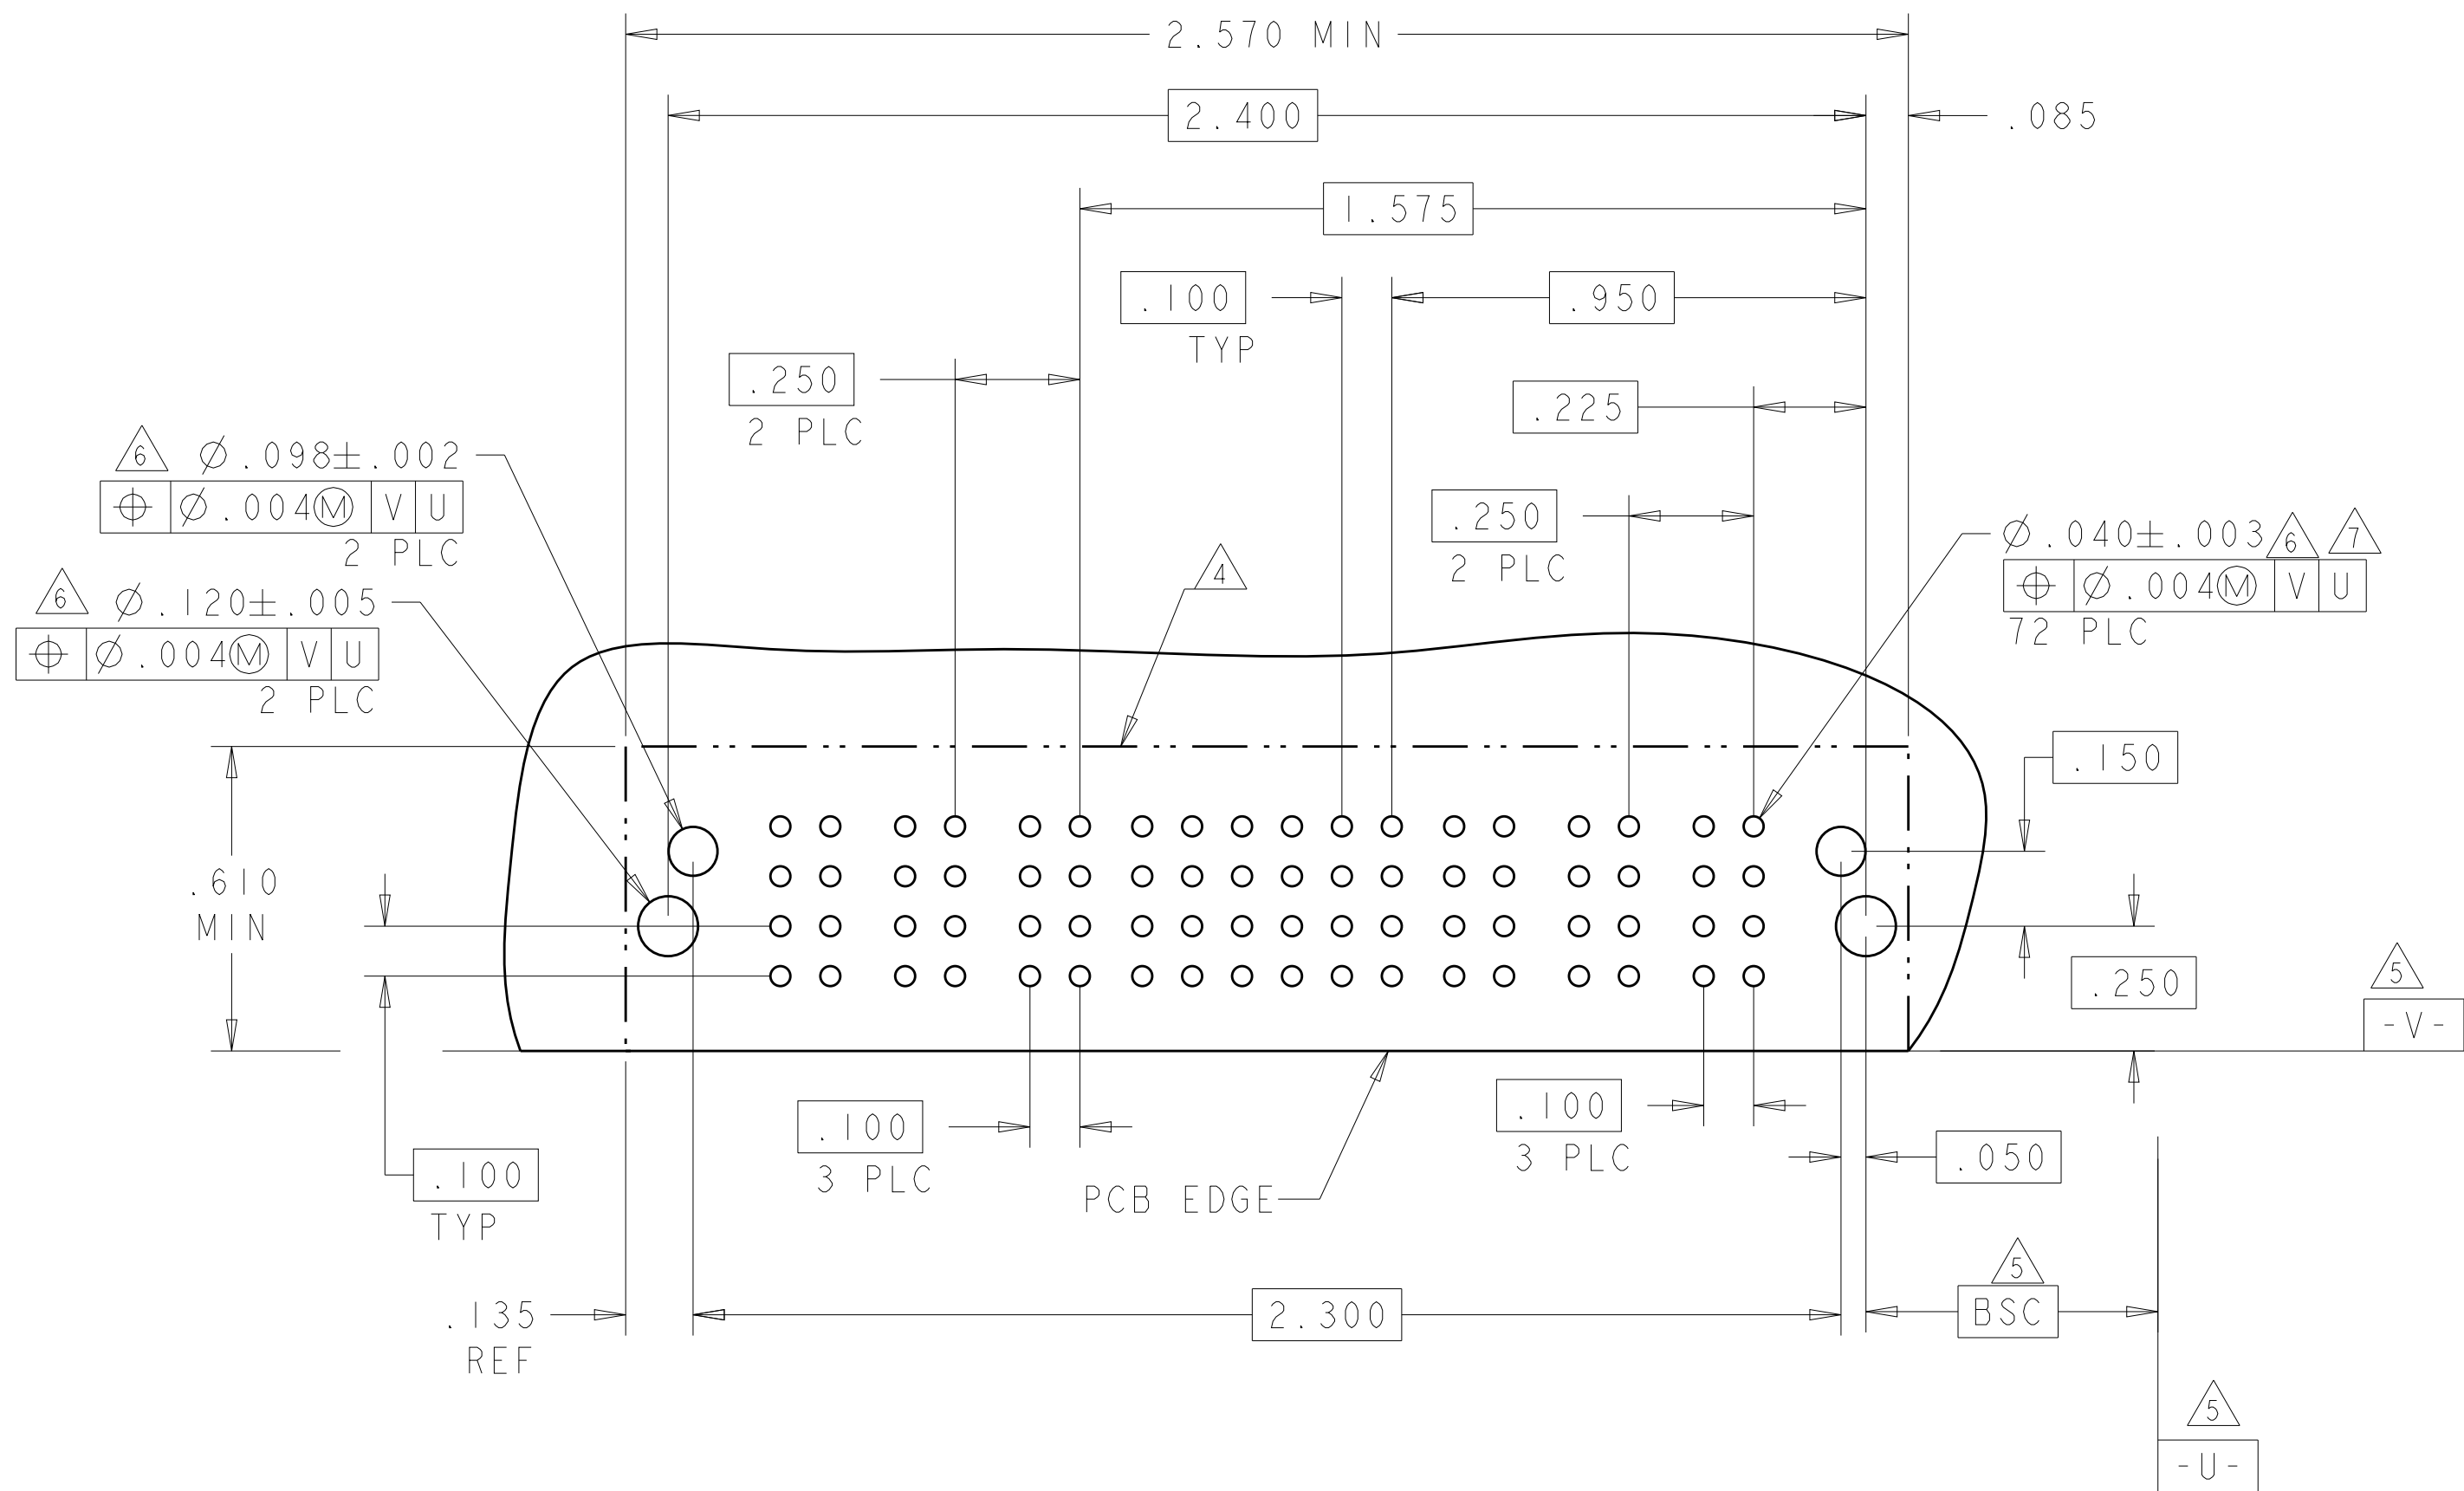
4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	SEE SHEET 1	-	-	-	

PART NUMBER	ROWS		POWER	SIGNAL						POWER	
			P2	6	5	4	3	2	1	P1	
6450870-5	D C B A		RM	H	H	H	H	H	H	RM	
				G	G	G	G	G	G		
				F	F	F	F	F	F		
				E	E	E	E	E	E		
IP + 24S + IP											

PART NUMBER	ROWS		POWER					SIGNAL					POWER								
			LP5	LP4	LP3	LP2	LPI	5	4	3	2	1	P8	P7	P6	P5	P4	P3	P2	PI	
6450870-7	D C B A		LM		LM		LM	H	H	H	H	H	RM	RM	RM	RM	RM	RM	RM	RM	
								G	G	G	G	G									
								E	E	E	E	E									
								E	E	E	E	E									
8HDP + 20S + 5LP																					

.250
 .200
6 PLC

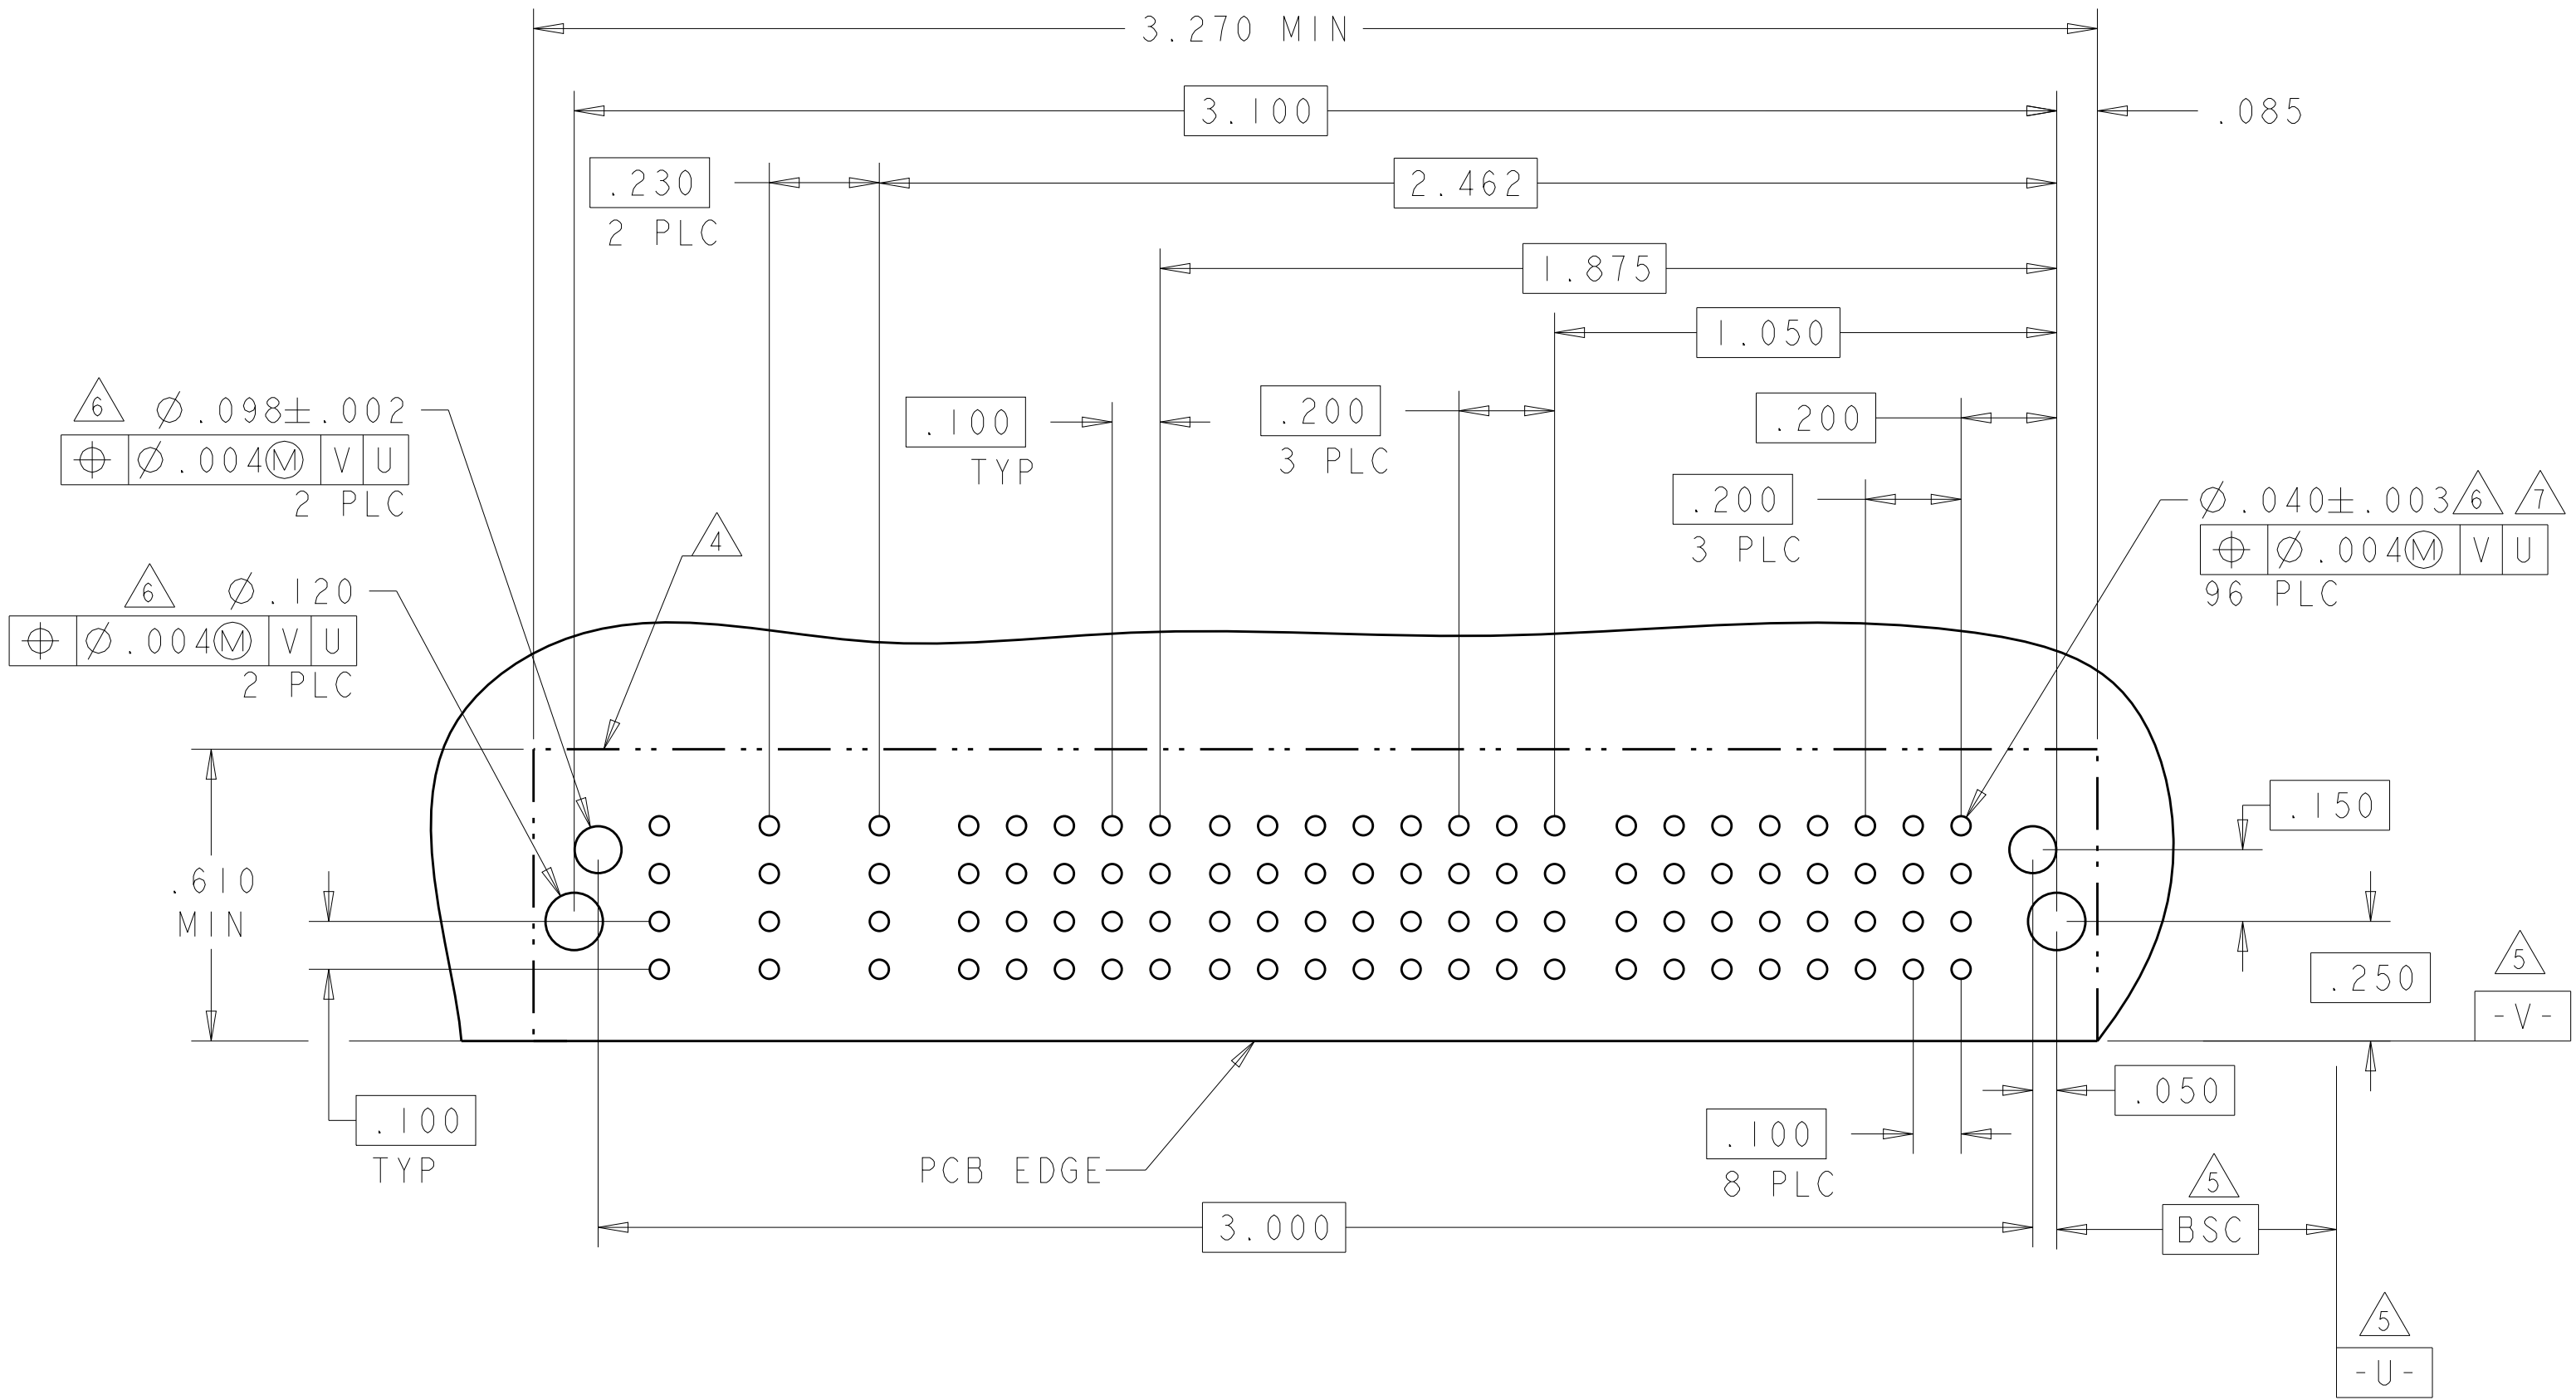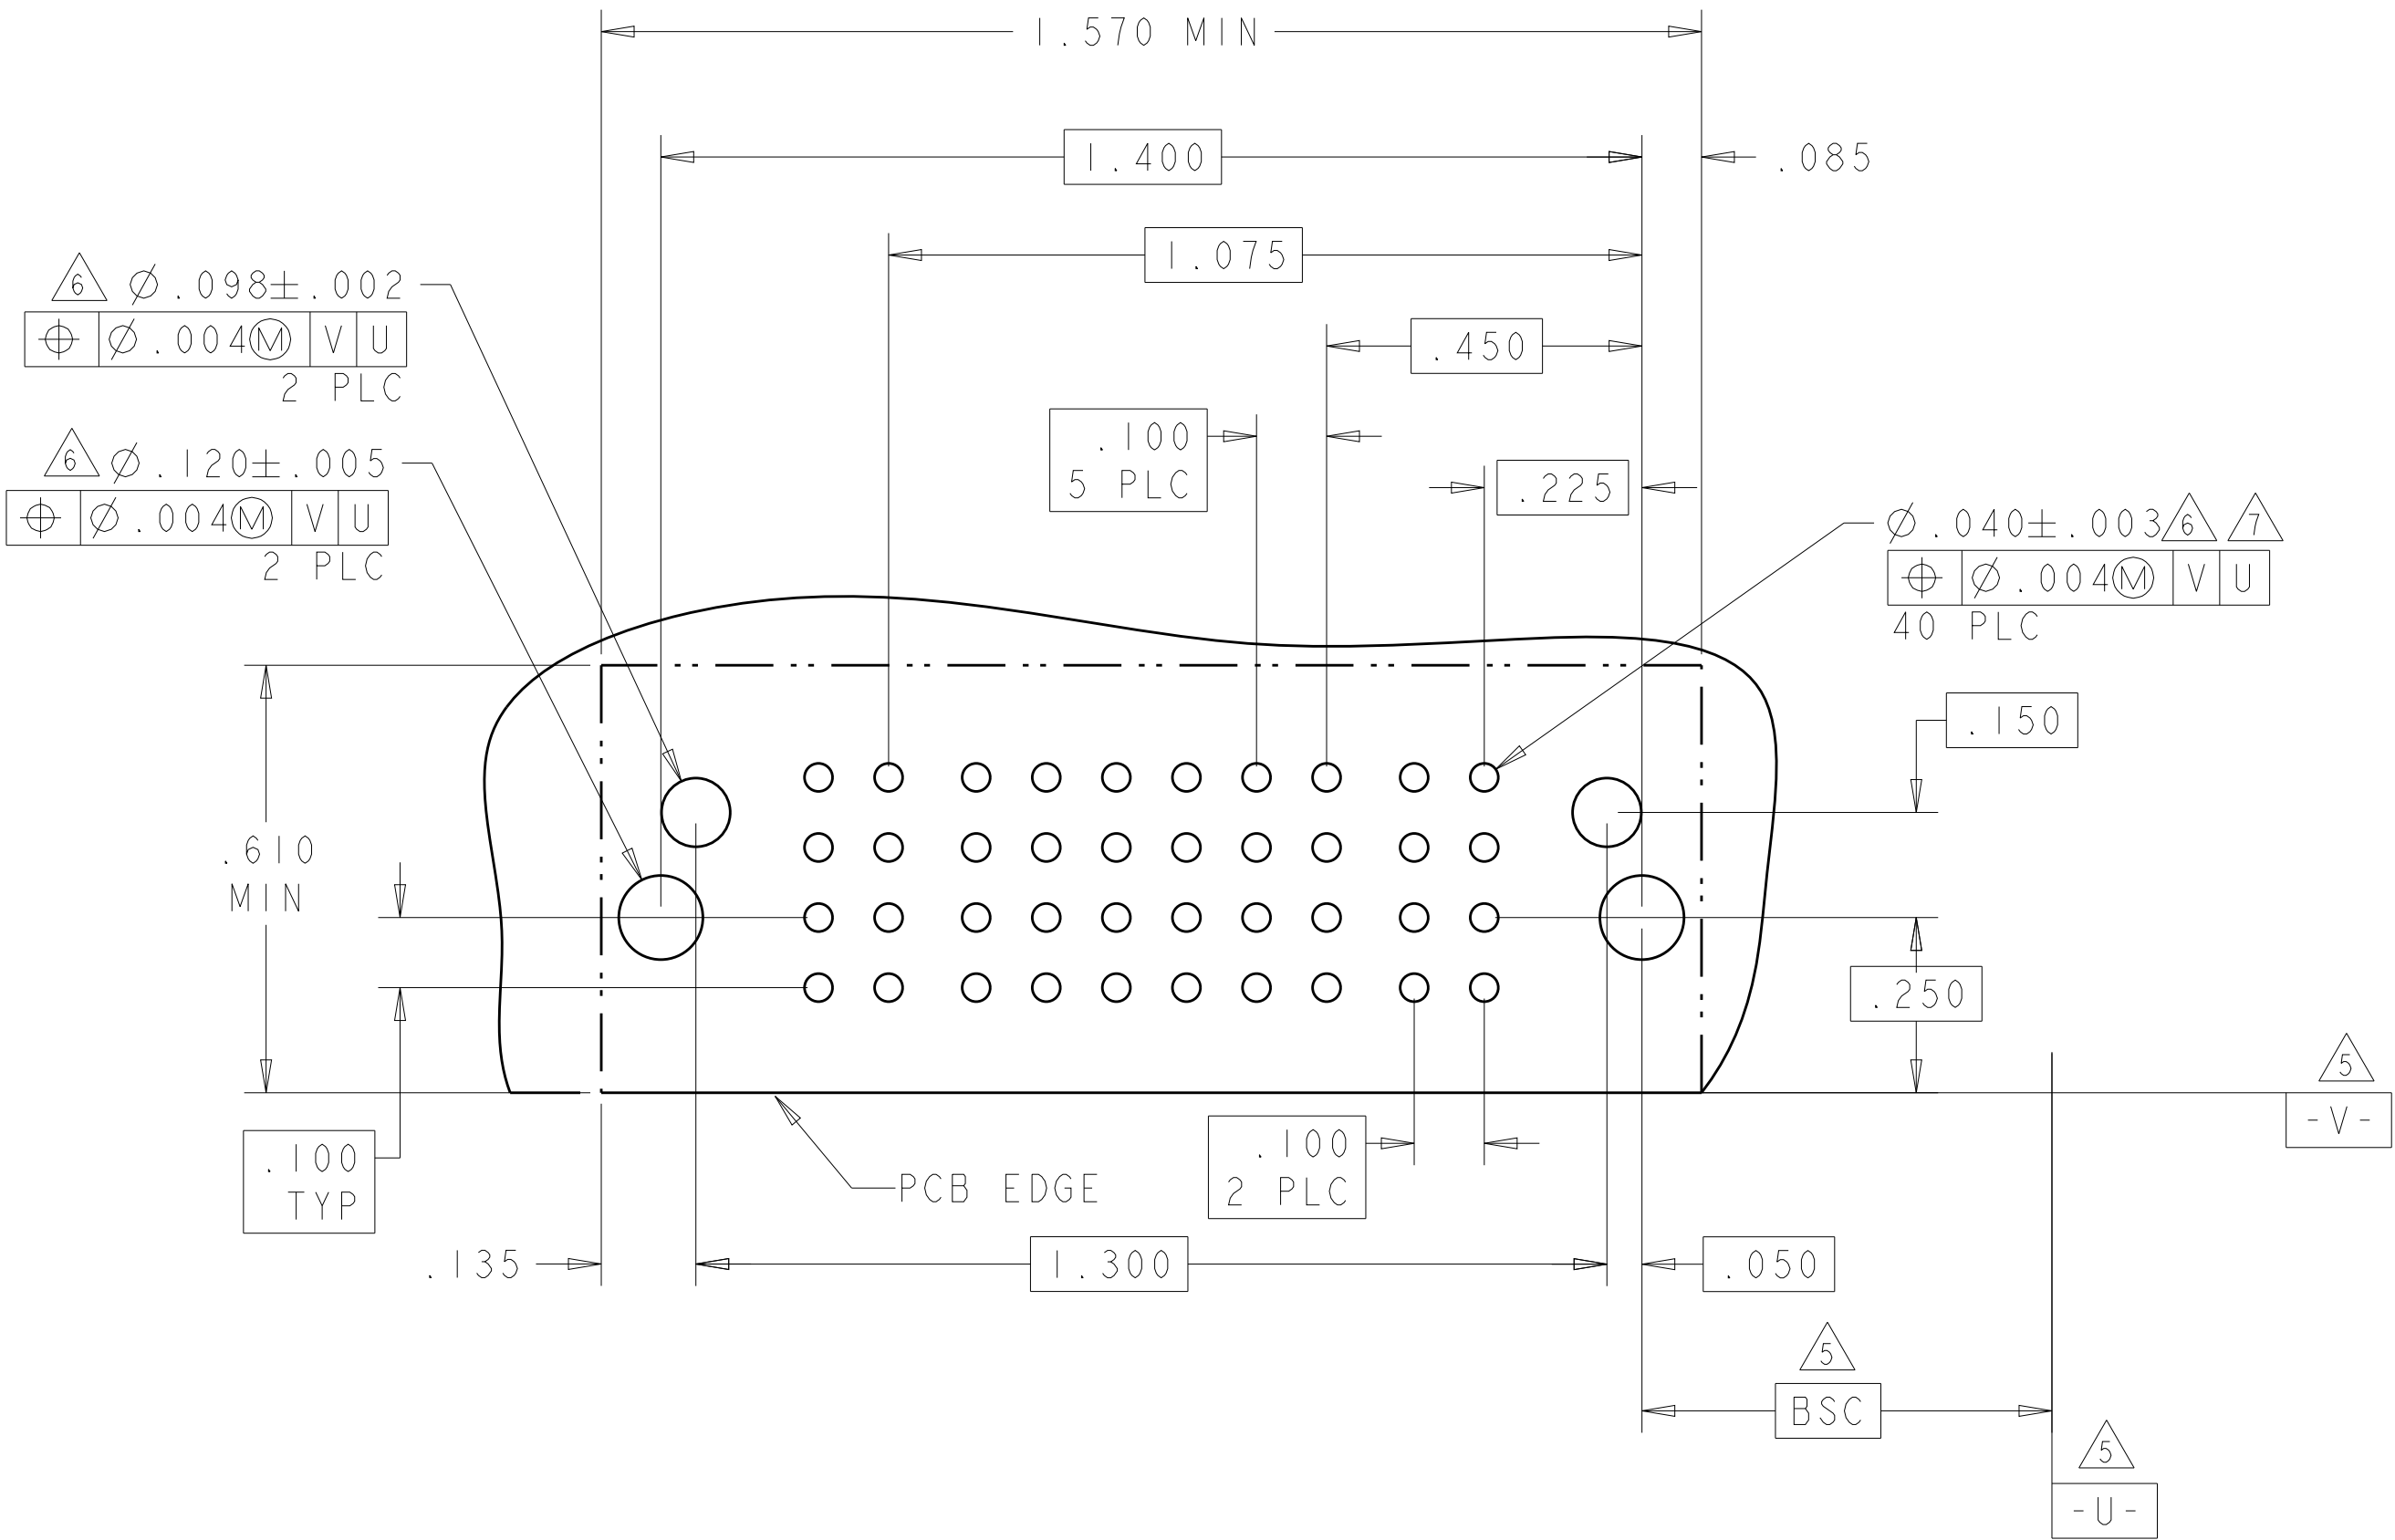

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
C.ZHOU
11OCT2007
CHK
S.ZHAO
11OCT2007
APVD
S.ZHAO
-

TE Connectivity

DIMENSIONS:
INCHES

MATERIAL
-

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±.1
1 PLC ±.1
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH
-

PRODUCT SPEC
108-2292
APPLICATION SPEC
114-13251
WEIGHT
-

Customer Drawing

NAME
RIGHT ANGLE RECEPTACLE
SHORT END MODULE
MULTI-BEAM XLE

SIZE
A100779

CAGE CODE
C=6450870

DRAWING NO
-

RESTRICTED TO
-


SCALE
4:1

SHEET
5

OF
20



REV
K2

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER			SIGNAL								POWER			
			P6	P5	P4	8	7	6	5	4	3	2	1	P3	P2	P1	
6450870-8	D					H	H	H	H	H	H	H	H				
	G					G	G	G	G	G	G	G					
	F					F	F	F	F	F	F	F					
	E					E	E	E	E	E	E	E					
3P + 32S + 3P																	

PART NUMBER	ROWS		POWER			SIGNAL								POWER			
			P6	P5	P4	8	7	6	5	4	3	2	1	P3	P2	P1	
3-6450870-3	D		RN	RN	RN	L	L	L	L	L	L	L	L	RN	RN	RN	
	K					K	K	K	K	K	K	K					
	J					J	J	J	J	J	J	J					
	I					I	I	I	I	I	I	I					
3P + 32S + 3P																	


PART NUMBER	ROWS		POWER		SIGNAL										POWER		
			P4	P3	10	9	8	7	6	5	4	3	2	1	P2	P1	
6450870-9	D		RM	RM	H	H	H	H	H	H	H	H	H	H	RM	RM	
	C				G	G	G	G	G	G	G	G	G				
	B				F	F	F	F	F	F	F	F	F	F			
	A				E	E	E	E	E	E	E	E	E	E			
2P + 40S + 2P																	

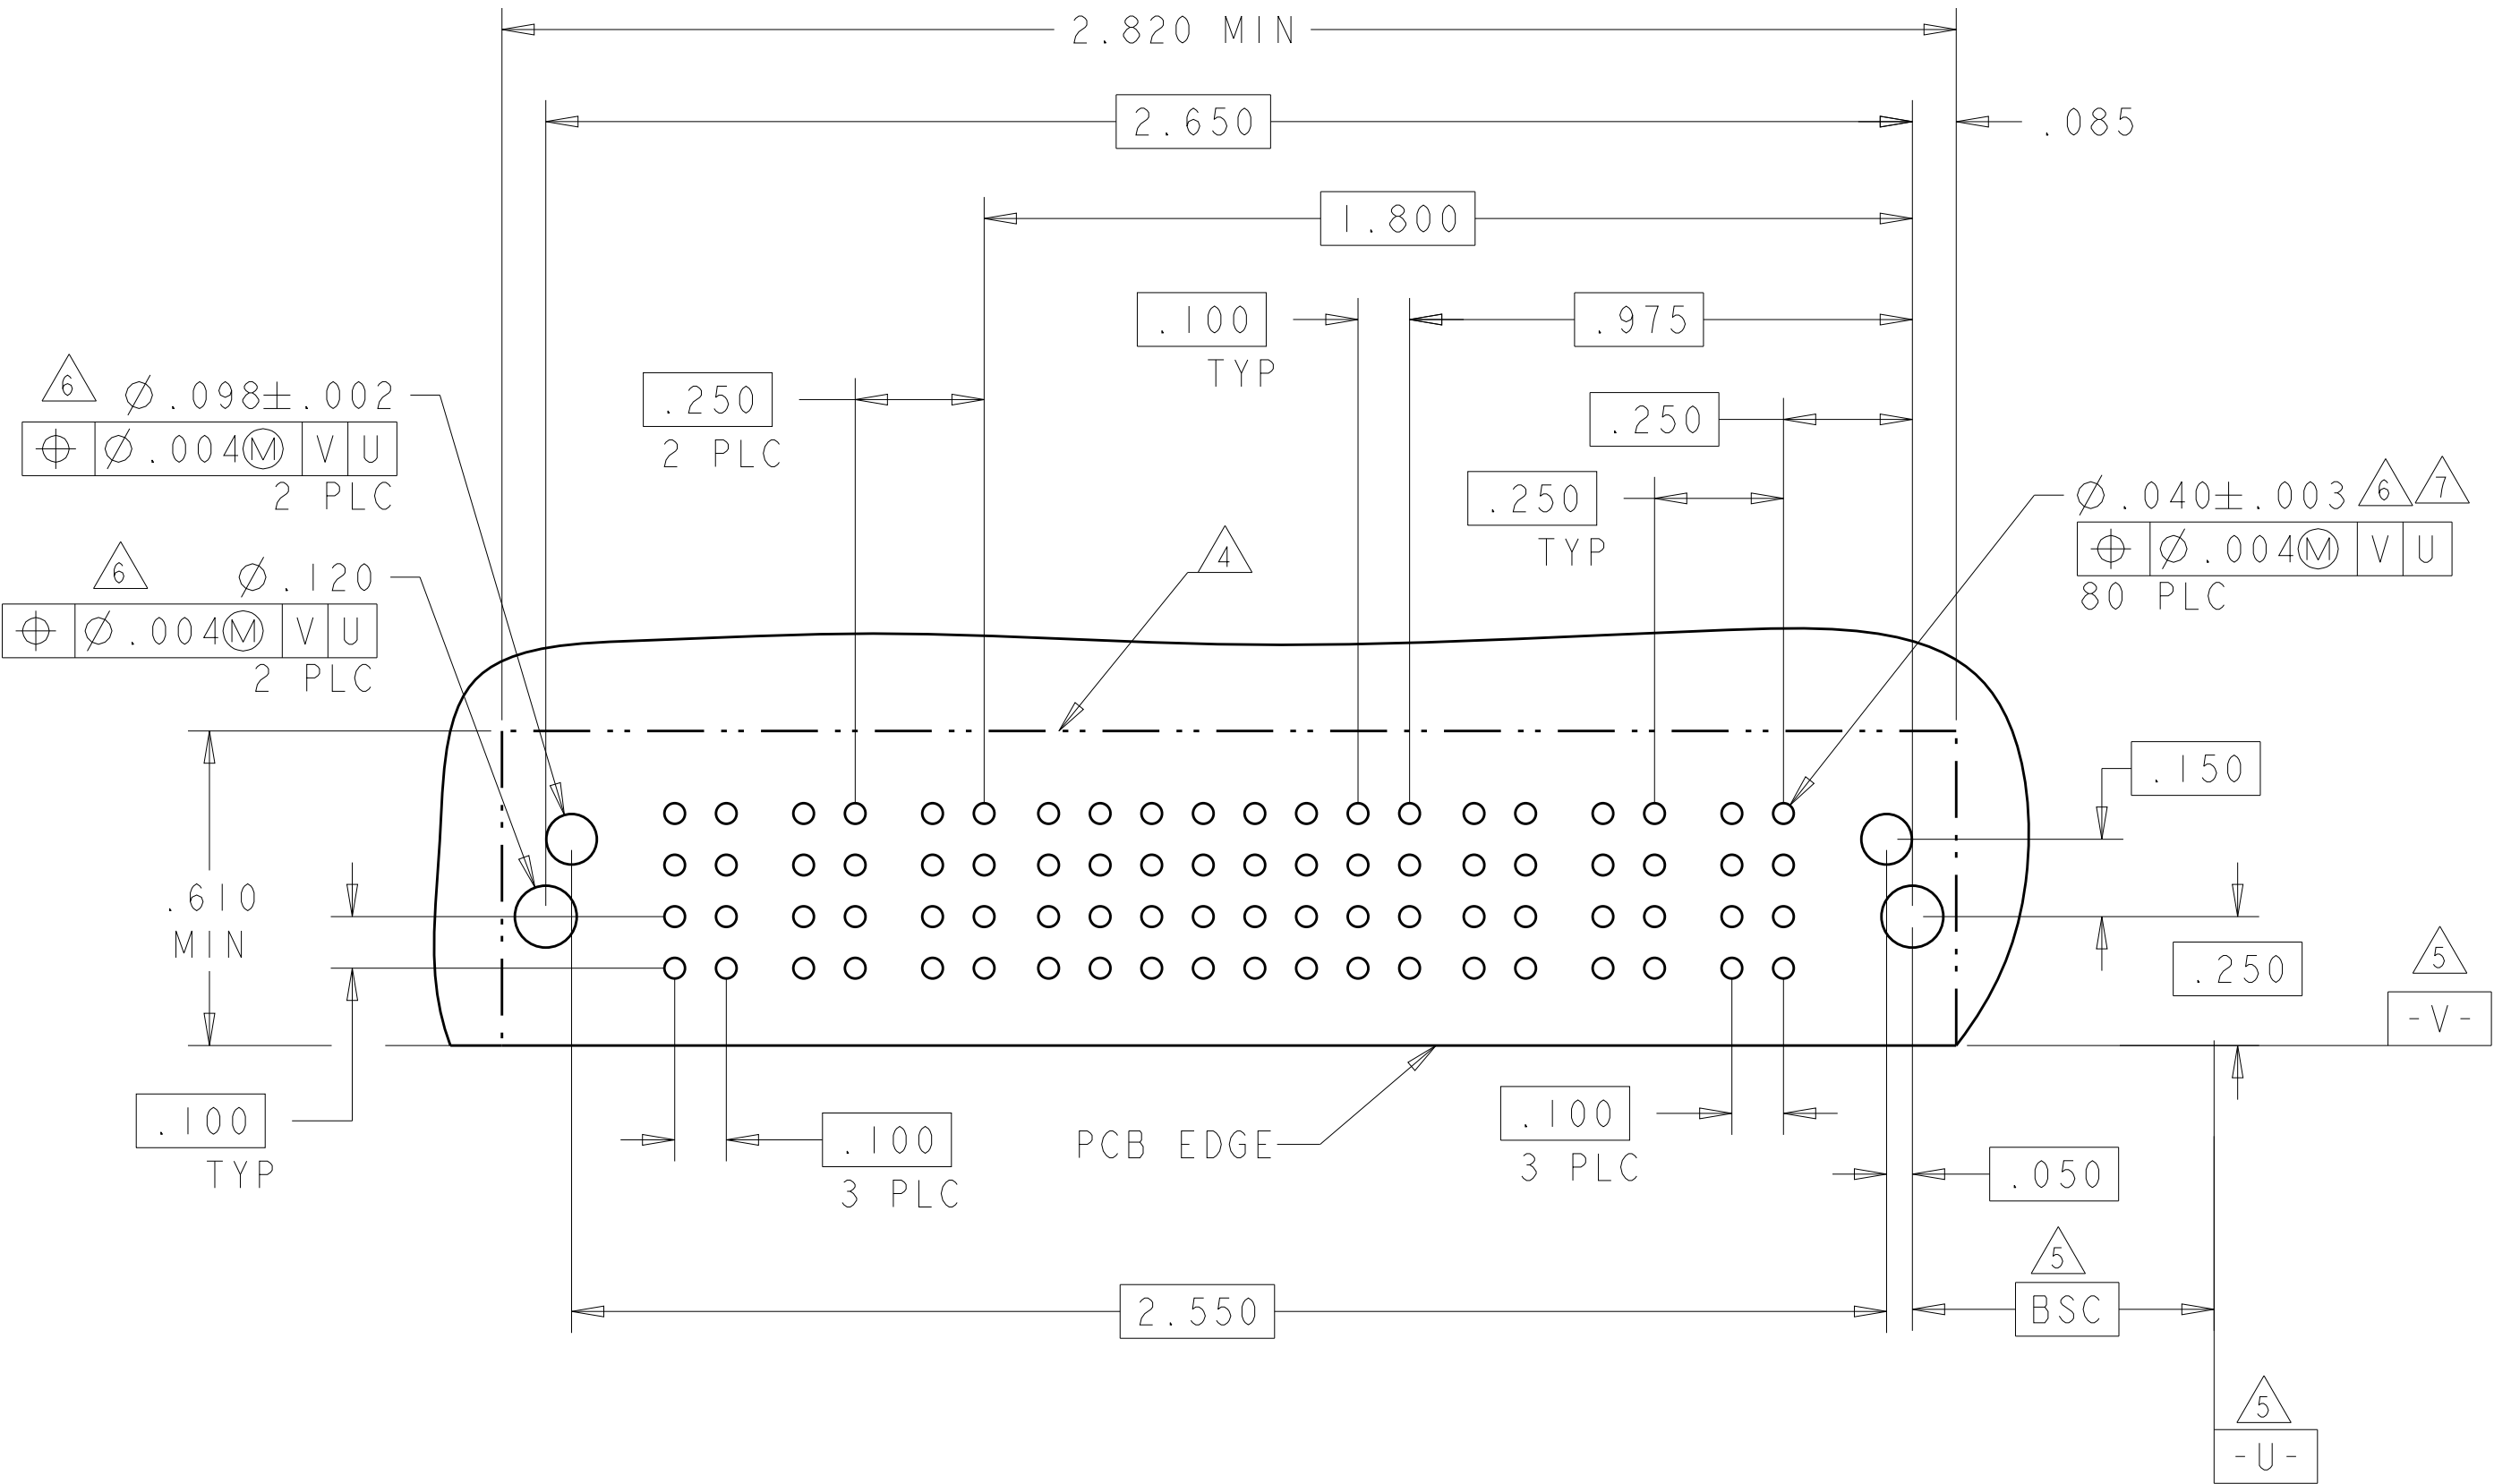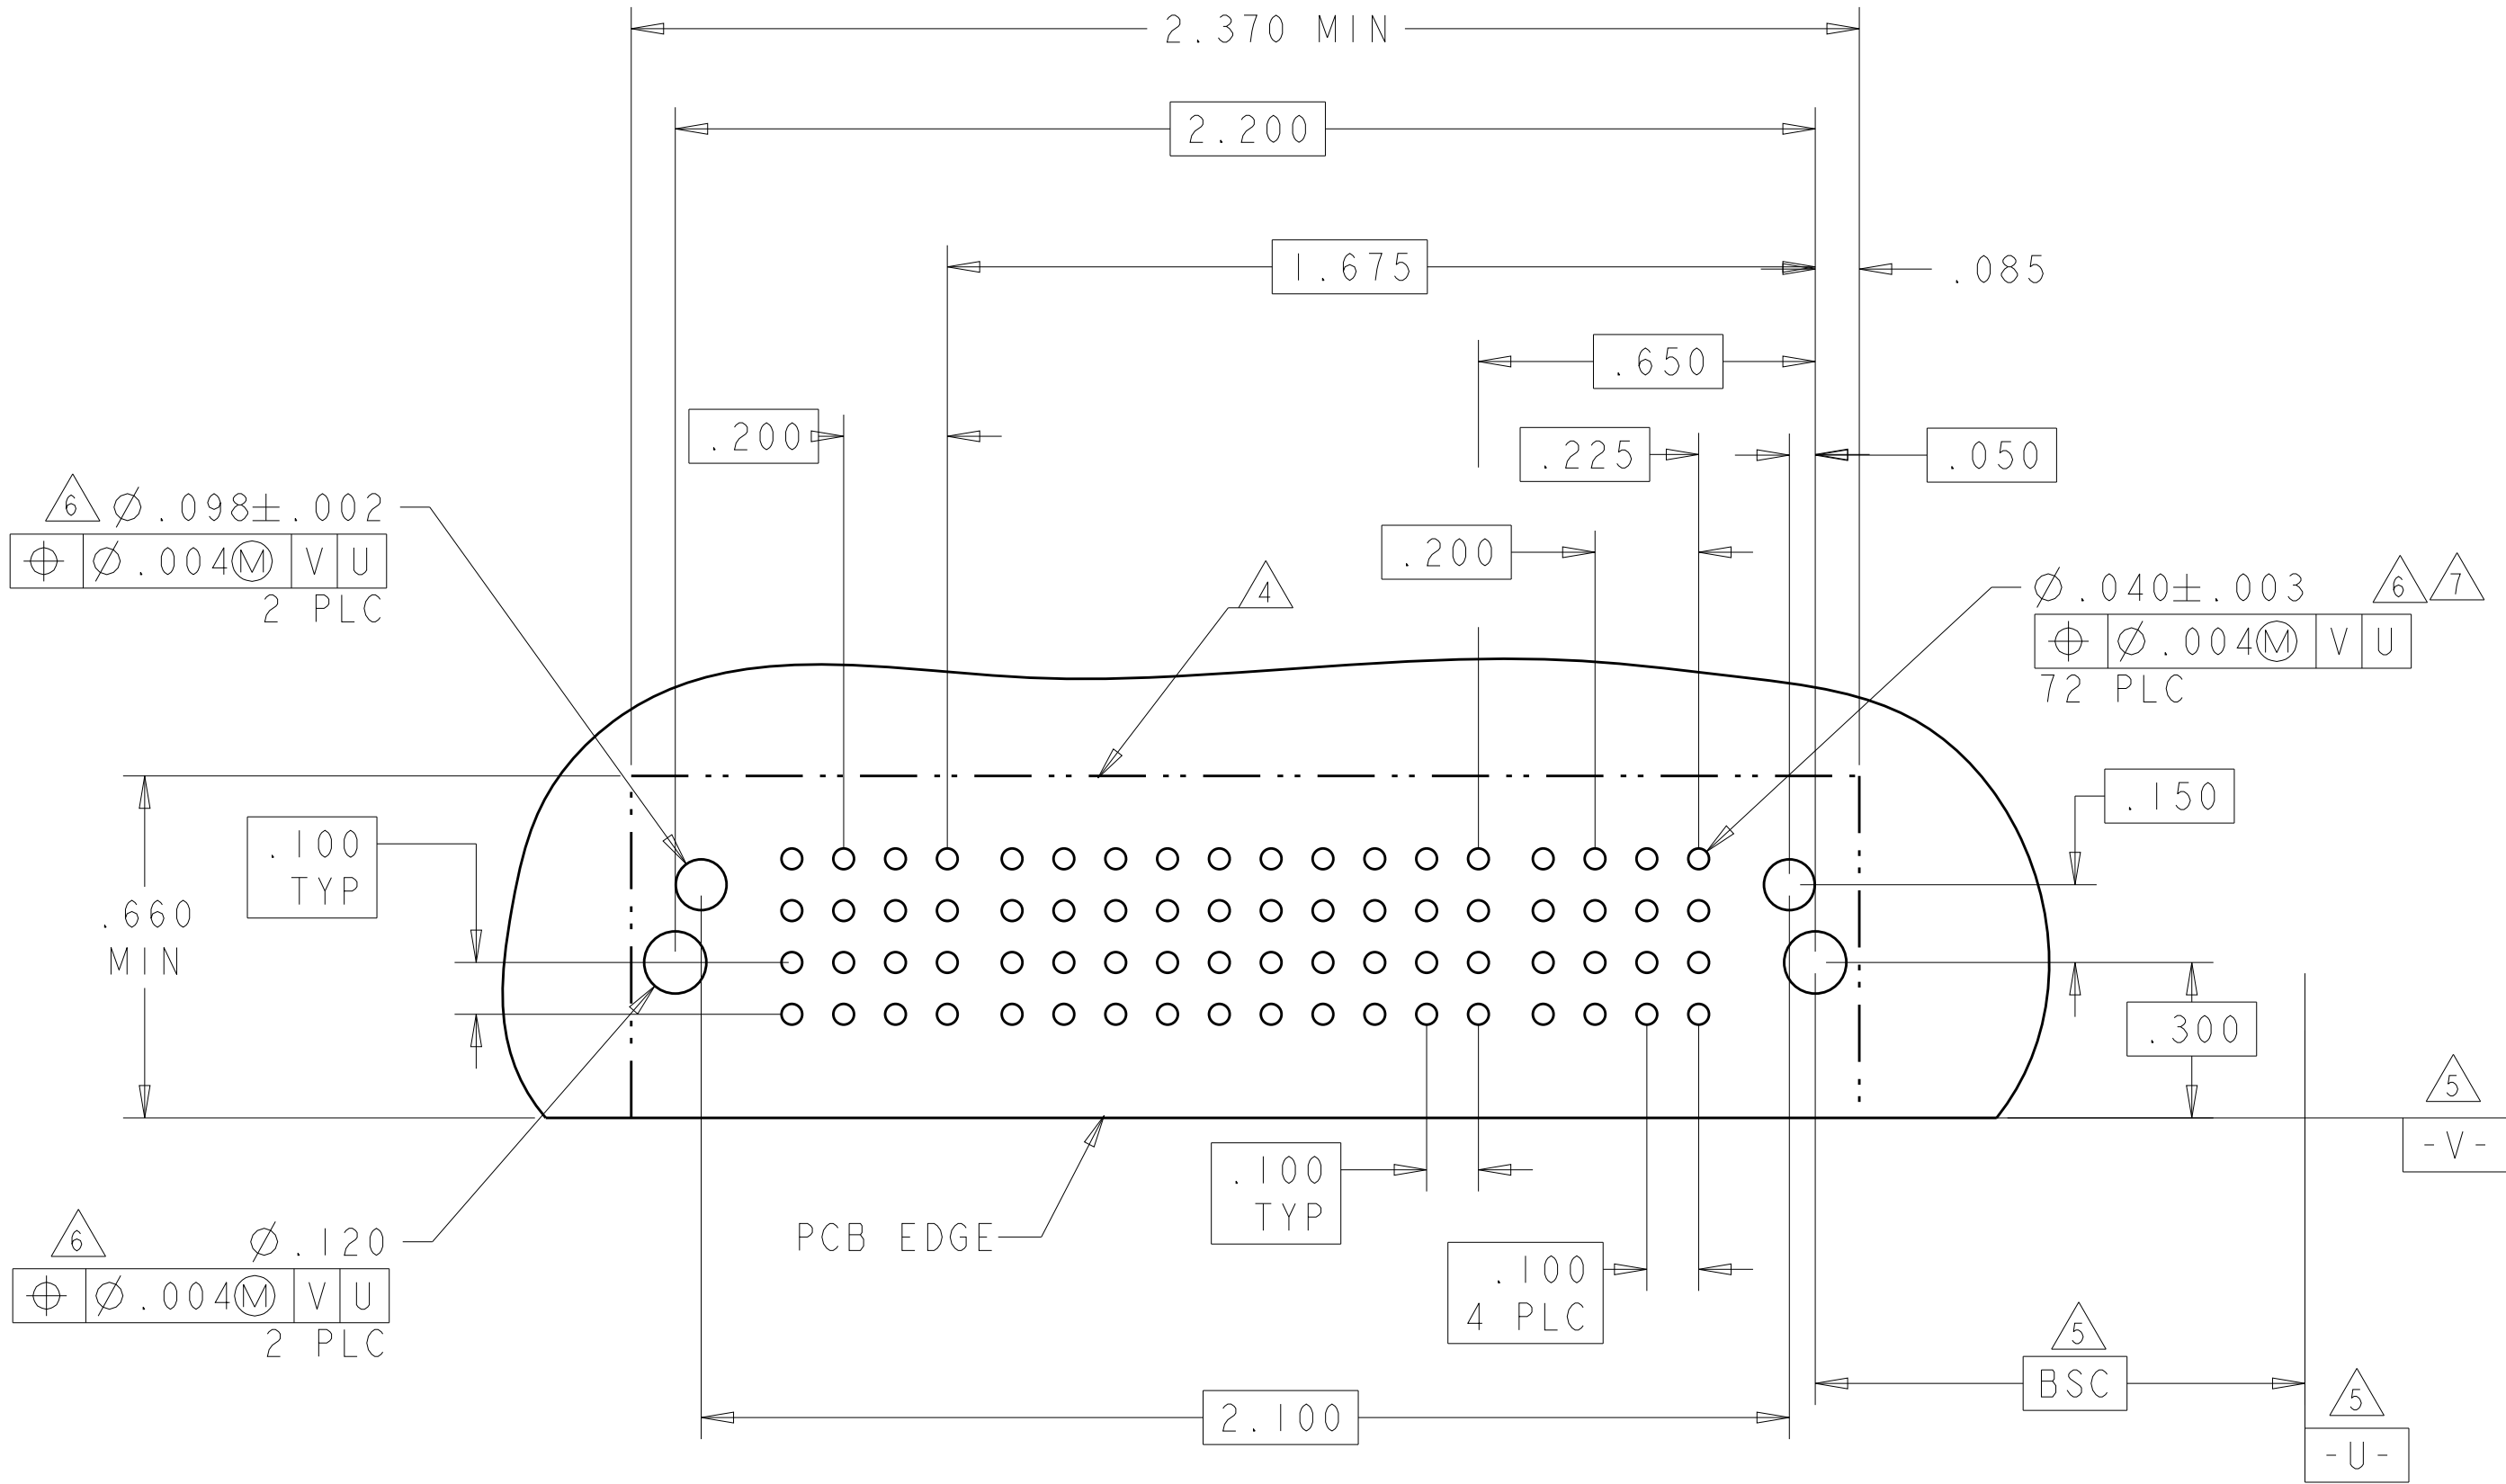

STANDARD SIGNAL CONTACT, .090 TAIL LENGTH, ROW D	L
STANDARD SIGNAL CONTACT, .090 TAIL LENGTH, ROW C	K
STANDARD SIGNAL CONTACT, .090 TAIL LENGTH, ROW B	J
STANDARD SIGNAL CONTACT, .090 TAIL LENGTH, ROW A	I
STD POWER CONTACT, .090 TAIL LENGTH	RN
DESCRIPTION	IDENTIFIER


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. ZHOU	11OCT2007	TE Connectivity	
		CHK S. ZHAO	11OCT2007		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ±.1 1 PLC ±.1 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES #2° FINISH		PRODUCT SPEC 108-2292 APPLICATION SPEC 114-13251	
MATERIAL	-	WEIGHT	-	SIZE A100779	CAGE CODE C=6450870
Customer Drawing		SCALE 4:1		SHEET 6	OF 20
				REV K2	

PART NUMBER	ROWS		POWER		SIGNAL					POWER			
			P4	P3	5	4	3	2	1	P2	P1		
I-6450870-I	D		RM	RM	H	H	H	H	H	RM	RM		
	C				G	G	G	G	G				
	B				F	F	F	F	F				
	A				E	E	E	E	E				
2P + 20S + 2P		HD											HD


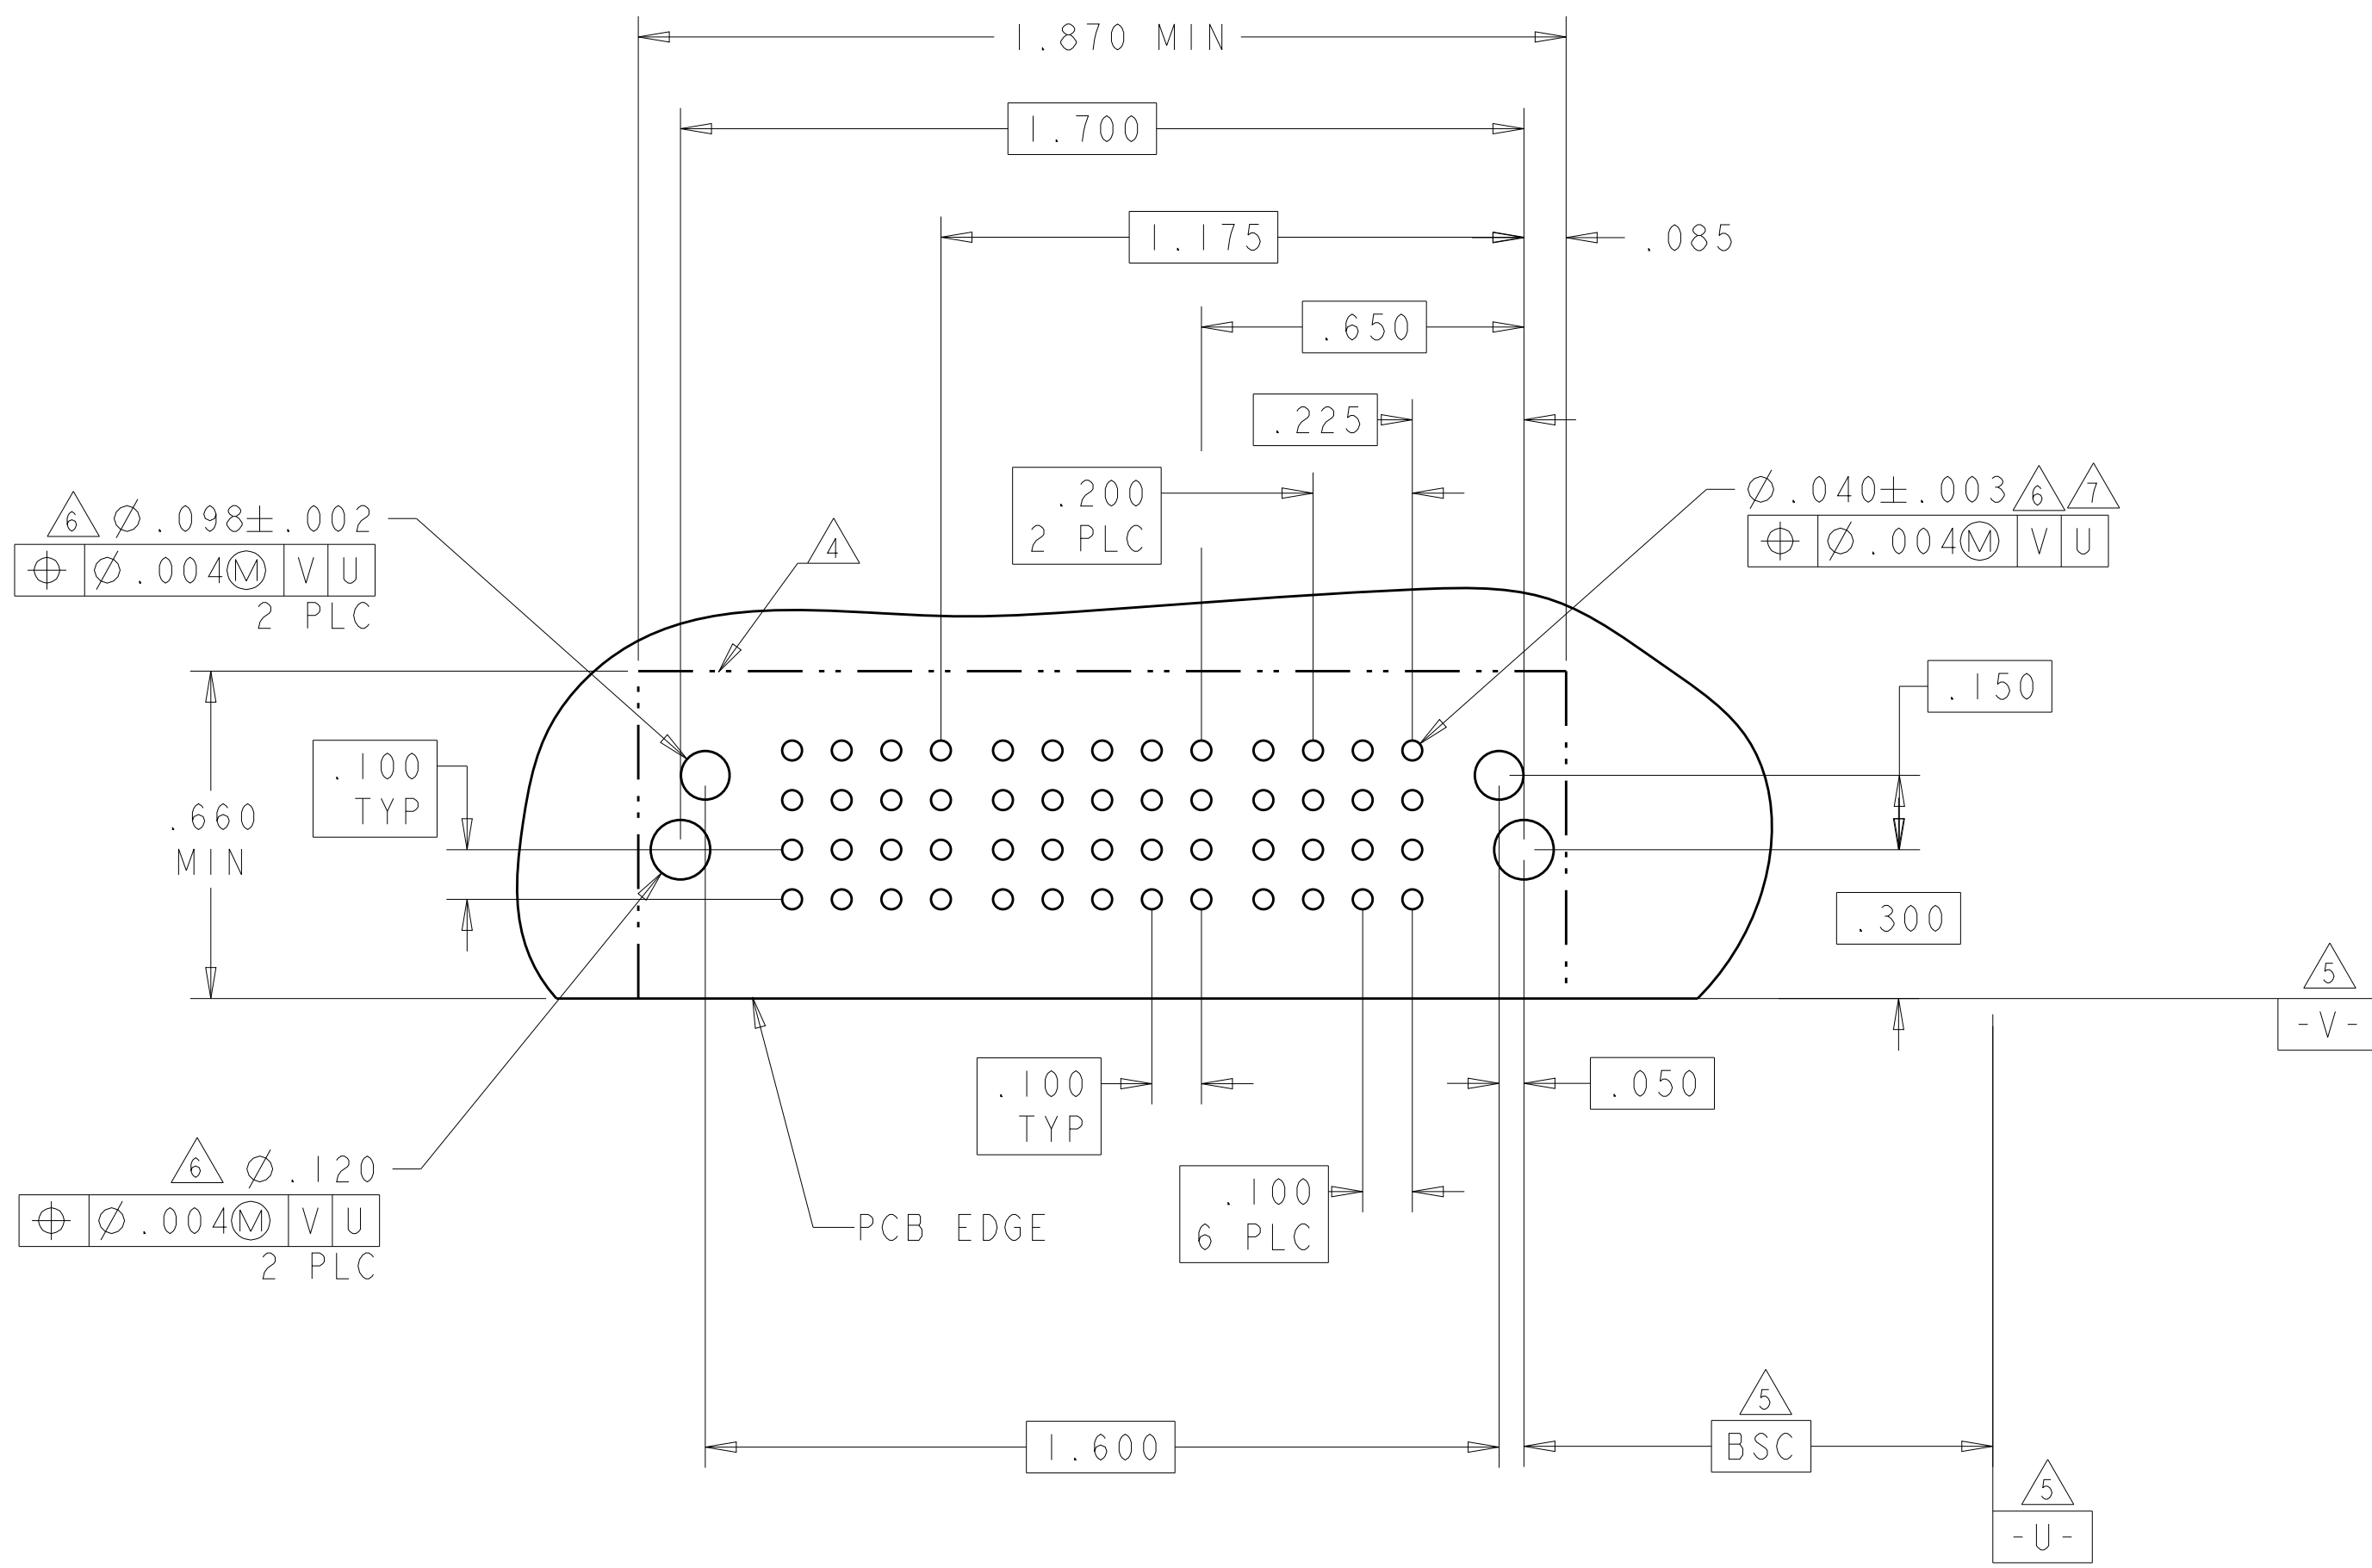
4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER				SIGNAL						POWER			
			P7	P6	P5	P4	6	5	4	3	2	1	P3	P2	P1	
1-6450870-2	D C B A	 HD	LM	LM	LM	LM	H	H	H	H	H	H	RM	RM	RM	
							G	G	G	G	G	G				
							F	F	F	F	F	F				
							E	E	E	E	E	E				
3ACP + 24S + 4LP																

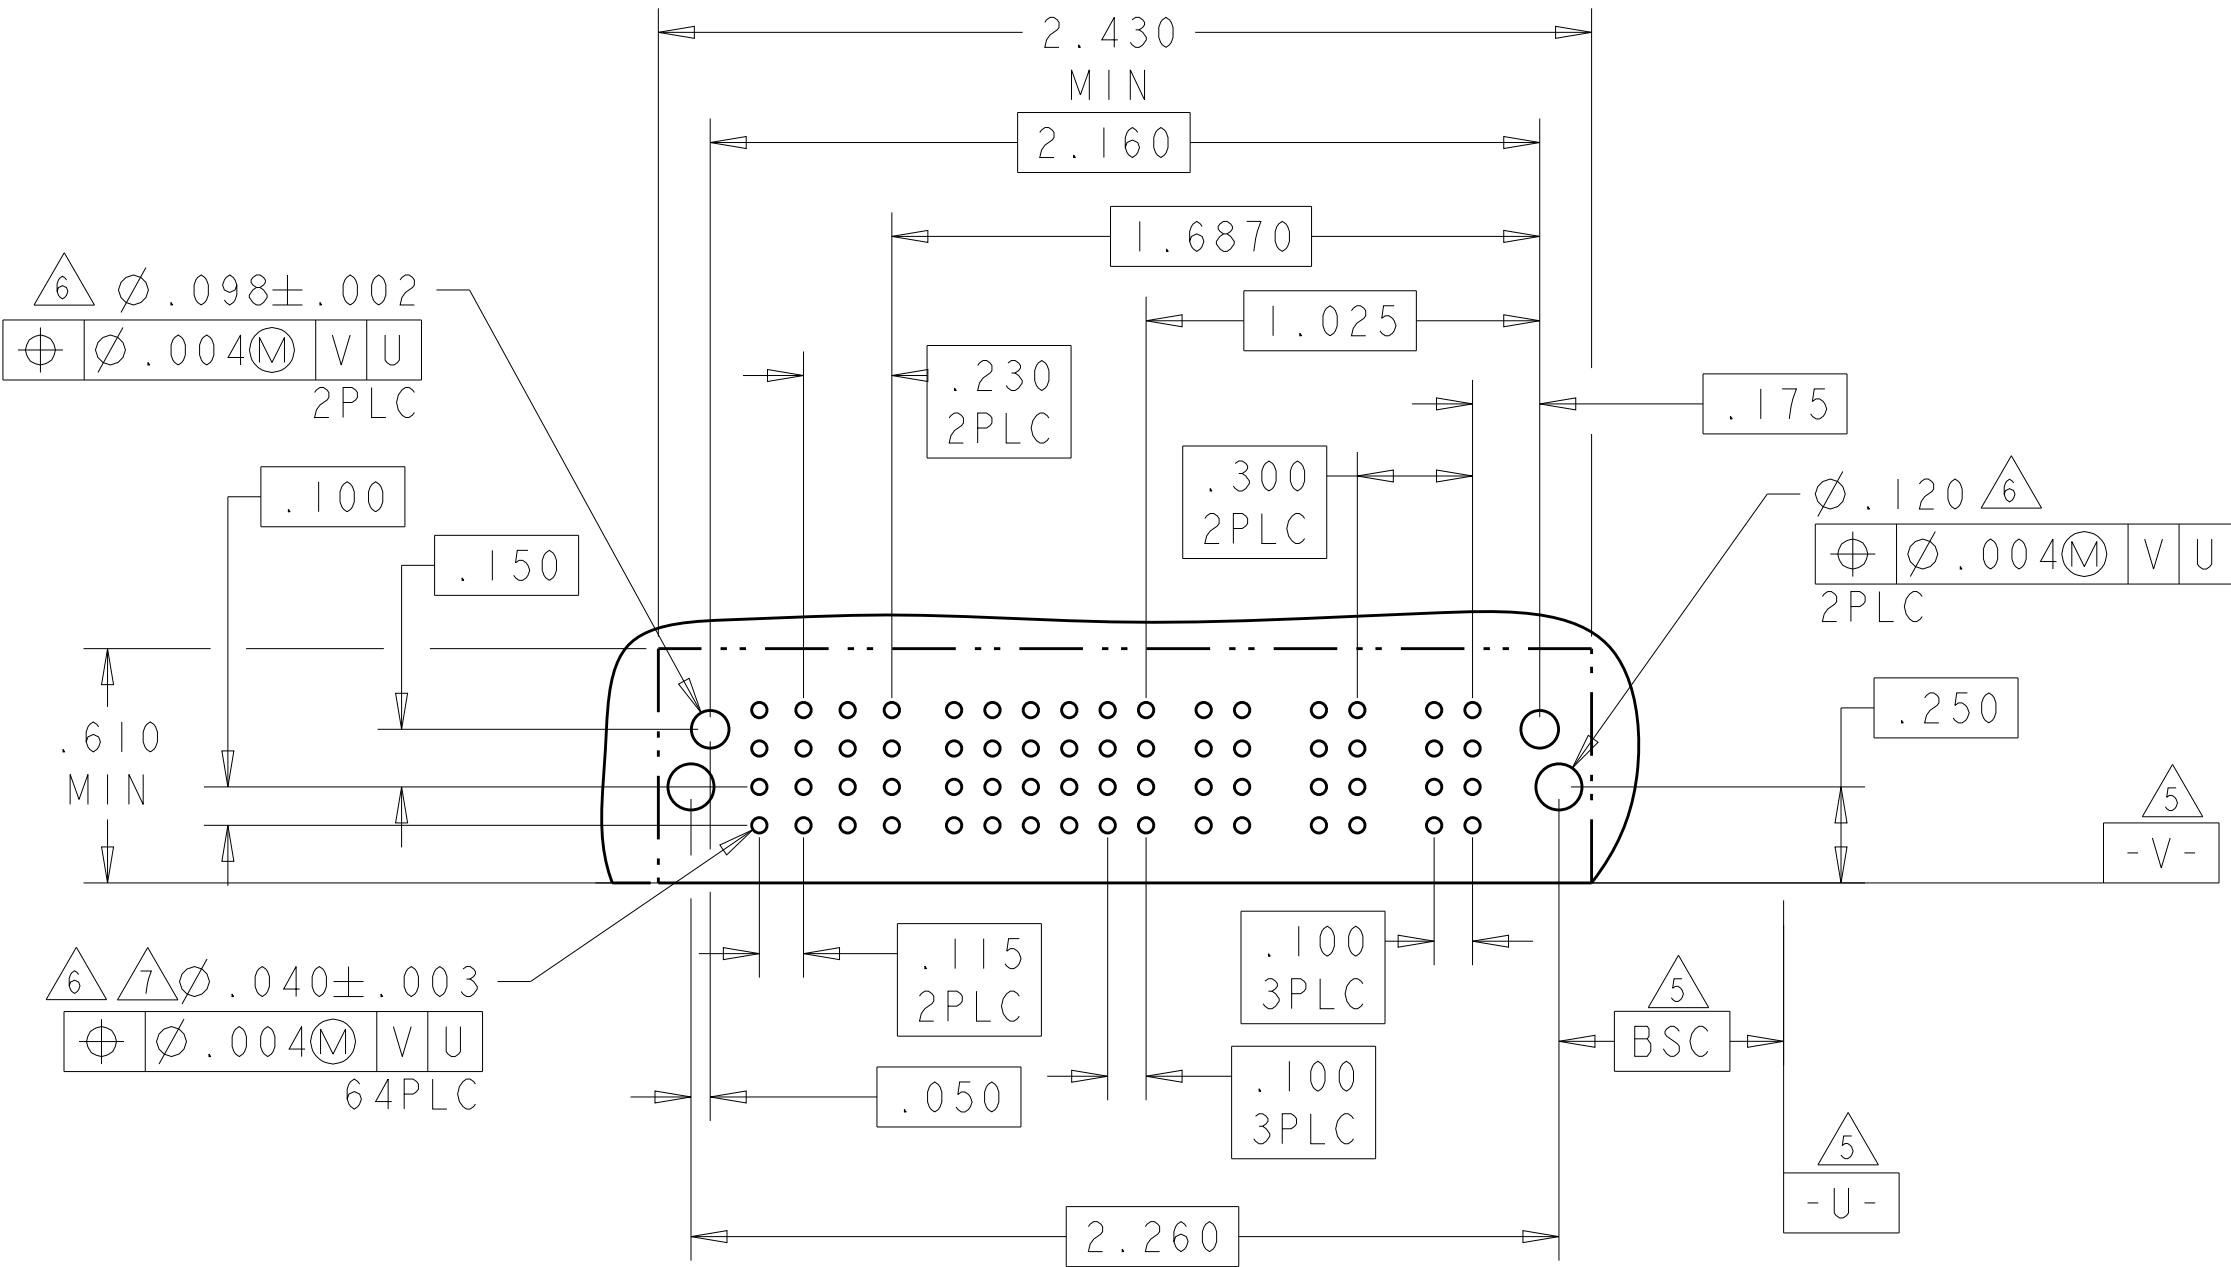


PART NUMBER	ROWS		POWER				SIGNAL				POWER								
			P12	P11	P10	P9	4	3	2	1	P8	P7	P6	P5	P4	P3	P2	P1	
1-6450870-3	D C B A		RM	RM	RM	RA	H	H		H	RA	RA	RA	RA	RM	RM	RM	RM	
							G	G		G									
							F	F		F									
							E	E		E									
8ACP + 16S + 4ACP																			

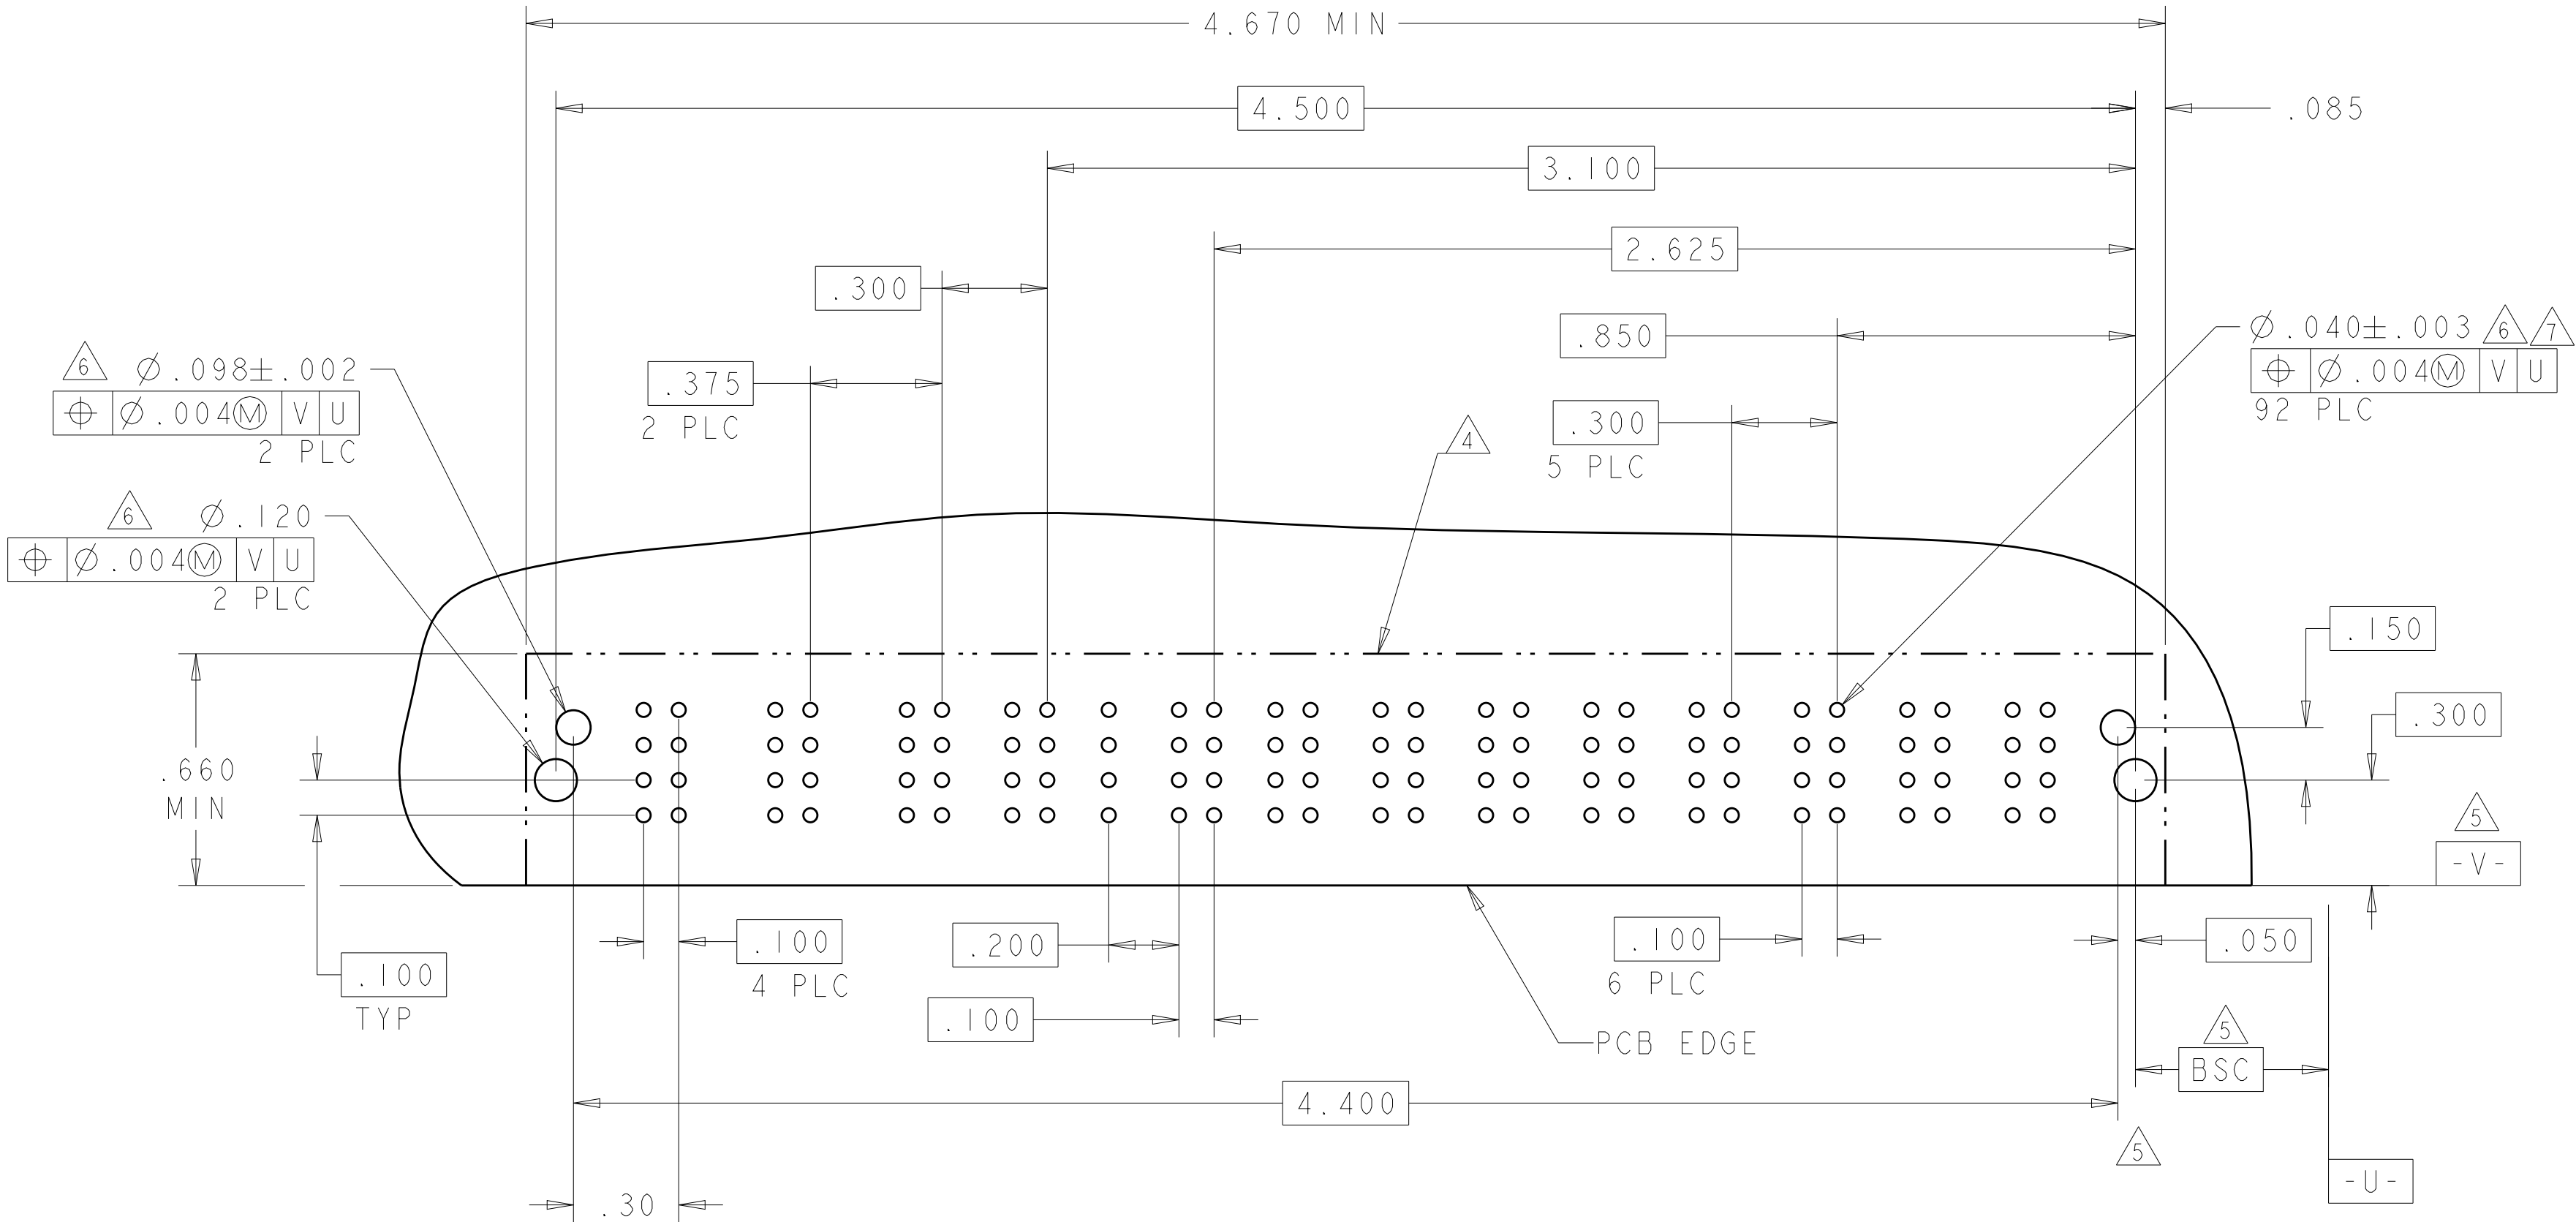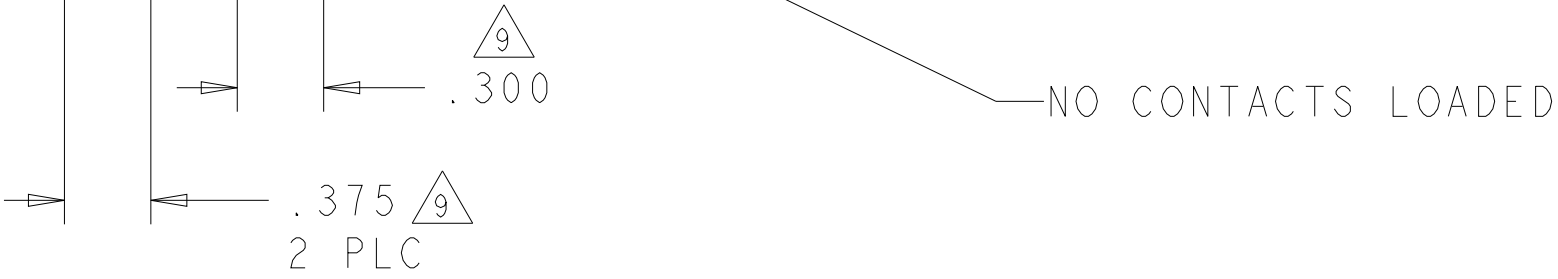





THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. ZHOU	11OCT2007	TE Connectivity	
		CHK S. ZHAO	11OCT2007		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ±.1		PRODUCT SPEC	
		1 PLC ±.1		108-2292	
		2 PLC ±.01		APPLICATION SPEC	
		3 PLC ±.005		114-13251	
		4 PLC ±.0020		WEIGHT	
		ANGLES ±.2°		Customer Drawing	
		FINISH		SCALE 4:1	
MATERIAL				SHEET 8 OF 20	
				REV K2	

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER				SIGNAL					POWER				
			P4	P3	P2	P1	5	4	3	2	1	LP3	LP2	LPI		
1-6450870-4	D C B A			RM	RM	RM	RM	H	H	H	H	H	LM	LM	LM	
								G	G	G	G	G				
								F	F	F	F	F				
								E	E	E	E	E				
3LP + 20S + 4HDP																

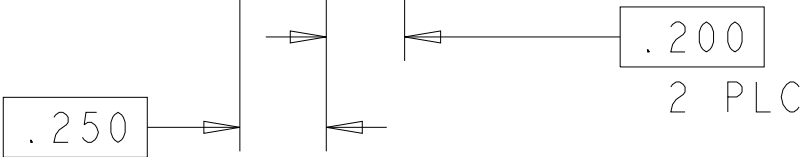

PART NUMBER	ROWS		POWER				SIGNAL		POWER		
			LP4	LP3	LP2	LPI	2	1	P2	PI	
1-6450870-5	D C B A		LM	LM	LM	LM	H	H	RM	RM	
							G	G			
							F	F			
							E	E			
2ACP + 8S + 4LP											

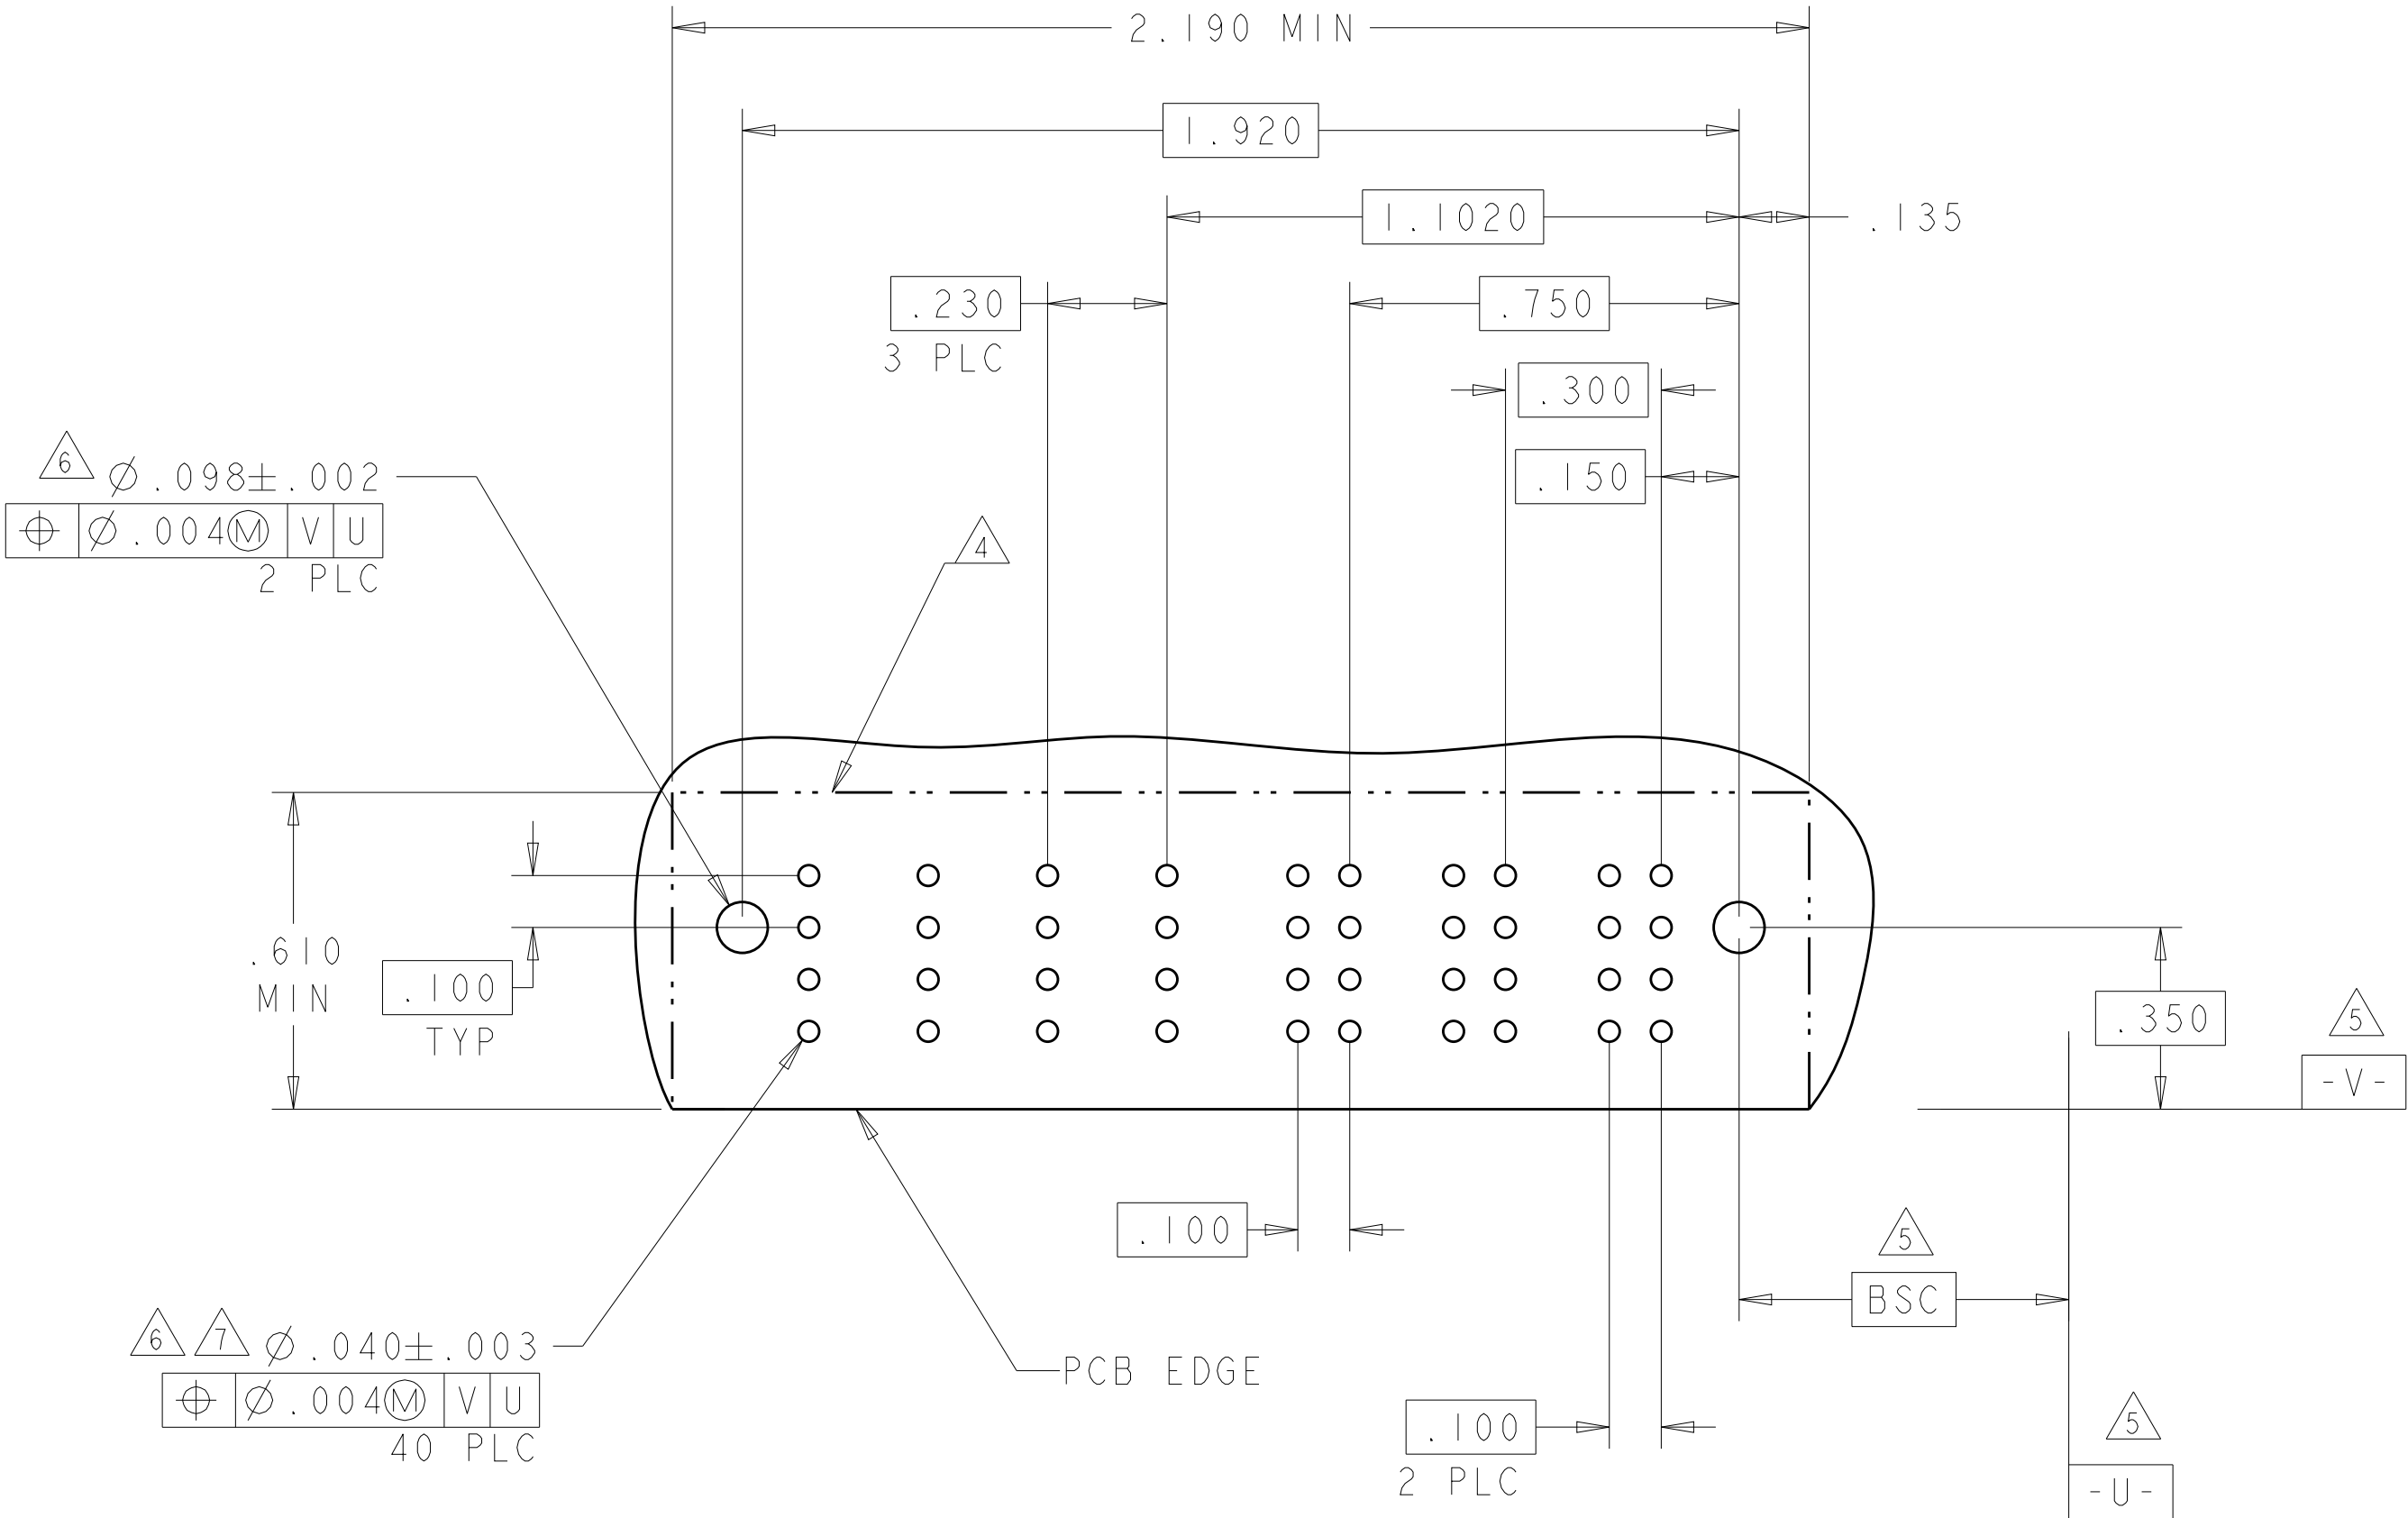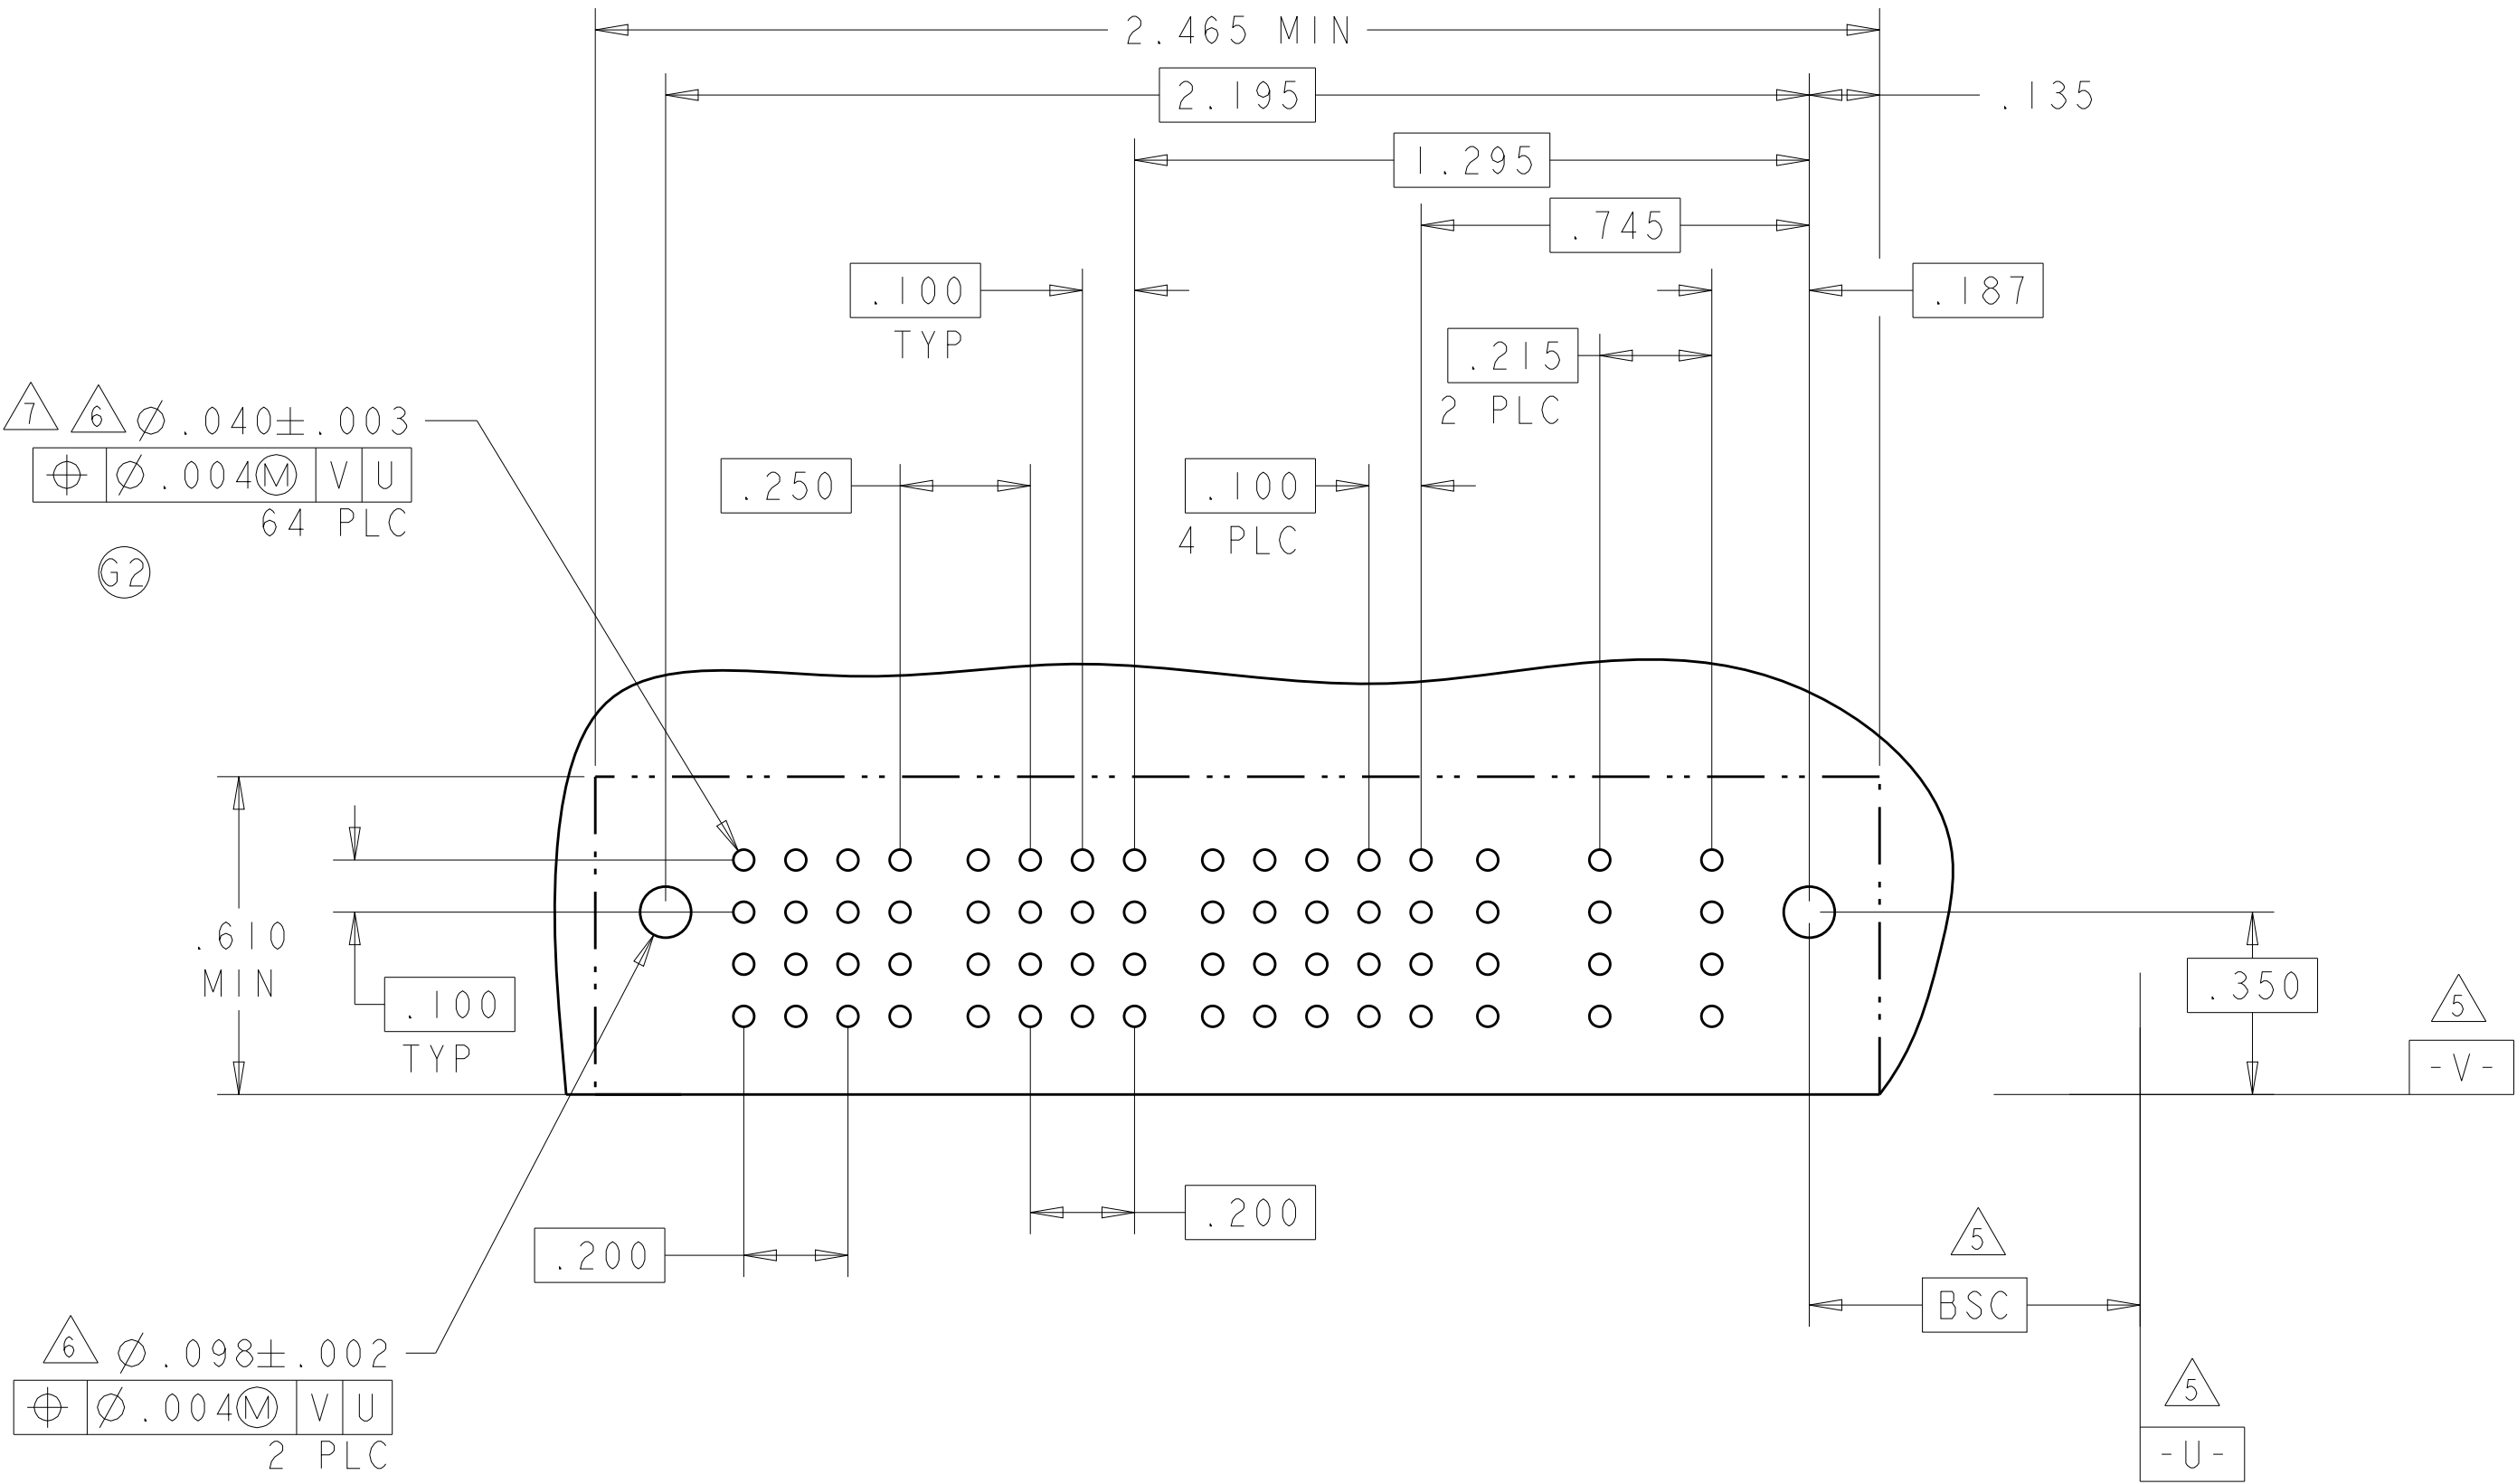

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
C. ZHOU
CHK
S. ZHAO
APVD
S. ZHAO

11OCT2007
11OCT2007
-

DIMENSIONS:
INCHES

0 PLC ±.1
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH -

TOLERANCES UNLESS OTHERWISE SPECIFIED:

PRODUCT SPEC
108-2292
APPLICATION SPEC
114-13251
WEIGHT -

MATERIAL -

Customer Drawing

NAME
RIGHT ANGLE RECEPTACLE
SHORT END MODULE
MULTI-BEAM XLE

SIZE
A100779

CAGE CODE
C=6450870

DRAWING NO
-

RESTRICTED TO
-


TE Connectivity

SCALE 4:1
SHEET 9 OF 20
REV K2

[illegible]4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER																SIGNAL			POWER					
			P20	P19	P18	P17	P16	P15	P14	P13	P12	P11	P10	P9	P8	P7	P6	P5	3	2	1	P4	P3	P2	P1		
1-6450870-8	D																		H	H	H						
	C																		G	G	G						
	B																			F	F	F					
	A	HD																		E	E	E					HD
4P + 12S + 16P																											

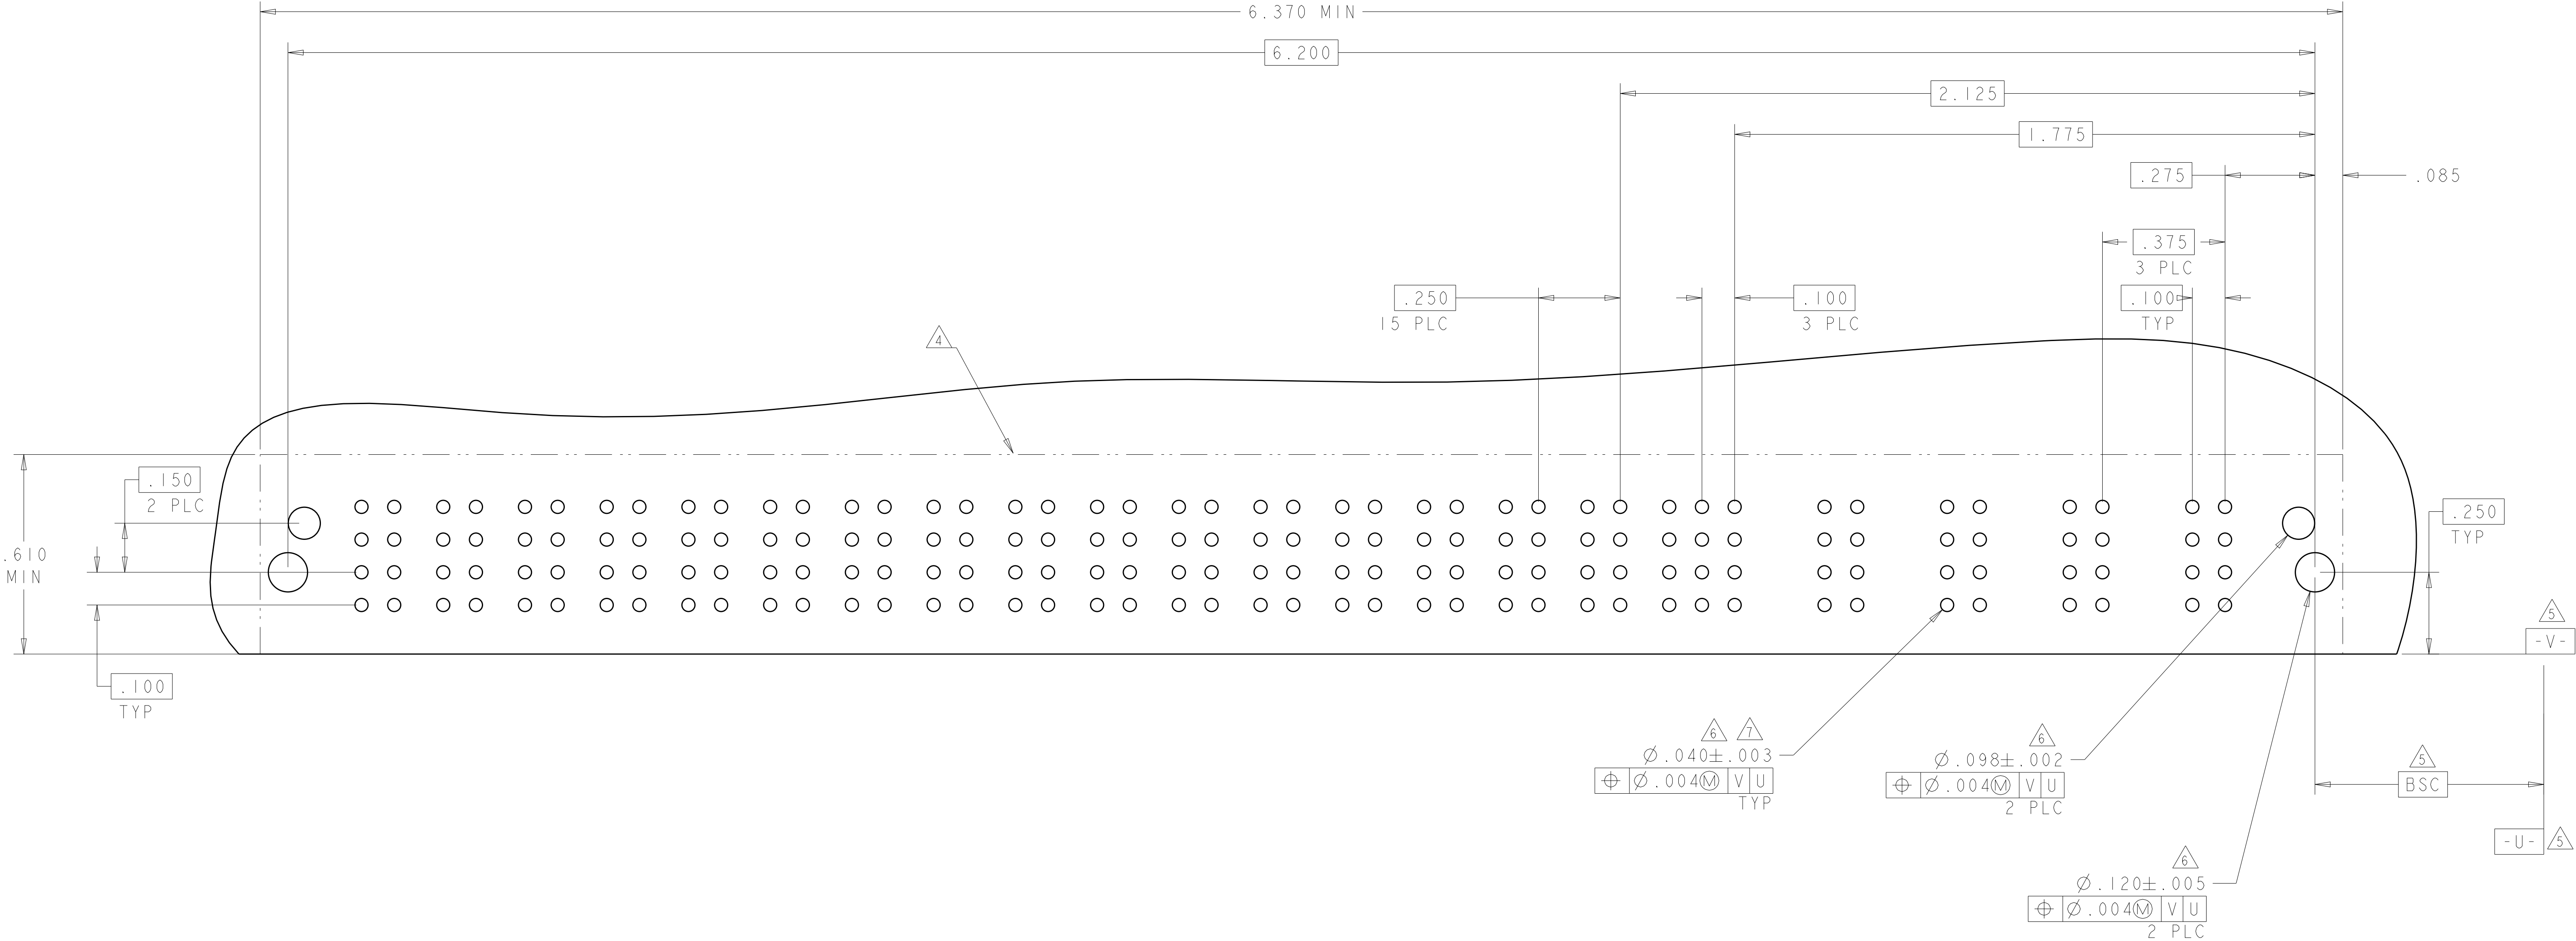


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. ZHOU	11OCT2007	TE Connectivity	
DIMENSIONS: INCHES		CHK S. ZHAO	11OCT2007		
		APVD S. ZHAO	-	NAME	
		PRODUCT SPEC		RIGHT ANGLE RECEPTACLE SHORT END MODULE MULTI-BEAM XLE	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		108-2292		SIZE	
0 PLC ±.1		APPLICATION SPEC		CAGE CODE	
1 PLC ±.01		114-13251		DRAWING NO	
2 PLC ±.005		WEIGHT		RESTRICTED TO	
3 PLC ±.002		Customer Drawing		A100779	
4 PLC ±.0020		SCALE		4:1	
ANGLES ±.2°		SHEET		11	
FINISH		REV		K2	
MATERIAL		OF		20	
-		REV		K2	
-		SHEET		11	
-		OF		20	
-		REV		K2	
-		SHEET		11	
-		OF		20	
-		REV		K2	


PART NUMBER	ROWS		POWER			SIGNAL						POWER			
			P6	P5	P4	6	5	4	3	2	1	P3	P2	P1	
2-6450870-0	D		RM	RM	RA		H	H				RM		RM	
	C						G	G							
	B						F	F							
	A	HD					E	E							HD

3P + 24S + 3P

-NO CONTACT LOADED

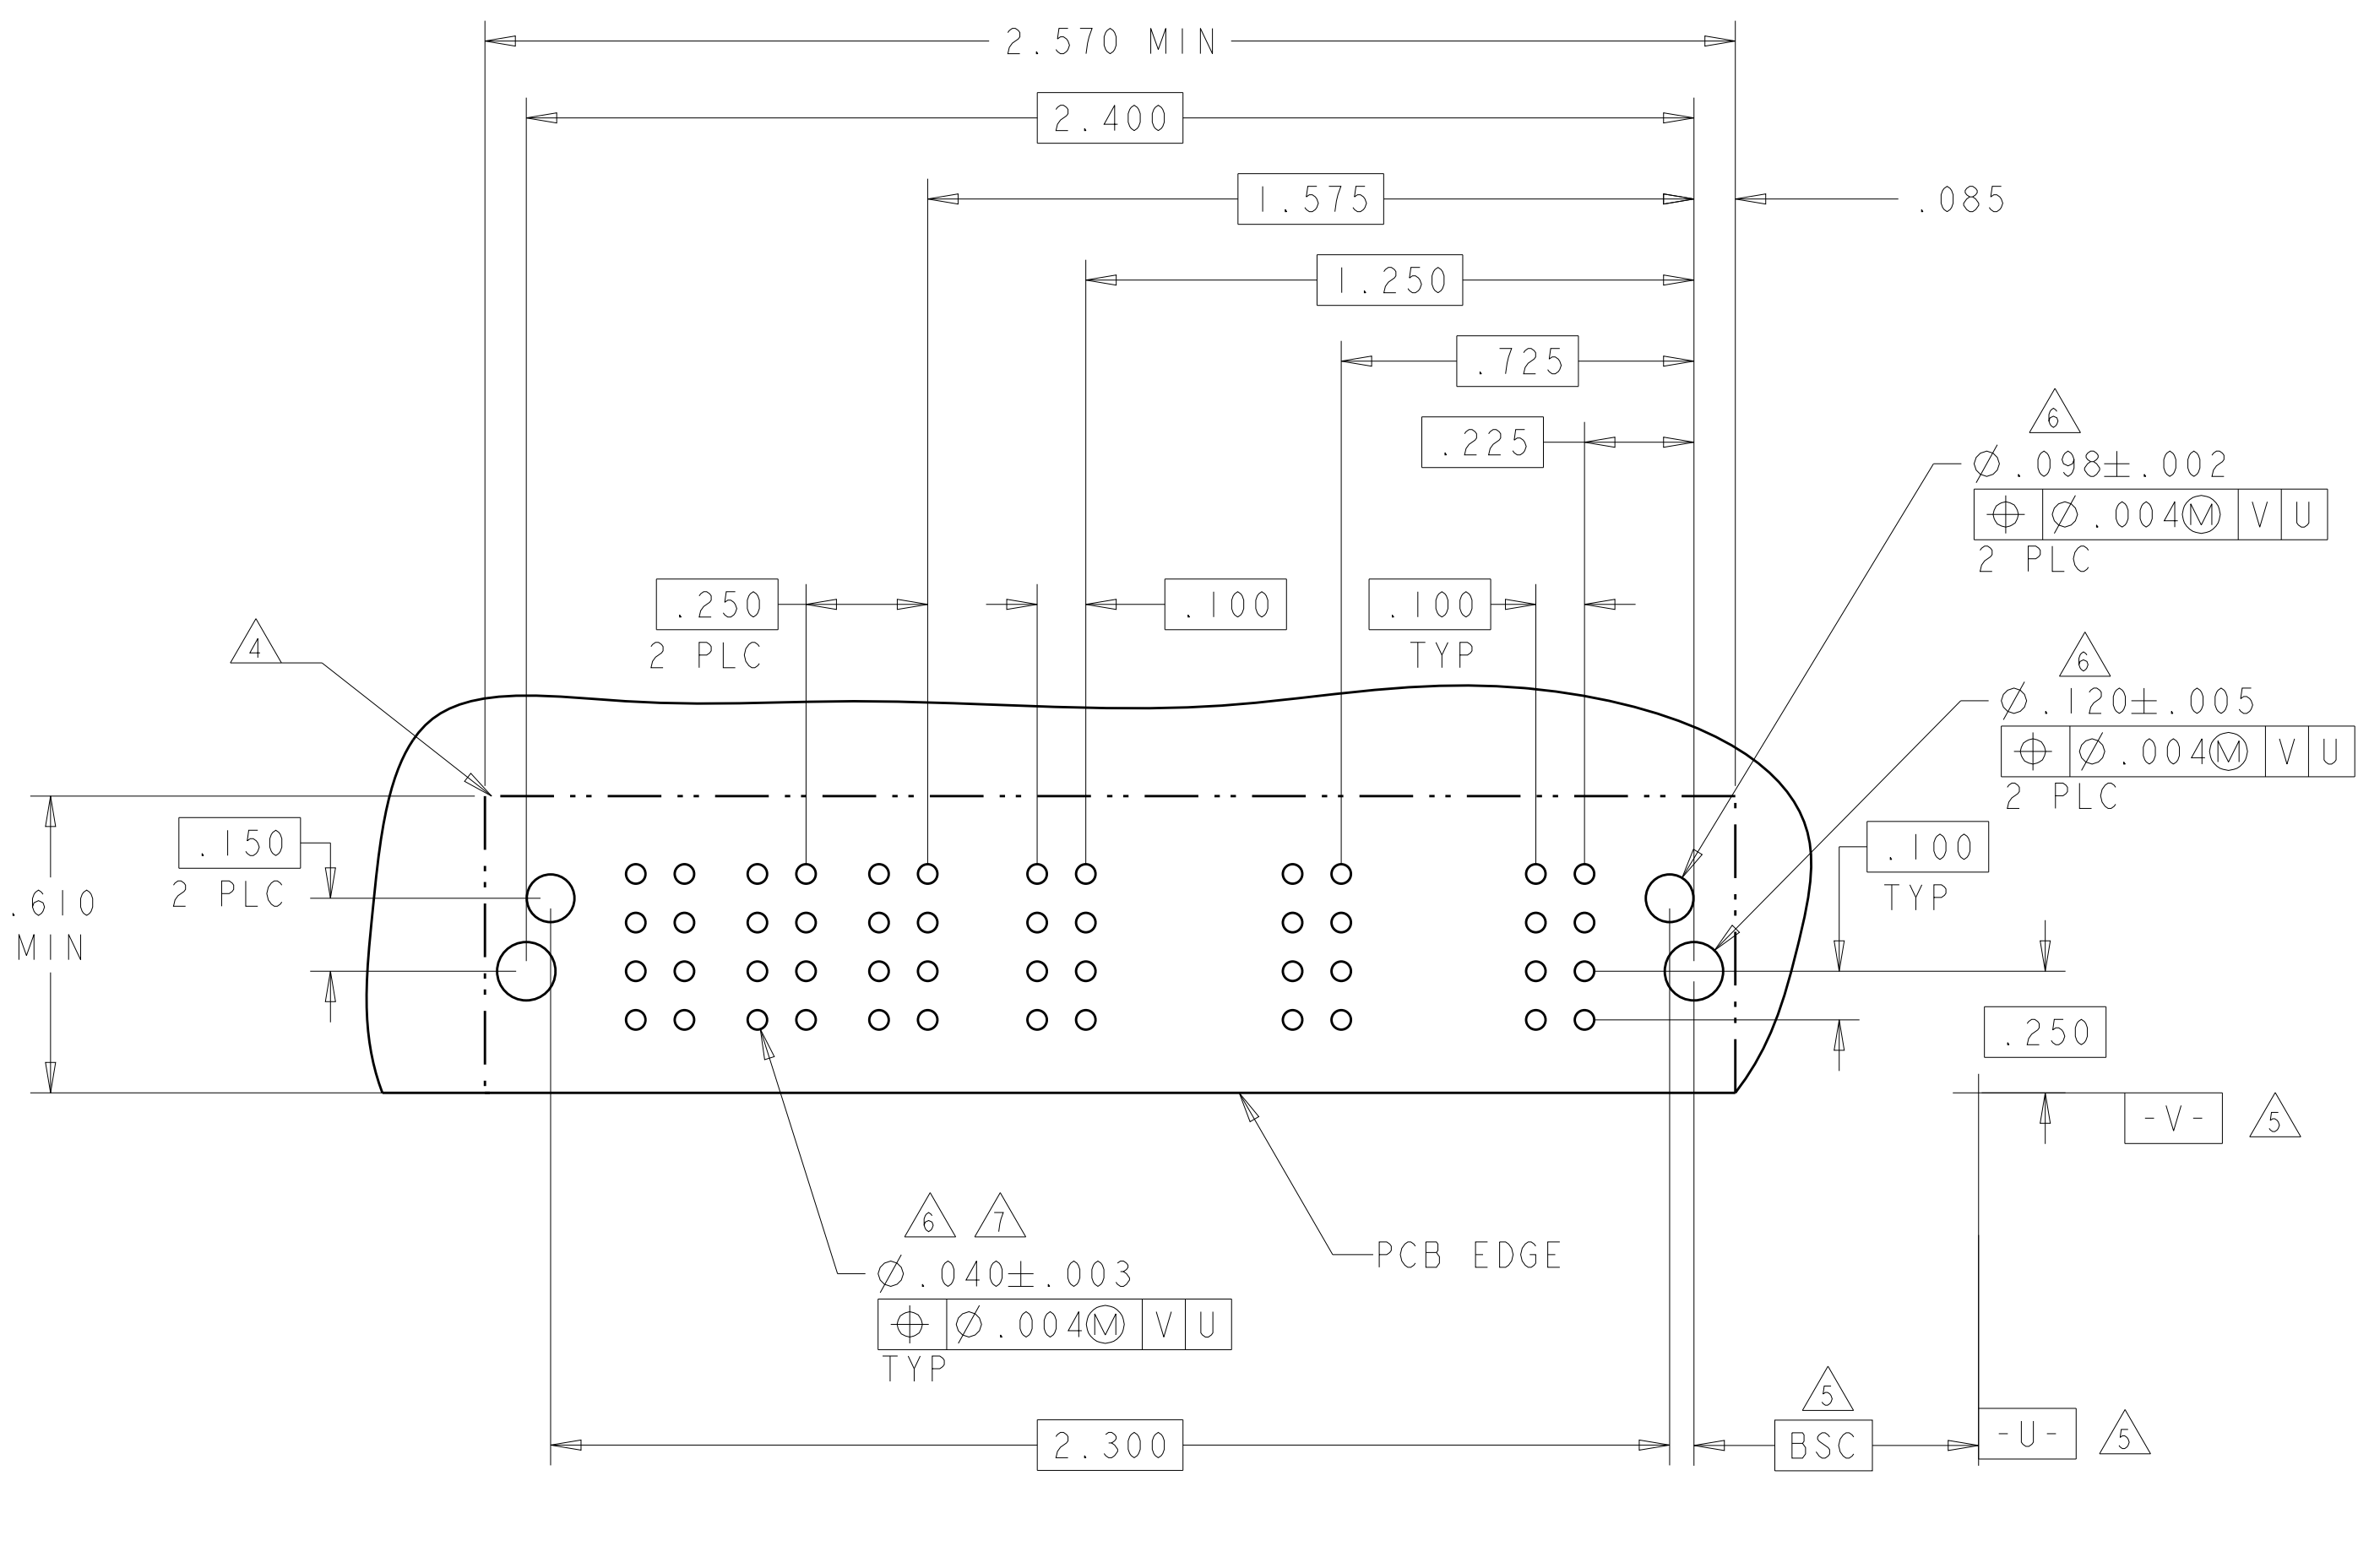
4805 (3/11)

PART NUMBER	ROWS		POWER		SIGNAL				POWER		
		P4	P3	4	3	2	1	P2	P1		
2-6450870-2	D		RM	RM	H	H	H	H	RM	RM	
	C				G	G	G	G			
	B				F	F	F	F			
	A	HD			E	E	E	E			HD
2P + 16S + 2P											

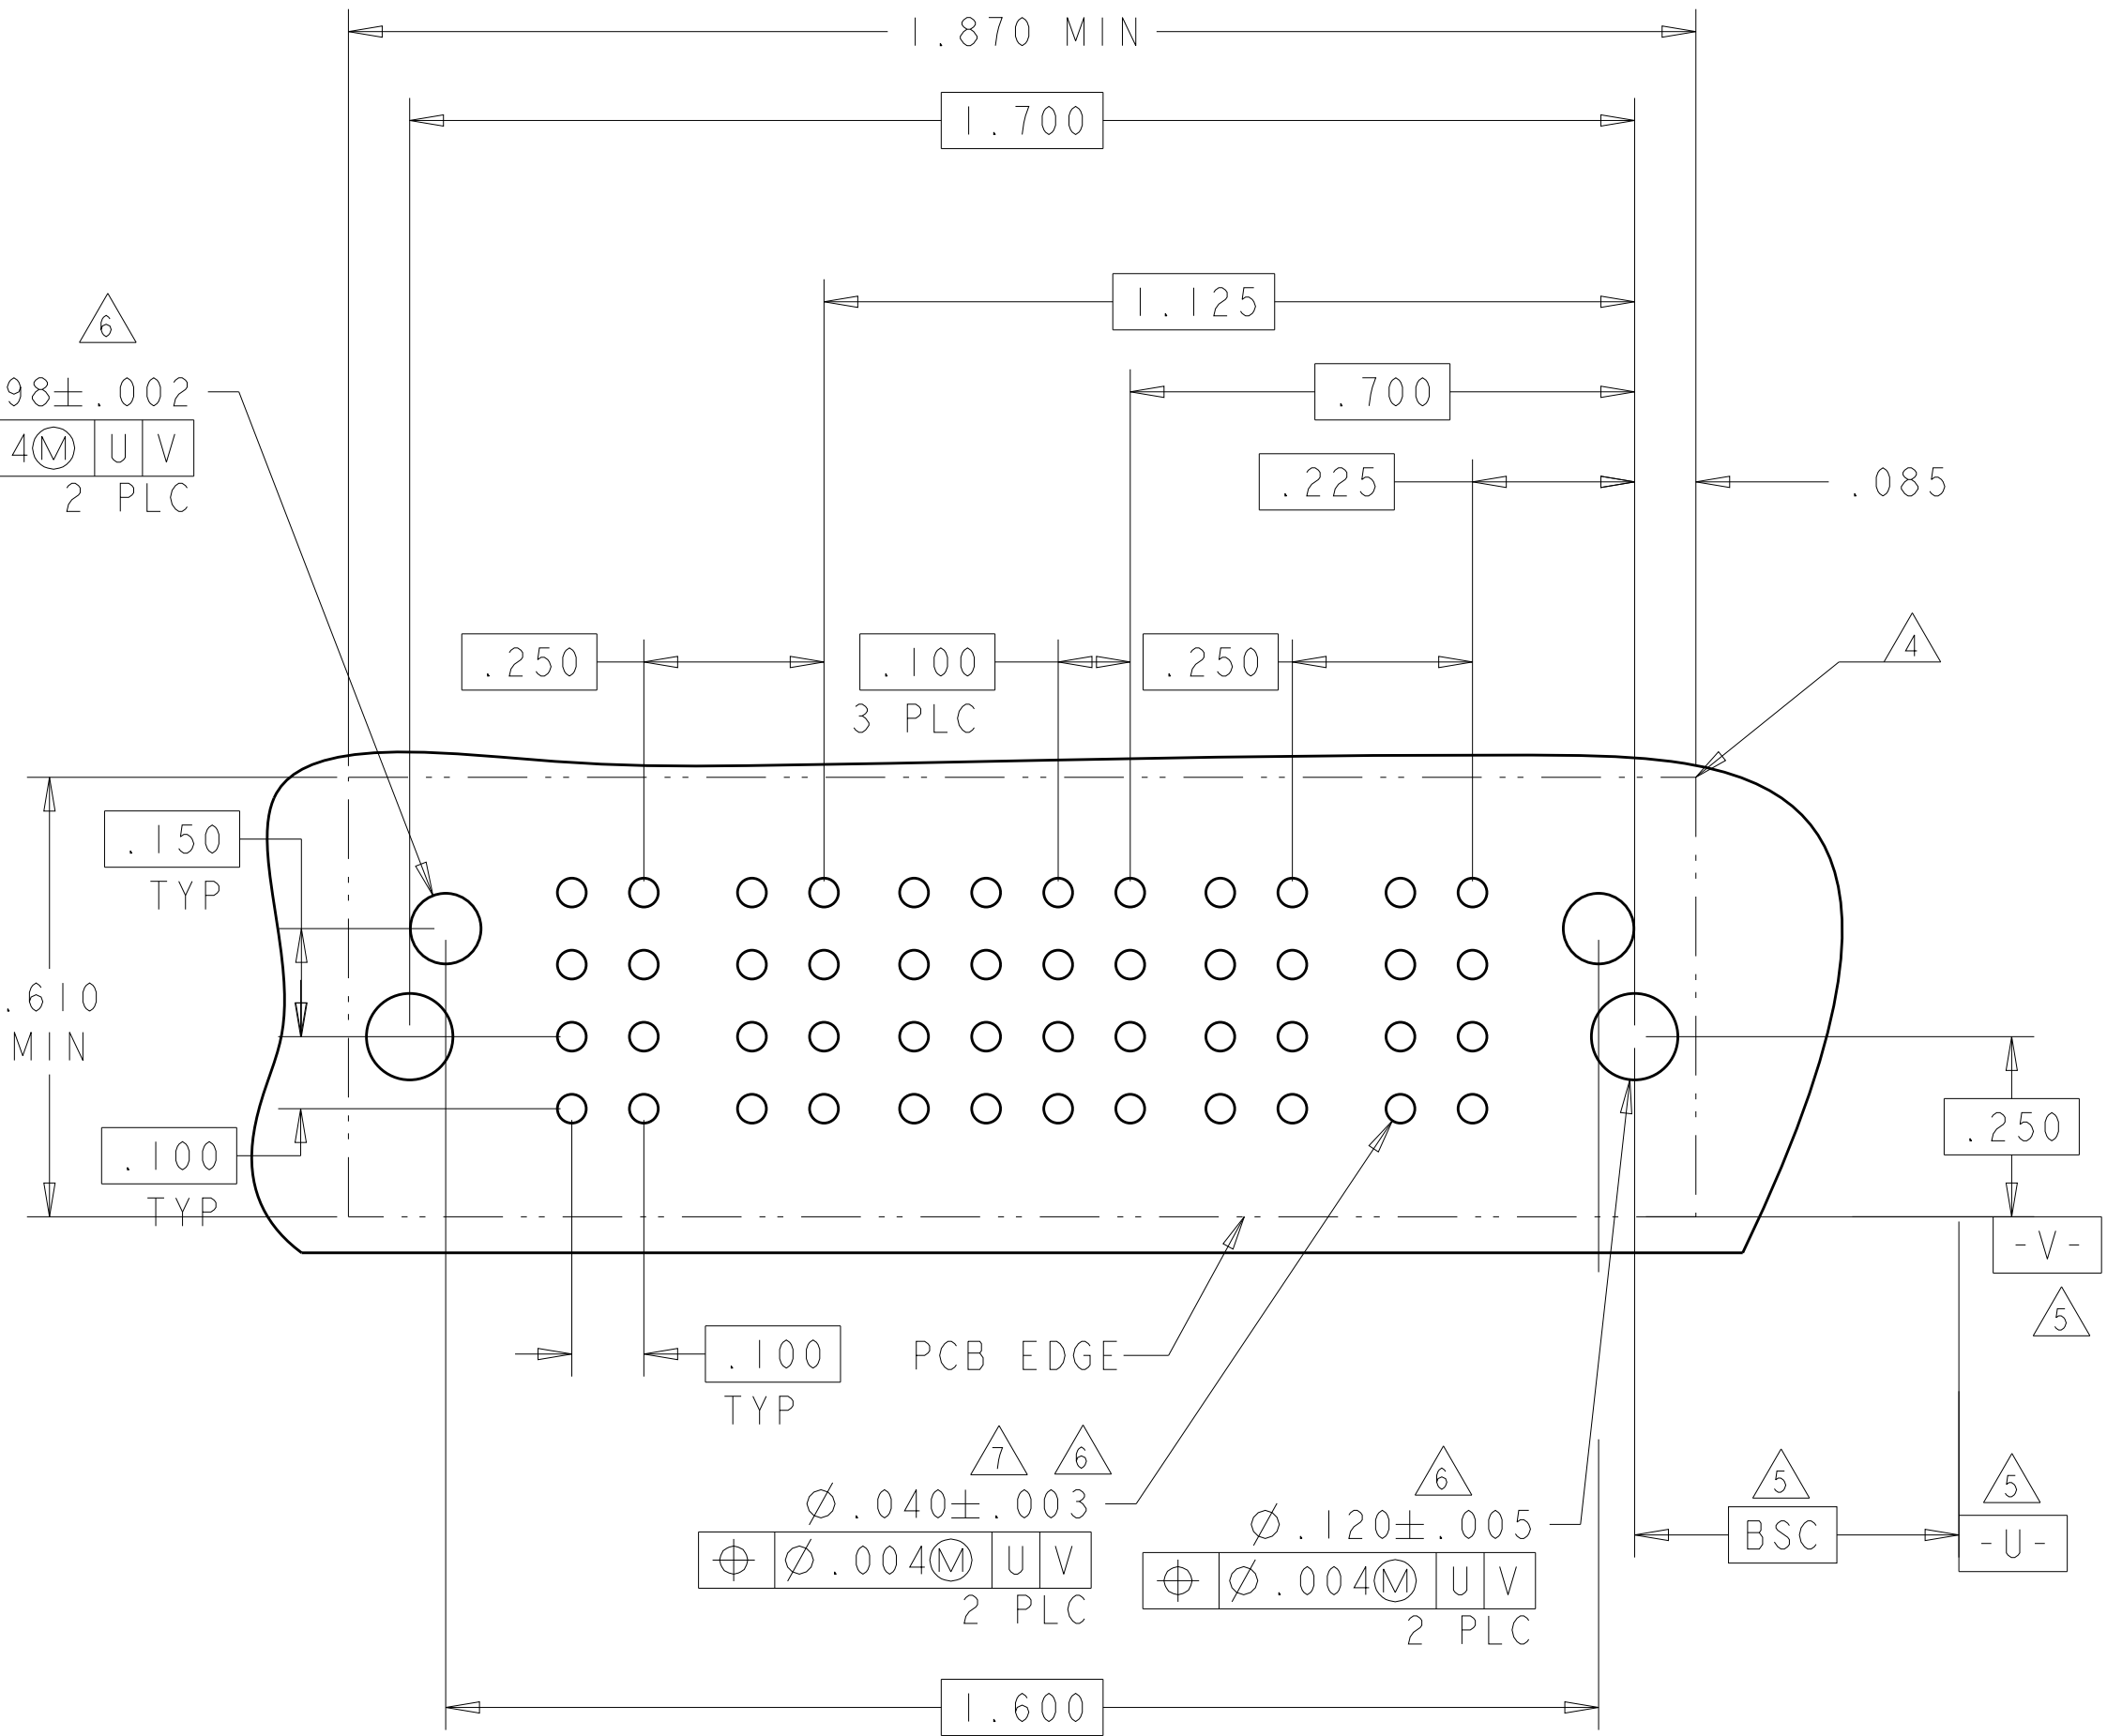4805 (3/11)


PART NUMBER	ROWS		POWER		SIGNAL		POWER			
			P5	P4	2	1	P3	P2	P1	
2-6450870-4	D		RM	RM	H	H	RA	RM	RM	
	C				G	G				
	B				F	F				
	A				E	E				
3ACP + 8S + 2P										

— 2.145 MIN

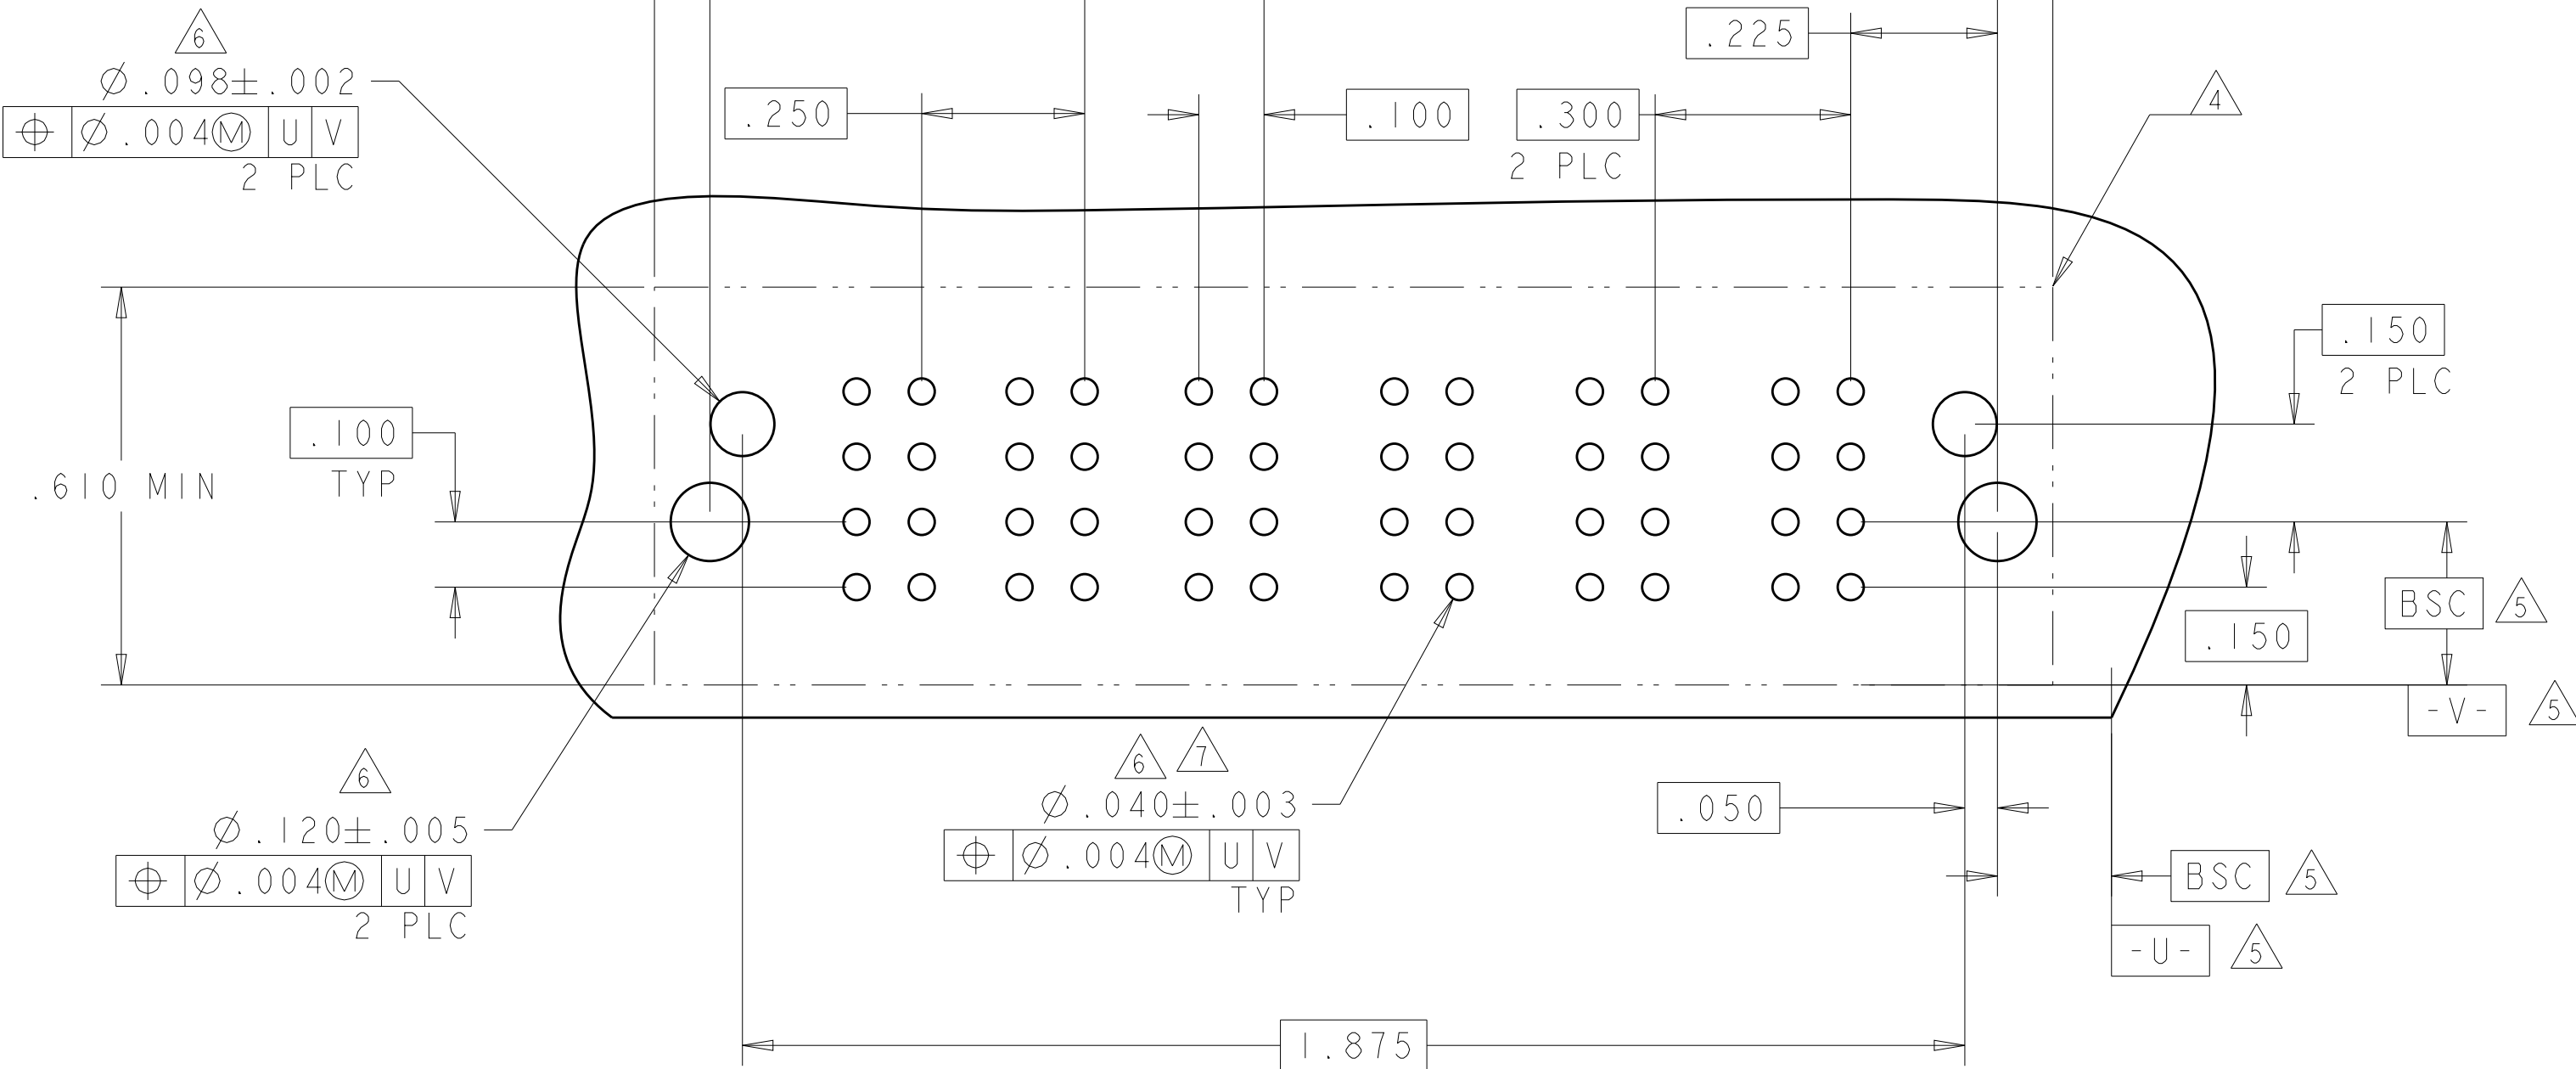4805 (3/11)


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER					SIGNAL											POWER									
			P10	P9	P8	P7	P6	12	11	10	9	8	7	6	5	4	3	2	1	P5	P4	P3	P2		P1			
2-6450870-5	D C B A			RM	RM	RM	RM	RM												RM	RM	RM	RM	RM				
									H	H	H	H	H	H	H	H	H	H	H							H	H	H
									G	G	G	G	G	G	G	G	G	G	G							G	G	G
									F	F	F	F	F	F	F	F	F	F	F							F	F	F
5P + 48S + 5P																												

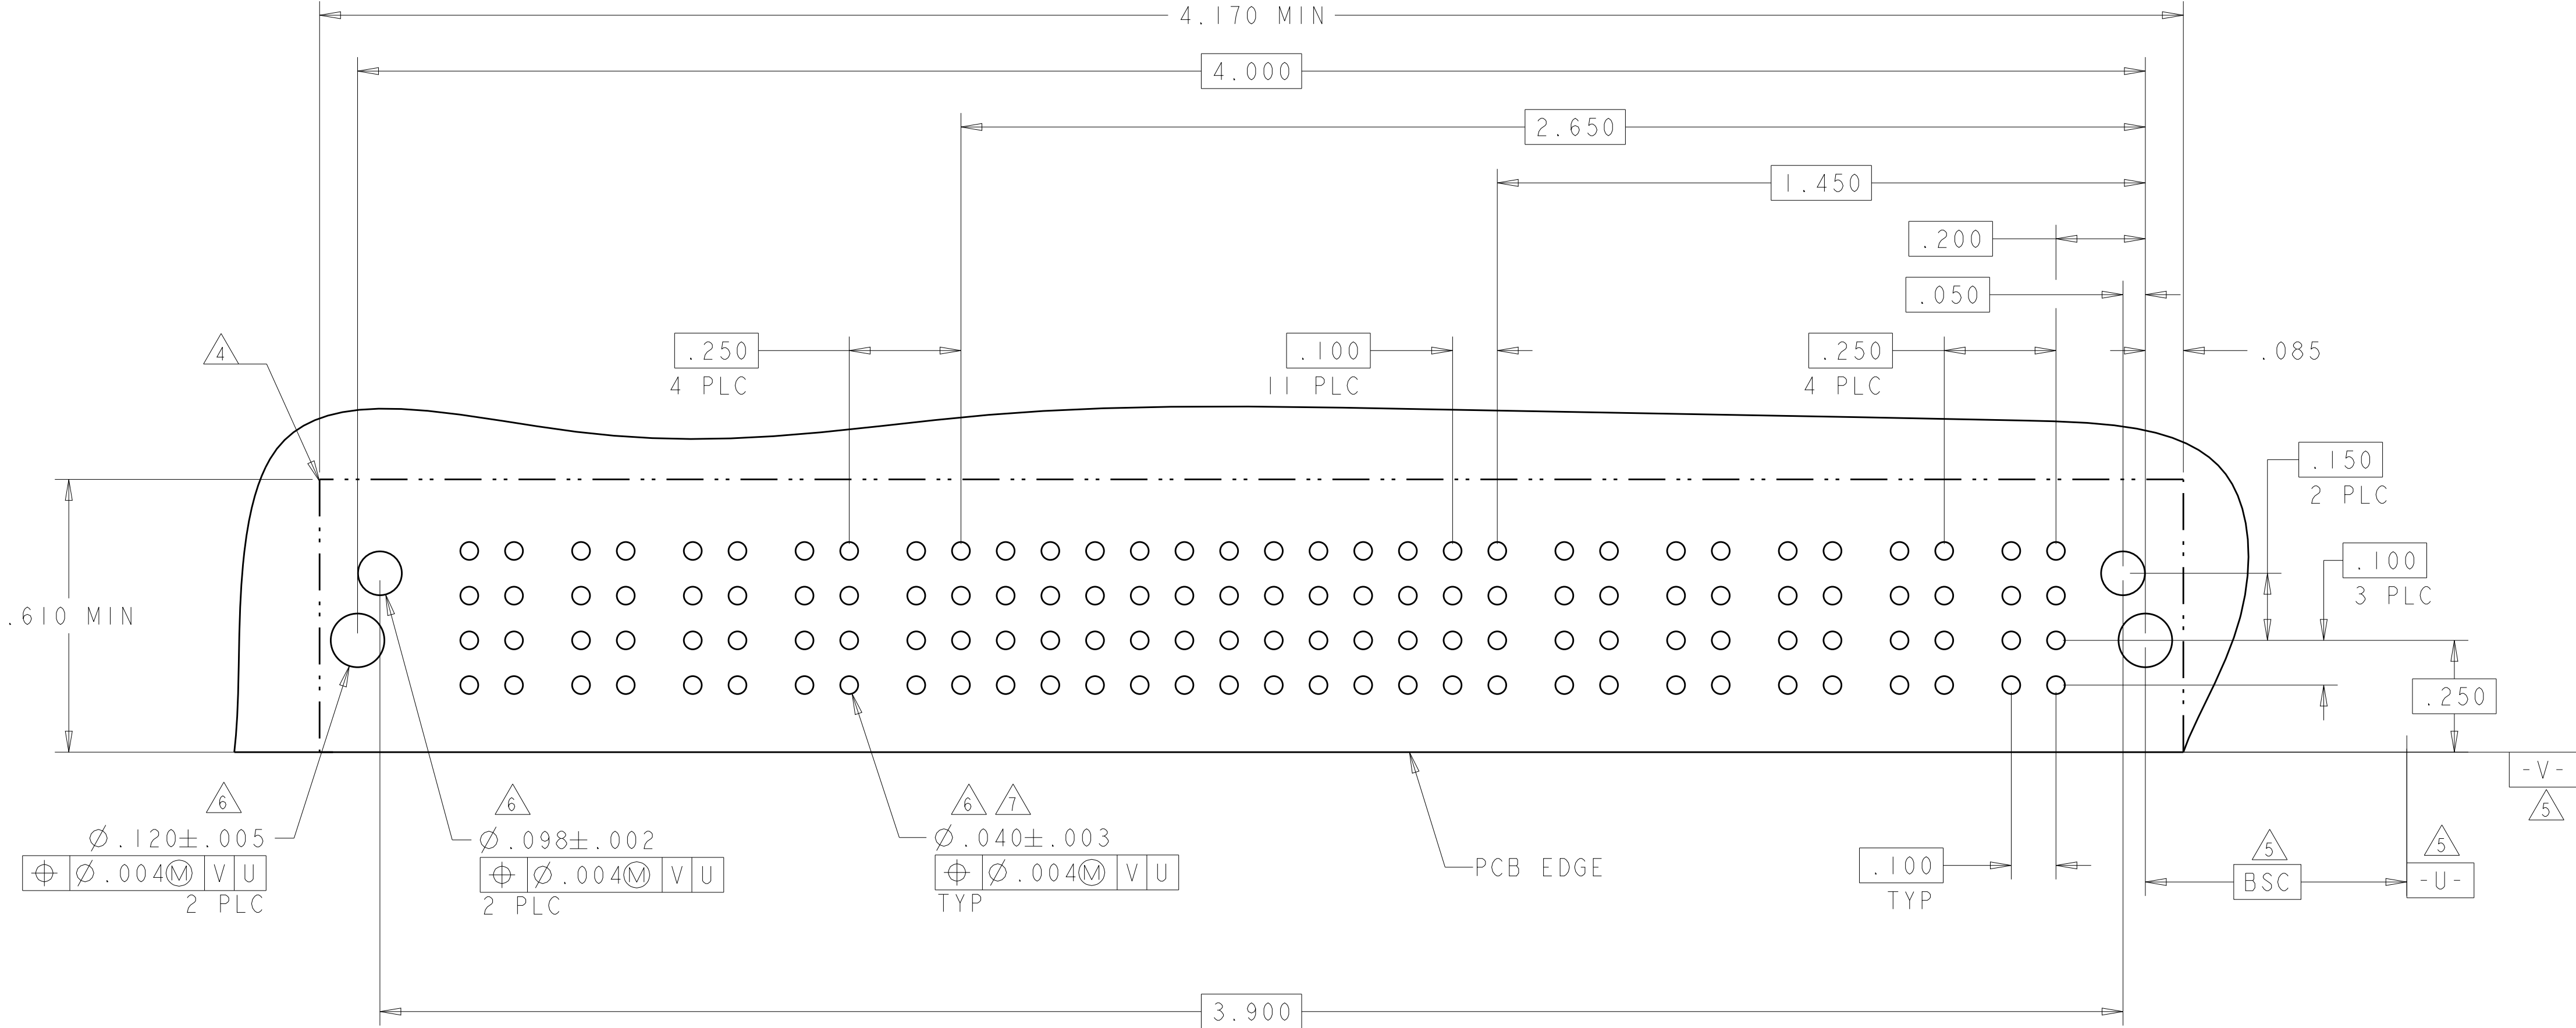

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-


PART NUMBER	ROWS		POWER				SIGNAL				POWER			
			P7	P6	P5	P4	4	3	2	1	P3	P2	P1	
2-6450870-6	D						H	H	H	H				
	C						G	G	G	G				
	B						F	F	F	F				
	A	HD					E	E	E	E				HD
3ACP + 16S + 4P														

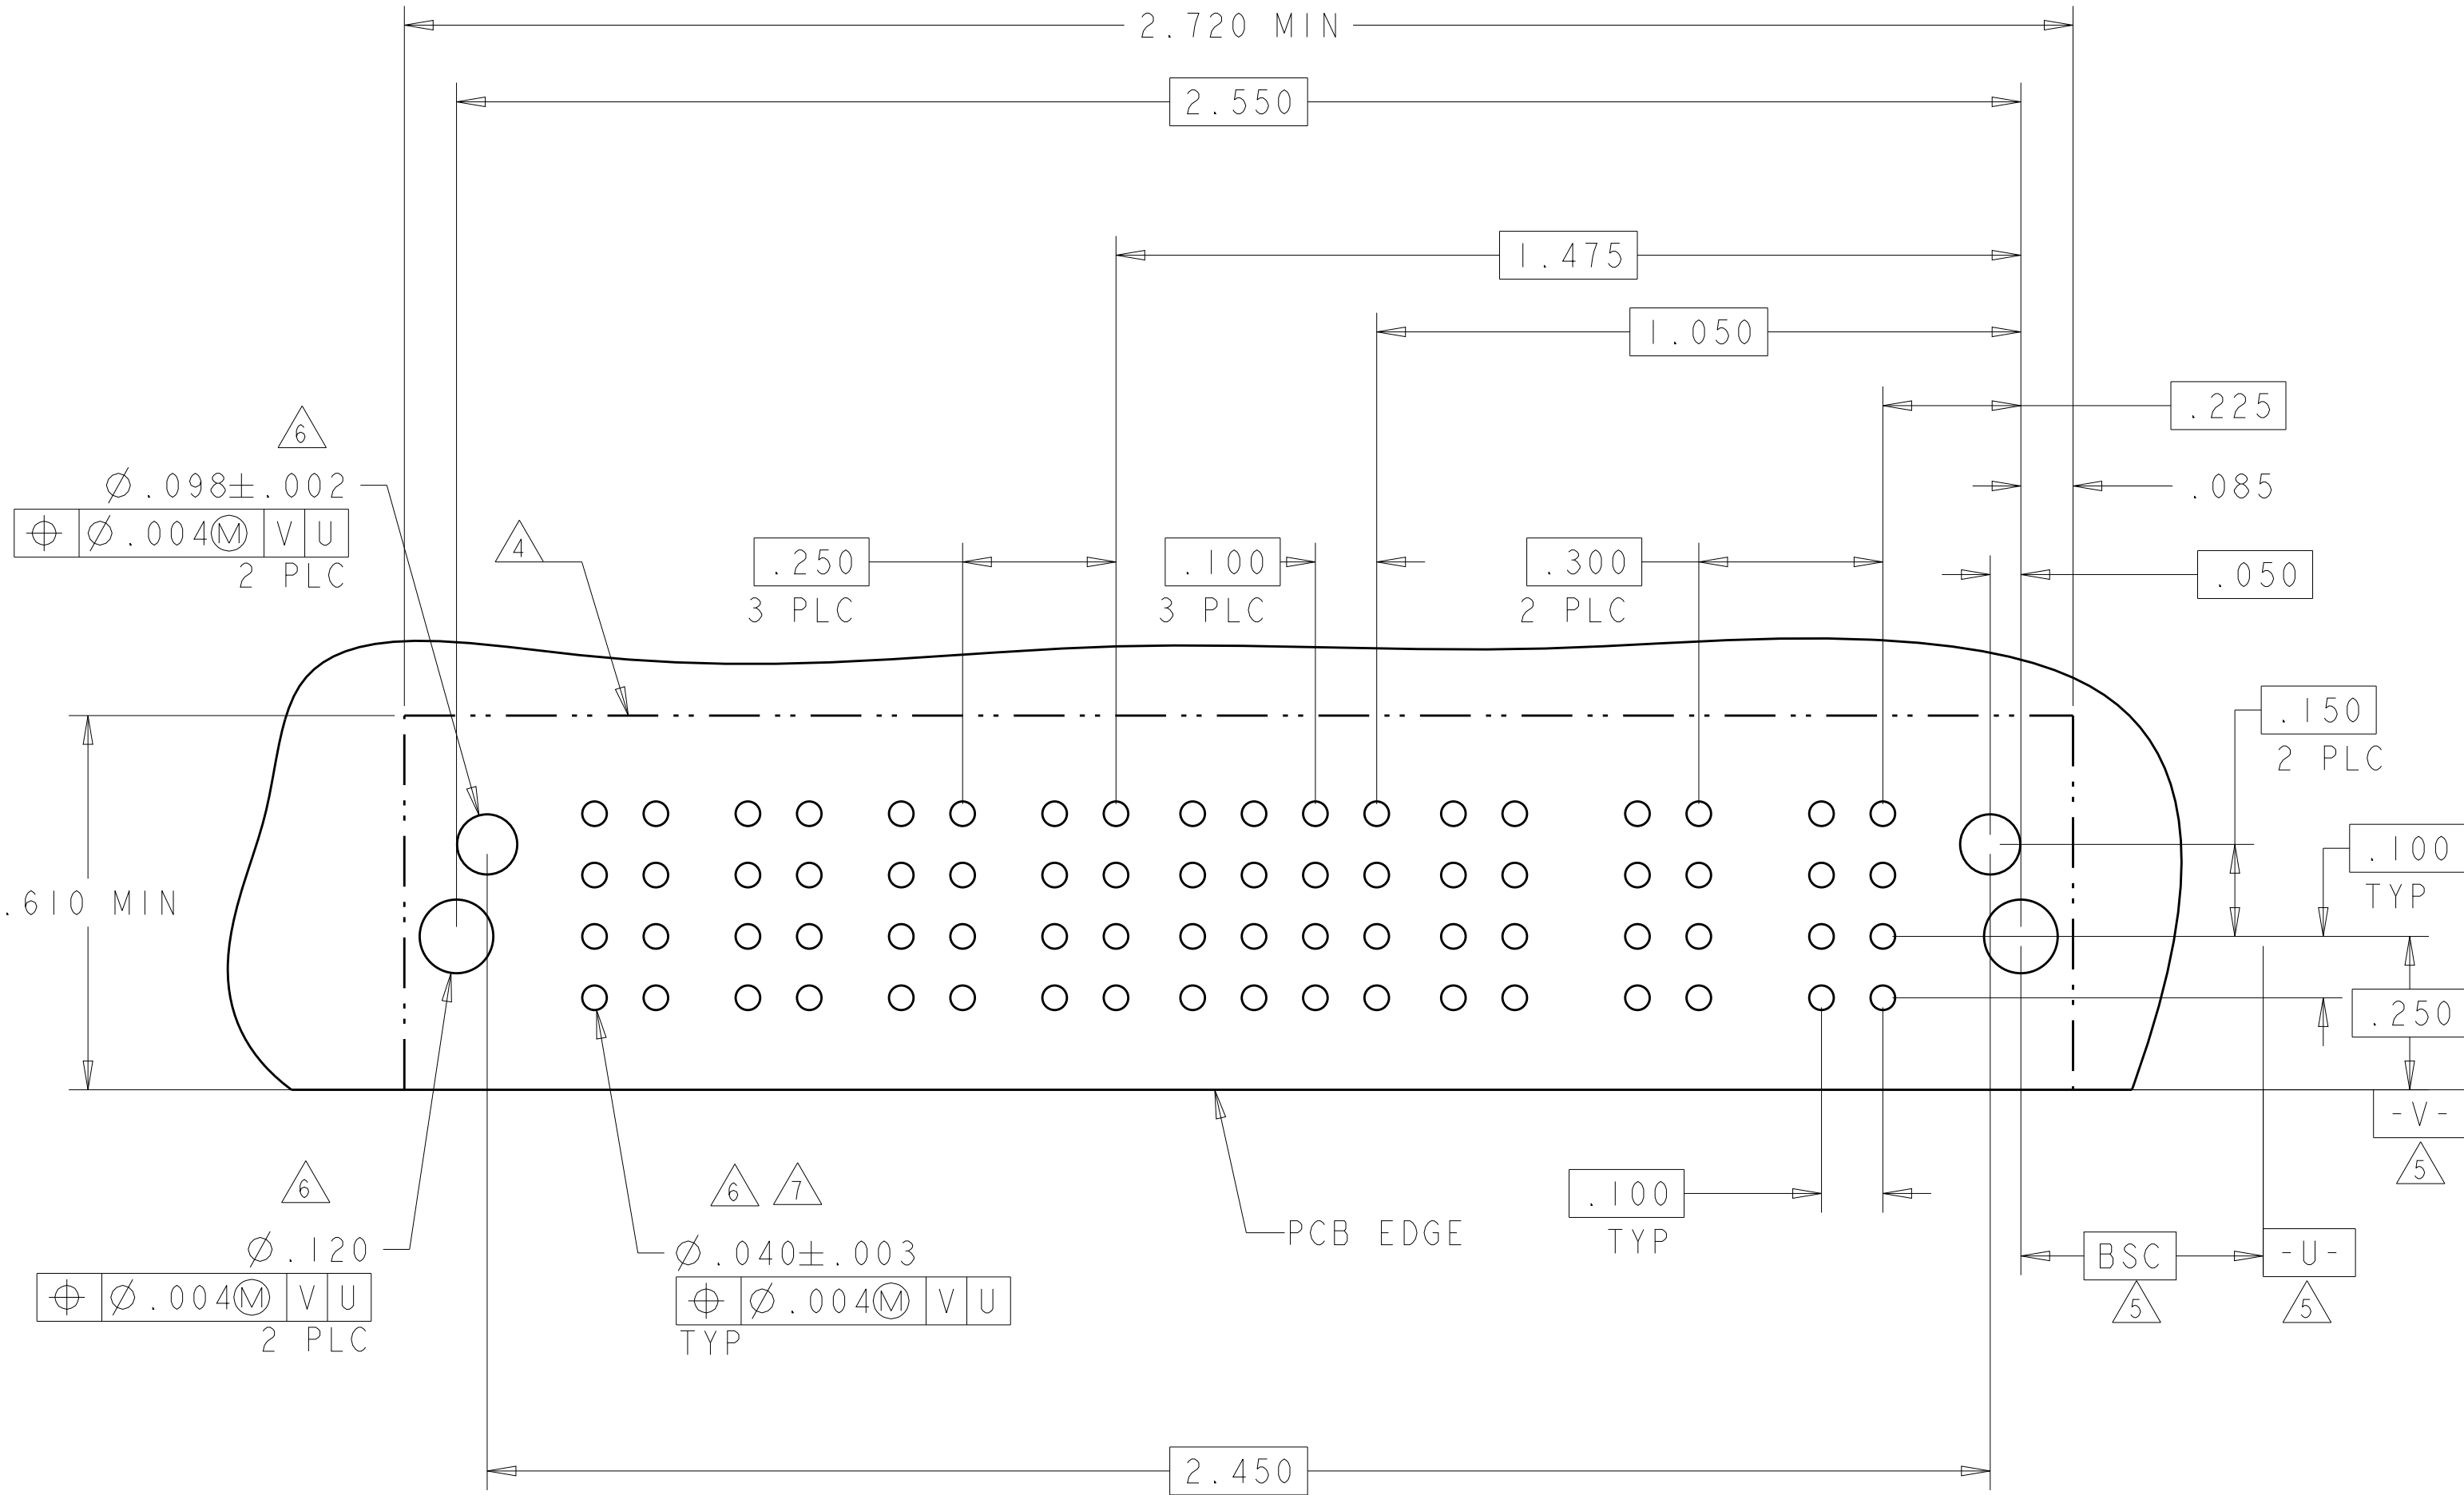

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.ZHOU	11OCT2007	TE Connectivity	
		CHK S.ZHAO	11OCT2007		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ±.1		PRODUCT SPEC	
		1 PLC ±.1		108-2292	
		2 PLC ±.01		APPLICATION SPEC	
		3 PLC ±.005		114-13251	
		4 PLC ±.0020		WEIGHT	
		ANGLES ±2°		Customer Drawing	
MATERIAL		FINISH		SCALE	
-		-		4:1	
				SHEET	
				16	
				OF	
				20	
				REV	
				K2	

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER	SIGNAL						POWER									
				P8	6	5	4	3	2	1	P7	P6	P5	P4	P3	P2		P1	
2-6450870-8	D	C	RA	H	H	H	H	H	H	RM	RM	RM	RM	RM	RM	RA	D		
	G			G	G	G	G	G											
	F			F	F	F	F	F											
	E			E	E	E	E	E											
7ACP + 24S + 1P		HD																HD	

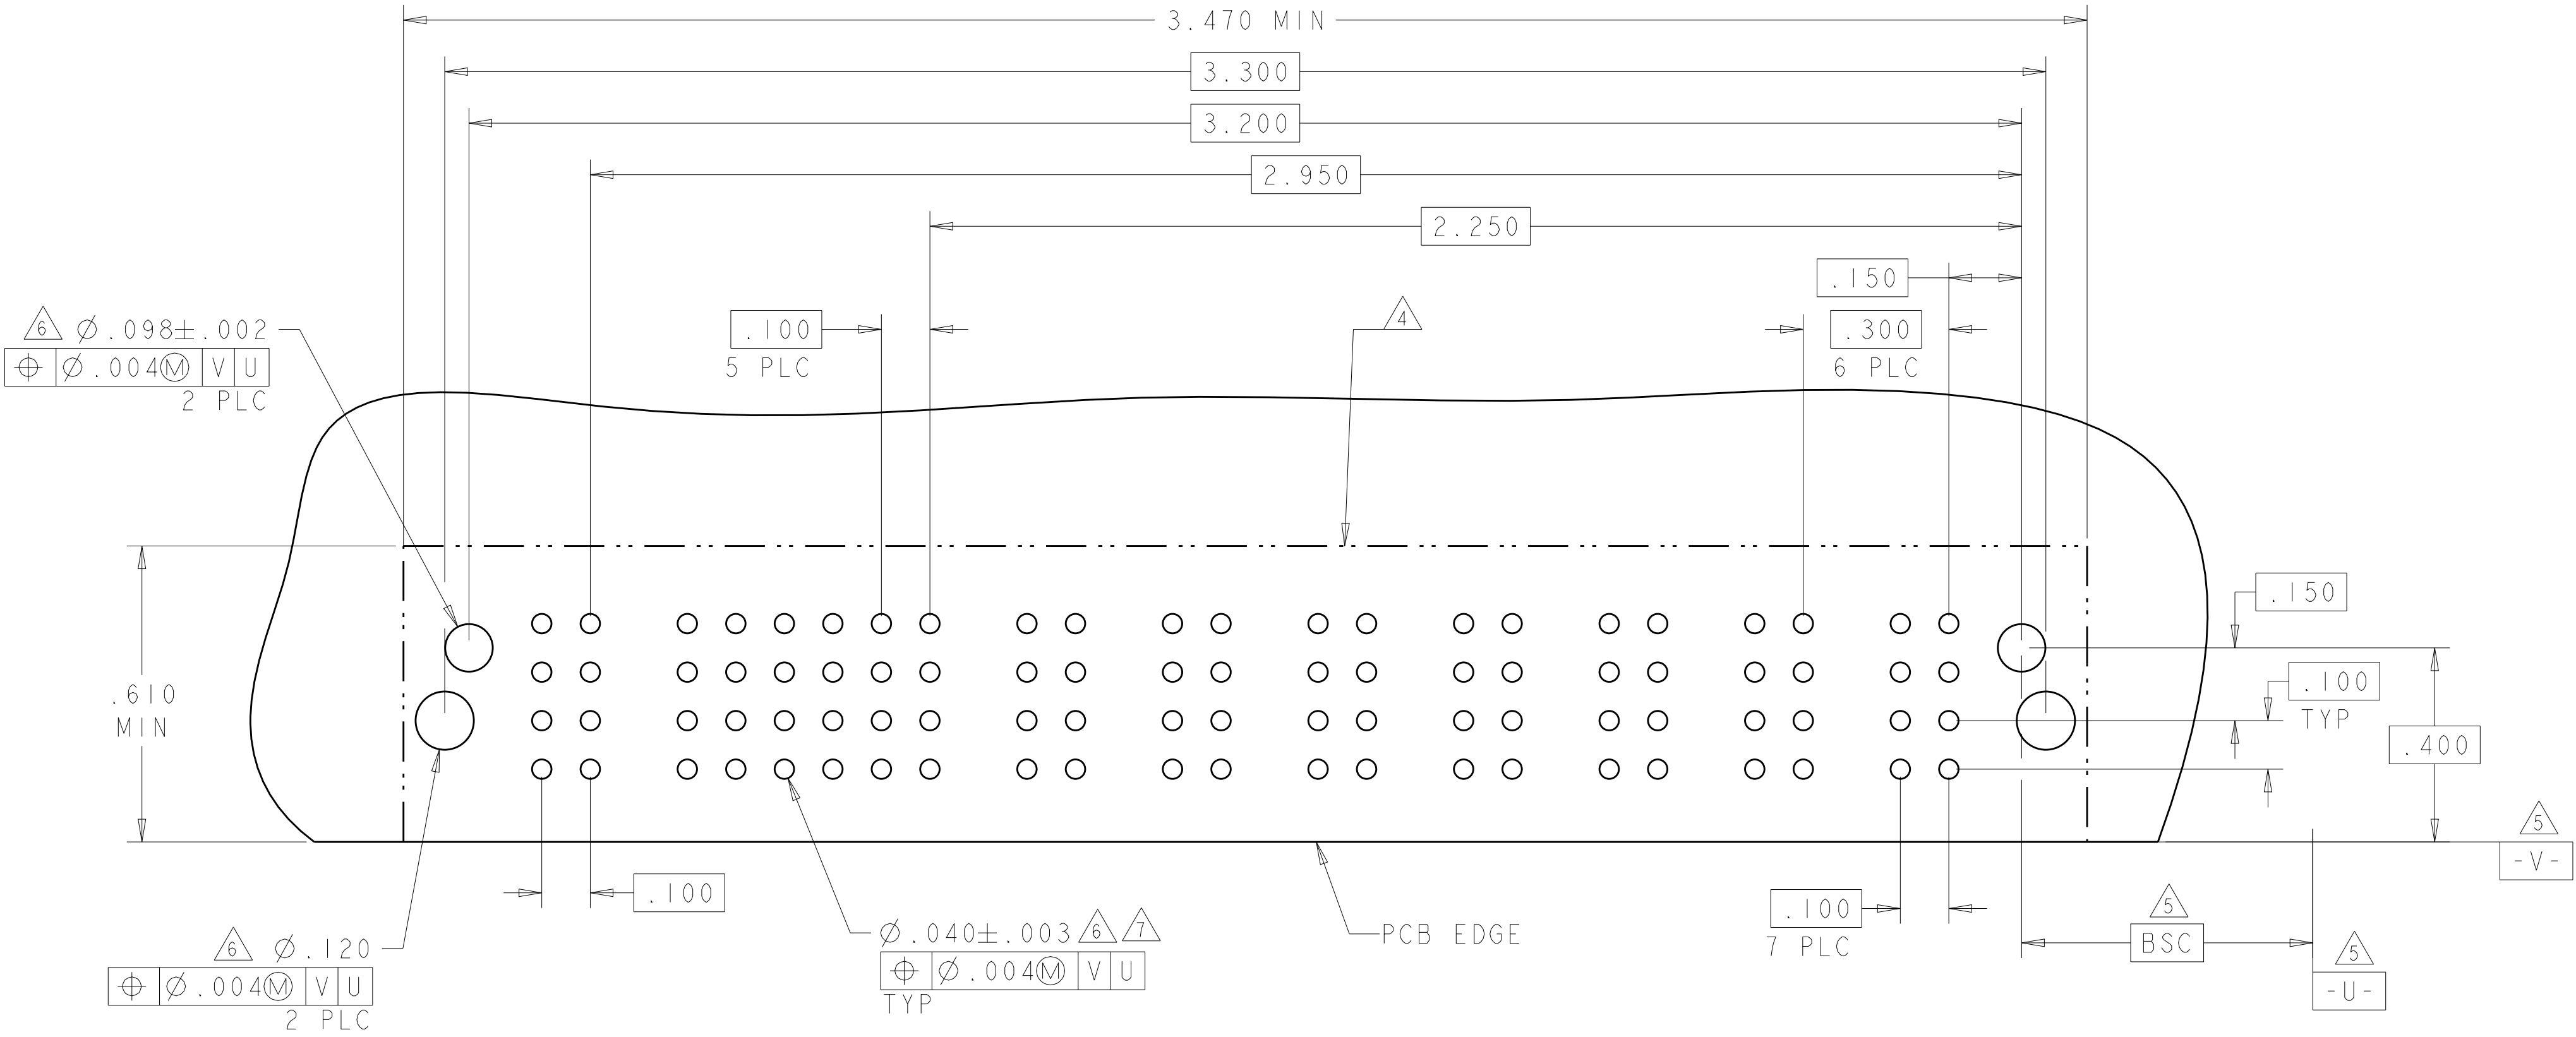

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

C. ZHOU

11OCT2007

CHK

S. ZHAO

11OCT2007

APVD

S. ZHAO

-

DIMENSIONS:

INCHES

0 PLC

1 PLC

2 PLC

3 PLC

4 PLC

ANGLES

FINISH

±"

±.1

±.01

±.005

±.0020

±2°

-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

PRODUCT SPEC

APPLICATION SPEC

114-13251

WEIGHT

-

MATERIAL

-

Customer Drawing

NAME

RIGHT ANGLE RECEPTACLE SHORT END MODULE MUTLI-BEAM XLE

SIZE

A1

CAGE CODE

00779

DRAWING NO

C=6450870

RESTRICTED TO

-

SCALE

4:1

SHEET

17

OF


20

REV

K2

TE Connectivity

PART NUMBER	ROWS		POWER			SIGNAL				POWER			
			P6	P5	P4	4	3	2	1	P3	P2	P1	
3-6450870-0	D C B A												
3P + 16S + 3P													


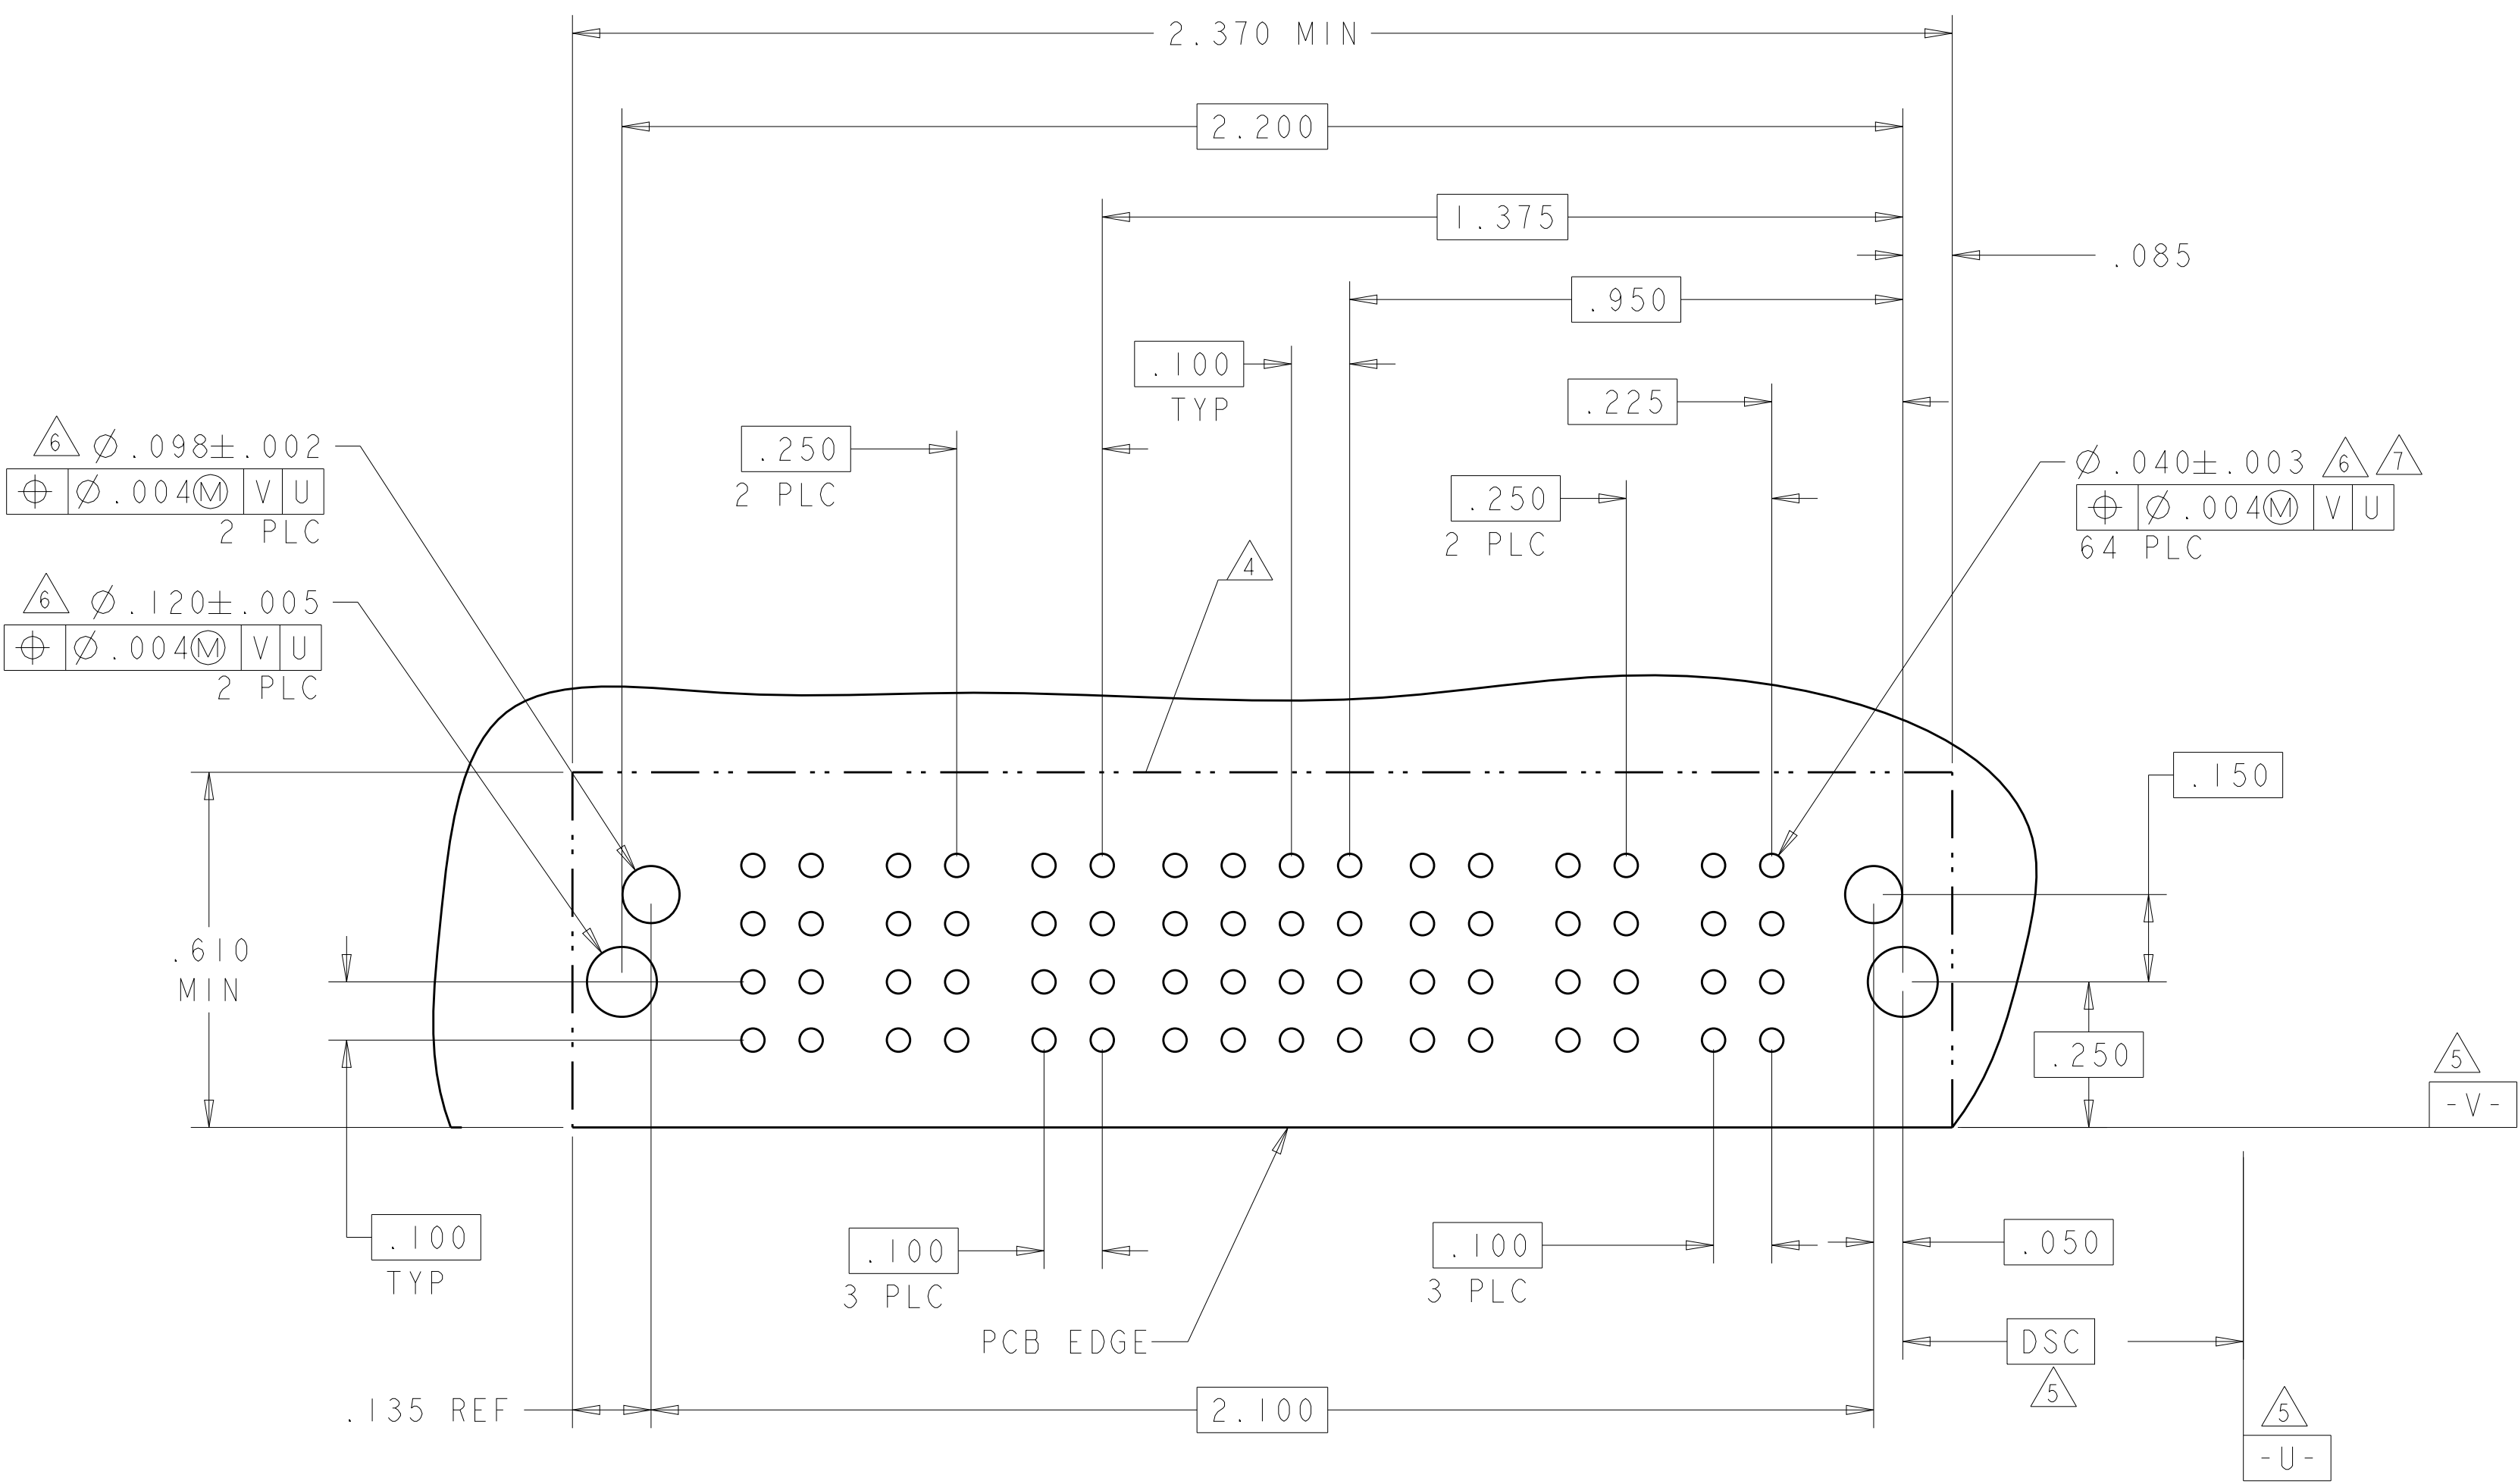
4805 (3/11)

LOC		DIST		REVISIONS					
ES		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
					-	SEE SHEET I	-	-	-

PART NUMBER	ROWS		LOW POWER				SIGNAL			LOW POWER			
			LP7	LP6	LP5	LP4	3	2	1	LP3	LP2	LP1	
3-6450870-1	D		LM	LM	LM	LM	H	H	H	LM	LM	LM	
	C						G	G	G				
	B						F	F	F				
	A						E	E	E				
3LP + 12S + 4LP													


PART NUMBER	ROWS			POWER	SIGNAL											POWER				
				P5	12	11	10	9	8	7	6	5	4	3	2	1	P4	P3	P2	
3-6450870-2	D		RM	H		H	H		H		H	H			H	RM	RM	RM	RM	
	C			G			G		G	G	G	G								
	B			F		F	F		F		F	F	F							
	A			E			E		E	E	E	E	E							
4P + 48S + 1P																				


BLANK SIGNAL PINS ARE UNLOADED

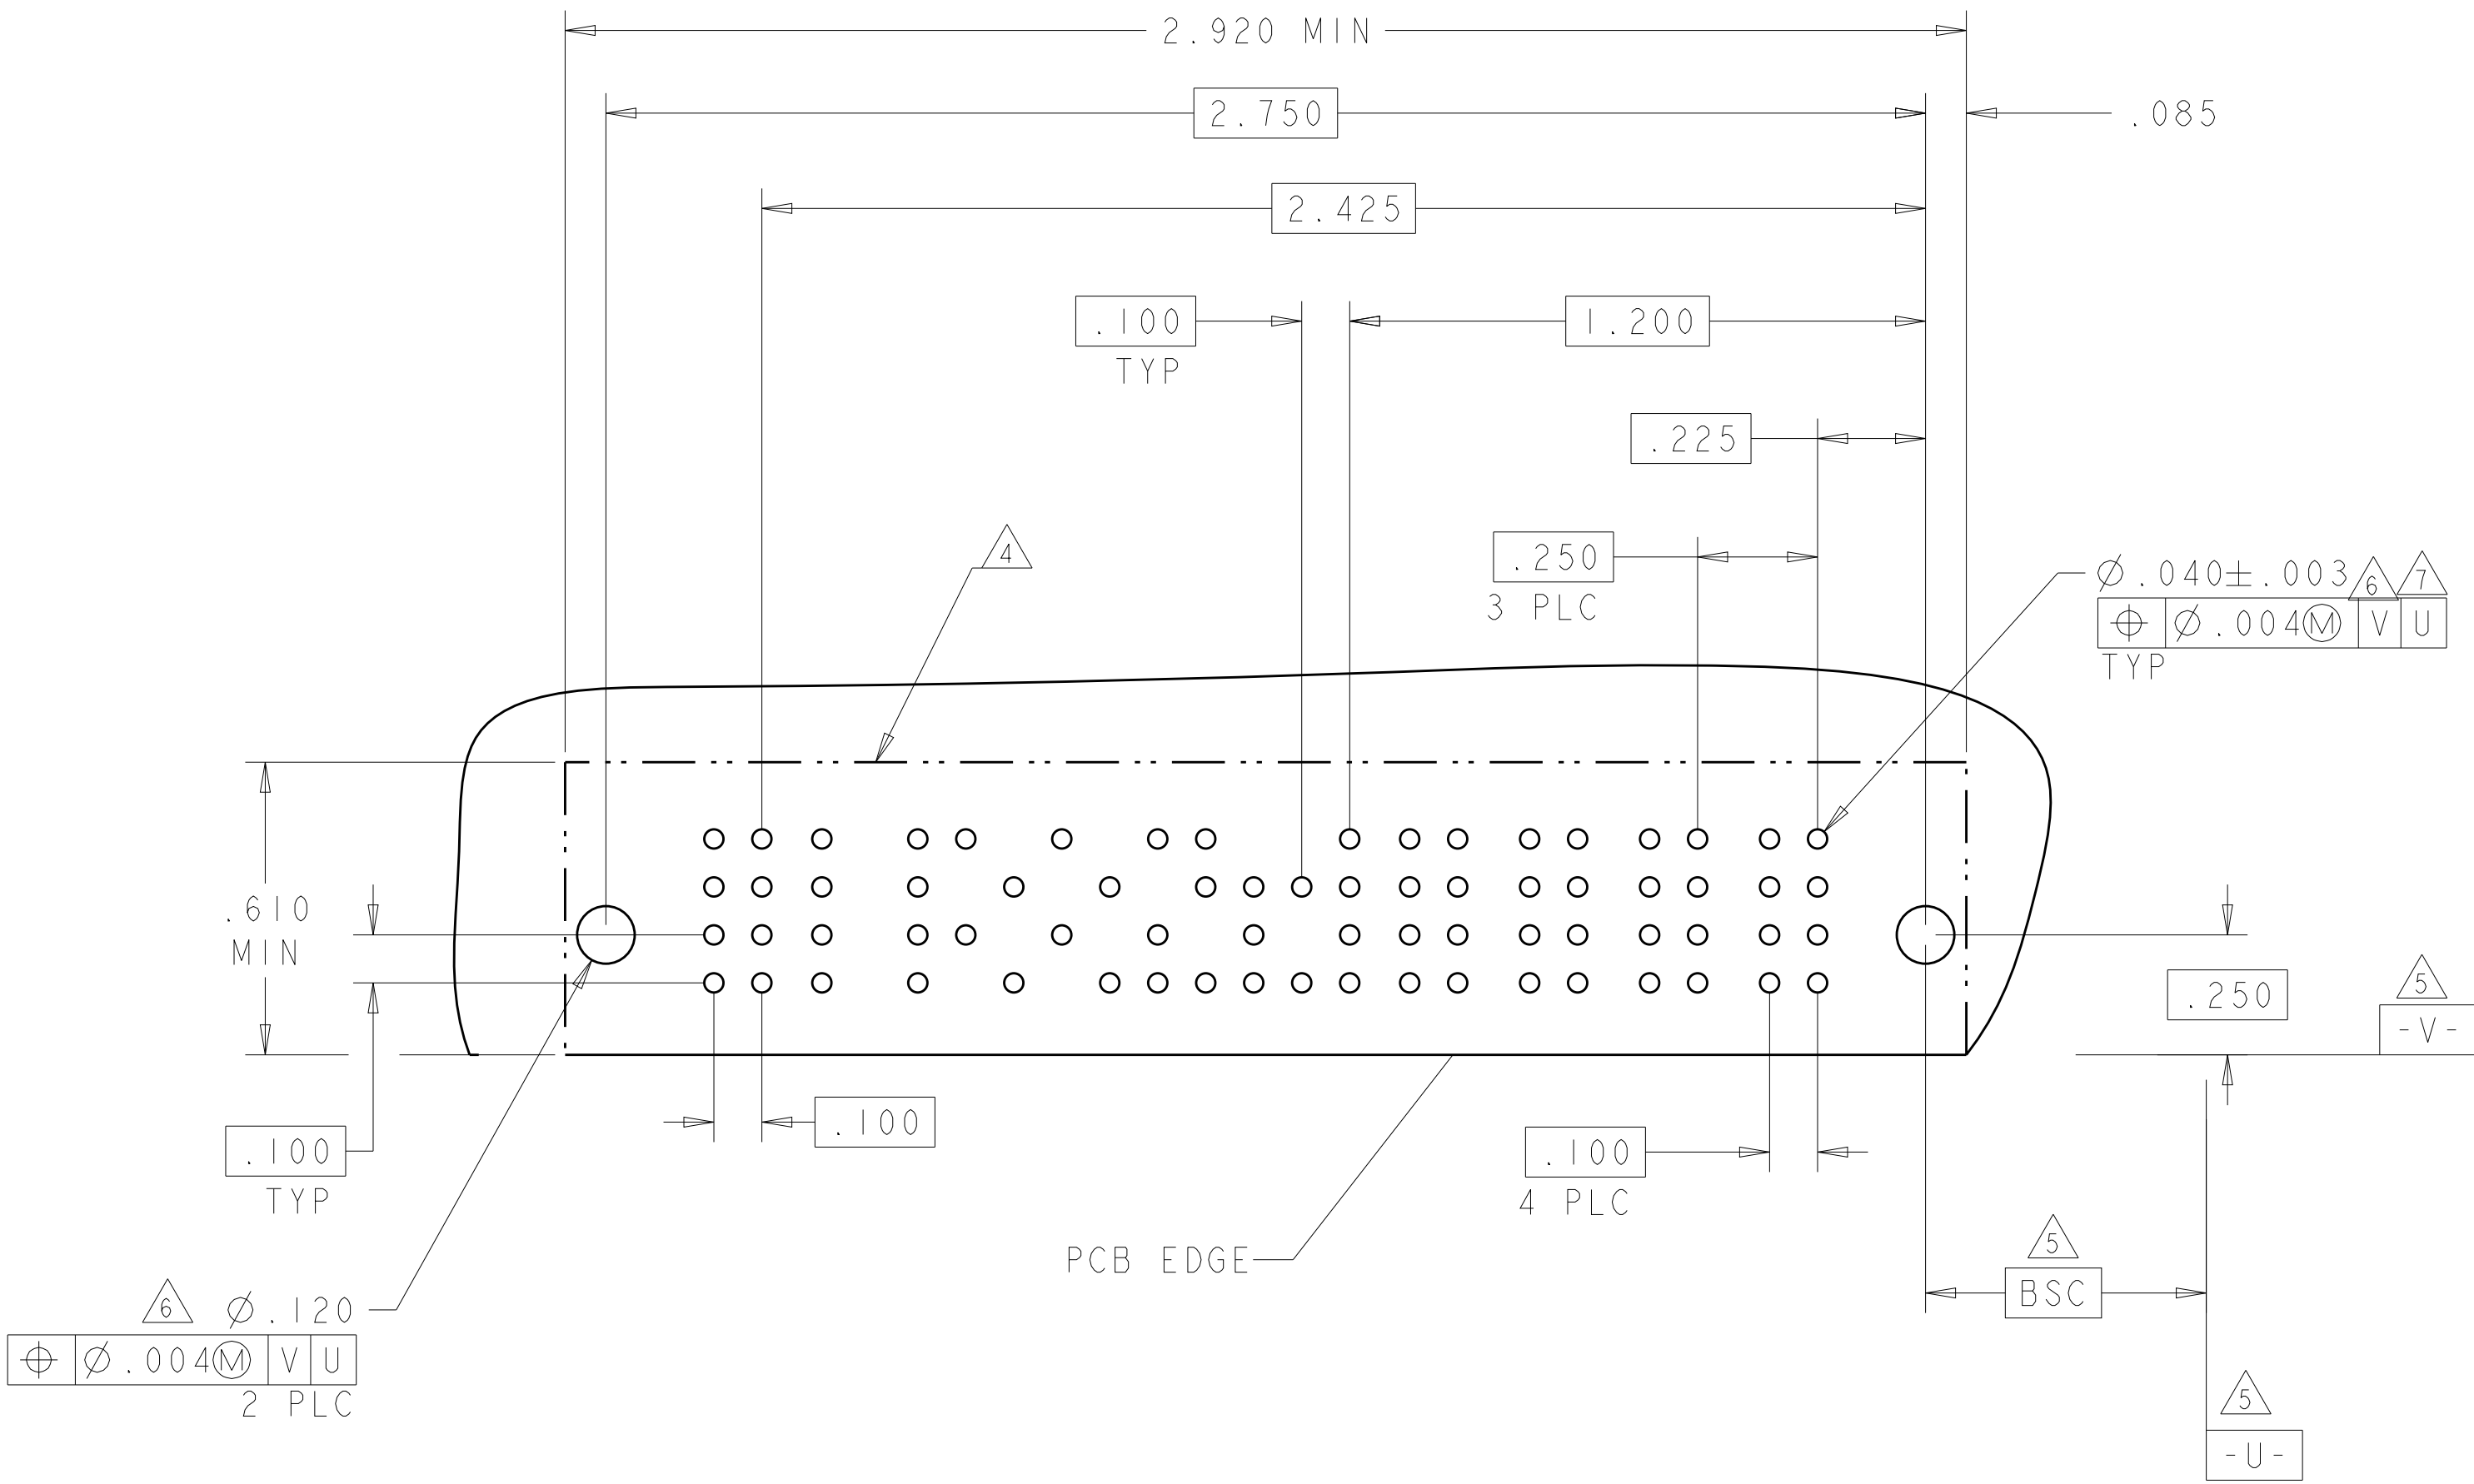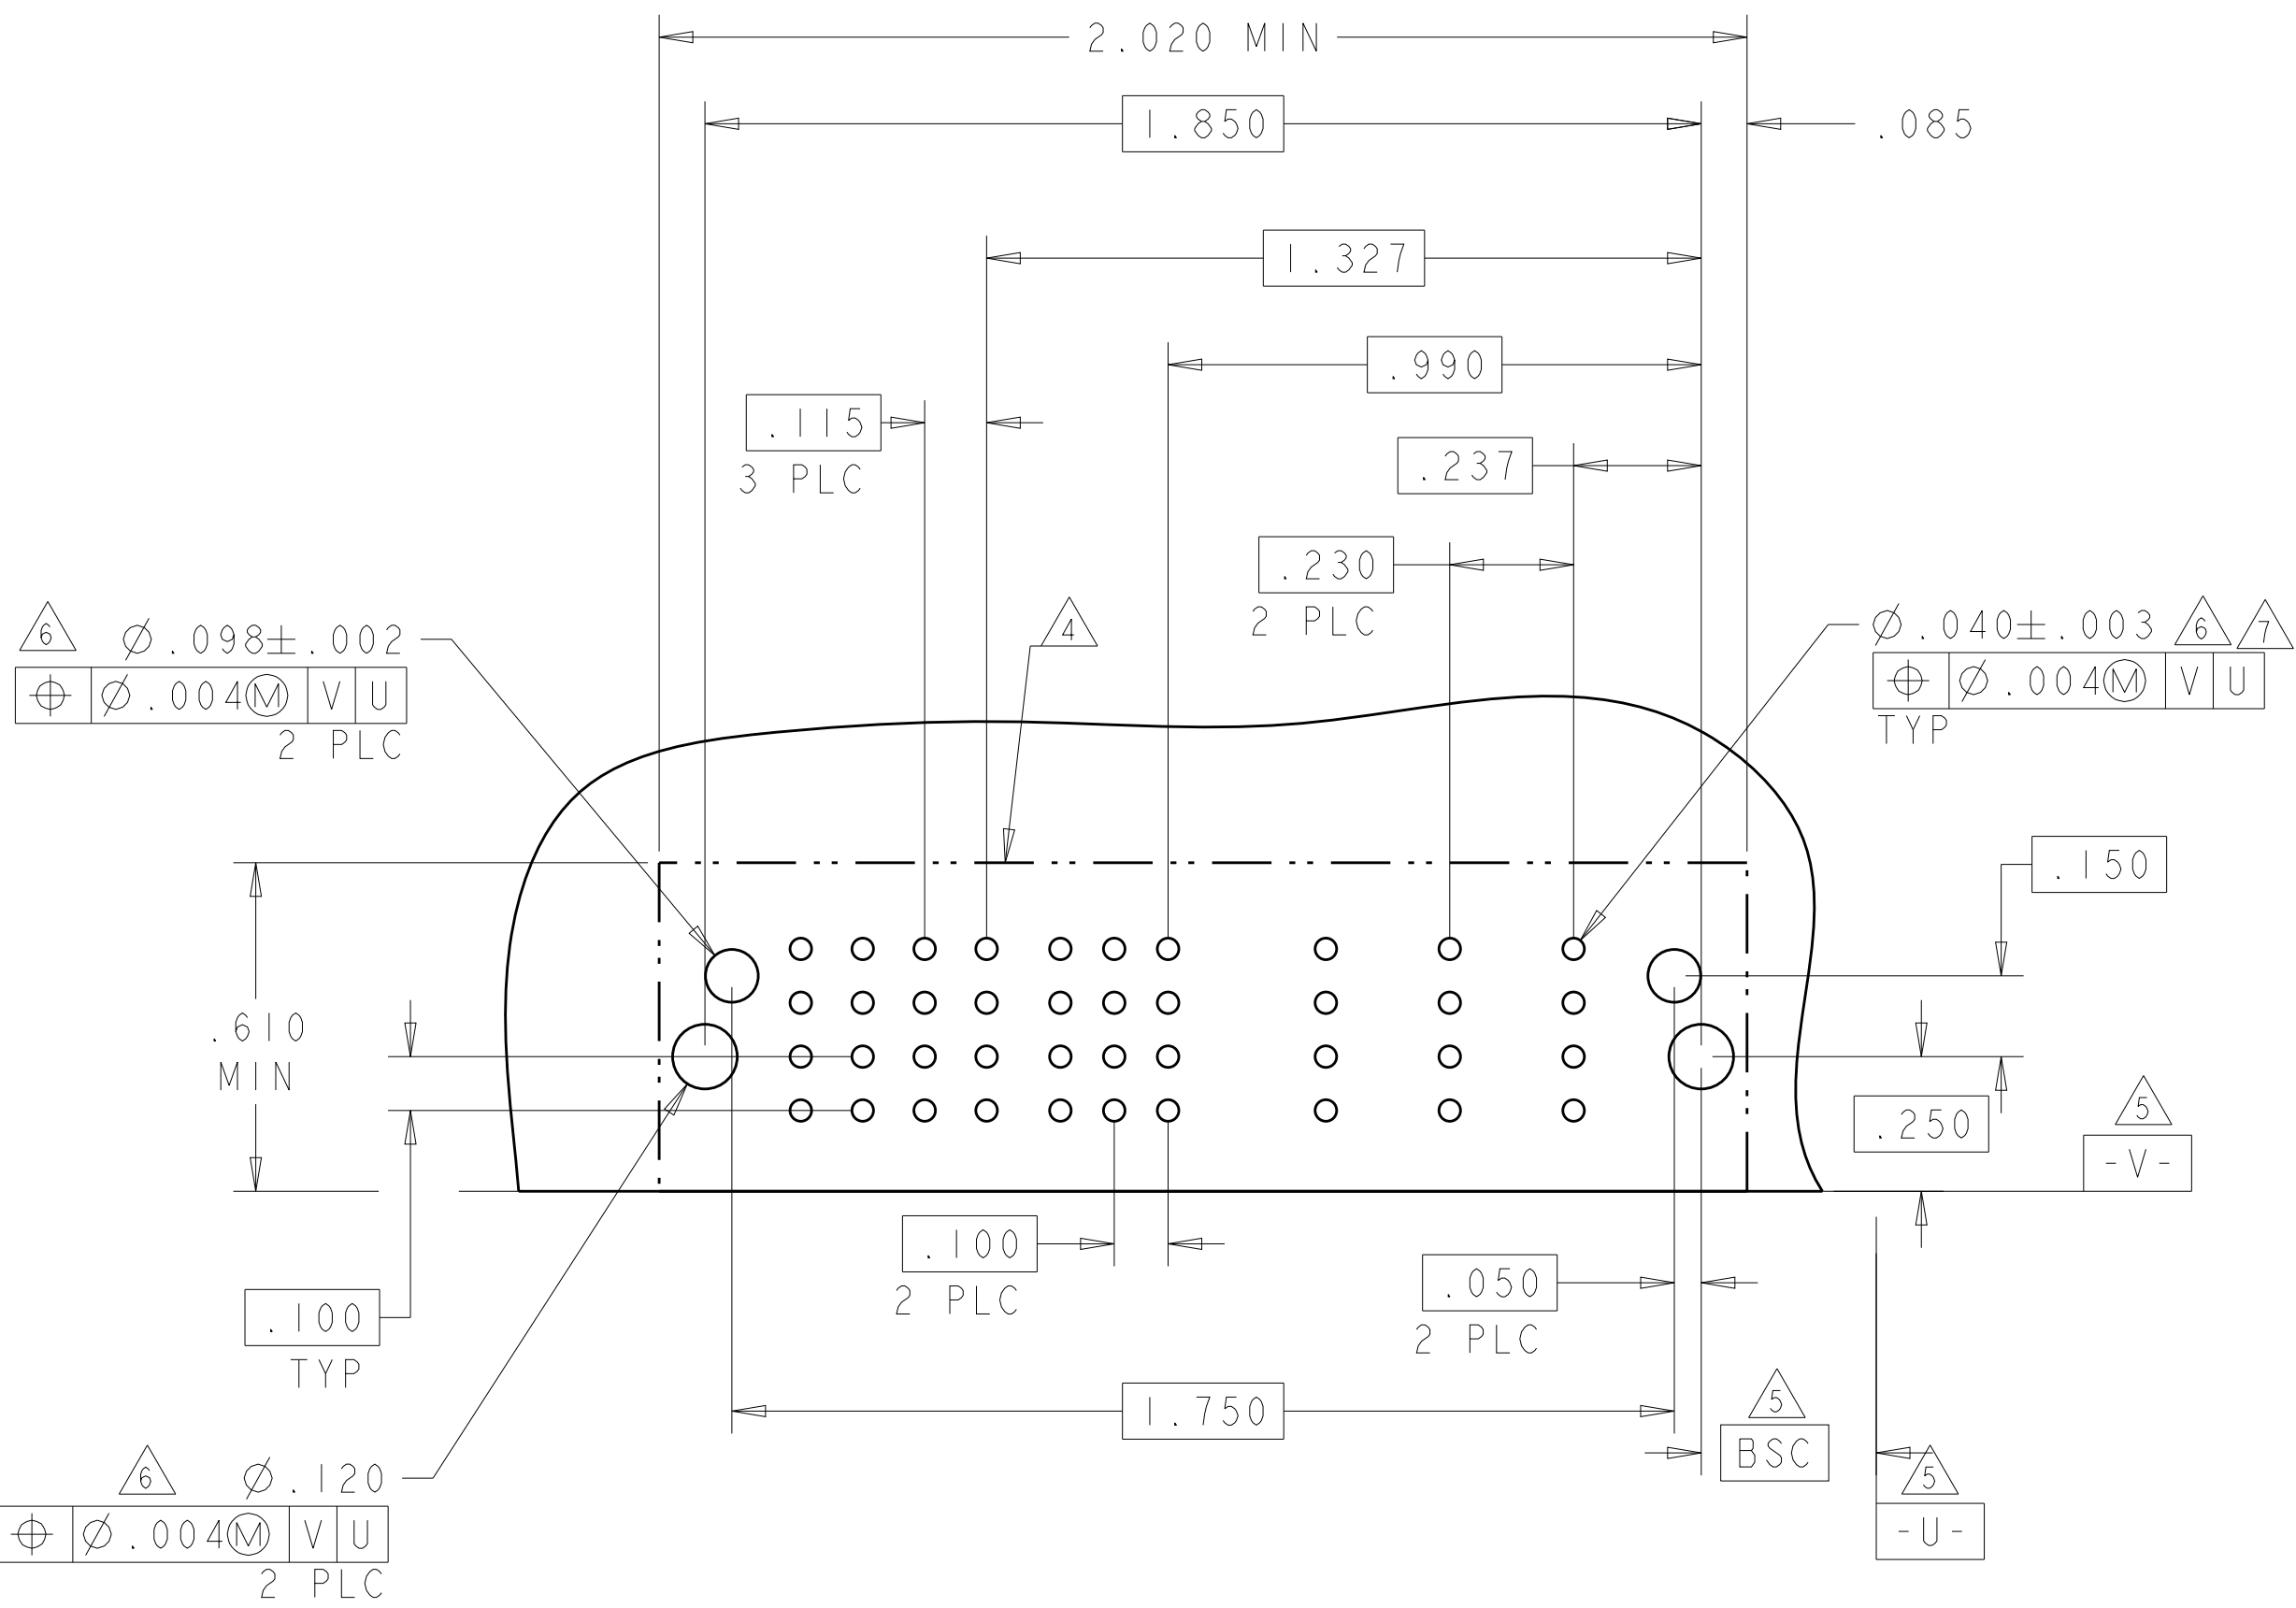

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS		LOW POWER	SIGNAL								LOW POWER	
			LP2	8	7	6	5	4	3	2	1	LPI	
3-6450870-4	D		LM	H	H	H	H	H	H	H	H	LM	
	C			G	G	G	G	G	G	G			
	B			F	F	F	F	F	F	F			
	A			E	E	E	E	E	E	E			
ILP + 32S + ILP													

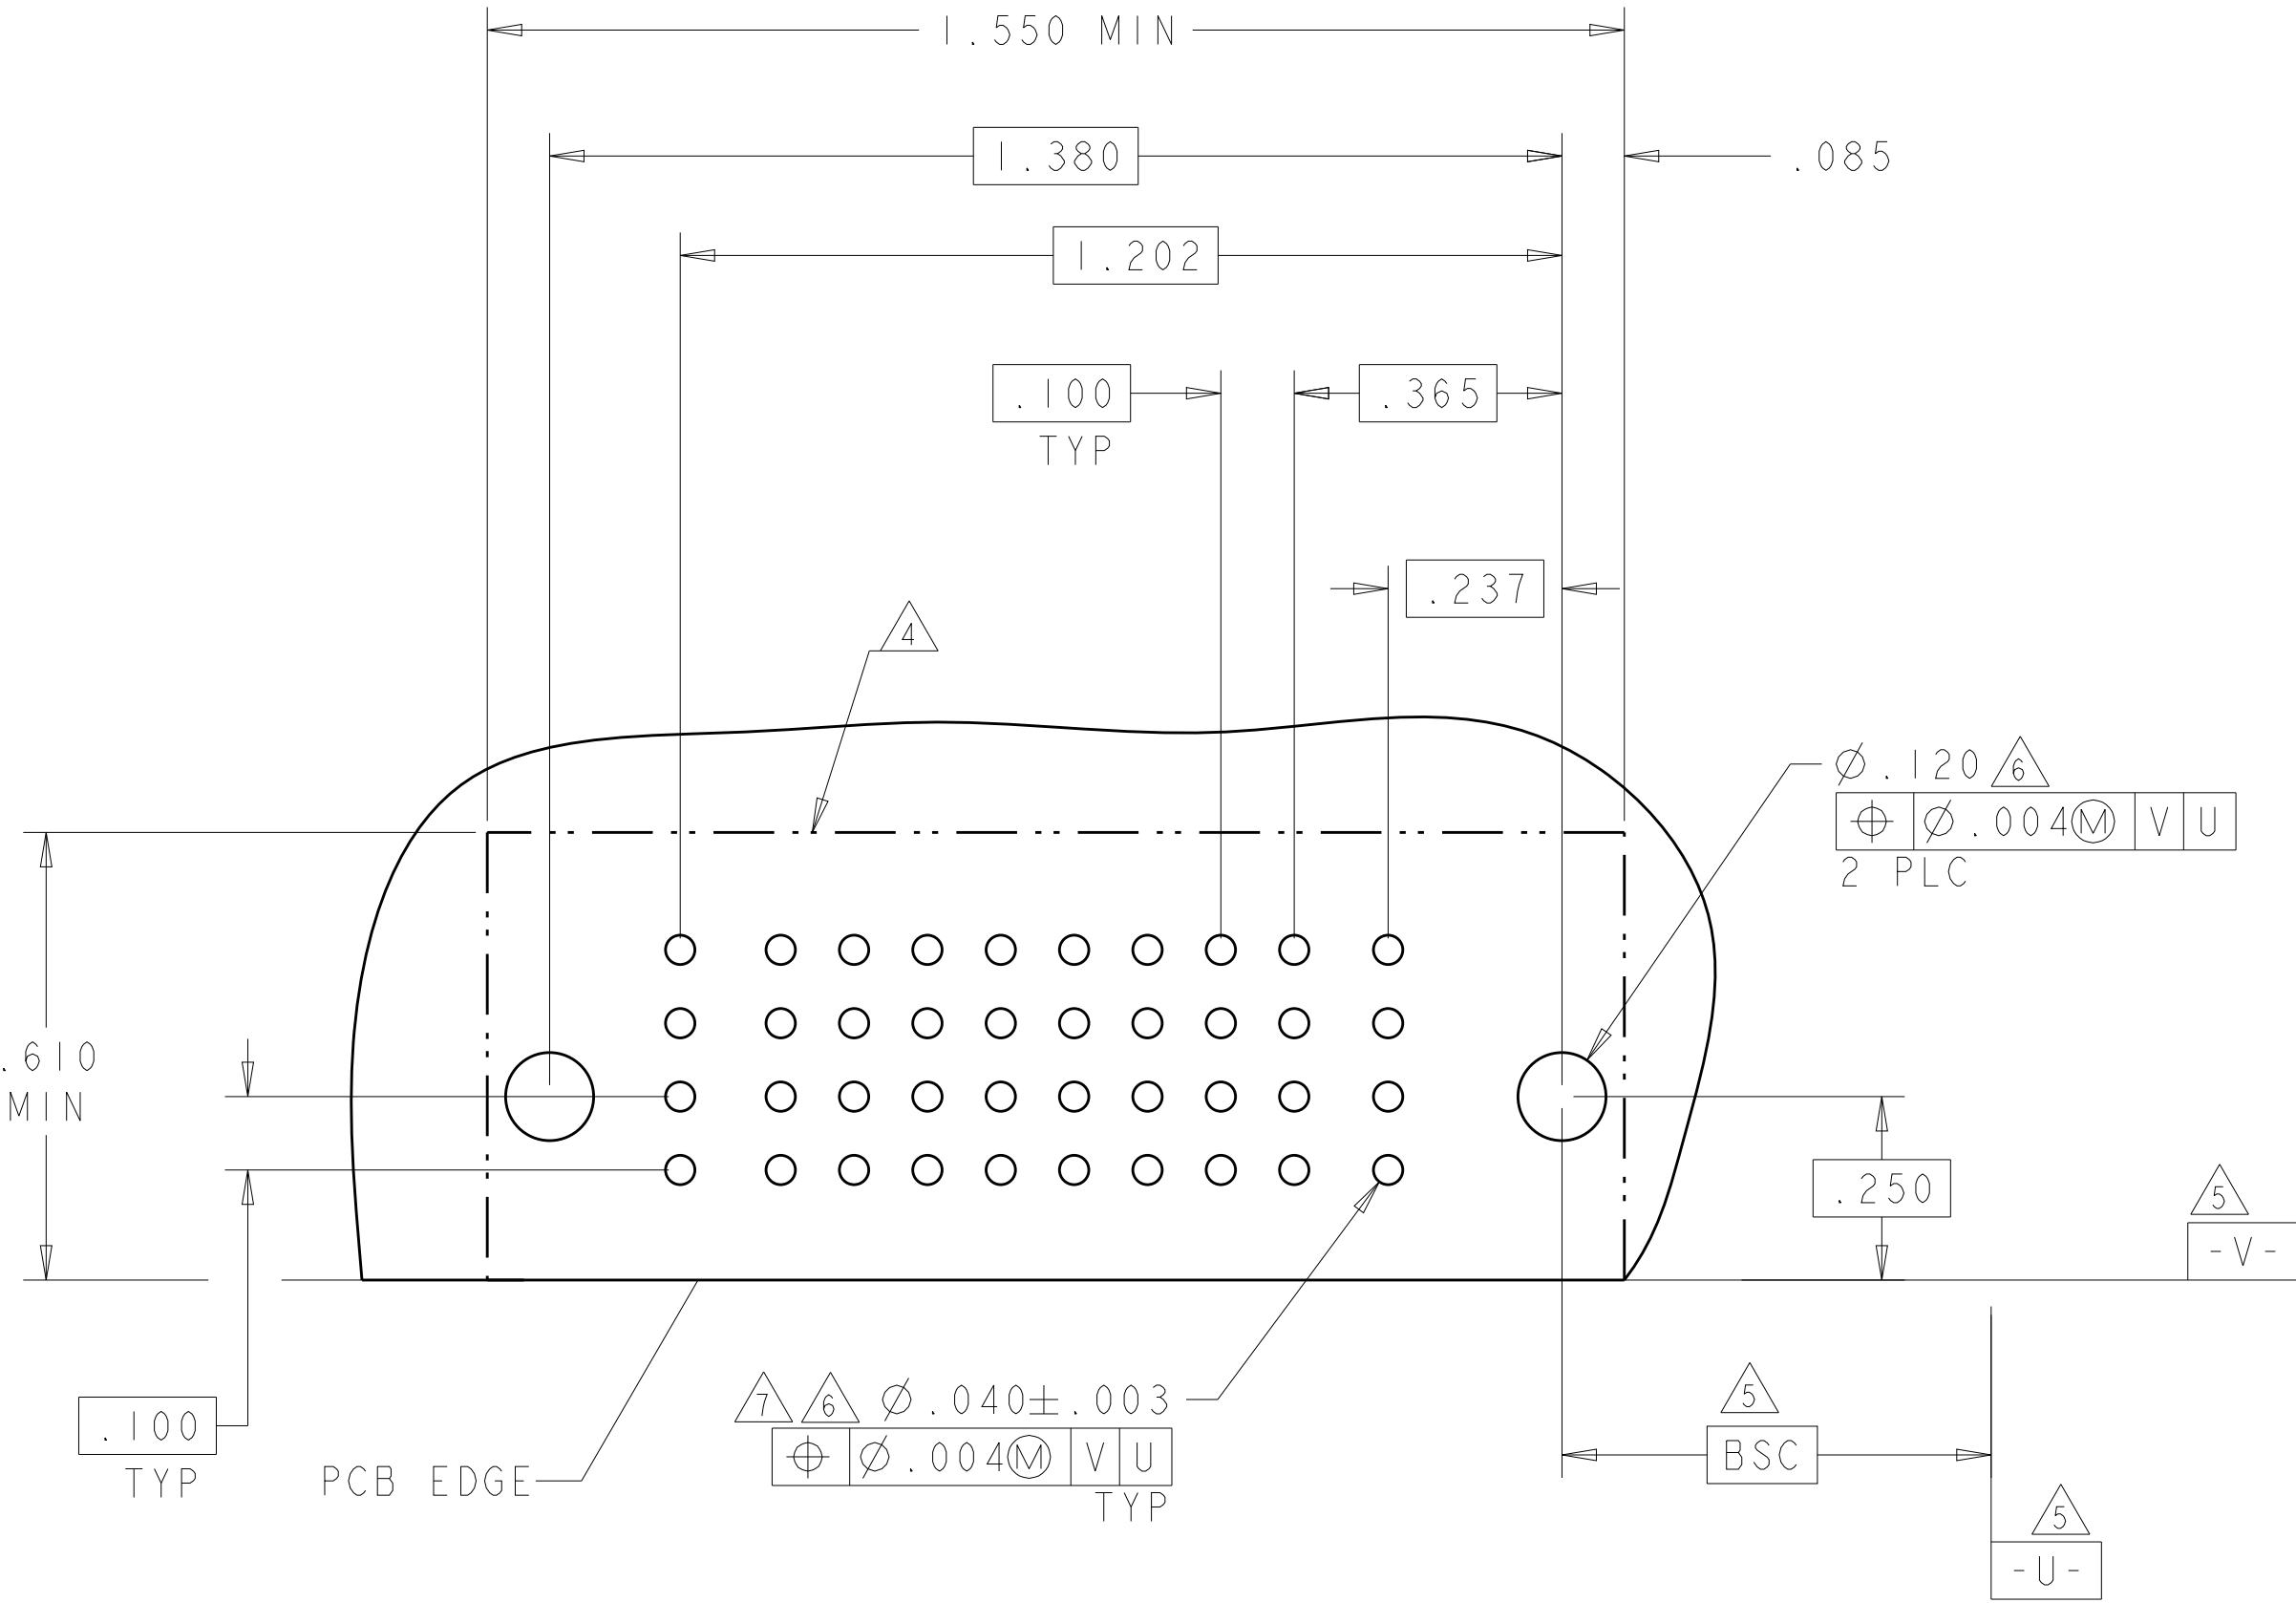

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	C. ZHOU	11OCT2007	 TE Connectivity	
		CHK	S. ZHAO	11OCT2007		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	RIGHT ANGLE RECEPTACLE SHORT END MODULE MULTI-BEAM XLE	
		0 PLC ±.1		PRODUCT SPEC		
		1 PLC ±.1		108-2292		
		2 PLC ±.01		APPLICATION SPEC		
		3 PLC ±.005		114-13251	SIZE	CAGE CODE
		4 PLC ±.0020		WEIGHT	DRAWING NO	RESTRICTED TO
		ANGLES ±2°			A1	00779C=6450870
MATERIAL	-	FINISH			SCALE	4:1
				Customer Drawing	SHEET	20 OF 20
					REV	K2

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9