
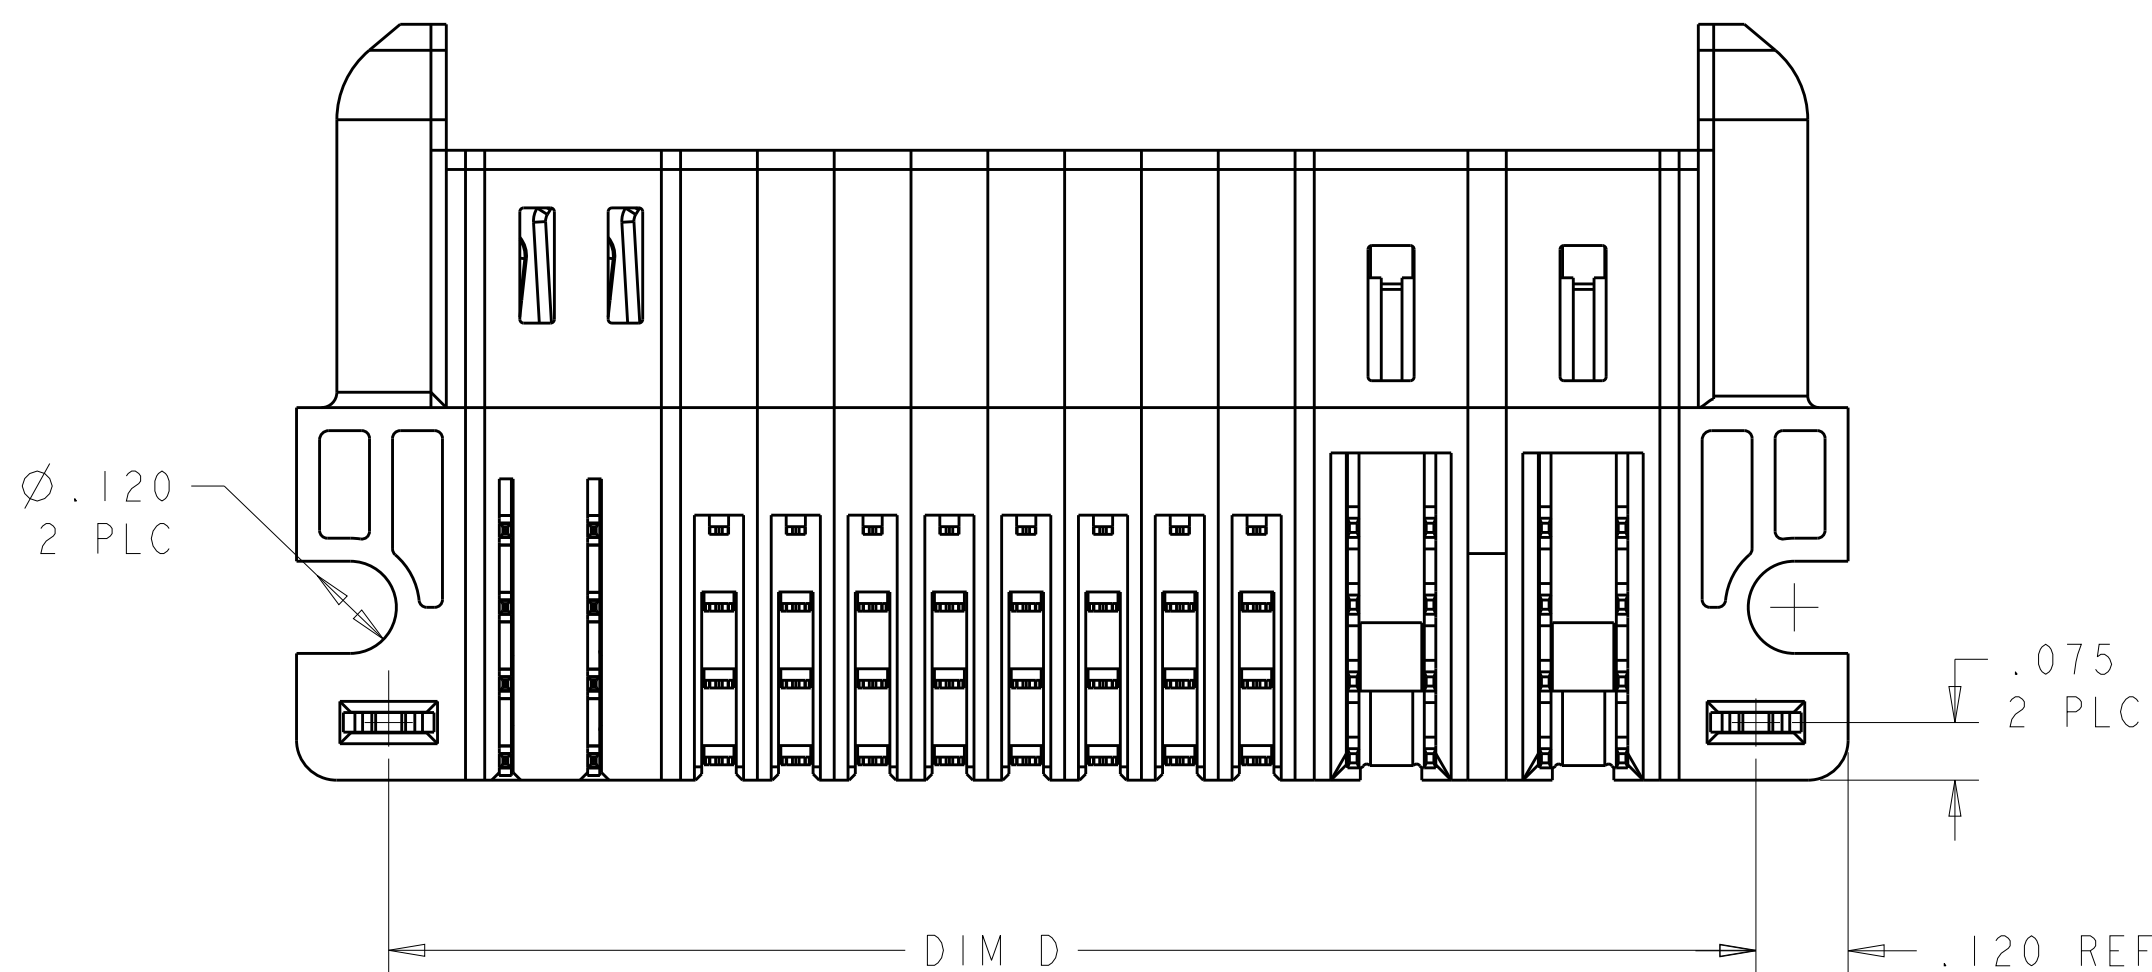
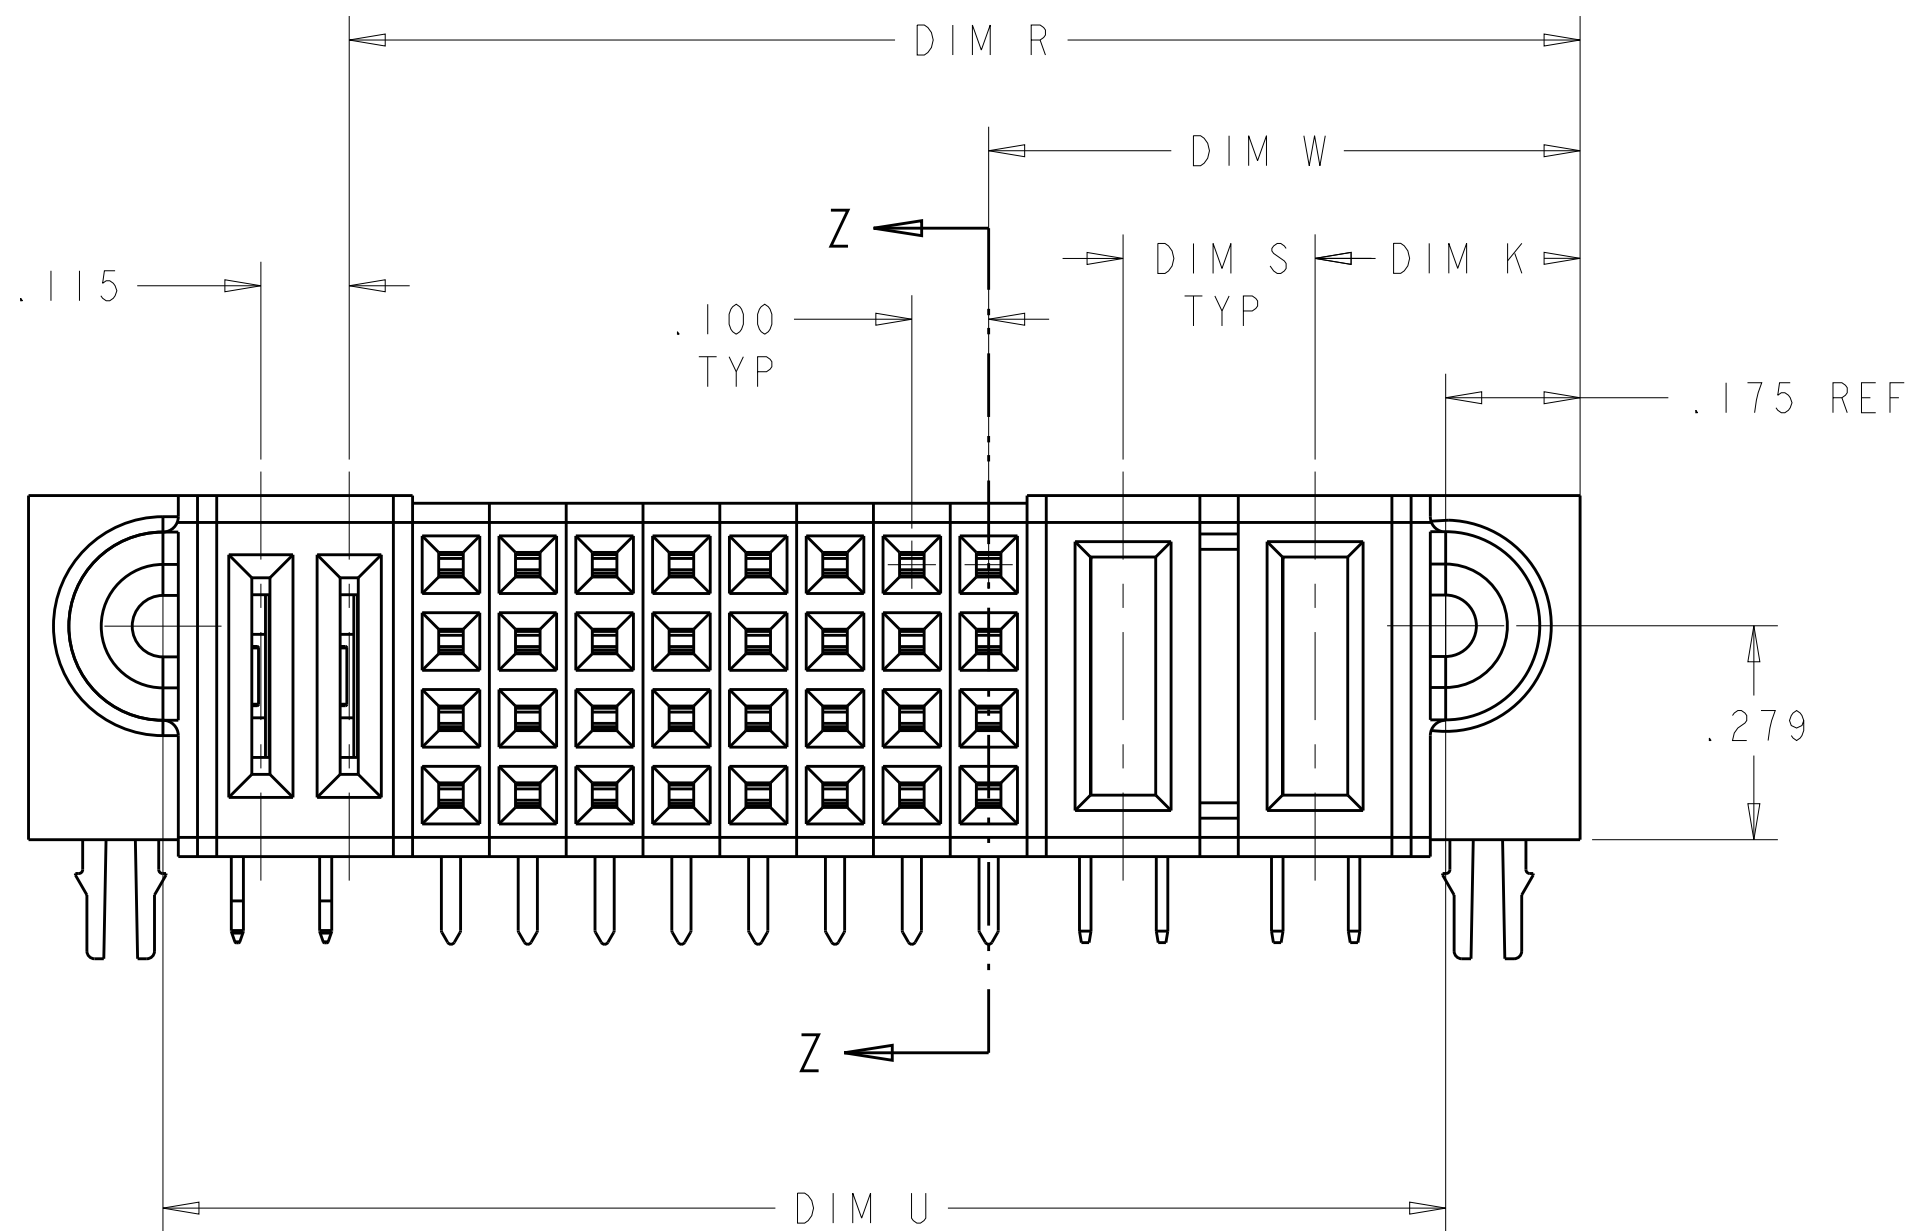


D


C

B

A

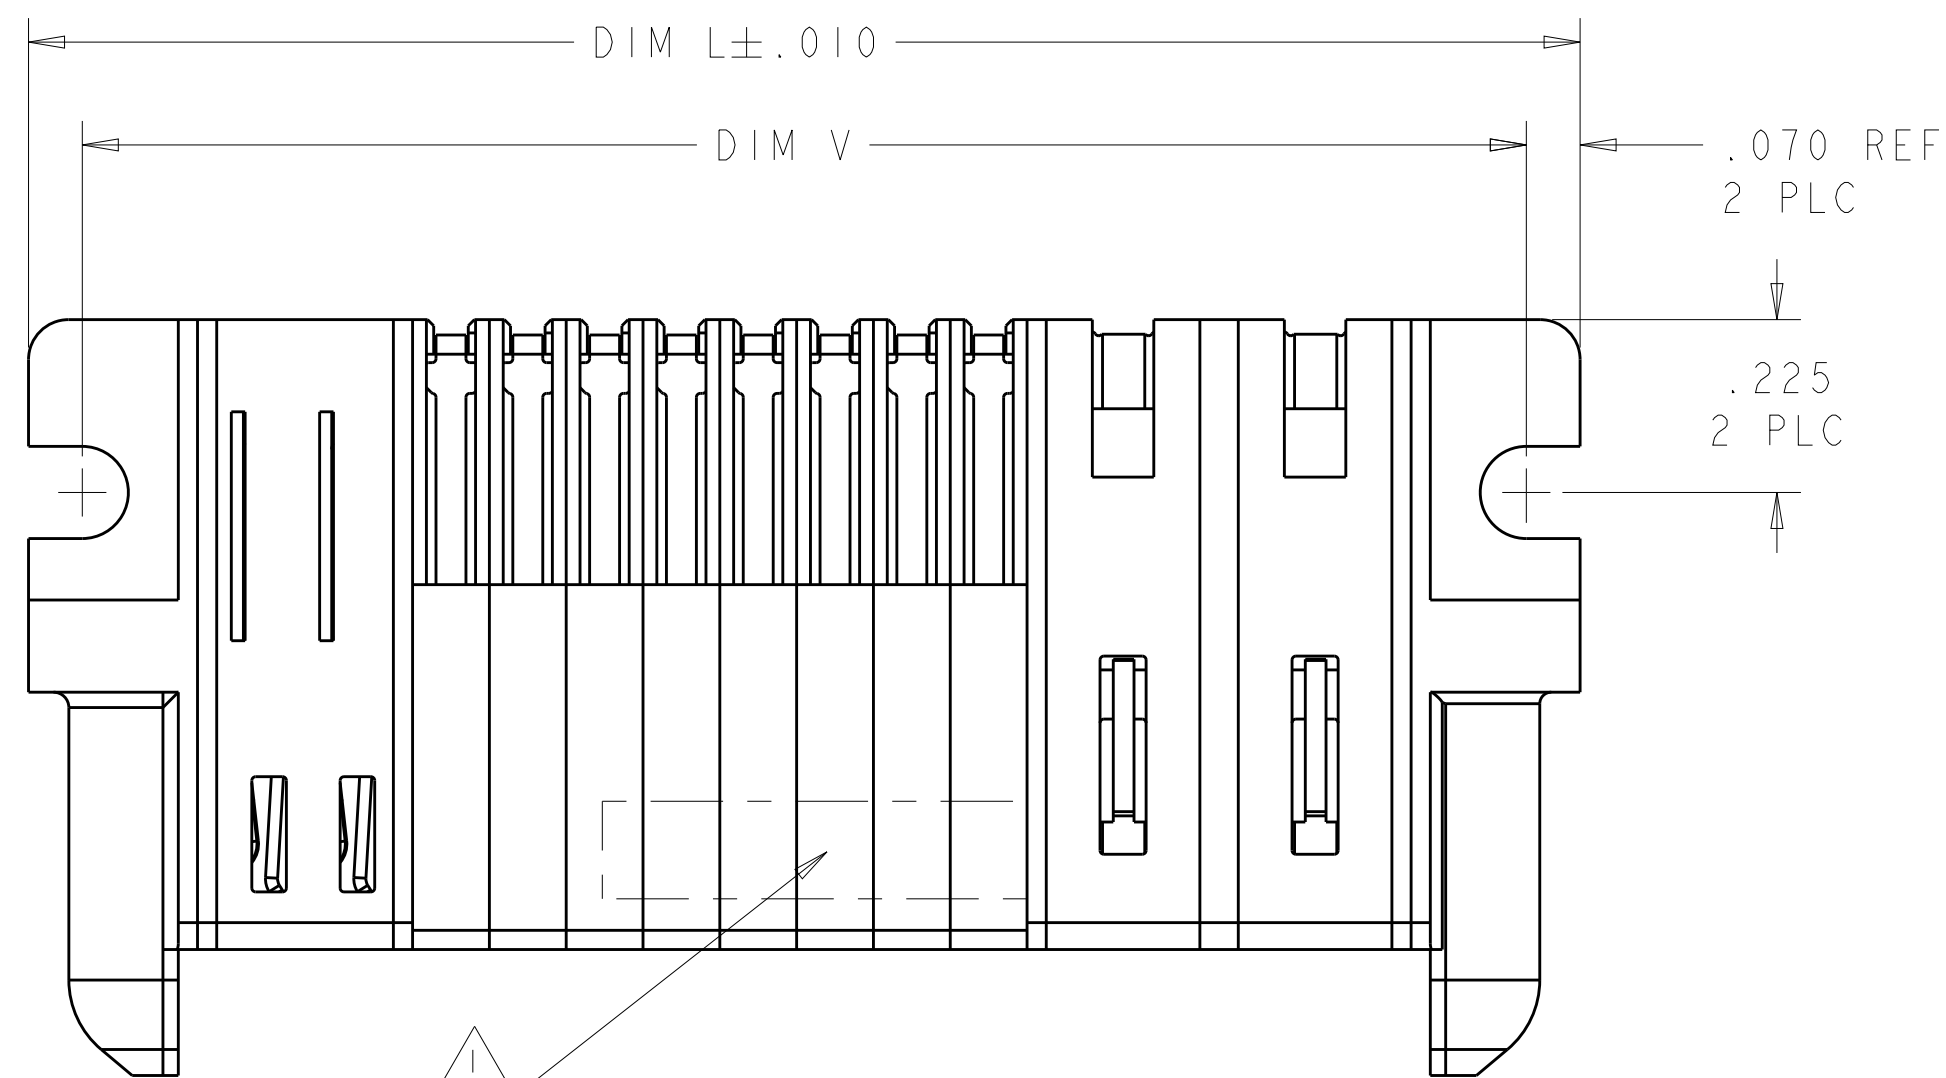

- 1 "AMP", PART NUMBER, AND DATECODE TO BE MARKED IN AREA SHOWN.
PARTS UNDER 2.00 LONG MAY BE MARKED ON BOTH SIDES.
- 2 MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC,BLACK, UL94 V-0
SIGNAL CONTACT - COPPER ALLOY
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY)
- 3 PLATING :NOBLE METAL PLATING AT CONTACT FUNCTIONAL AREA OF
POWER CONTACT AND SIGNAL CONTACT
- 4 MECHANICAL CONNECTOR KEEP OUT ZONE.
- 5 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 6 PCB - HOLE DIAMETERS ARE FINISHED HOLE SIZE.
- 7 PCB - .0453±.0010 DRILLED HOLES PLATED WITH .0003 MIN Sn
OVER .001 TO .003 Cu PLATING TO ACHIEVE A .040 DIA HOLE.
- 8 FOR P/S/P CONFIGURATION, THE DIMENSION PLEASE SEE SHEET 2
- 9 VARIABLE DIMENSION PLEASE SEE TABLE OR PART VIEW
- 10 FOR LP/S/P CONFIGURATION, THE DIMENSION PLEASE SEE SHEET 2

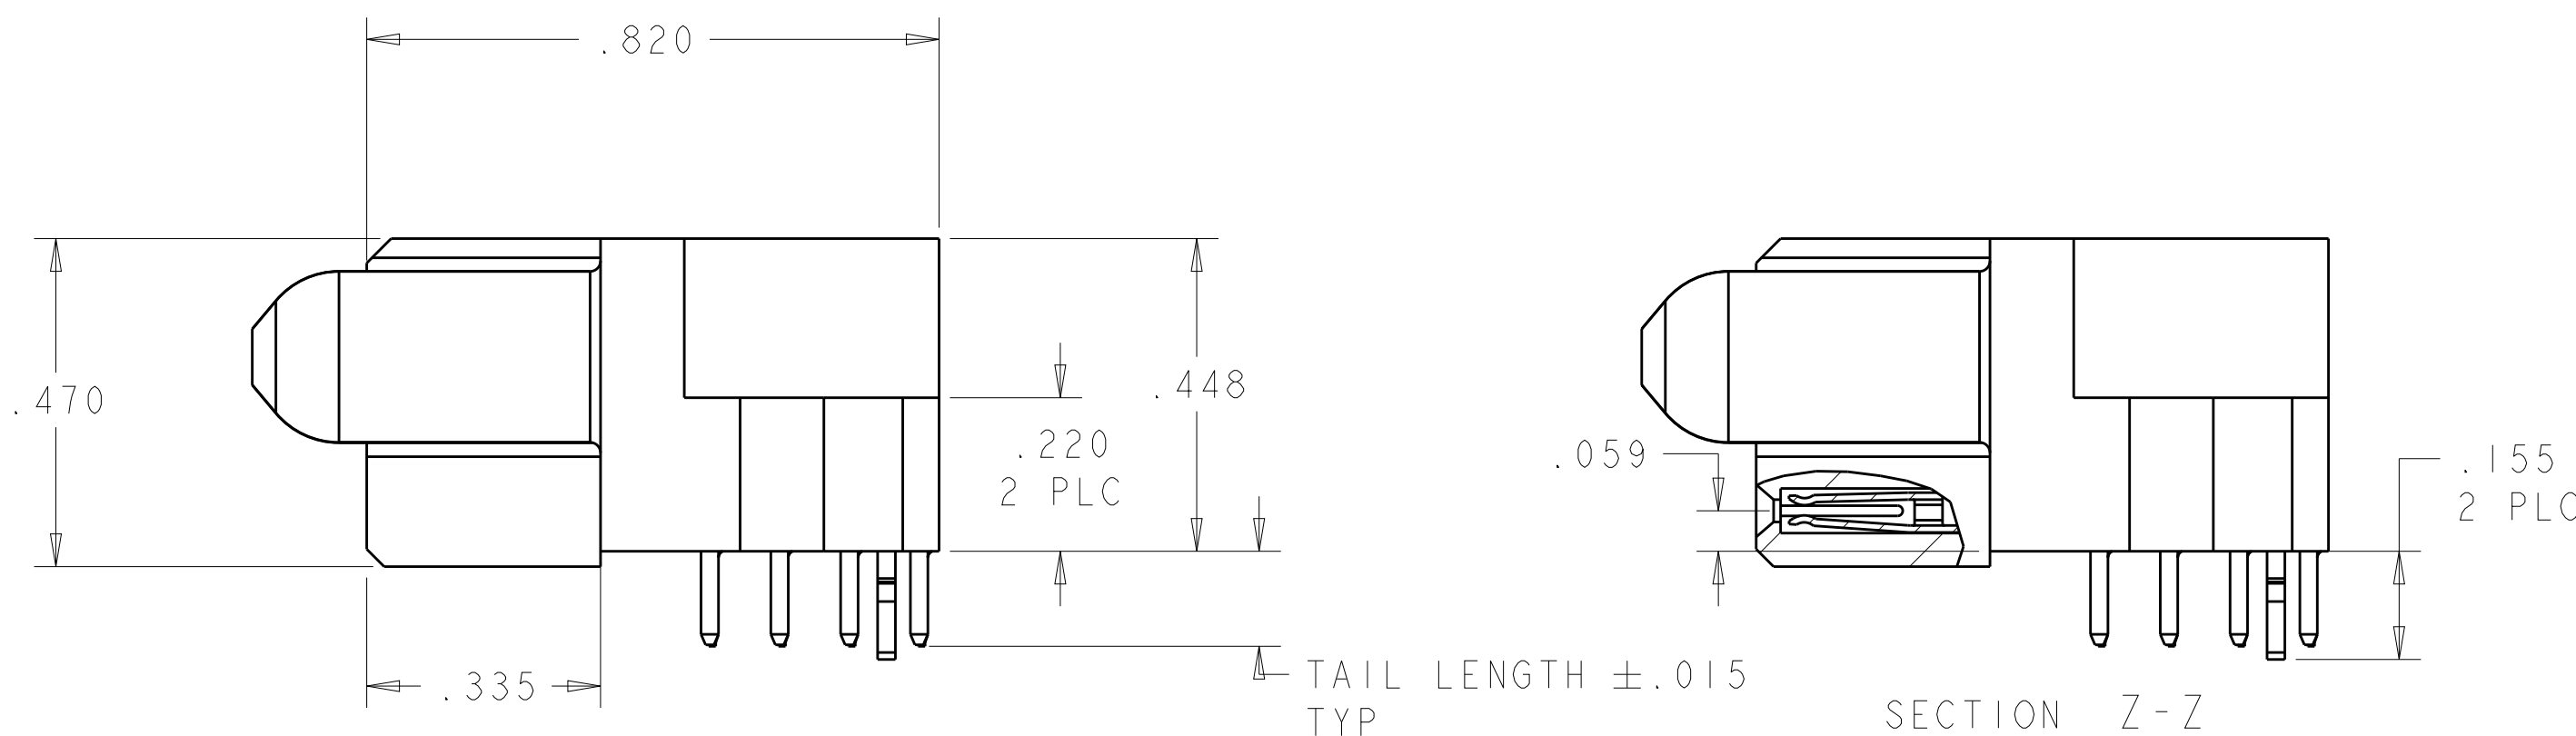

D

C

B

A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
C.ZHOU
CHK
S.ZHAO
APPD
S.ZHAO

11OCT2007
11OCT2007
-

DIMENSIONS:
INCHES

0 PLC ±.1
1 PLC ±.1
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±.2°
FINISH

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

PRODUCT SPEC
108-2292
APPLICATION SPEC
114-13251

WEIGHT
-

Customer Drawing

NAME
RIGHT ANGLE RECEPTACLE
SHORT END MODULE
MULTI-BEAM XLE

SIZE
A1

CAGE CODE
00779

DRAWING NO
6450870

RESTRICTED TO
-

SCALE
4:1


SHEET
1

OF
20


REV
K2

TE Connectivity

LOC	DIST	REVISIONS					
		P.	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-

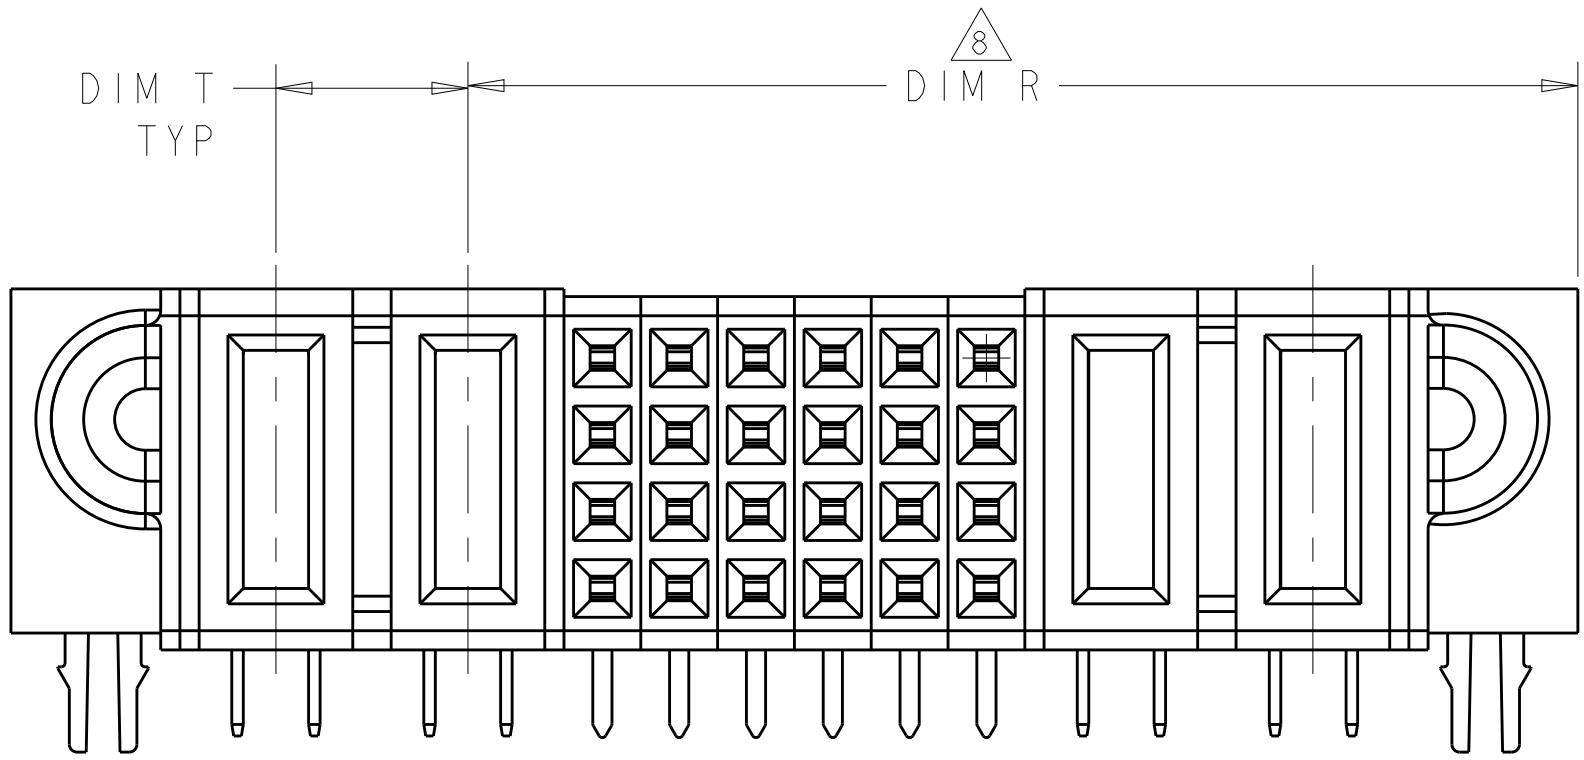

FOR PART NUMBER 6450870-2,6450870-3,6450870-4,6450870-5,THE OTHER DIMENSION REFER TO TABLE OF SHEET 1.

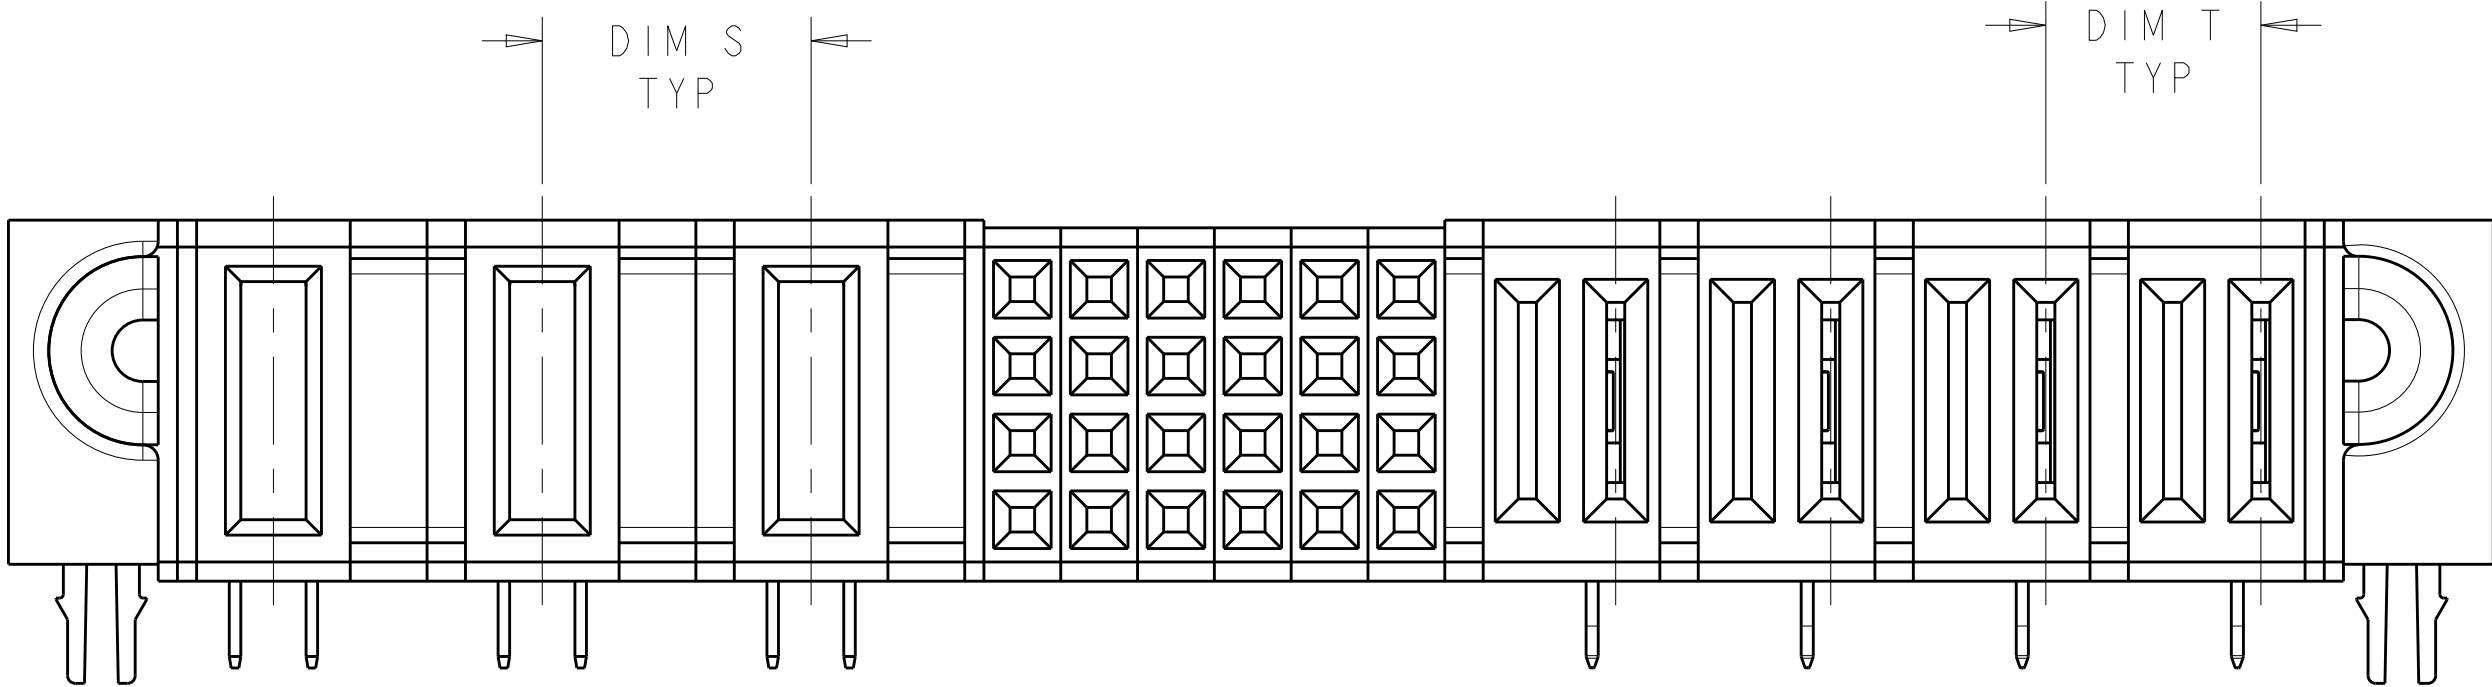

FOR LP/S/P CONFIGUTION (2-6450870-1),THE OTHER DIMENSION REFER TO TABLE OF SHEET 1.

K2	1.380	1.170	-	-	1.2425	.435	-	1.520	.2775	1LP + 32S + 1LP	3-6450870-4
	2.650	2.440	.250	.250	1.920	1.045	2.550	2.790	.370	3P + 32S + 3P	3-6450870-3
	2.650	2.540	-	.250	2.545	1.270	2.750	2.890	.345	4P + 48S + 1P	3-6450870-2
	1.850	1.640	.230	.230	1.3675	1.060	1.750	1.990	.2775	3LP + 12S + 4LP	3-6450870-1
	2.200	1.990	0.250	0.250	1.495	1.020	2.100	2.340	.345	3P + 16S + 3P	3-6450870-0
	1.100	.890	-	-	.895	.570	1.000	1.240	.345	1P + 8S + 1P	2-6450870-9
	3.300	3.090	-	.300	3.120	2.370	3.200	3.440	.320	7ACP + 24S + 1P	2-6450870-8
	2.550	2.340	.250	.300	1.595	1.120	2.450	2.690	.345	3ACP + 16S + 4P	2-6450870-6
	4.000	3.790	.250	.250	2.770	1.520	3.900	4.140	.320	5P + 48S + 5P	2-6450870-5
	1.975	1.765	.250	.300	1.520	1.195	1.875	2.115	.345	3ACP + 8S + 2P	2-6450870-4
	1.380	1.170	-	-	1.2425	.435	-	1.520	.2775	1LP + 32S + 1LP	2-6450870-3
	1.700	1.490	.250	.250	1.245	.770	1.600	1.840	.345	2P + 16S + 2P	2-6450870-2
	3.095	2.885	.280	.350	2.190	1.415	2.995	3.235	.3025	8LP + 24S + 3P ^{△10}	2-6450870-1
	2.400	2.190	.250	.250	1.695 ^{△8}	1.020	2.300	2.540	.345	3P + 24S + 3P	2-6450870-0
	2.400	2.190	.250	.250	1.695 ^{△8}	1.020	2.300	2.540	.345	3P + 24S + 3P	1-6450870-9
	6.200	5.990	.250	.375	2.195 ^{△8}	1.845	6.100	6.340	.395	4P + 12S + 16P	1-6450870-8
	3.775	3.565	.375	.375	2.445	2.045	3.675	3.915	.345	5ACP + 12S + 4ACP	1-6450870-6
	2.020	1.810	-	.300	1.0775	.870	1.920	2.160	.320	2ACP + 8S + 4LP	1-6450870-5
	2.295	2.085	^{△9}	.215	1.465	.865	2.195	2.435	.2775	3LP + 20S + 4HDP	1-6450870-4
	4.500	4.290	^{△8}	.300	3.220 ^{△8}	2.695	4.400	4.640	.370	8ACP + 16S + 4ACP	1-6450870-3
	2.260	2.050	-	.300	1.7775	1.145	2.160	2.400	.345	3ACP + 24S + 4LP	1-6450870-2
	1.700	1.490	.200	.200	1.295 ^{△8}	.720	1.600	1.840	.345	2P + 20S + 2P	1-6450870-1
	1.600	1.390	.200	.200	1.195 ^{△8}	.720	1.500	1.740	.345	2P + 16S + 2P	1-6450870-0
	2.200	1.990	.200	.200	1.795 ^{△8}	.720	2.100	2.340	.345	2P + 40S + 2P	6450870-9
	2.650	2.440	.250	.250	1.920	1.045	2.550	2.790	.370	3P + 32S + 3P	6450870-8
	3.100	2.890	.230	^{△9}	2.5025	1.945	3.000	3.240	.320	8HDP + 20S + 5LP	6450870-7
	1.400	1.190	-	-	1.195 ^{△8}	.520	1.300	1.540	.345	1P + 24S + 1P	6450870-5
	2.400	2.190	.250	.250	1.695 ^{△8}	1.020	2.300	2.540	.345	3P + 24S + 3P	6450870-4
	1.900	1.690	.250	.250	1.445 ^{△8}	.770	1.800	2.040	.345	2P + 24S + 2P	6450870-3
	1.575	1.365	-	-	1.320 ^{△8}	.595	1.475	1.715	.370	1P + 24S + 1P	6450870-2
	1.880	1.670	-	.250	1.6025	.770	1.780	2.020	.345	2P + 32S + 2LP	6450870-1
	DIM V	DIM U	DIM T	DIM S	DIM R	DIM W	DIM D	DIM L	DIM K	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.1

1 PLC ±.01

2 PLC ±.01

3 PLC ±.005

4 PLC ±.0020

ANGLES ±.2°

FINISH

MATERIAL

-

DWN

C. ZHOU

11OCT2007

CHK

S. ZHAO

11OCT2007

APVD

S. ZHAO

-

NAME

RIGHT ANGLE RECEPTACLE
SHORT END MODULE
MULTI-BEAM XLE

SIZE

A1

CAGE CODE

100779

DRAWING NO

6450870

RESTRICTED TO

-

Customer Drawing

SCALE

4:1

SHEET

2


OF

20

REV

K2

PART NUMBER	ROWS		POWER	SIGNAL						POWER	
			P2	6	5	4	3	2	1	P1	
6450870-2	D C B A			H	H	H	H	H	H		
				G	G	G	G	G	G		
				F	F	F	F	F	F		
				E	E	E	E	E	E		
IP + 24S + IP											

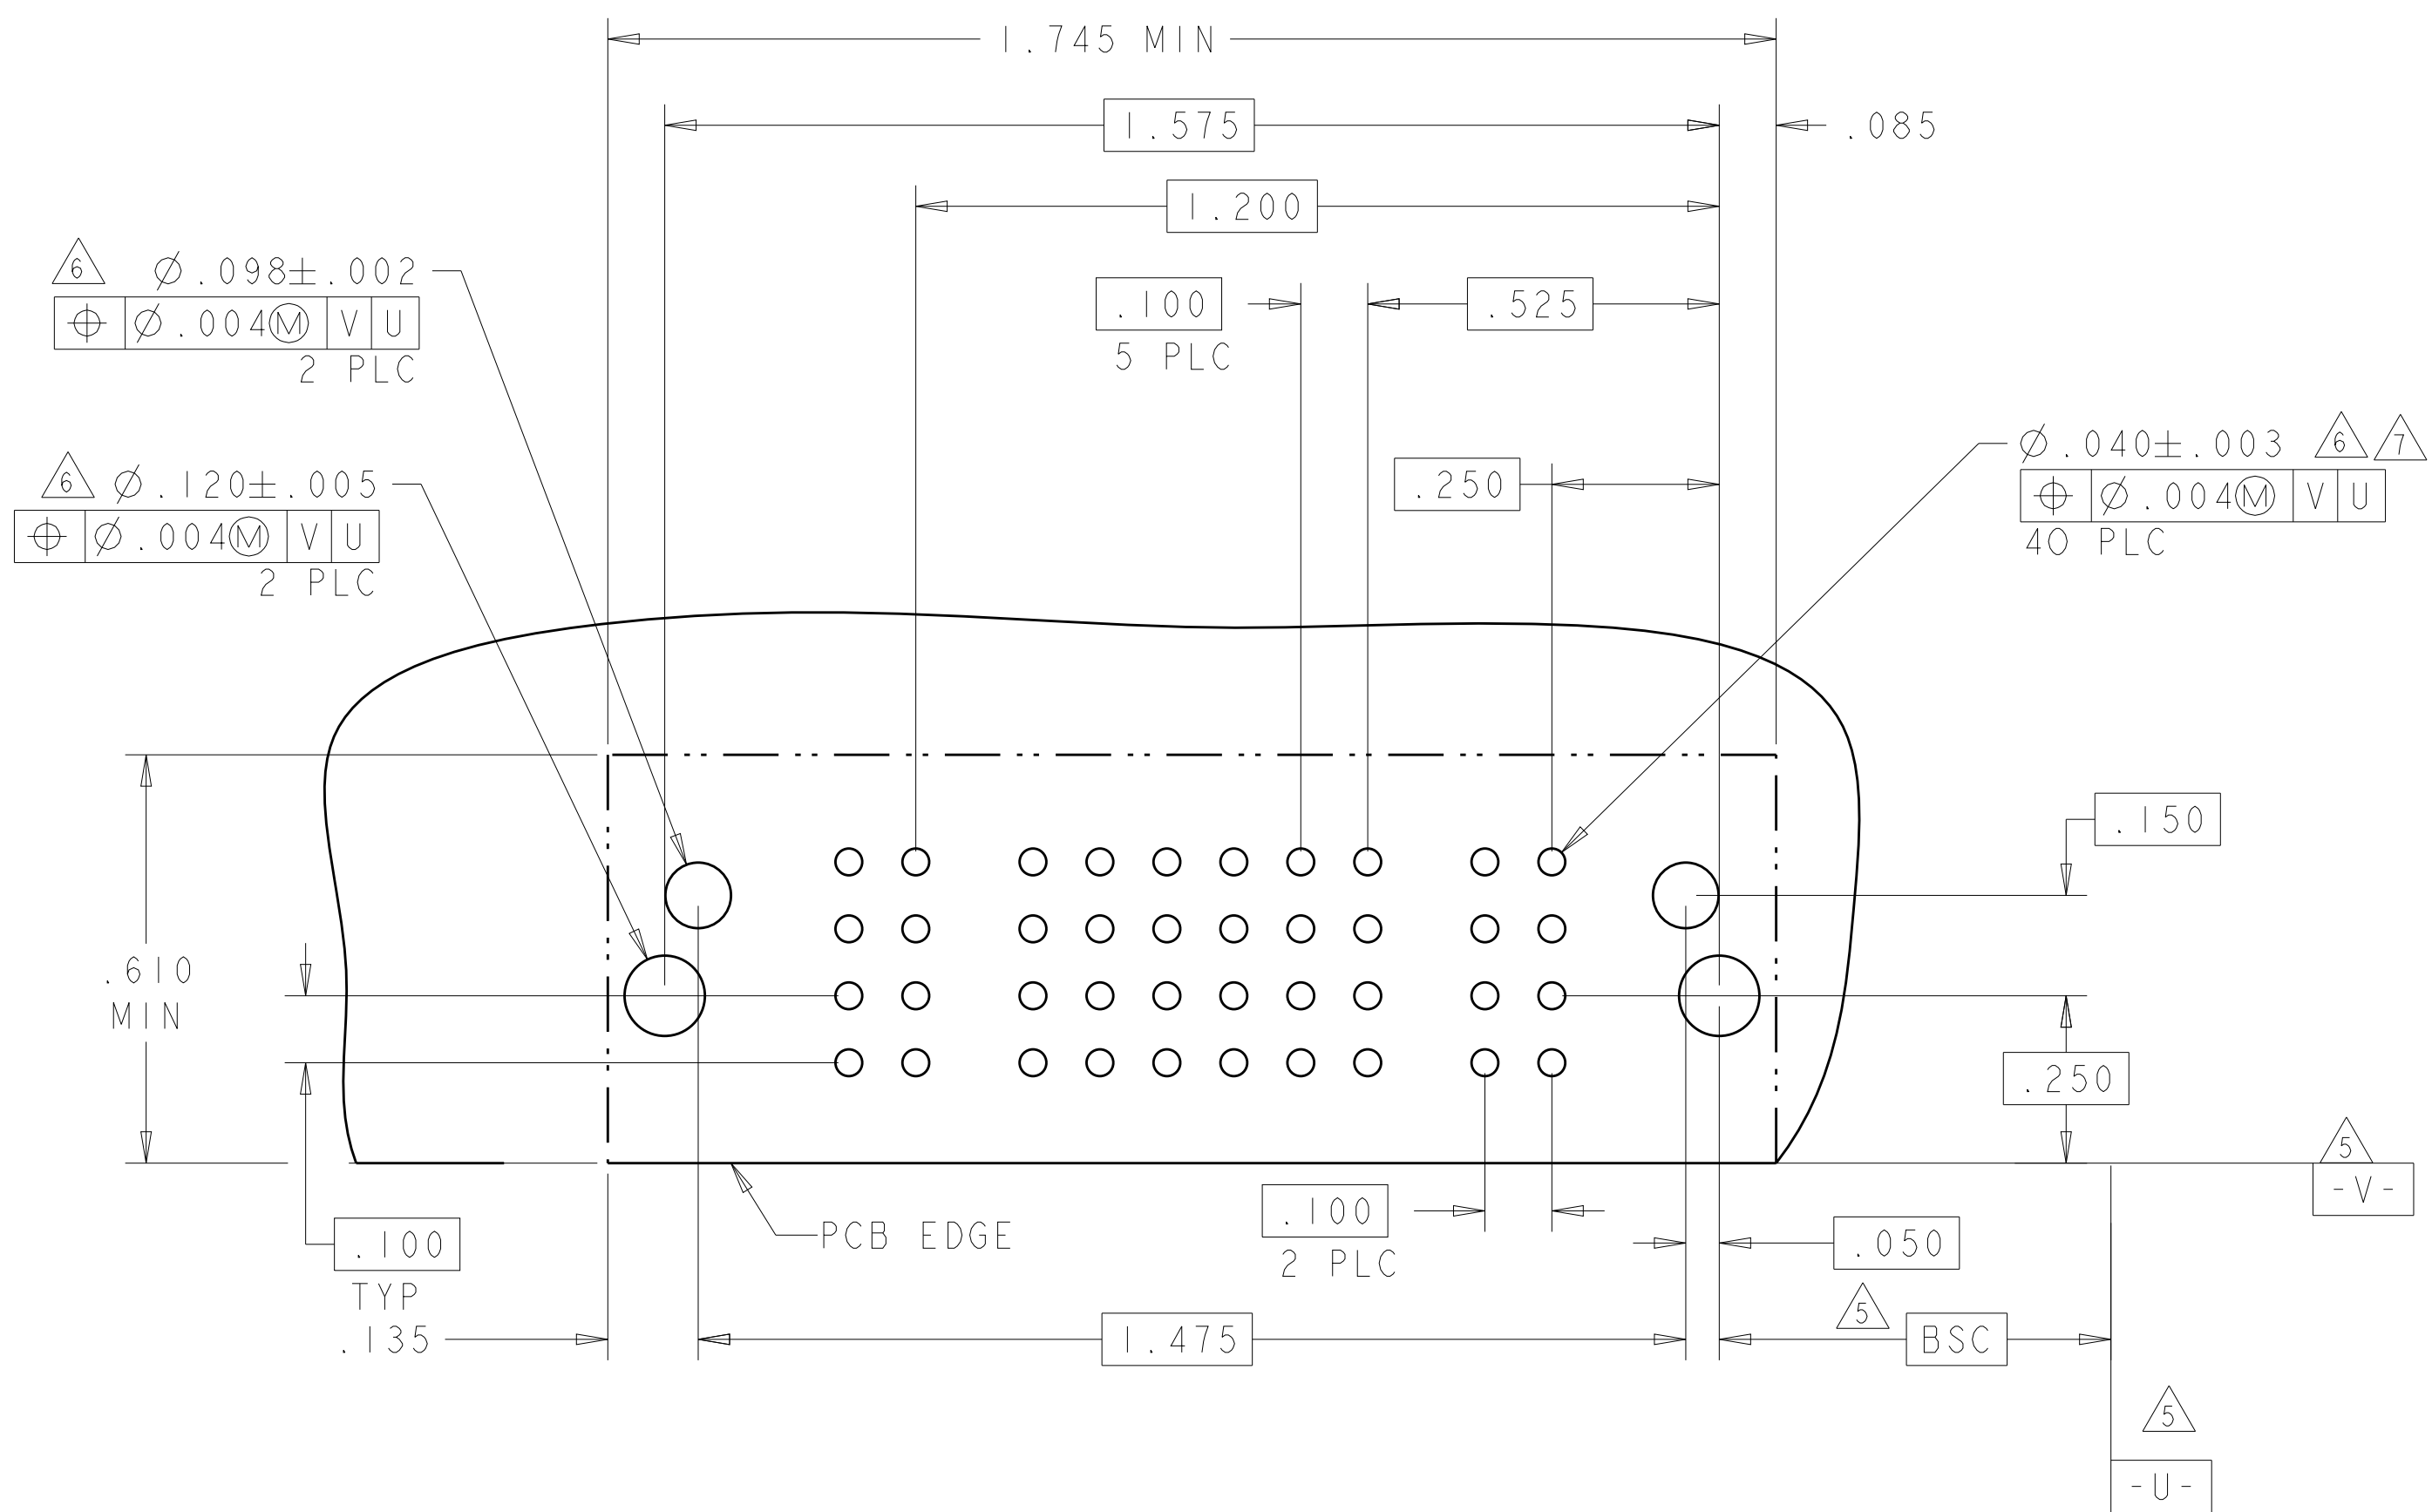


STANDARD SIGNAL CONTACT, .135 TAIL LENGTH, ROW D	H
STANDARD SIGNAL CONTACT, .135 TAIL LENGTH, ROW C	G
STANDARD SIGNAL CONTACT, .135 TAIL LENGTH, ROW B	F
STANDARD SIGNAL CONTACT, .135 TAIL LENGTH, ROW A	E
MFBL POWER CONTACT, .135 TAIL LENGTH	RA
STD POWER CONTACT, .135 TAIL LENGTH	RM
LOWER POWER CONTACT, .135 TAIL LENGTH	LM
DESCRIPTION	IDENTIFIER


THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN C. ZHOU	110C12007	 TE Connectivity					
DIMENSIONS: INCHES		CHK S. ZHAO	110C12007						
		APVD S. ZHAO	-	NAME					
		PRODUCT SPEC		RIGHT ANGLE RECEPTACLE					
		108-2292		SHORT END MODULE					
		APPLICATION SPEC		MULTI-BEAM XLE					
		114-13251		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
MATERIAL	FINISH	WEIGHT	-	A100779		G6450870	-		
Customer Drawing			SCALE		4:1	SHEET	3 OF 20	REV	K2

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER		SIGNAL						POWER		
			P4	P3	6	5	4	3	2	1	P2	P1	
6450870-3	D C B A		RM	RM	H	H	H	H	H	H	RM	RM	
					G	G	G	G	G	G			
					F	F	F	F	F	F			
2P + 24S + 2P					E	E	E	E	E	E			

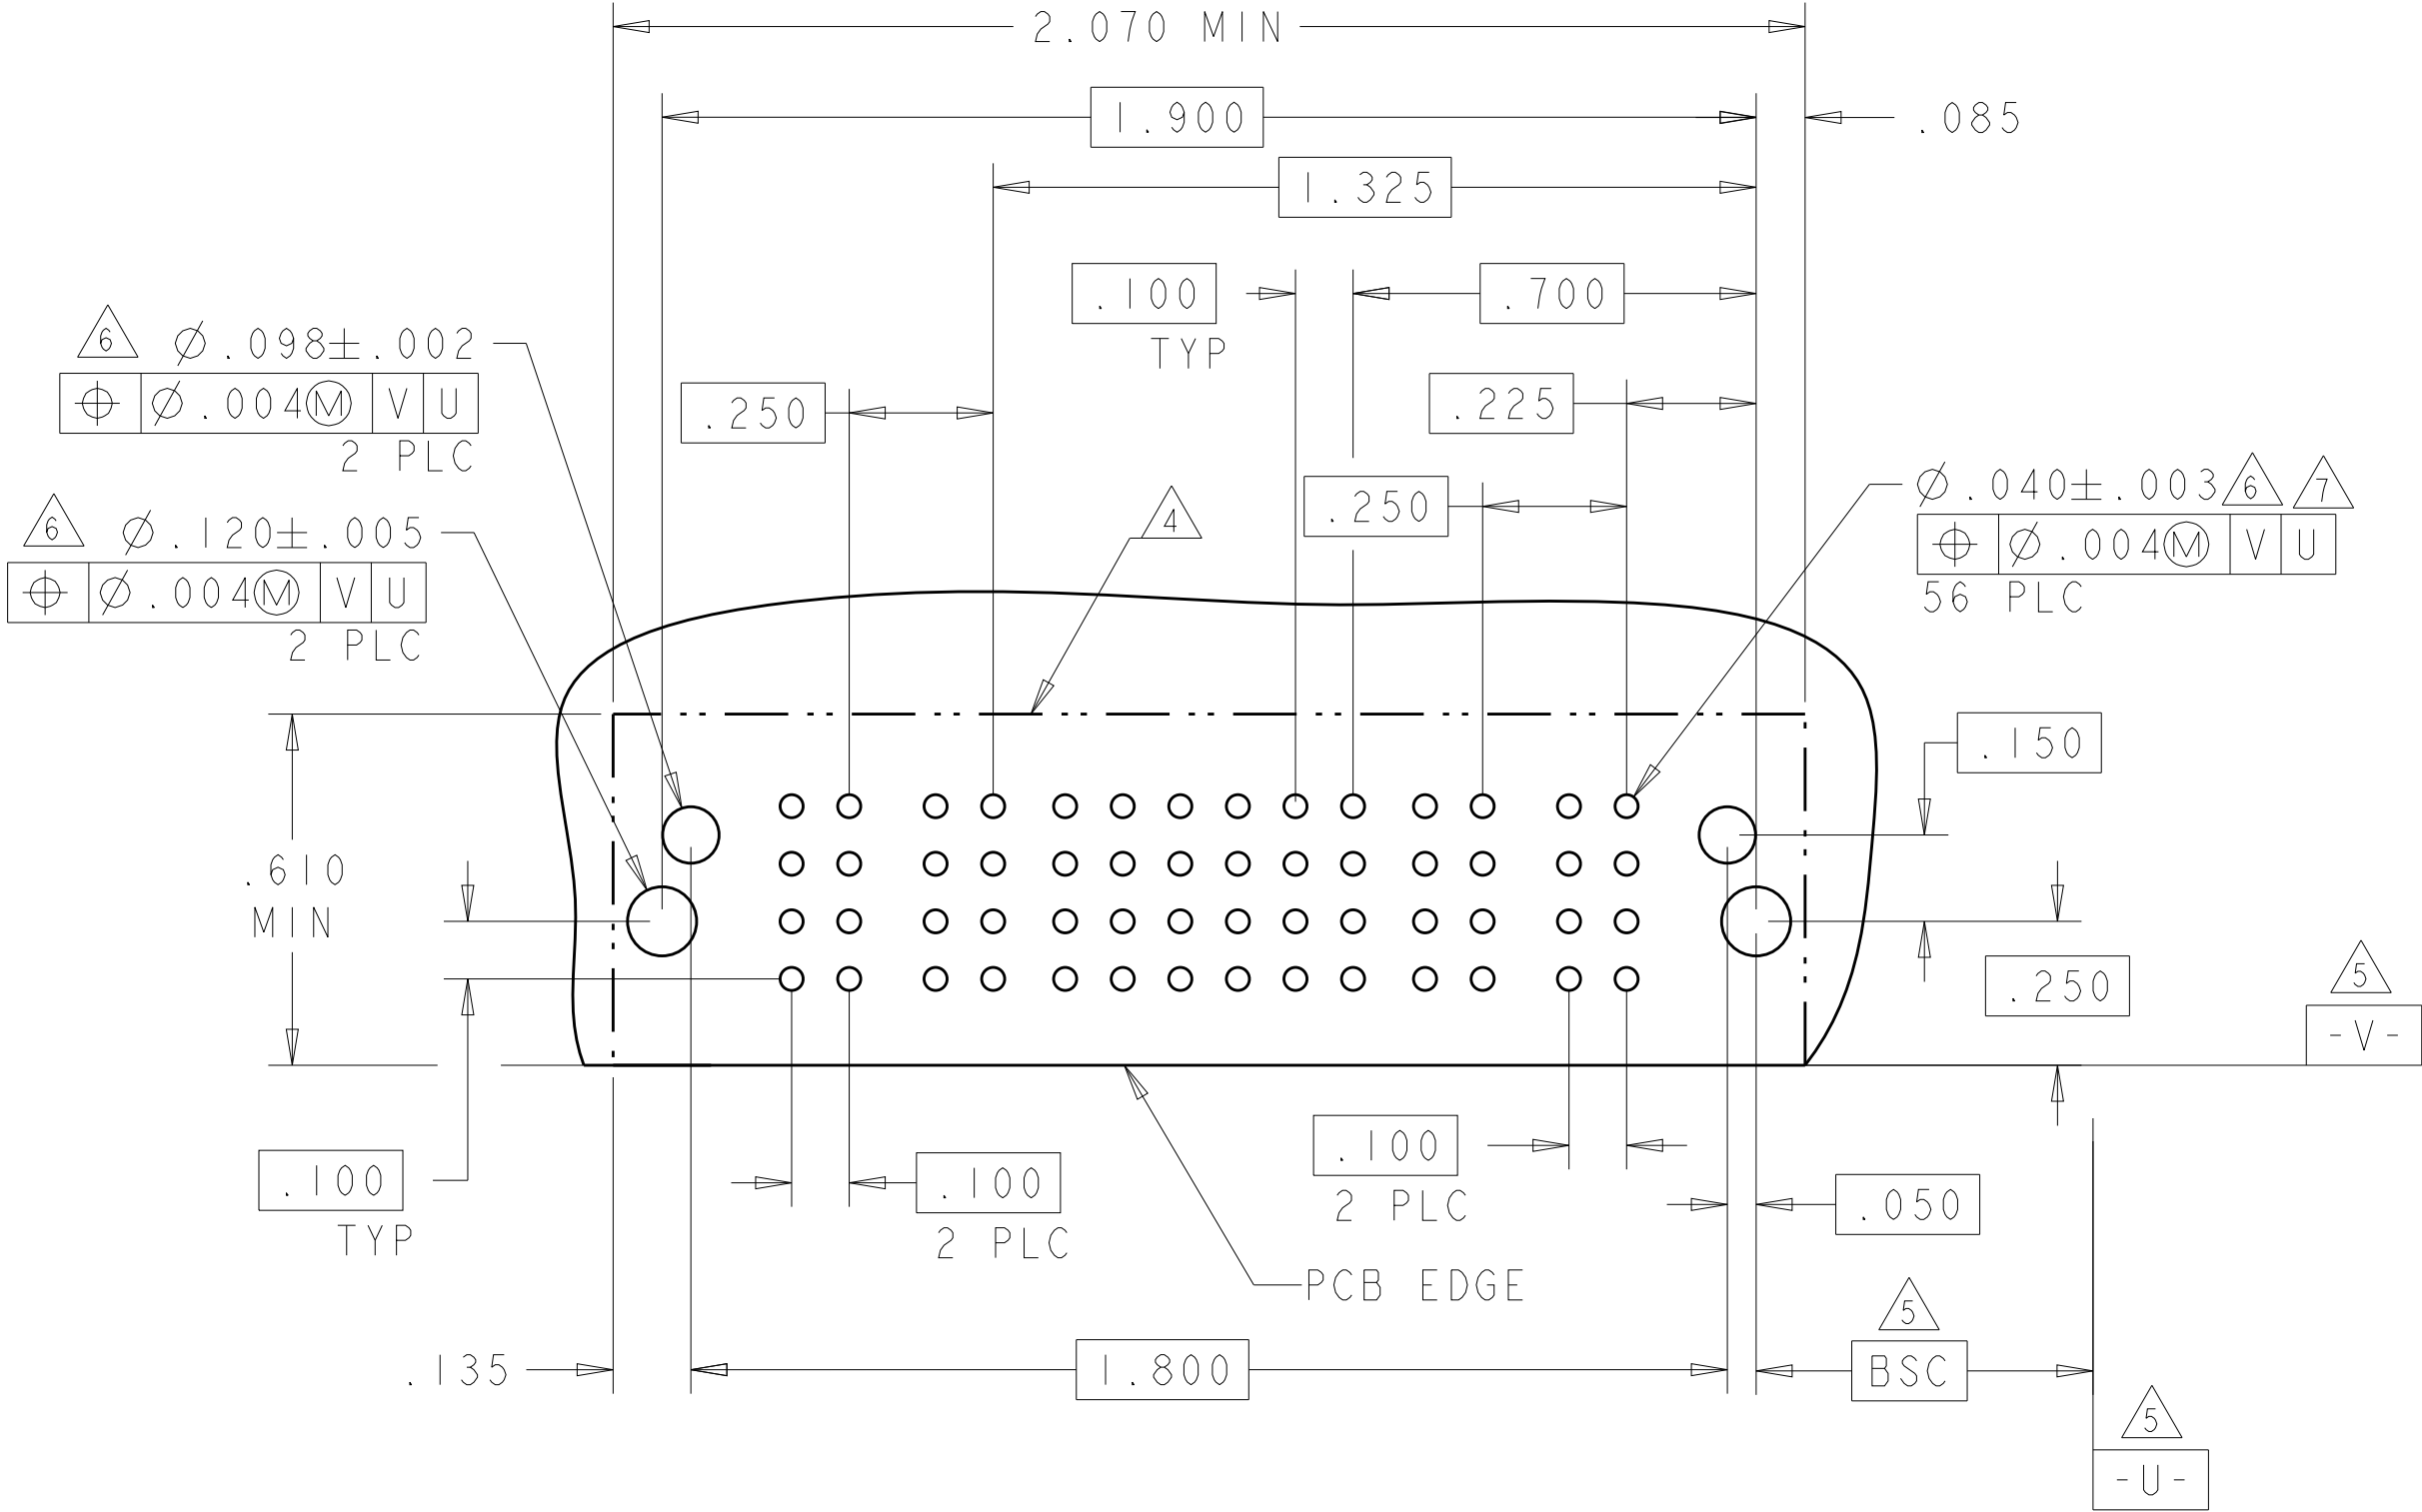

PART NUMBER	ROWS		POWER			SIGNAL						POWER			
			P6	P5	P4	6	5	4	3	2	1	P3	P2	P1	
6450870-4	D C B A				H	H	H	H	H	H					
					G	G	G	G	G	G					
					F	F	F	F	F	F					
					E	E	E	E	E	E					
3P + 24S + 3P															

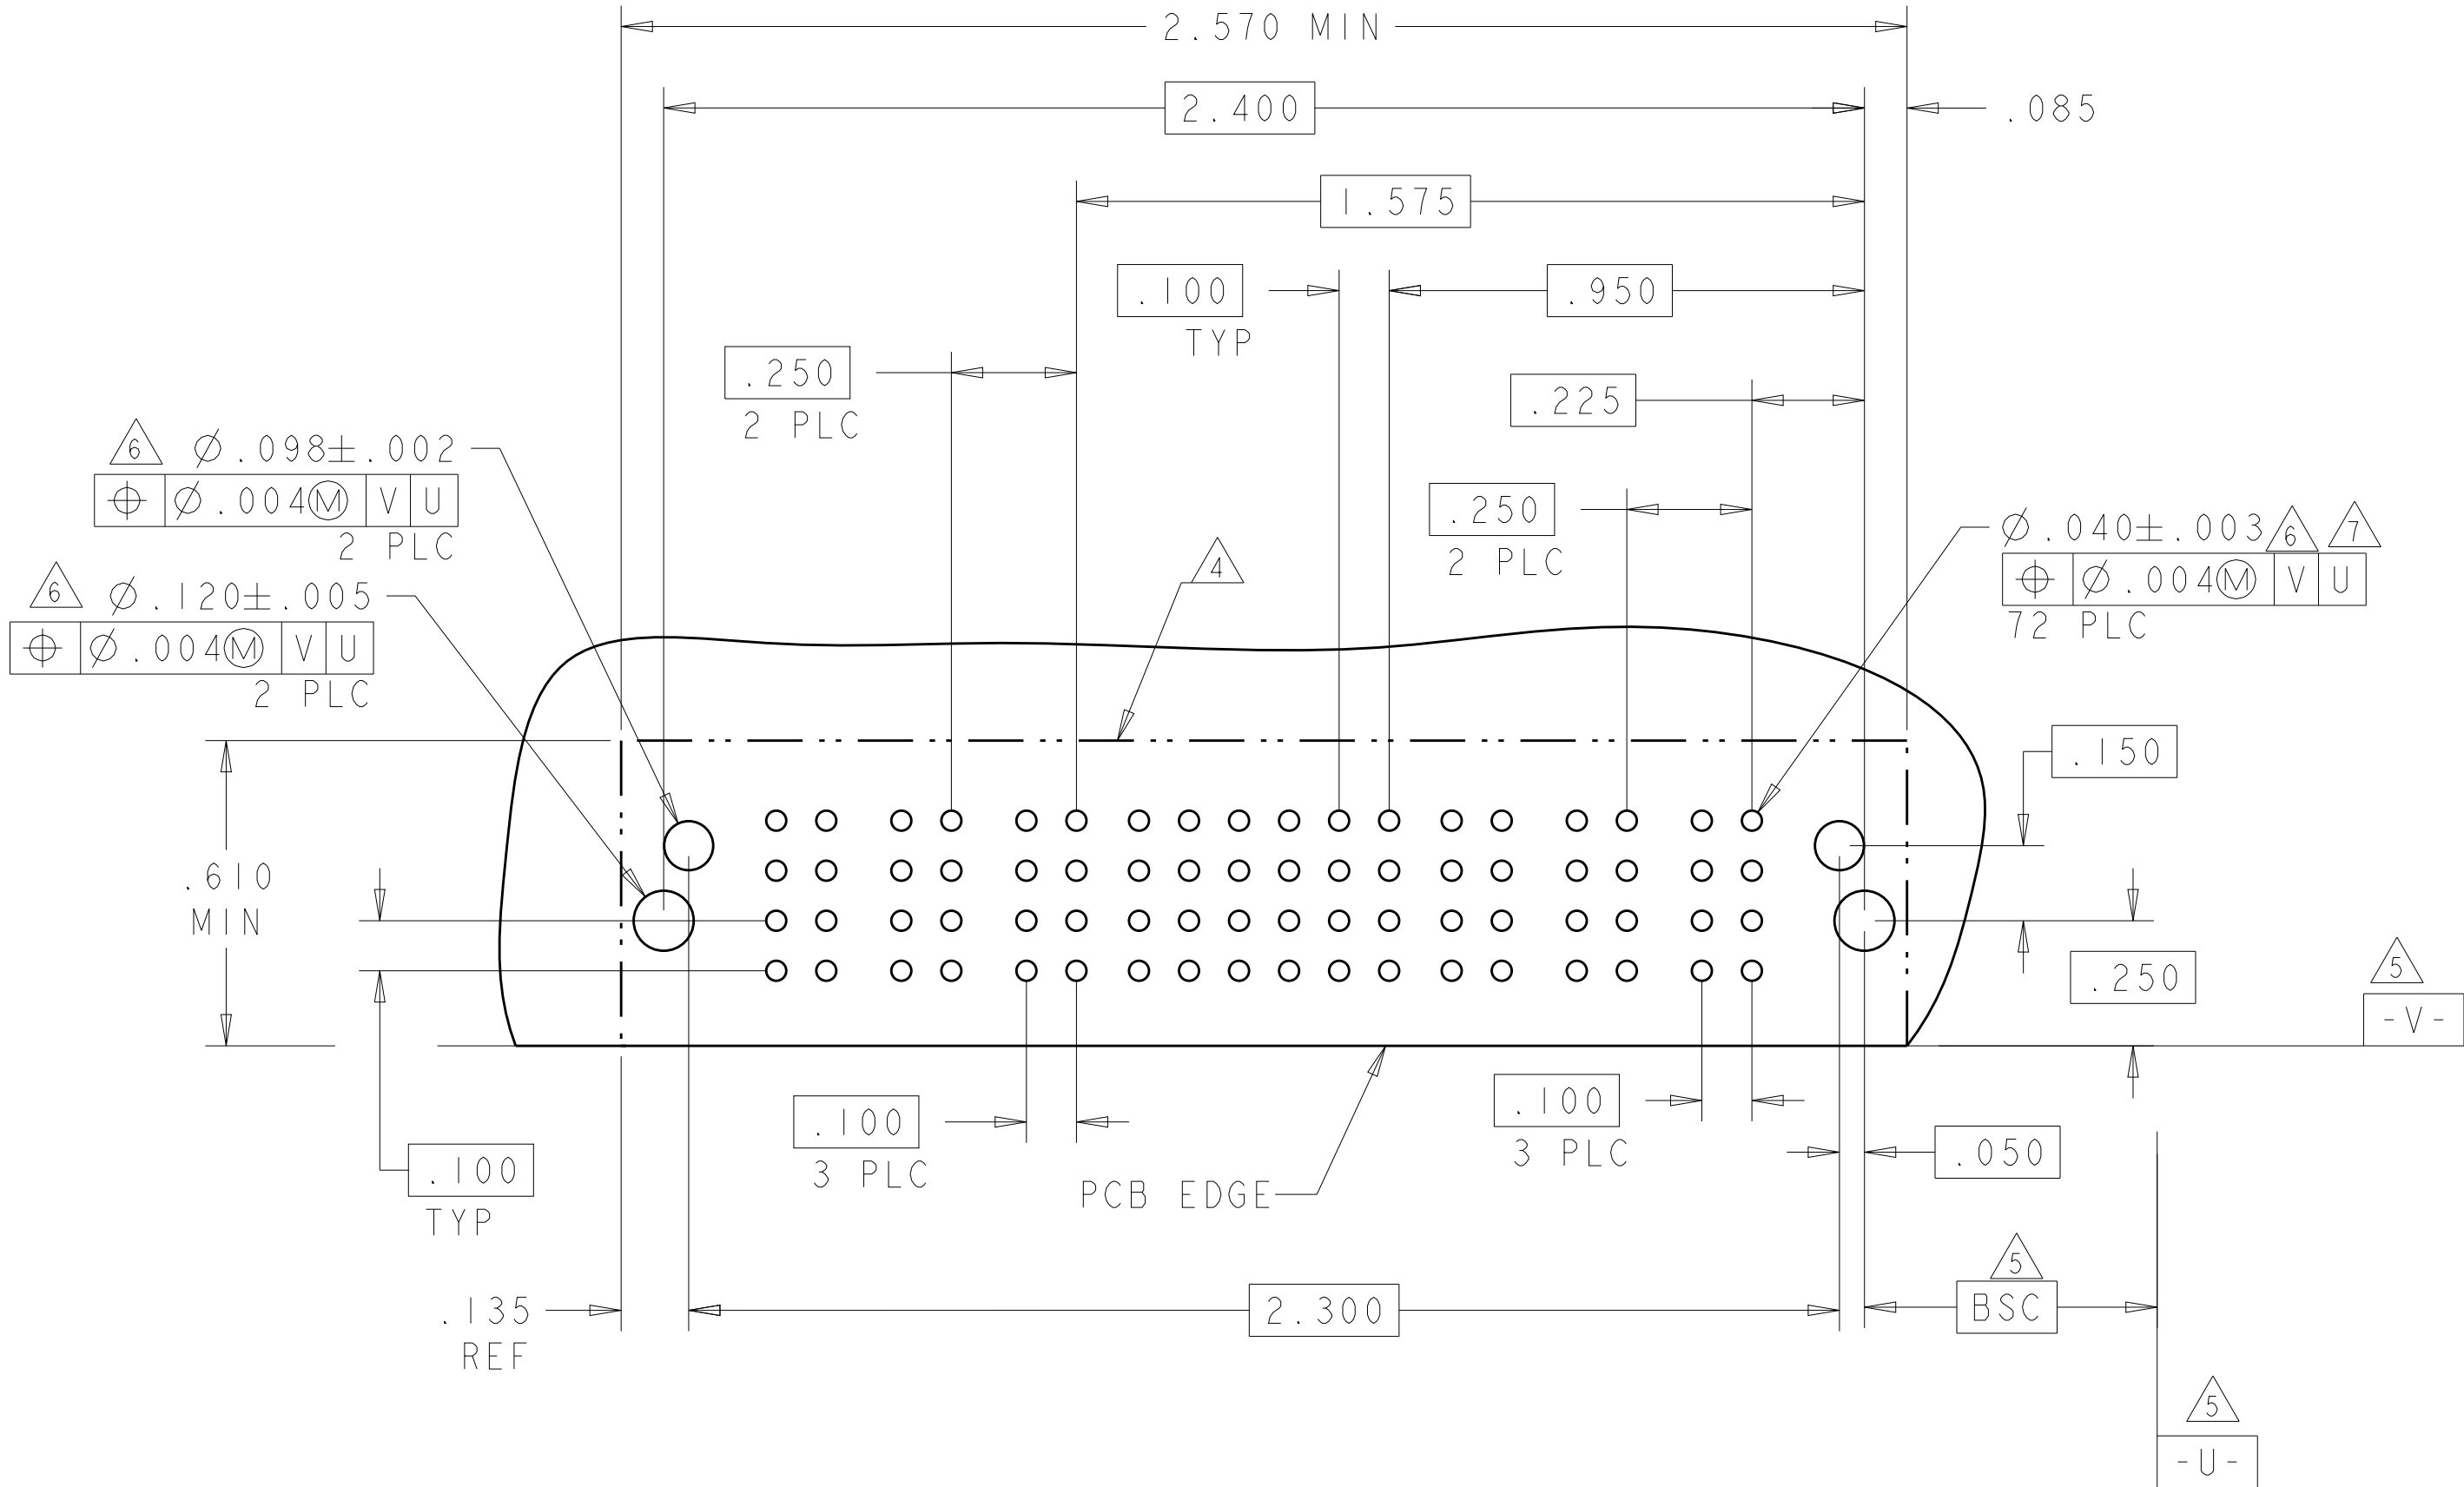



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. ZHOU	11OCT2007	TE Connectivity	
		CHK S. ZHAO	11OCT2007		
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
INCHES				PRODUCT SPEC	
				108-2292	
				APPLICATION SPEC	
				114-13251	
MATERIAL		FINISH		WEIGHT	
				Customer Drawing	
				SCALE 4:1 SHEET 4 OF 20 REV K2	

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER	SIGNAL						POWER	
			P2	6	5	4	3	2	1	P1	
6450870-5	D C B A		 RM	H	H	H	H	H	H	 RM	
				G	G	G	G	G	G		
				F	F	F	F	F	F		
				E	E	E	E	E	E		
IP + 24S + IP											 HD

PART NUMBER	ROWS		POWER					SIGNAL					POWER									
			LP5	LP4	LP3	LP2	LPI	5	4	3	2	1	P8	P7	P6	P5	P4	P3	P2		P1	
6450870-7	D C B A		LM		LM		LM	H	H	H	H	H	RM	RM	RM	RM	RM	RM	RM			
								G	G	G	G	G										
								E	E	E	E	E										
								E	E	E	E	E										
8HDP + 20S + 5LP																						

.250
 .200
6 PLC

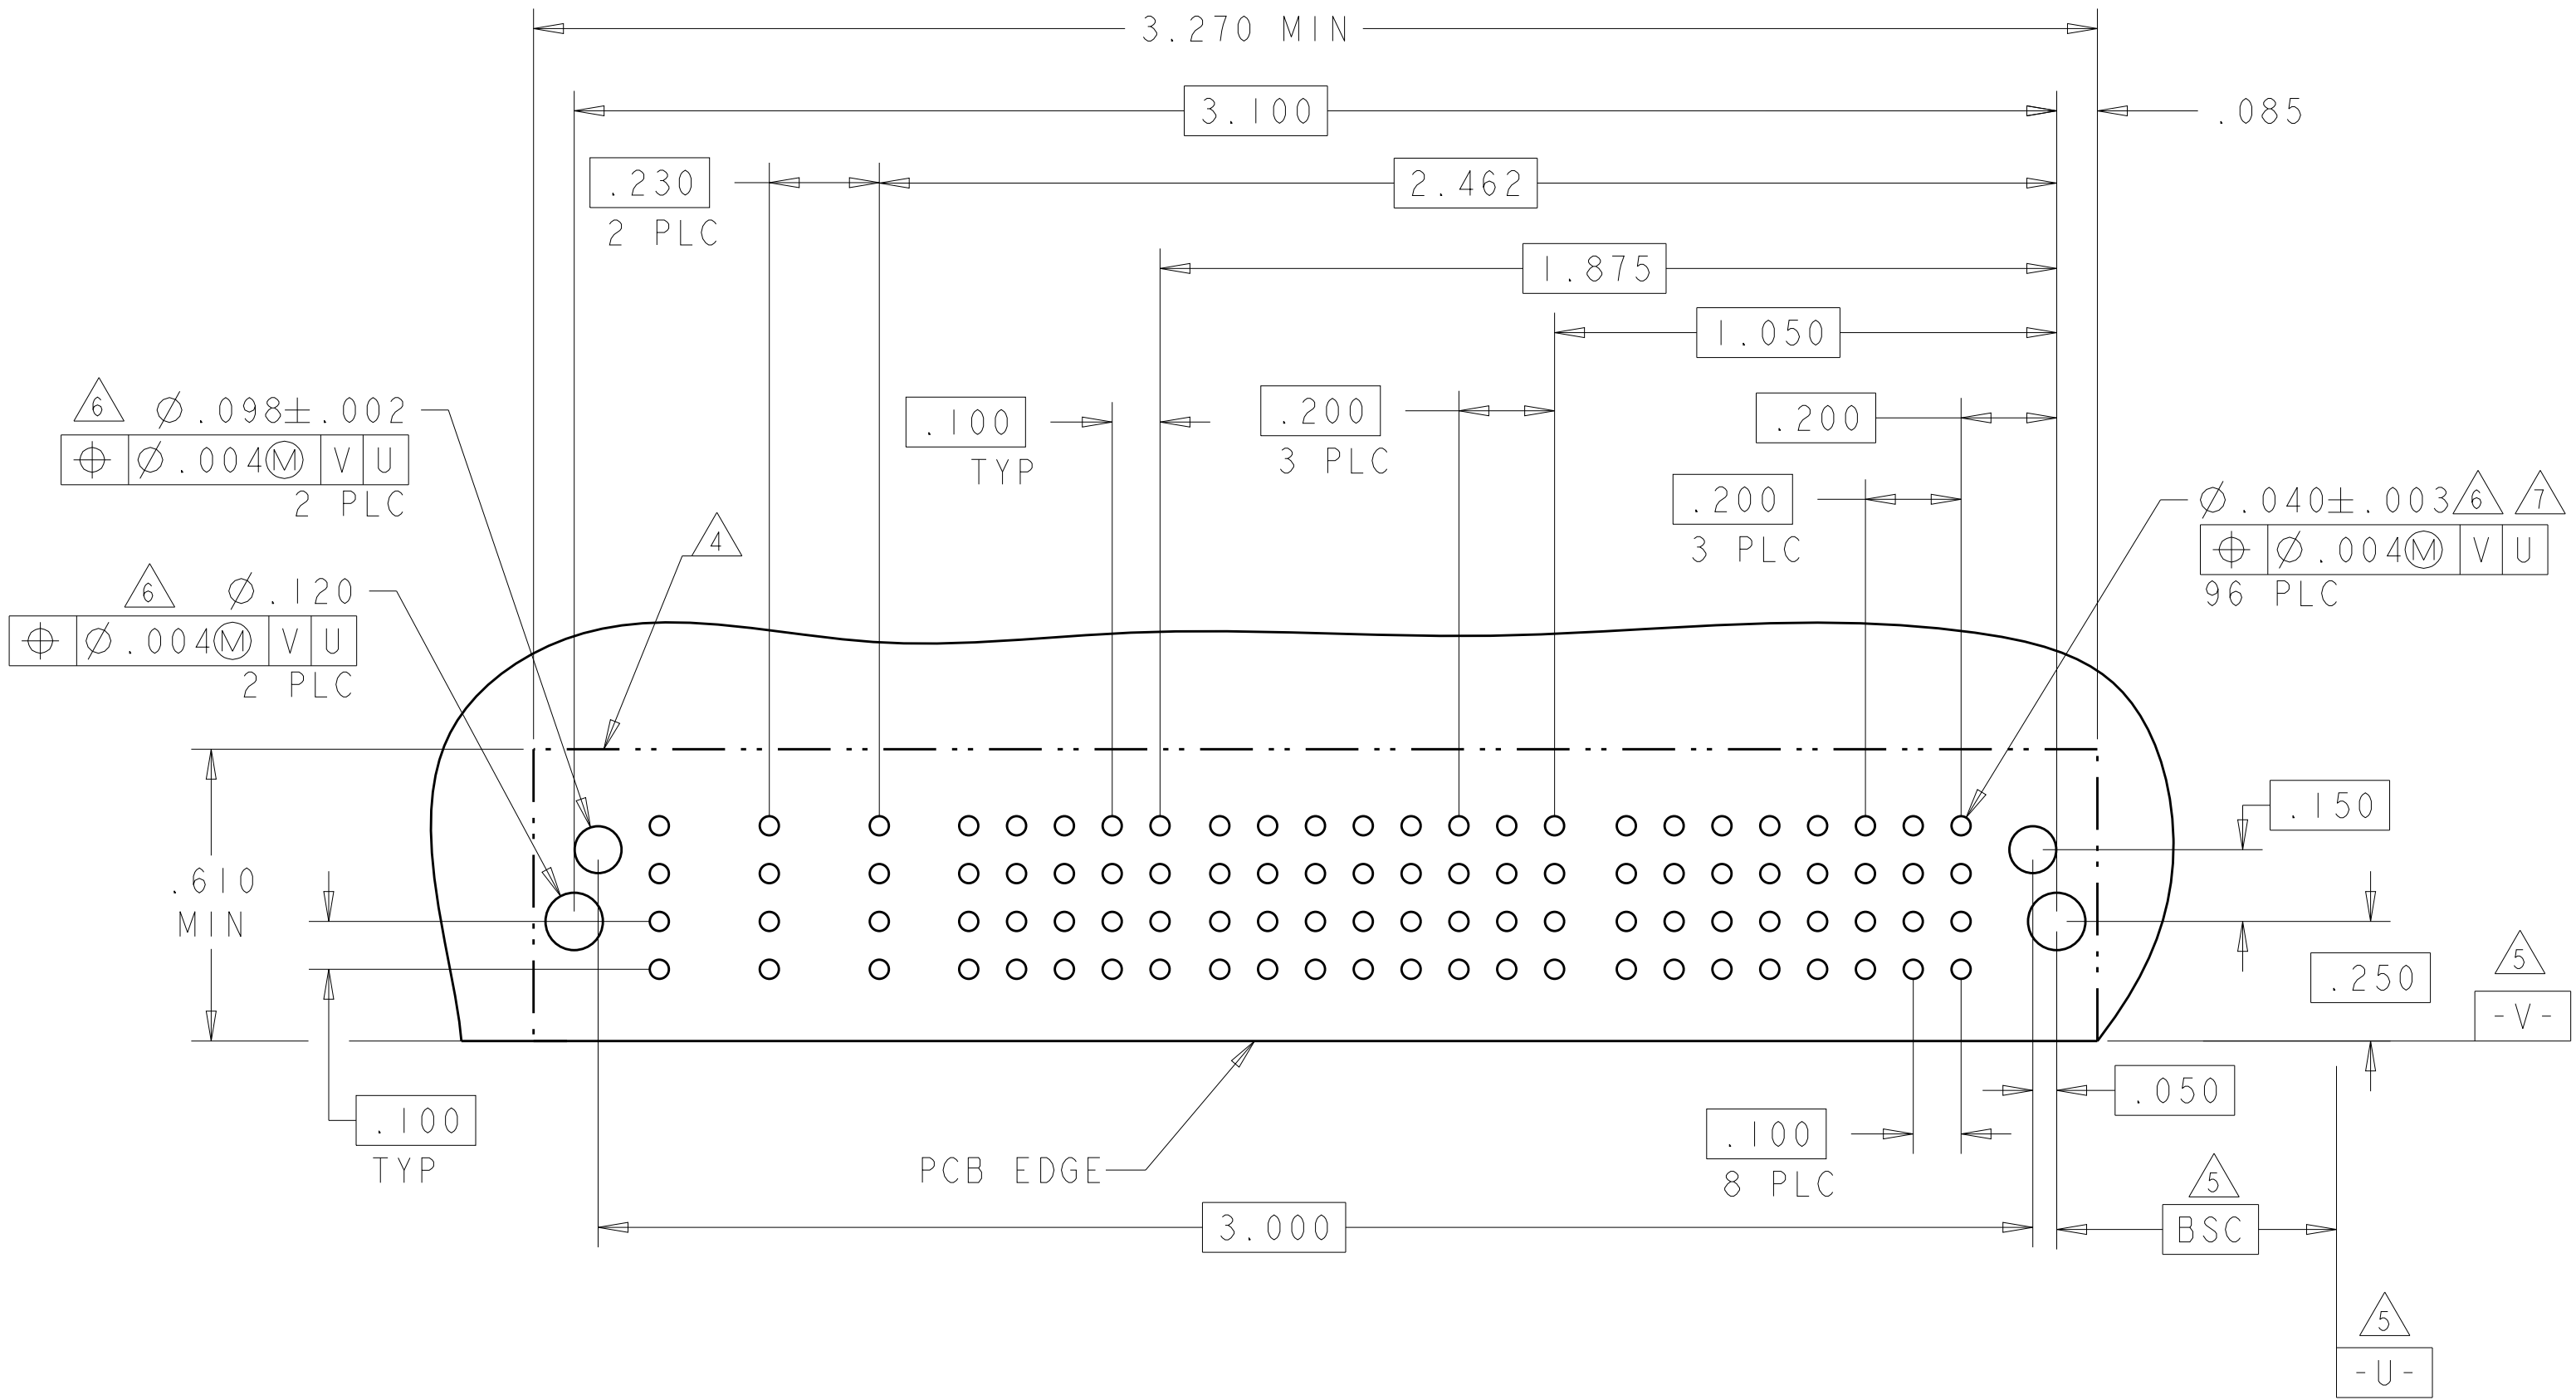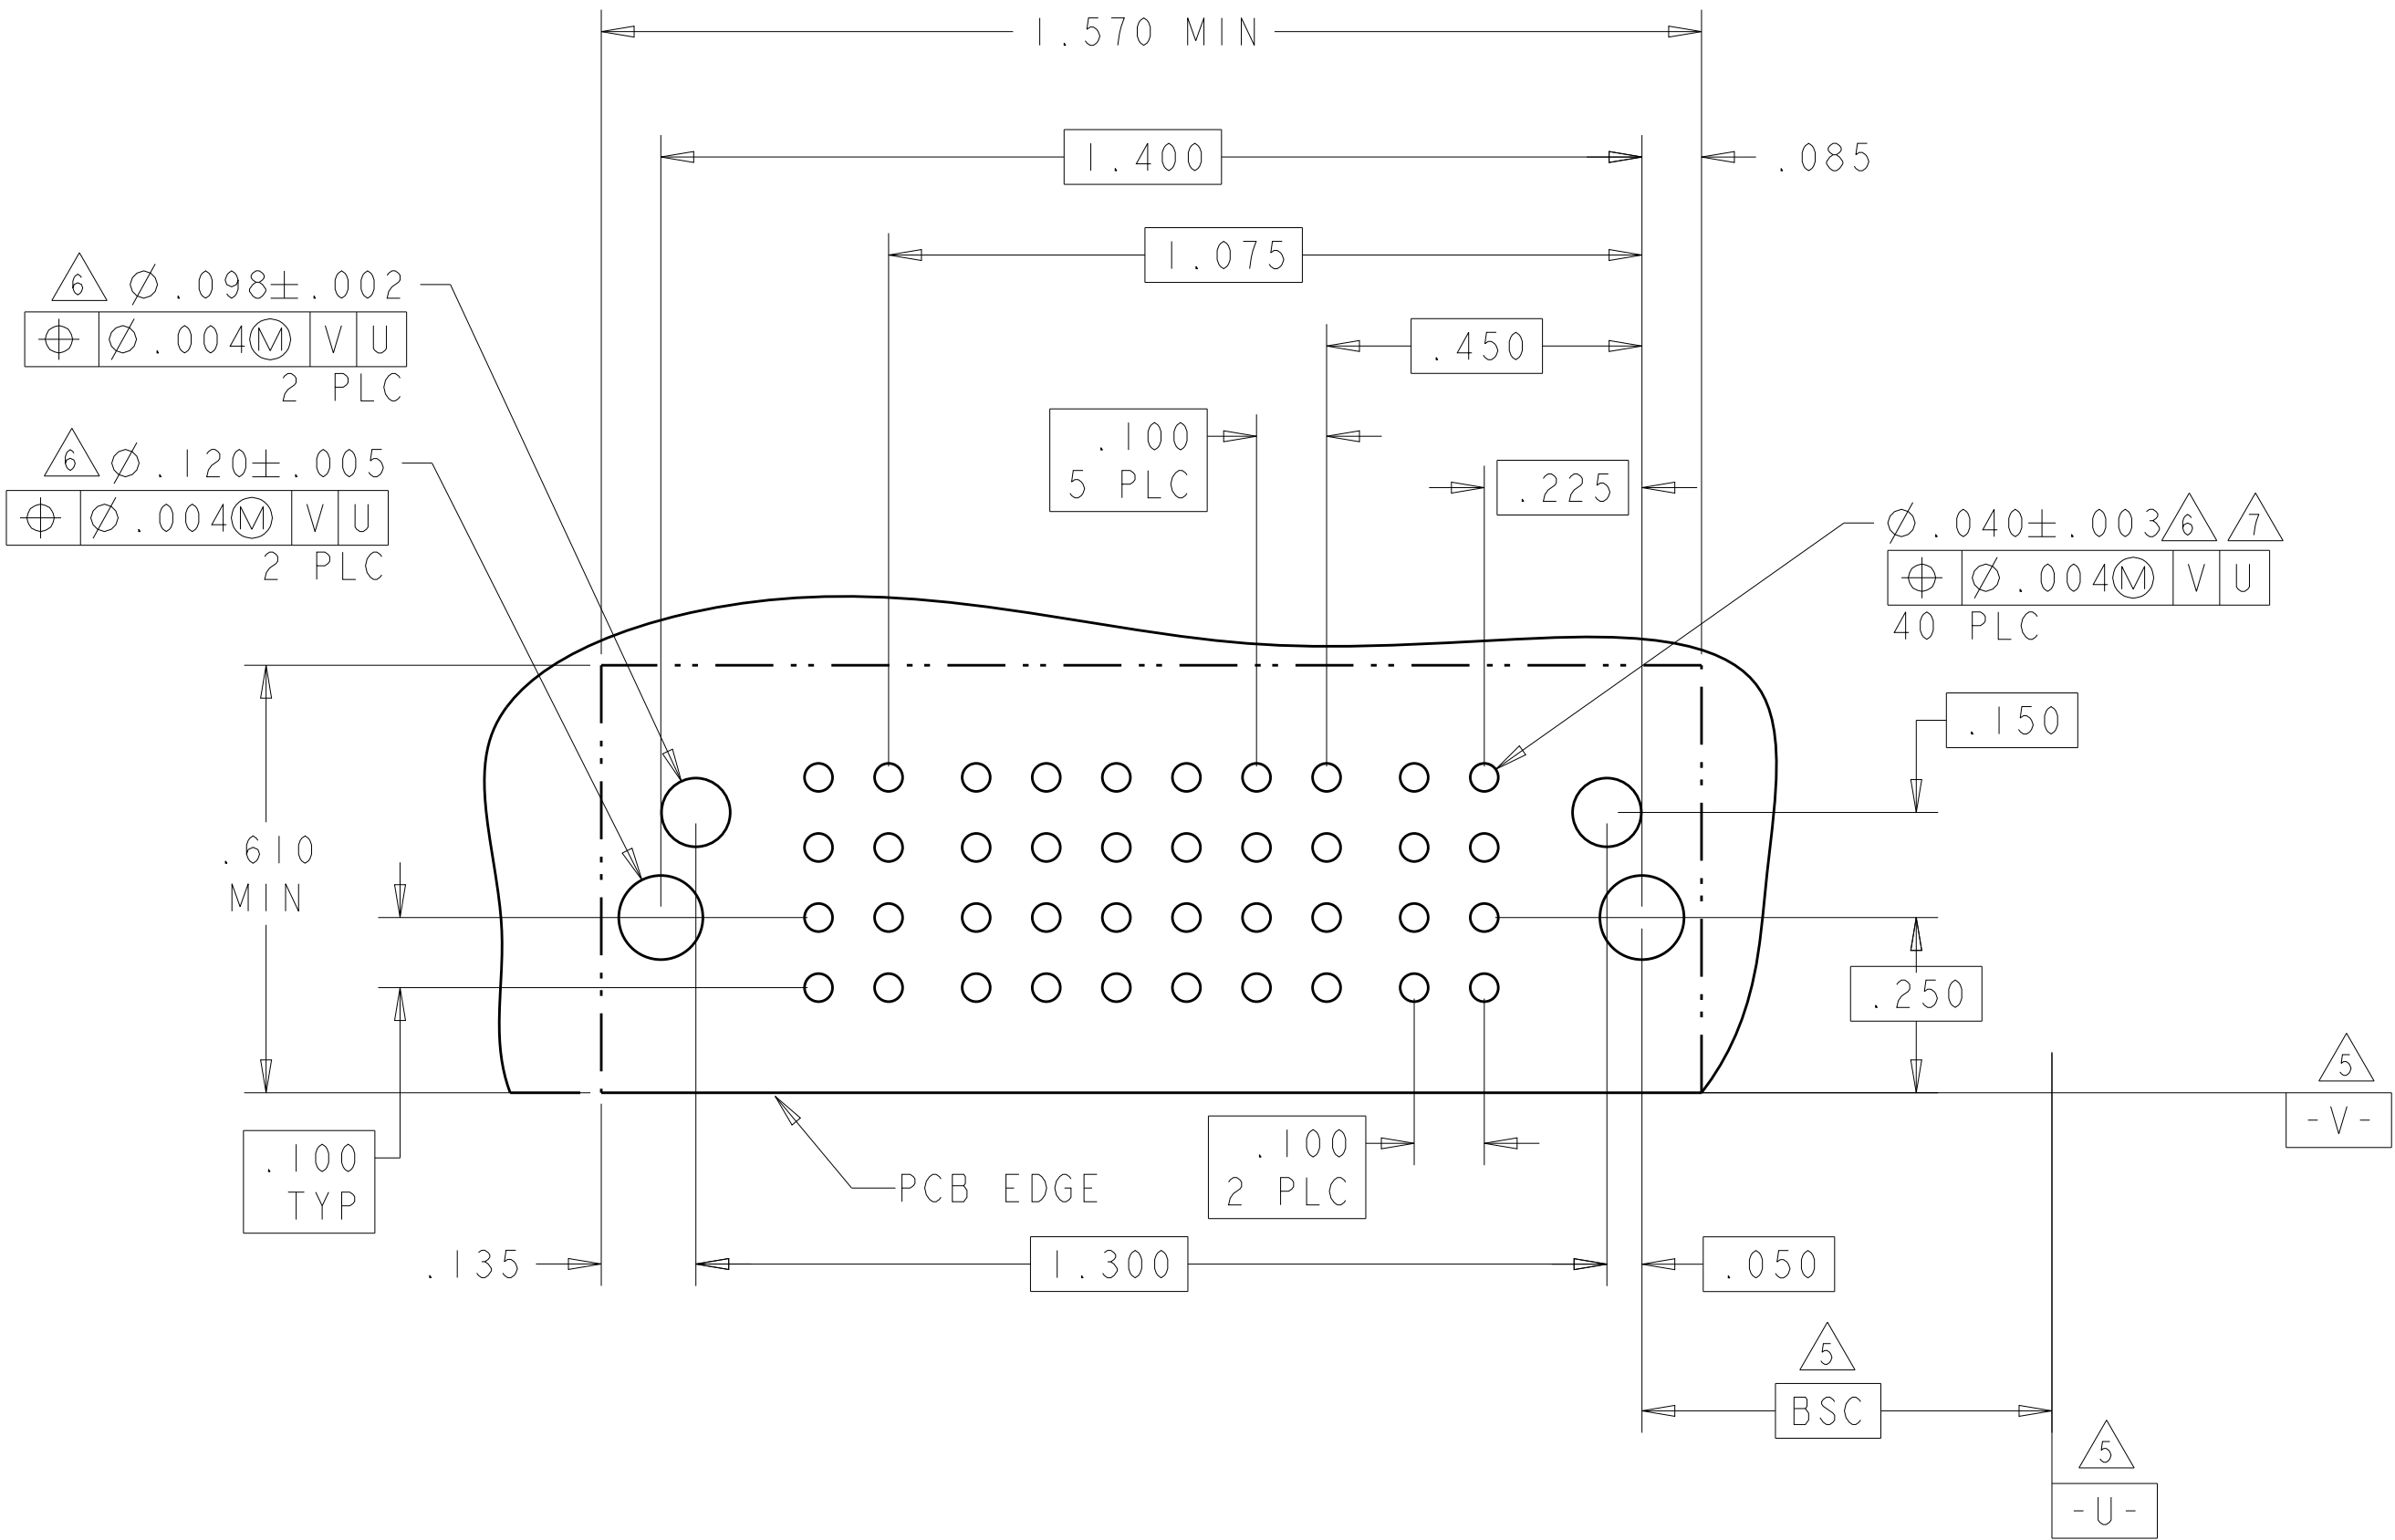



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.ZHOU	11OCT2007	TE Connectivity	
		CHK S.ZHAO	11OCT2007		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC	±.1	PRODUCT SPEC	
		1 PLC	±.1	108-2292	
		2 PLC	±.01	APPLICATION SPEC	
		3 PLC	±.005	114-13251	
MATERIAL		FINISH		SIZE	CAGE CODE
				A1	00779
				C=6450870	
				Customer Drawing	
				SCALE	4:1
				SHEET	5
				OF	20
				REV	K2

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-


PART NUMBER	ROWS		POWER			SIGNAL								POWER			
			P6	P5	P4	8	7	6	5	4	3	2	1	P3	P2	P1	
6450870-8	D					H	H	H	H	H	H	H	H				
	G					G	G	G	G	G	G	G					
	F					F	F	F	F	F	F	F					
	E					E	E	E	E	E	E	E					
3P + 32S + 3P																	

PART NUMBER	ROWS		POWER			SIGNAL								POWER			
			P6	P5	P4	8	7	6	5	4	3	2	1	P3	P2	P1	
3-6450870-3	D		RN	RN	RN	L	L	L	L	L	L	L	L	RN	RN	RN	
	K					K	K	K	K	K	K	K					
	J					J	J	J	J	J	J	J					
	I					I	I	I	I	I	I	I					
3P + 32S + 3P																	


PART NUMBER	ROWS		POWER		SIGNAL										POWER		
			P4	P3	10	9	8	7	6	5	4	3	2	1	P2	P1	
6450870-9	D		RM	RM	H	H	H	H	H	H	H	H	H	H	RM	RM	
	C				G	G	G	G	G	G	G	G	G				
	B				F	F	F	F	F	F	F	F	F	F			
	A				E	E	E	E	E	E	E	E	E	E			
2P + 40S + 2P																	

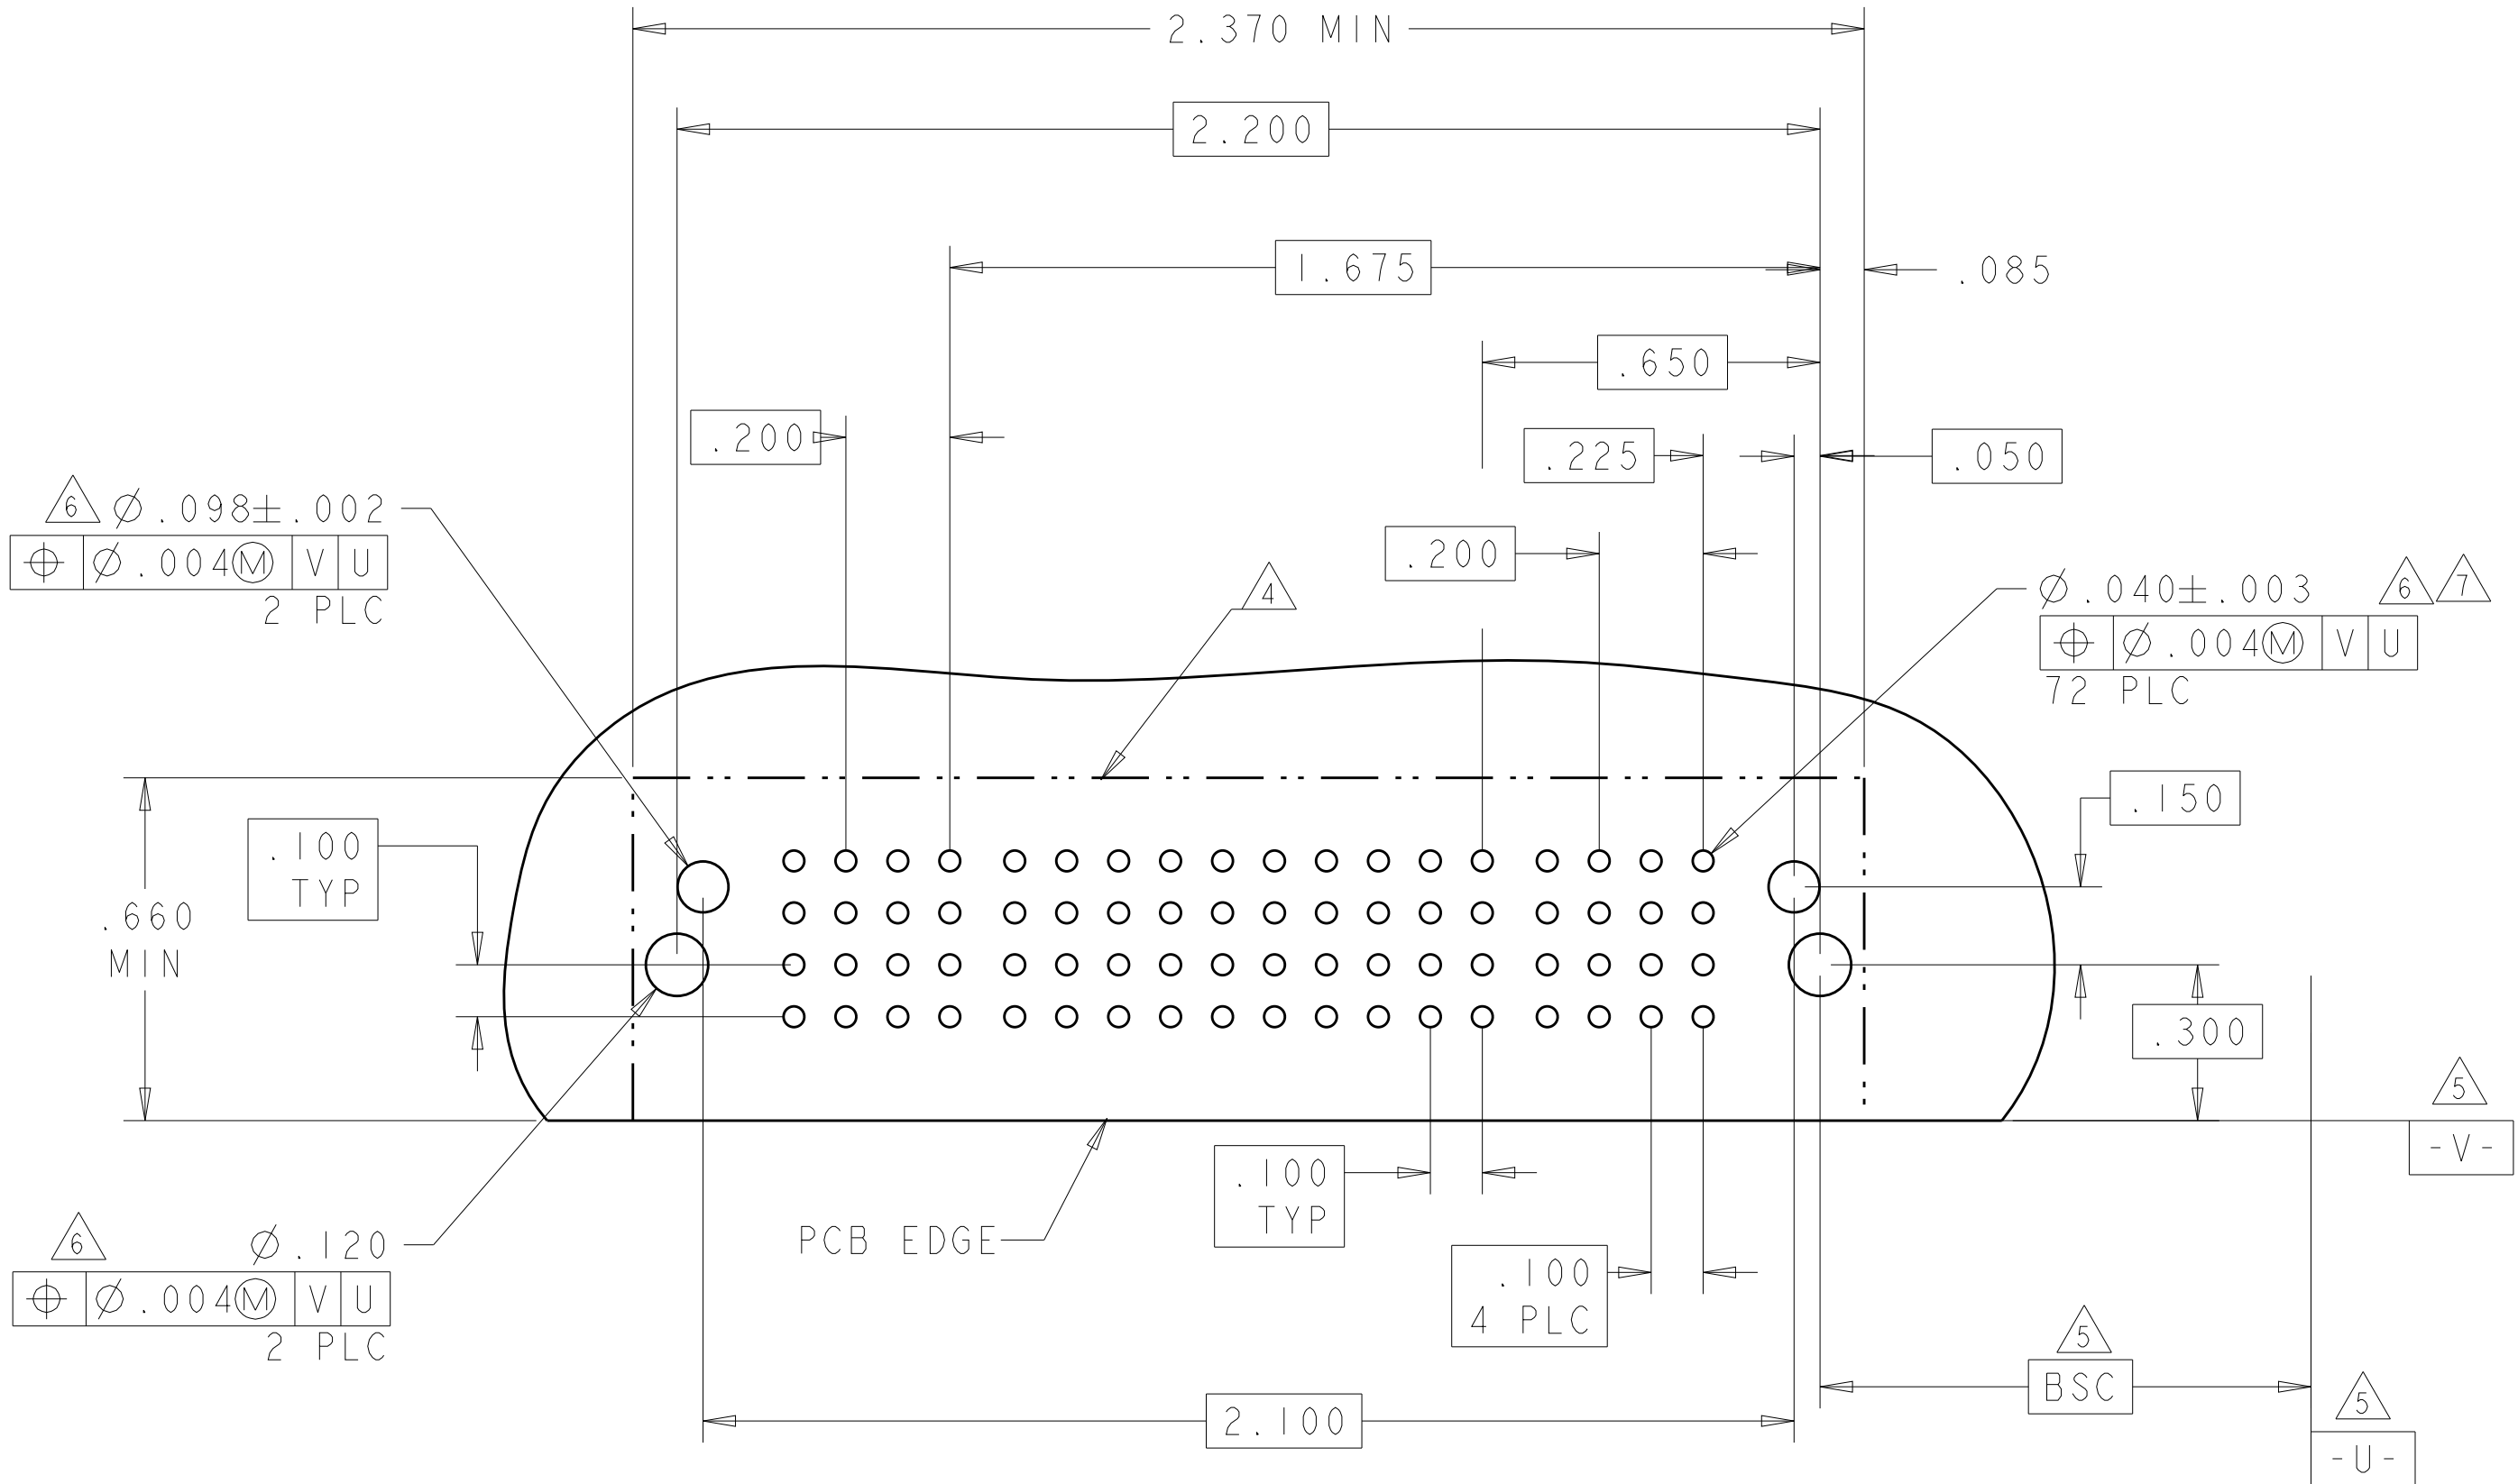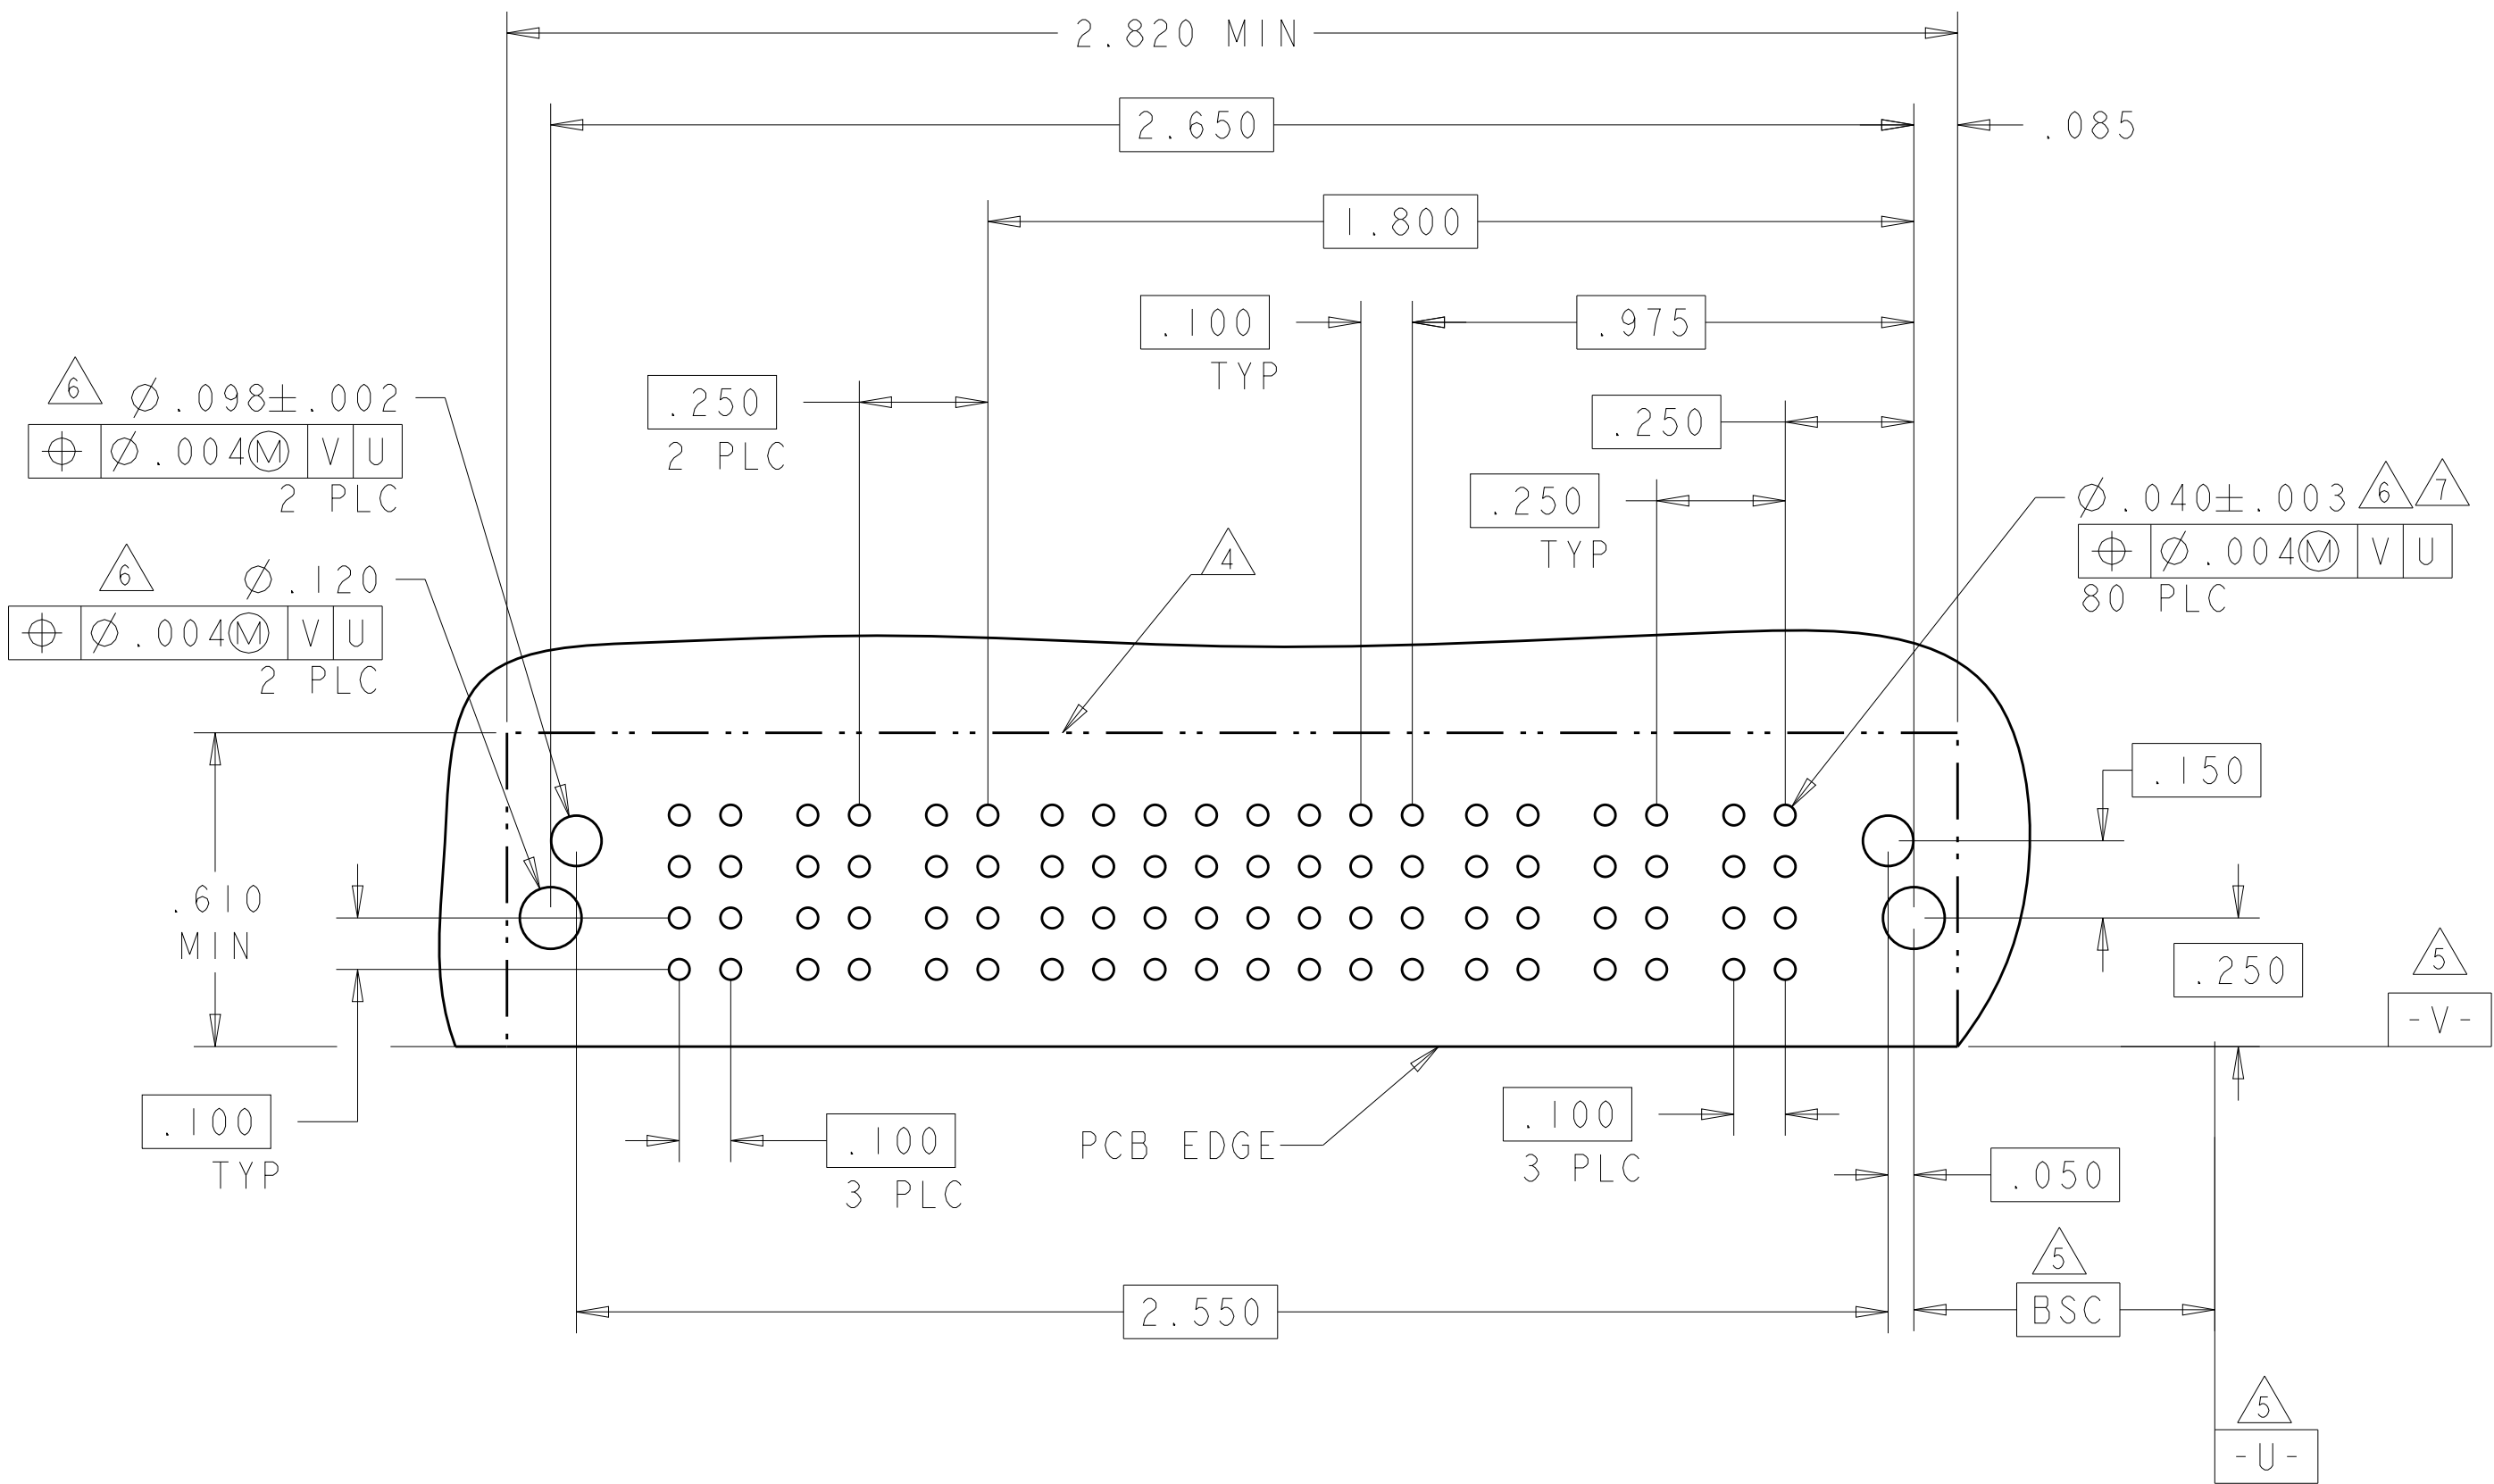


PART NUMBER	ROWS		POWER		SIGNAL					POWER			
		P4	P3	5	4	3	2	1	P2	P1			
I-6450870-I	D		RM	RM	H	H	H	H	H	RM	RM		
	C				G	G	G	G	G				
	B				F	F	F	F	F				
	A				E	E	E	E	E				
2P + 20S + 2P		HD											HD

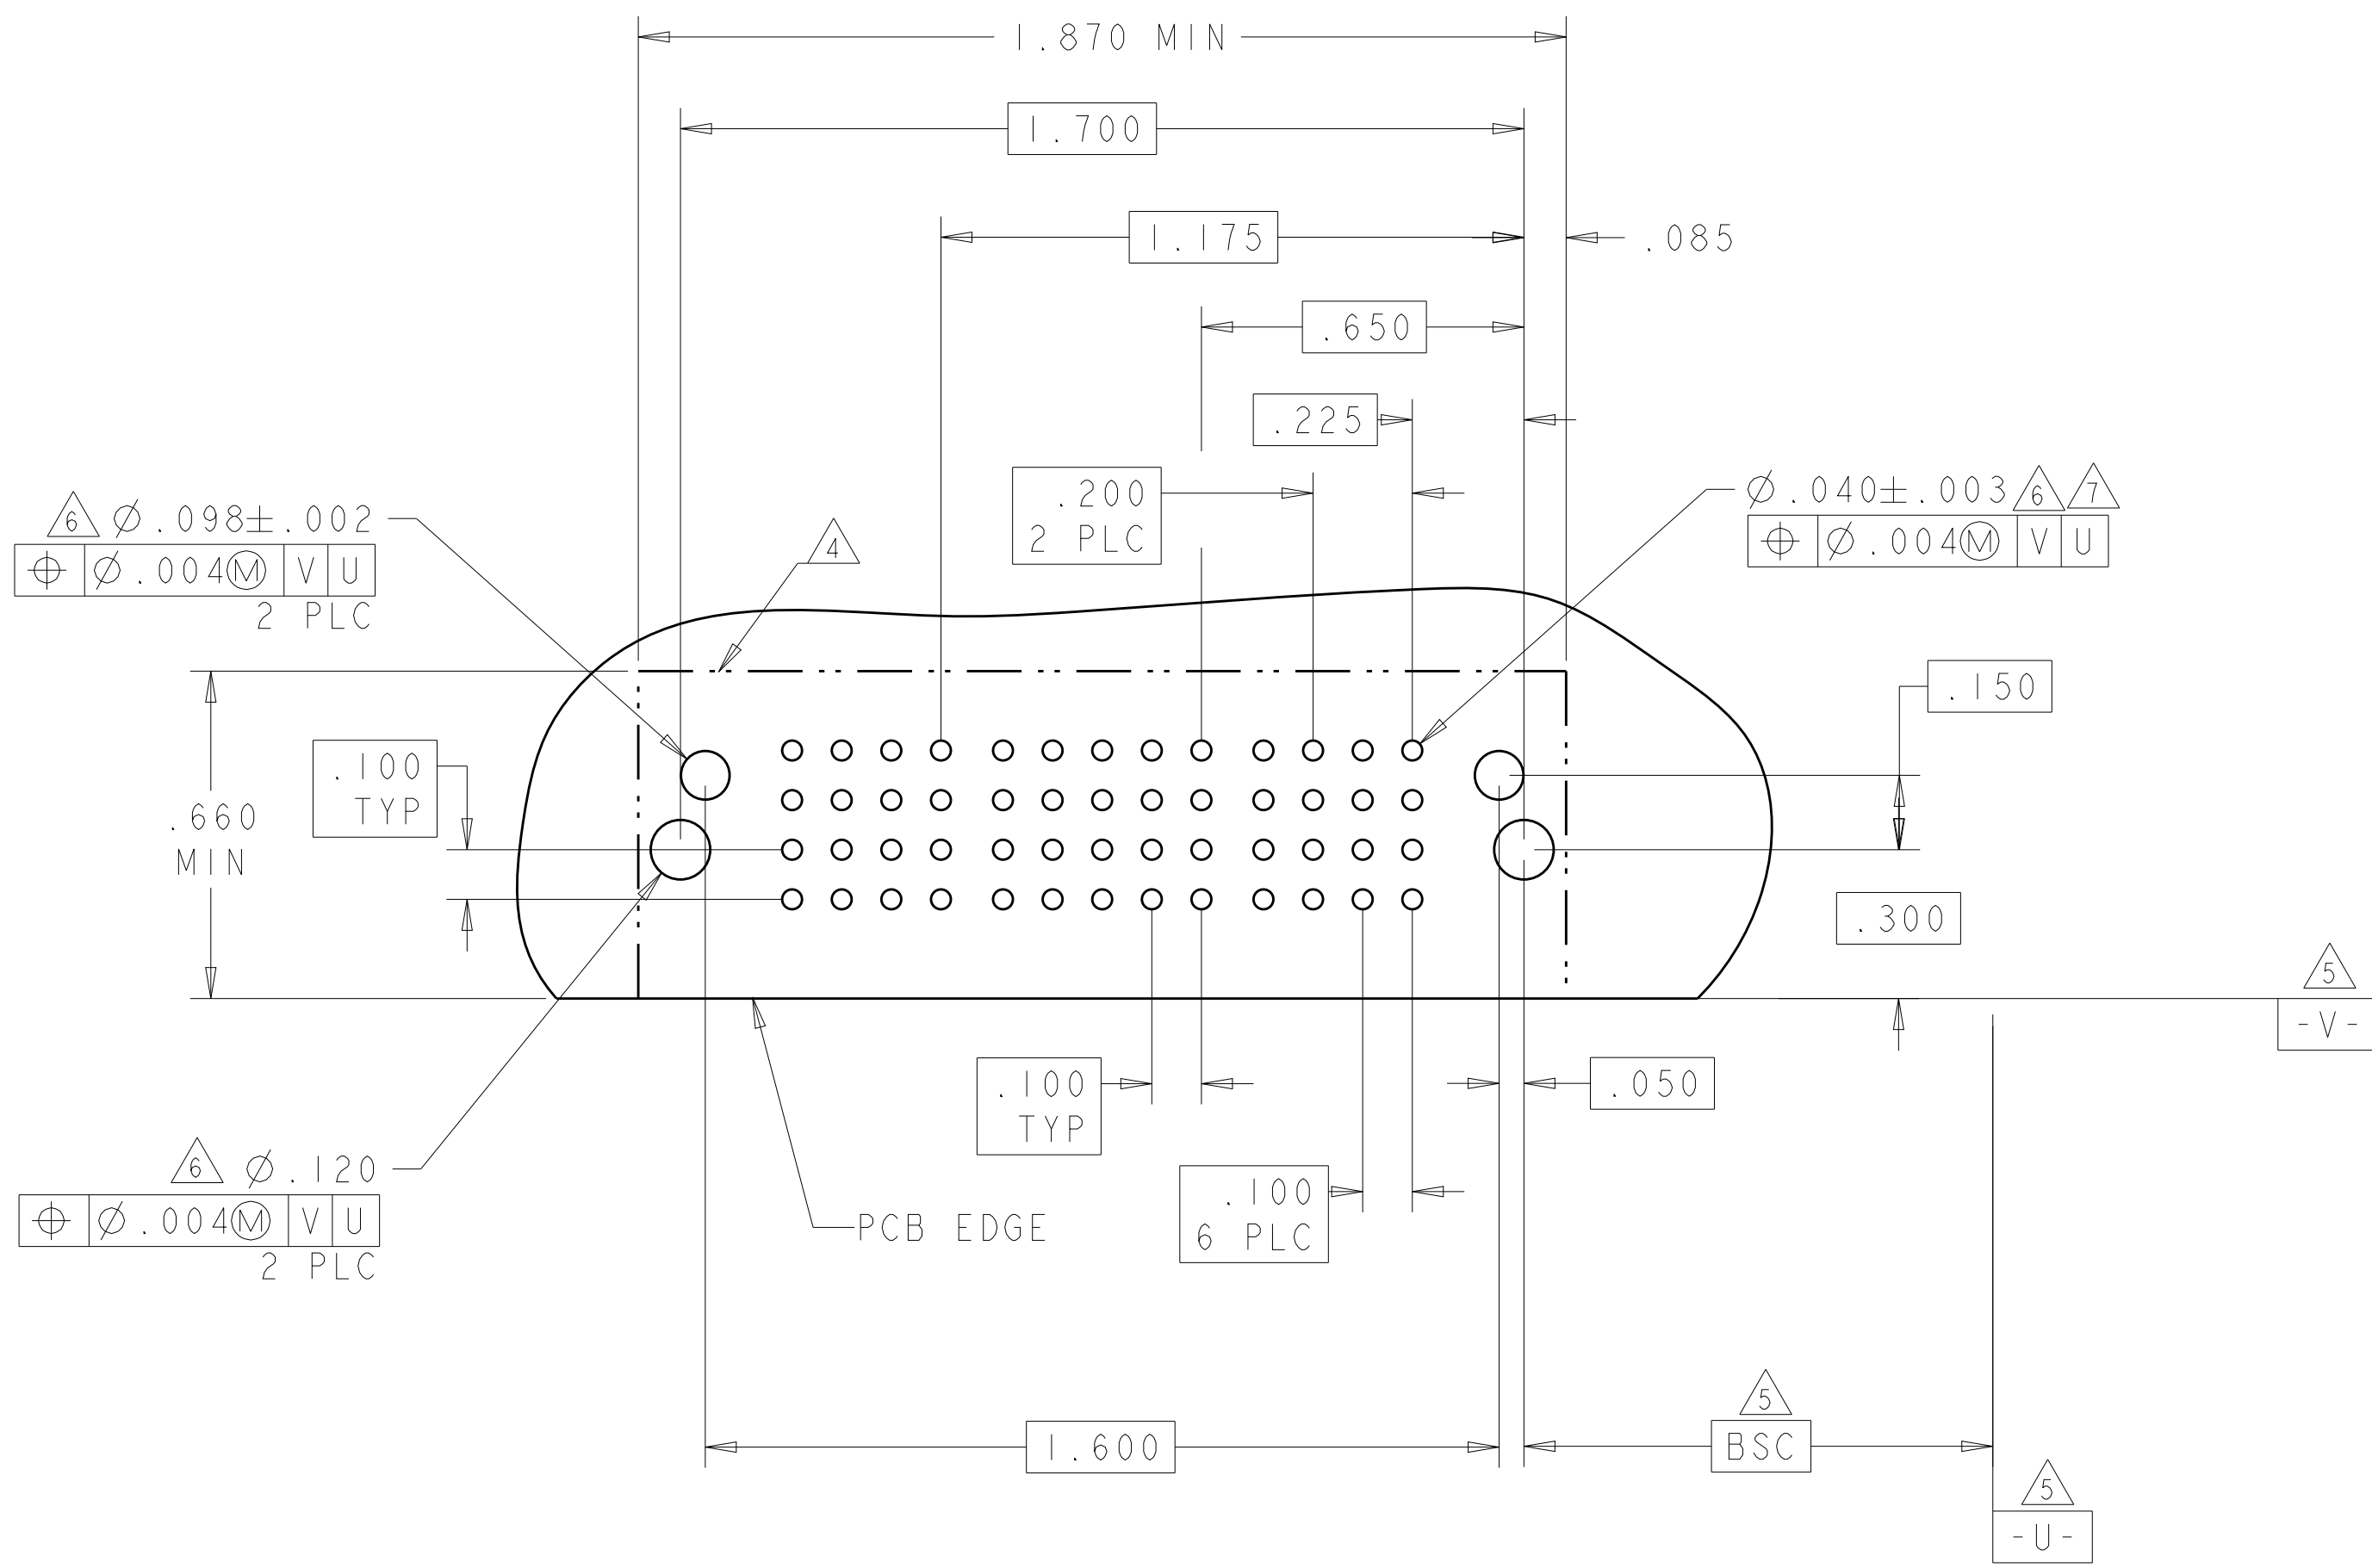
4805 (3/11)


PART NUMBER	ROWS		POWER				SIGNAL				POWER								
			P12	P11	P10	P9	4	3	2	1	P8	P7	P6	P5	P4	P3	P2	P1	
1-6450870-3	D		RM	RM	RM	RA	H	H		H	RA	RA	RA	RA	RM	RM	RM	RM	
	G						G		G										
	F						F		F										
	E						E		E										
8ACP + 16S + 4ACP																			

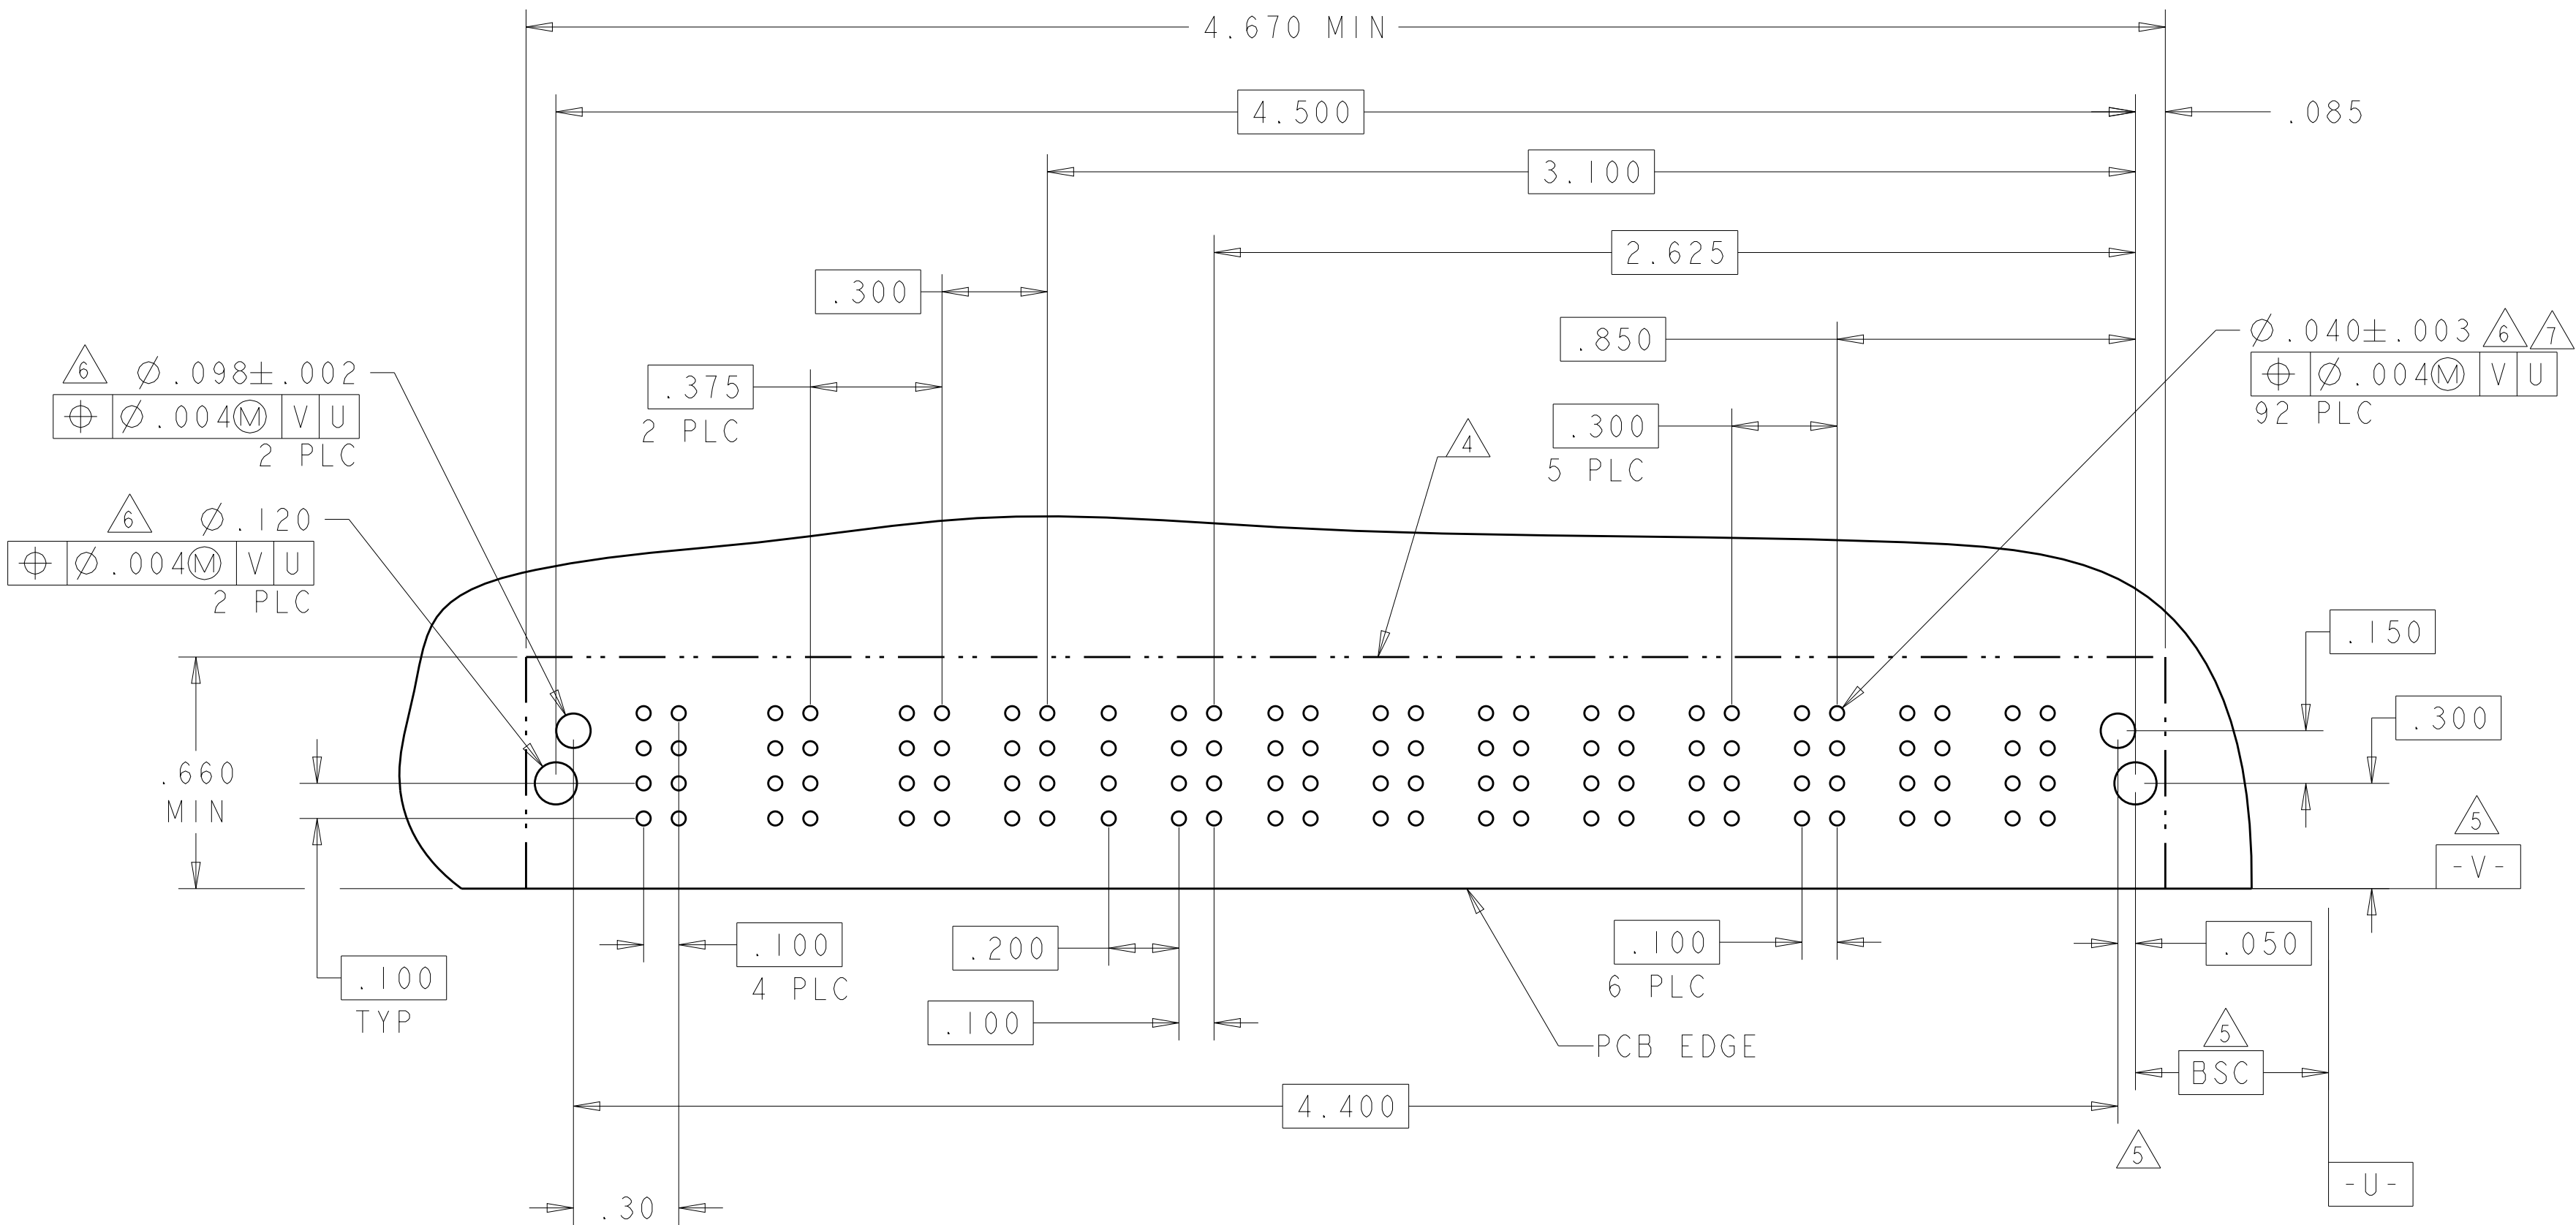





THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.ZHOU	110CT2007	 TE Connectivity	
		CW S.ZHAO	110CT2007		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		APVD S.ZHAO		RIGHT ANGLE RECEPTACLE SHORT END MODULE MULTI-BEAM XLE	
		PRODUCT SPEC			
		108-2292			
		APPLICATION SPEC			
		114-13251		SIZE CAGE CODE DRAWING NO RESTRICTED TO	
MATERIAL	FINISH	WEIGHT -		A 100779 ©=6450870 -	
		Customer Drawing		SCALE 4:1 SHEET 8 OF 20 REV K2	

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	OWN
ES	00	-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS		POWER				SIGNAL					POWER				
			P4	P3	P2	P1	5	4	3	2	1	LP3	LP2	LPI		
1-6450870-4	D C B A			RM	RM	RM	RM	H	H	H	H	H	LM	LM	LM	
								G	G	G	G	G				
								F	F	F	F	F				
								E	E	E	E	E				
3LP + 20S + 4HDP																



PART NUMBER	ROWS		POWER				SIGNAL		POWER		
			LP4	LP3	LP2	LPI	2	1	P2	PI	
1-6450870-5	D C B A		LM	LM	LM	LM	H	H	RM	RM	
							G	G			
							F	F			
							E	E			
2ACP + 8S + 4LP											

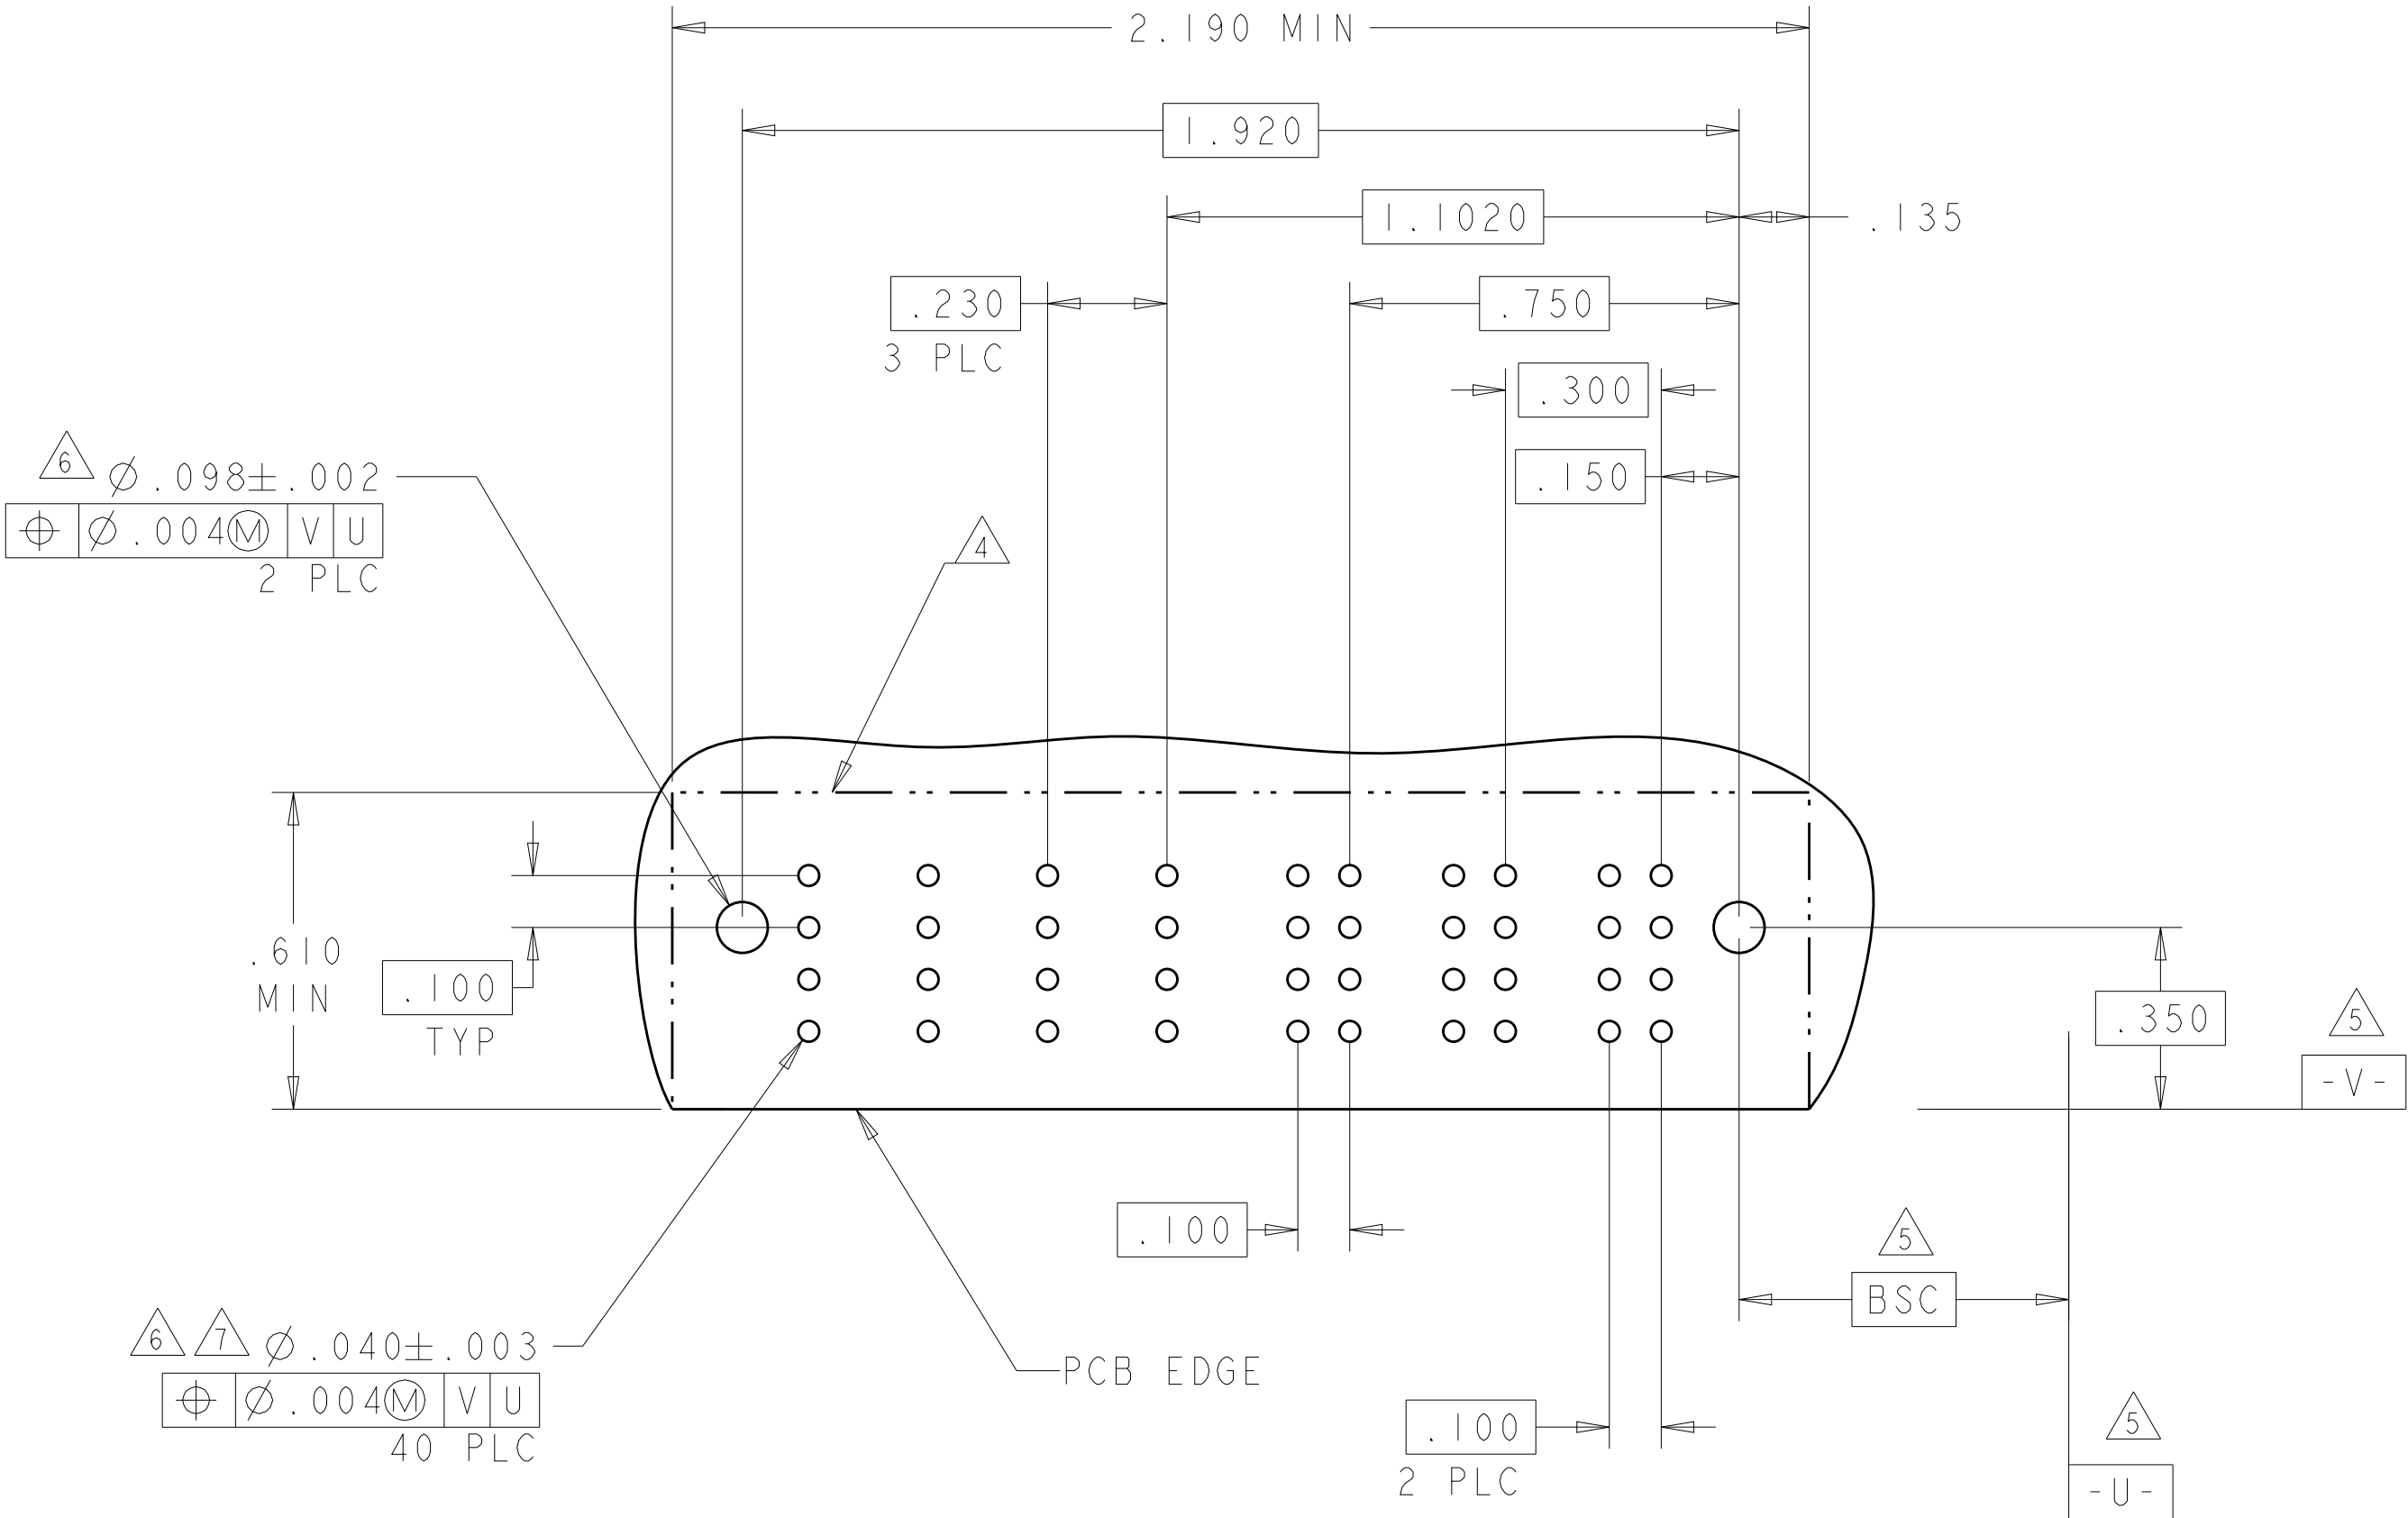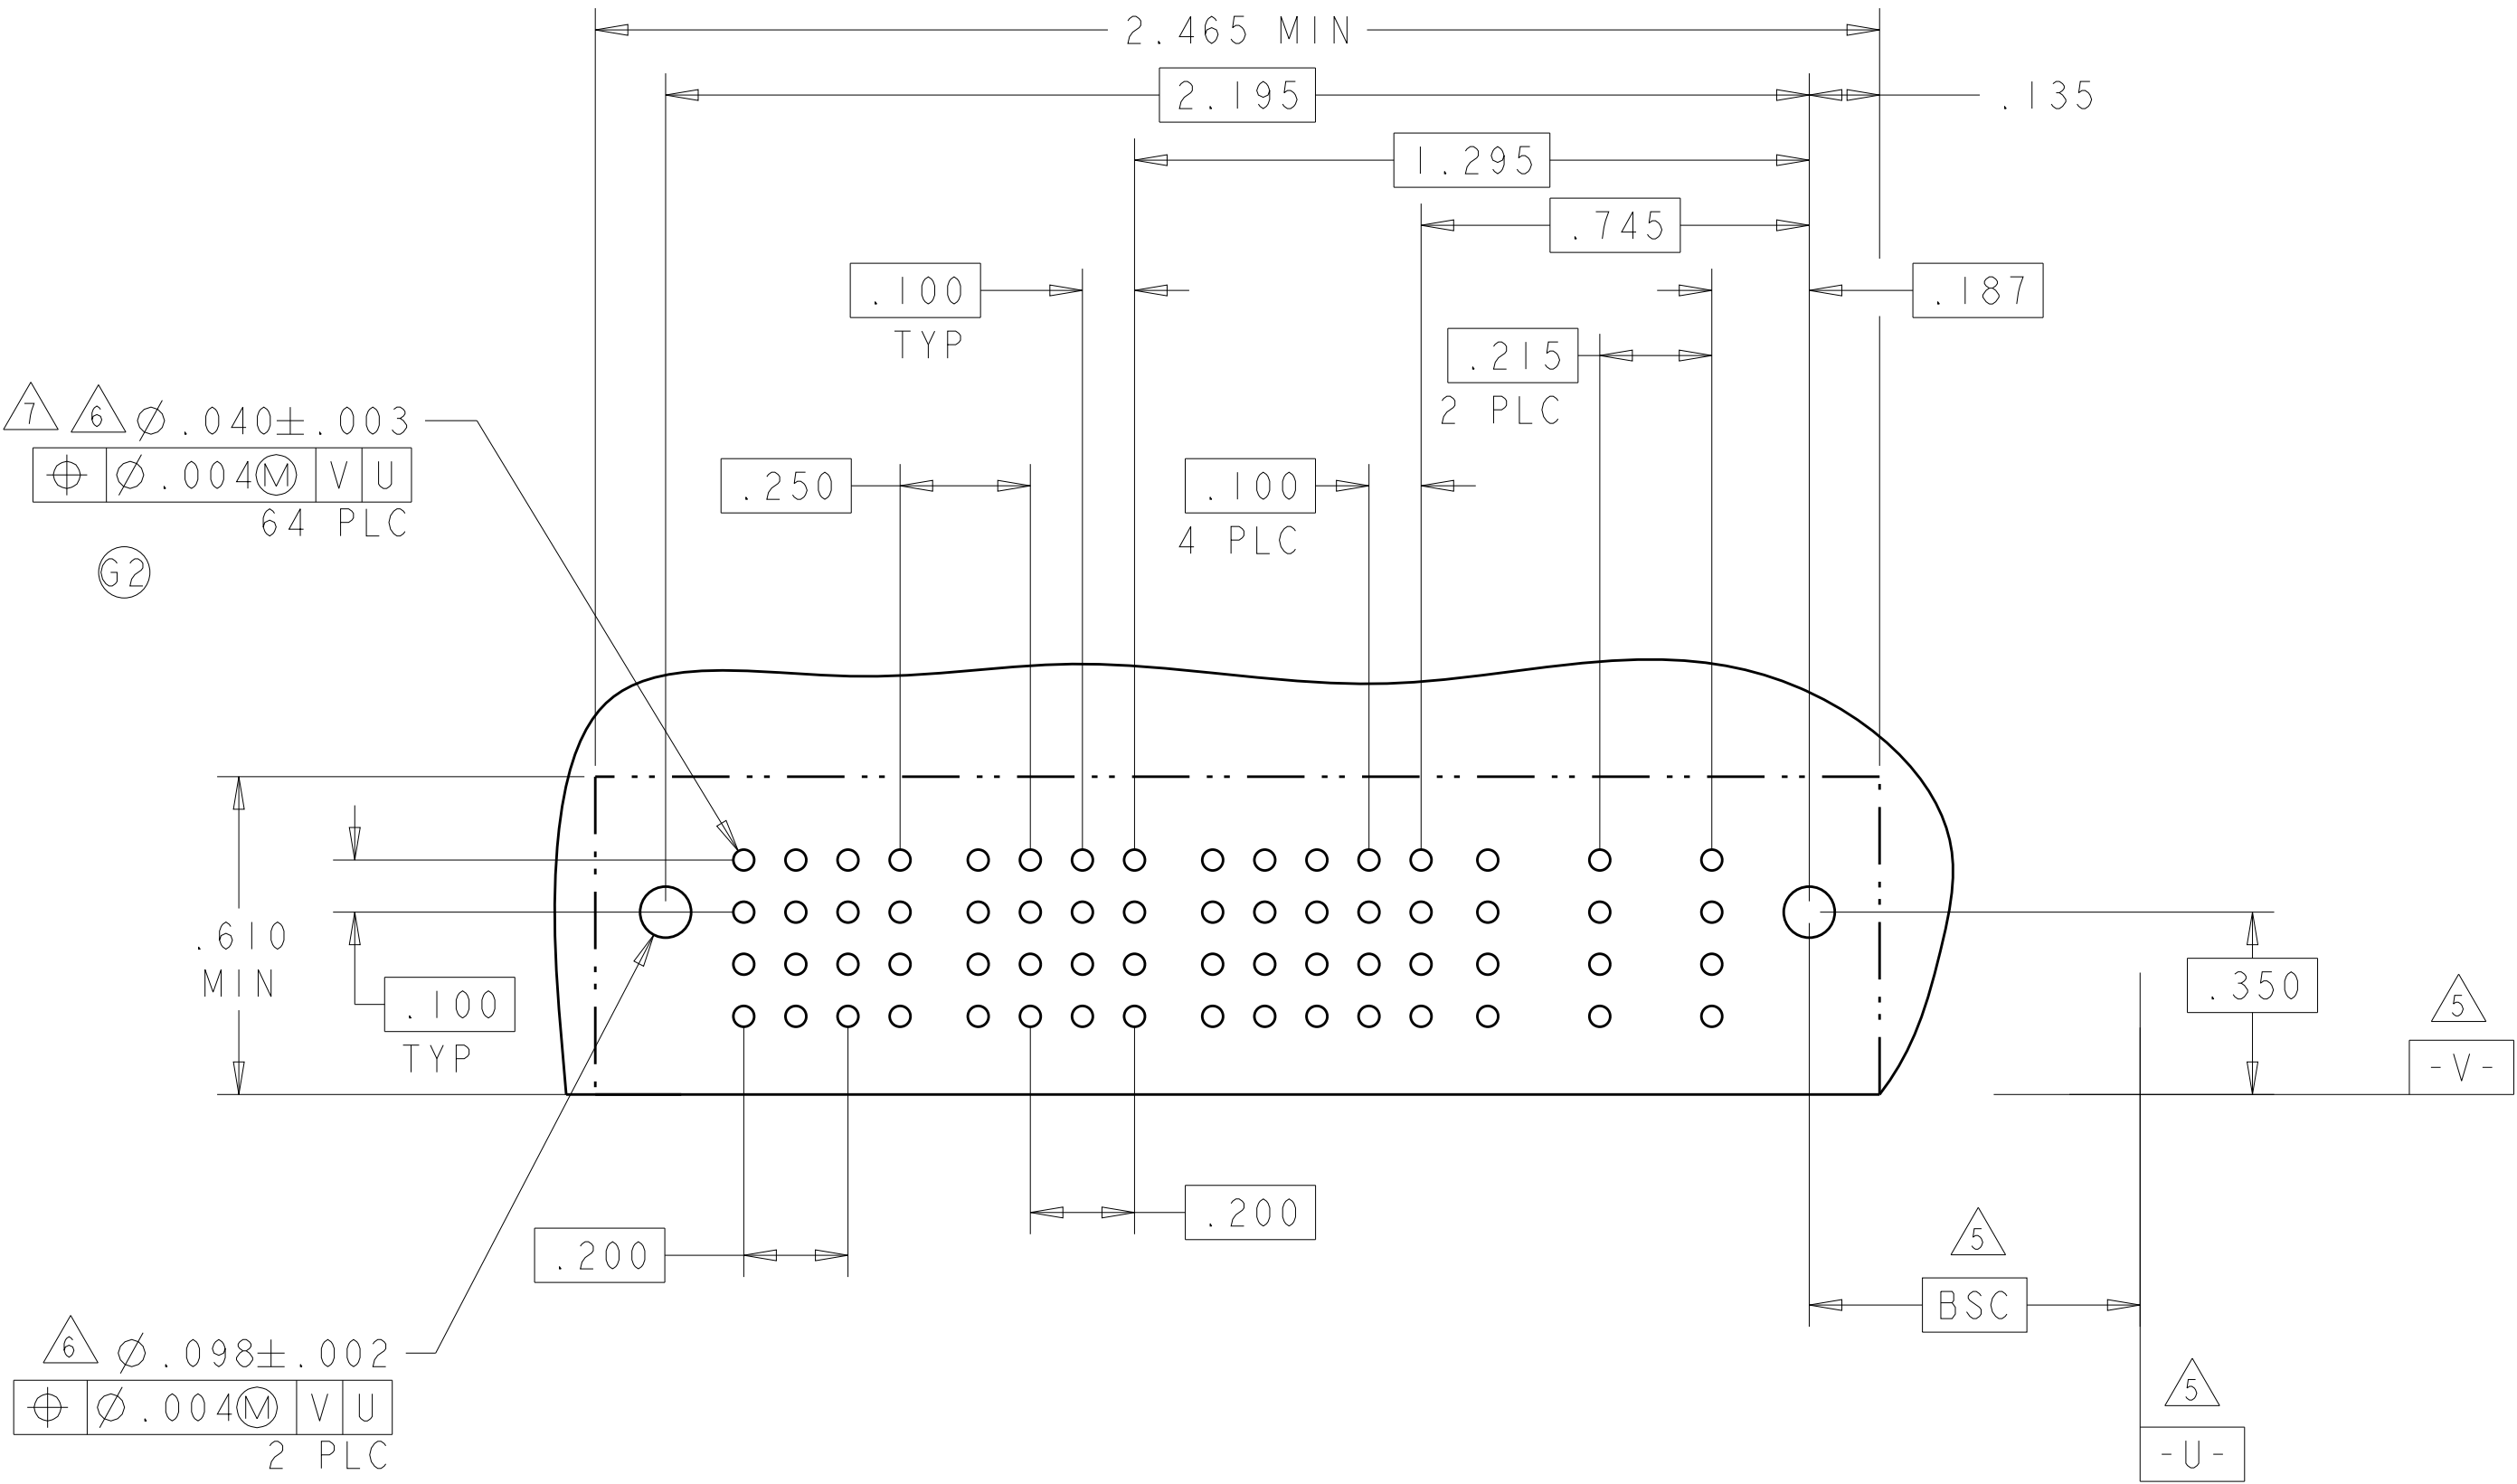

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.1
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH

OWN: C. ZHOU
CHK: S. ZHAO
APVD: S. ZHAO

11OCT2007
11OCT2007

PRODUCT SPEC
108-2292
APPLICATION SPEC
114-13251

WEIGHT

NAME: RIGHT ANGLE RECEPTACLE SHORT END MODULE MUTLI-BEAM XLE

SIZE: A1
CAGE CODE: 00779
DRAWING NO: 6450870


RESTRICTED TO: -

Customer Drawing

SCALE: 4:1
SHEET: 9 OF 20
REV: K2

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS		POWER				SIGNAL			POWER					
			P9	P8	P7	P6	3	2	1	P5	P4	P3	P2	P1	
I-6450870-6	D														
	H						H	H							
	G						G	G							
	F						F	F							
	A						E	E	E						
5ACP + 12S + 4ACP															

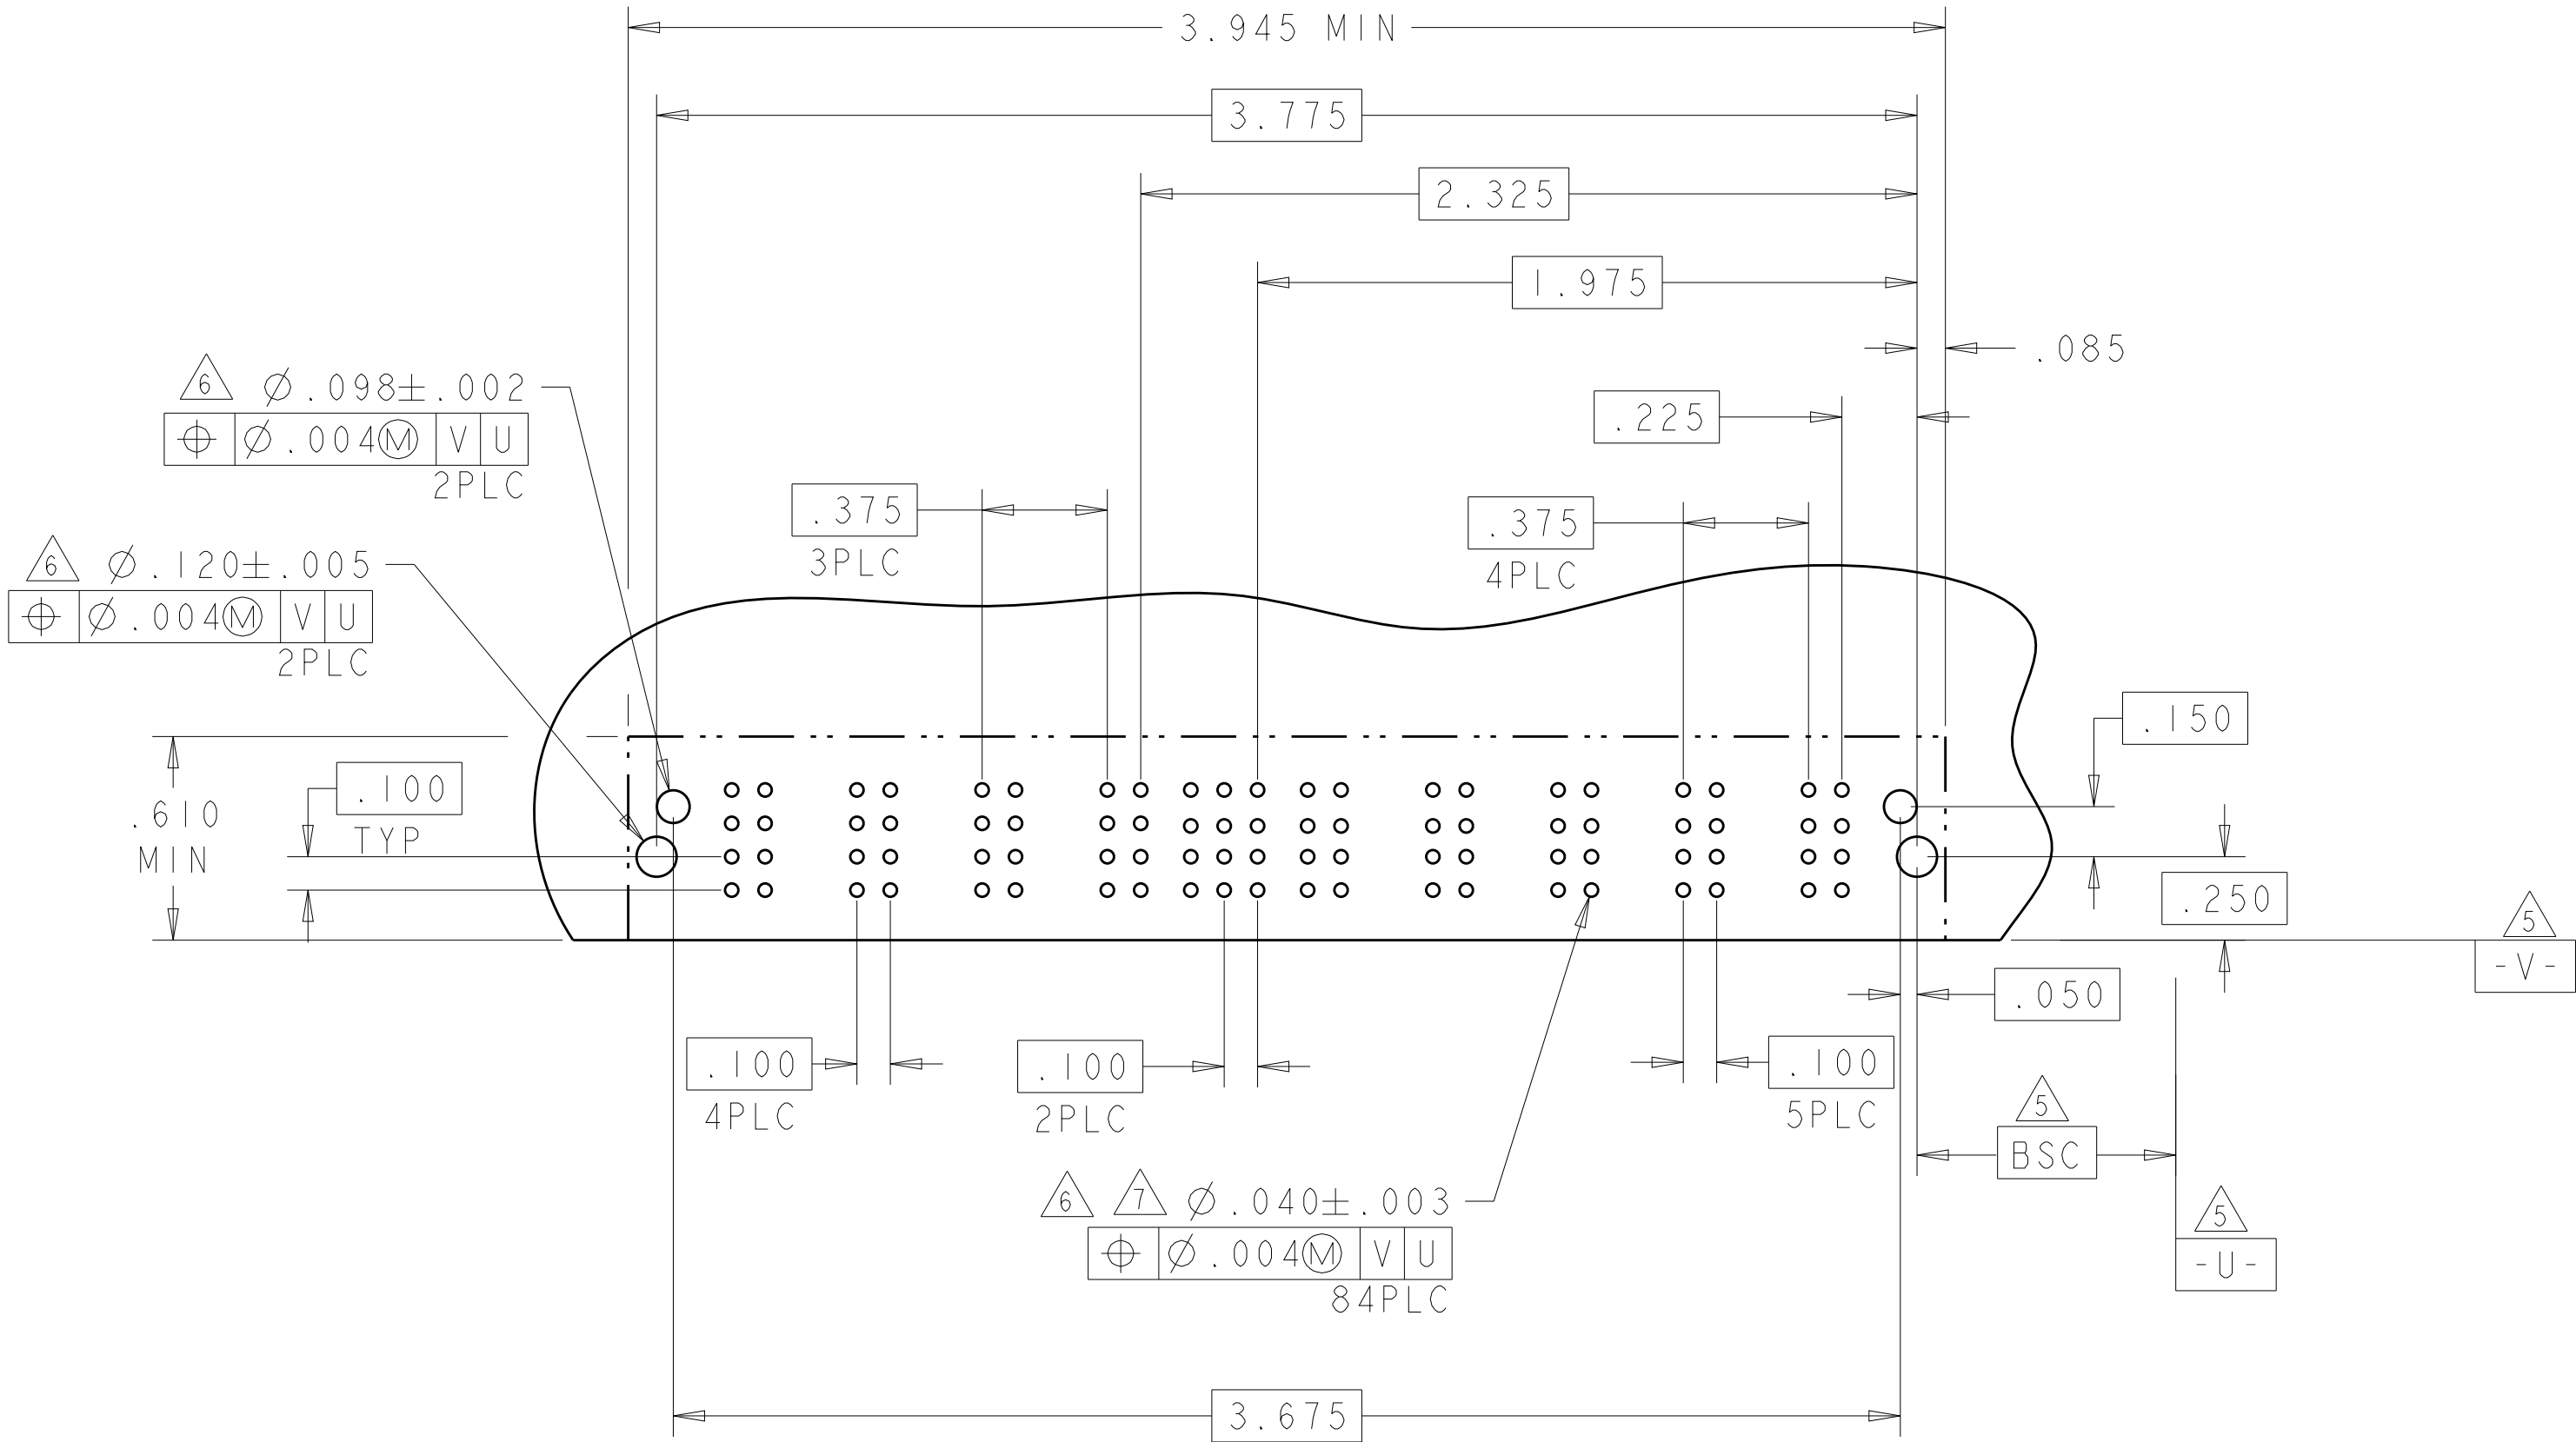

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
C.ZHOU
CHK
S.ZHAO
APVD
S.ZHAO

11OCT2007
11OCT2007
-

DIMENSIONS:
INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±.1
1 PLC ±.1
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES #2°
FINISH -

PRODUCT SPEC
108-2292
APPLICATION SPEC
114-13251
WEIGHT -

Customer Drawing

NAME
RIGHT ANGLE RECEPTACLE
SHORT END MODULE
MULTI-BEAM XLE

SIZE
A1

CAGE CODE
00779

DRAWING NO
C=6450870

RESTRICTED TO
-

SCALE
4:1

SHEET
10


OF
20

REV
K2

TE Connectivity

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER																SIGNAL			POWER					
			P20	P19	P18	P17	P16	P15	P14	P13	P12	P11	P10	P9	P8	P7	P6	P5	3	2	1	P4	P3	P2	P1		
I-6450870-8	D																	H	H	H							
	C																	G	G	G							
	B																		F	F	F						
	A	HD																	E	E	E						HD
4P + 12S + 16P																											

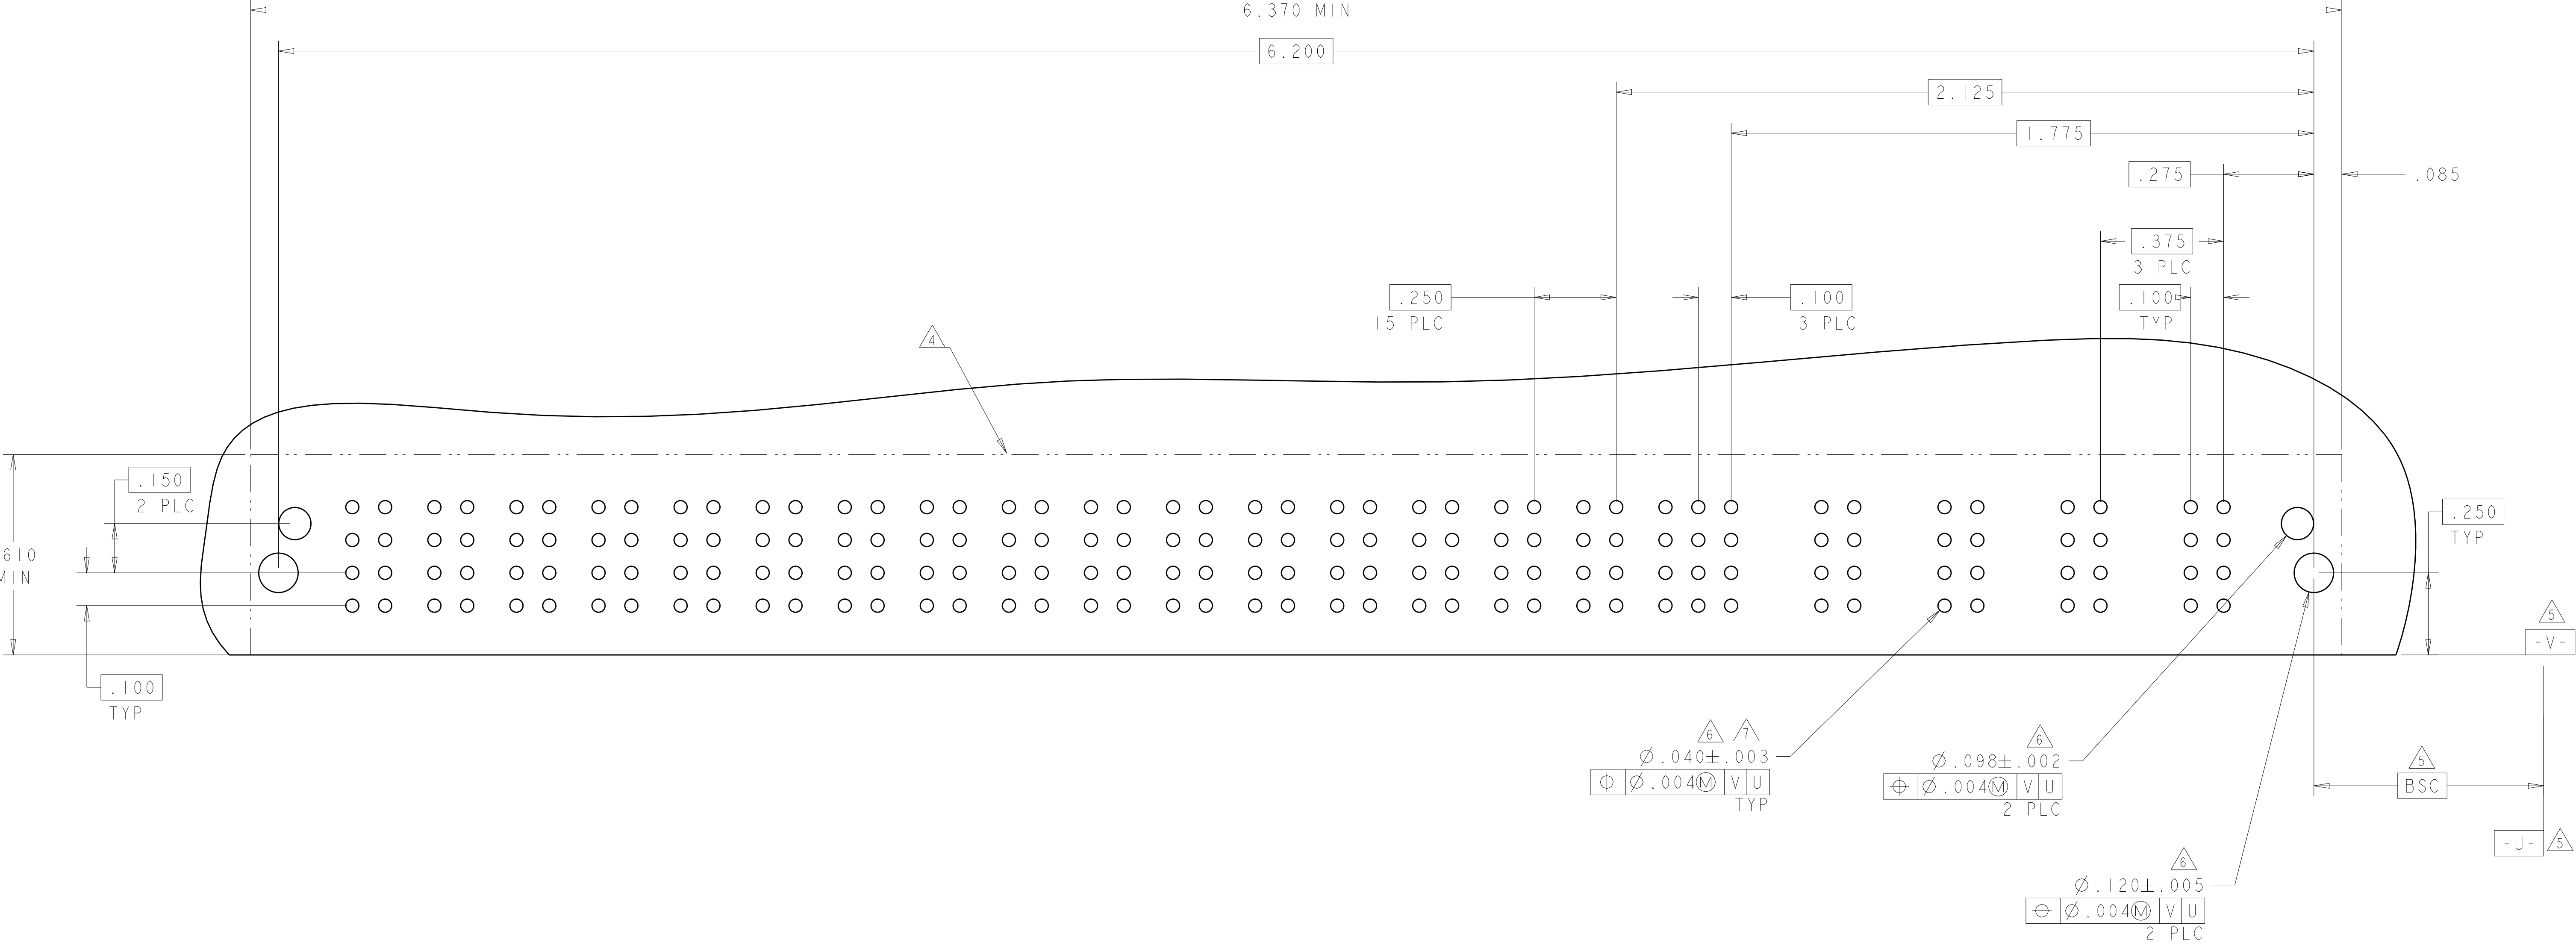

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

G8



PART NUMBER	ROWS		POWER			SIGNAL					POWER				
			P6	P5	P4	6	5	4	3	2	1	P3	P2		P1
1-6450870-9	D		RM	RM	RA		H	H	H						
							G	G	G						
							F	F	F						
	C														
	B														
	A	HD					E	E	E						HD
3P + 24S + 3P															

NO CONTACT LOADED

G9

PART NUMBER	ROWS		POWER			SIGNAL					POWER				
			P6	P5	P4	6	5	4	3	2	1	P3	P2		P1
2-6450870-0	D		RM	RM	RA		H	H				RM		RM	
							G	G							
							F	F							
	A	HD						E	E						
3P + 24S + 3P															

NO CONTACT LOADED

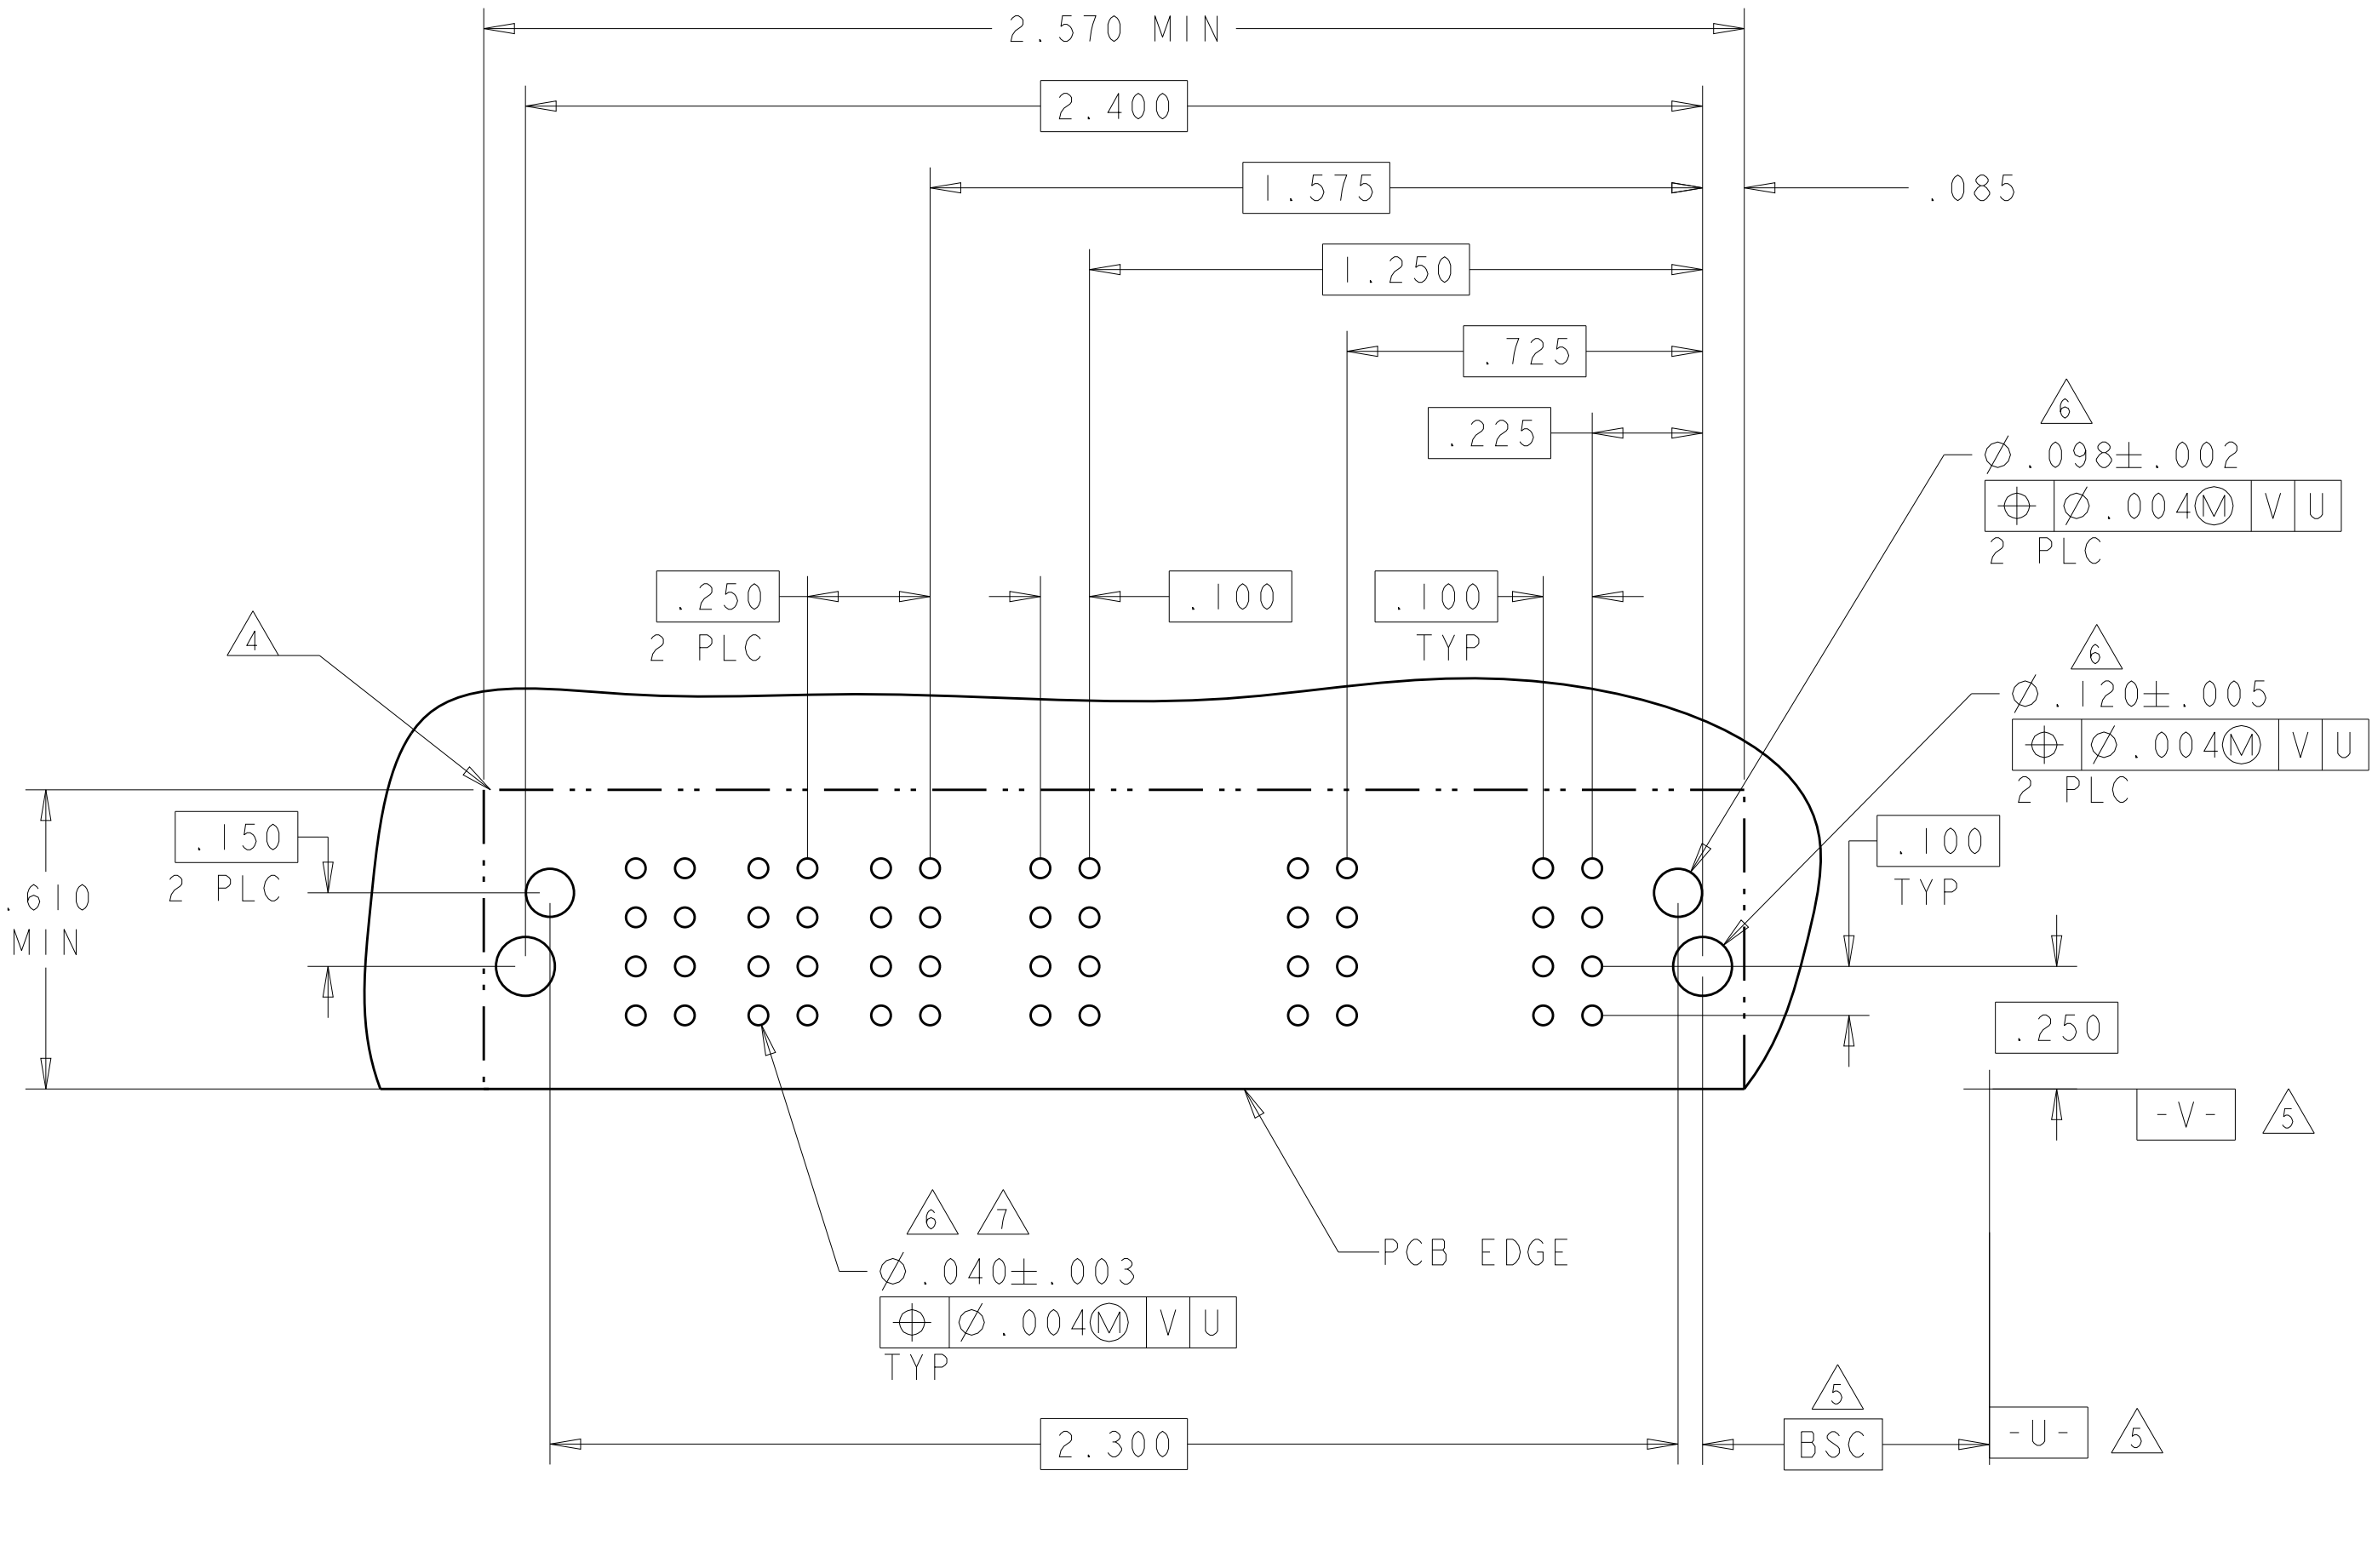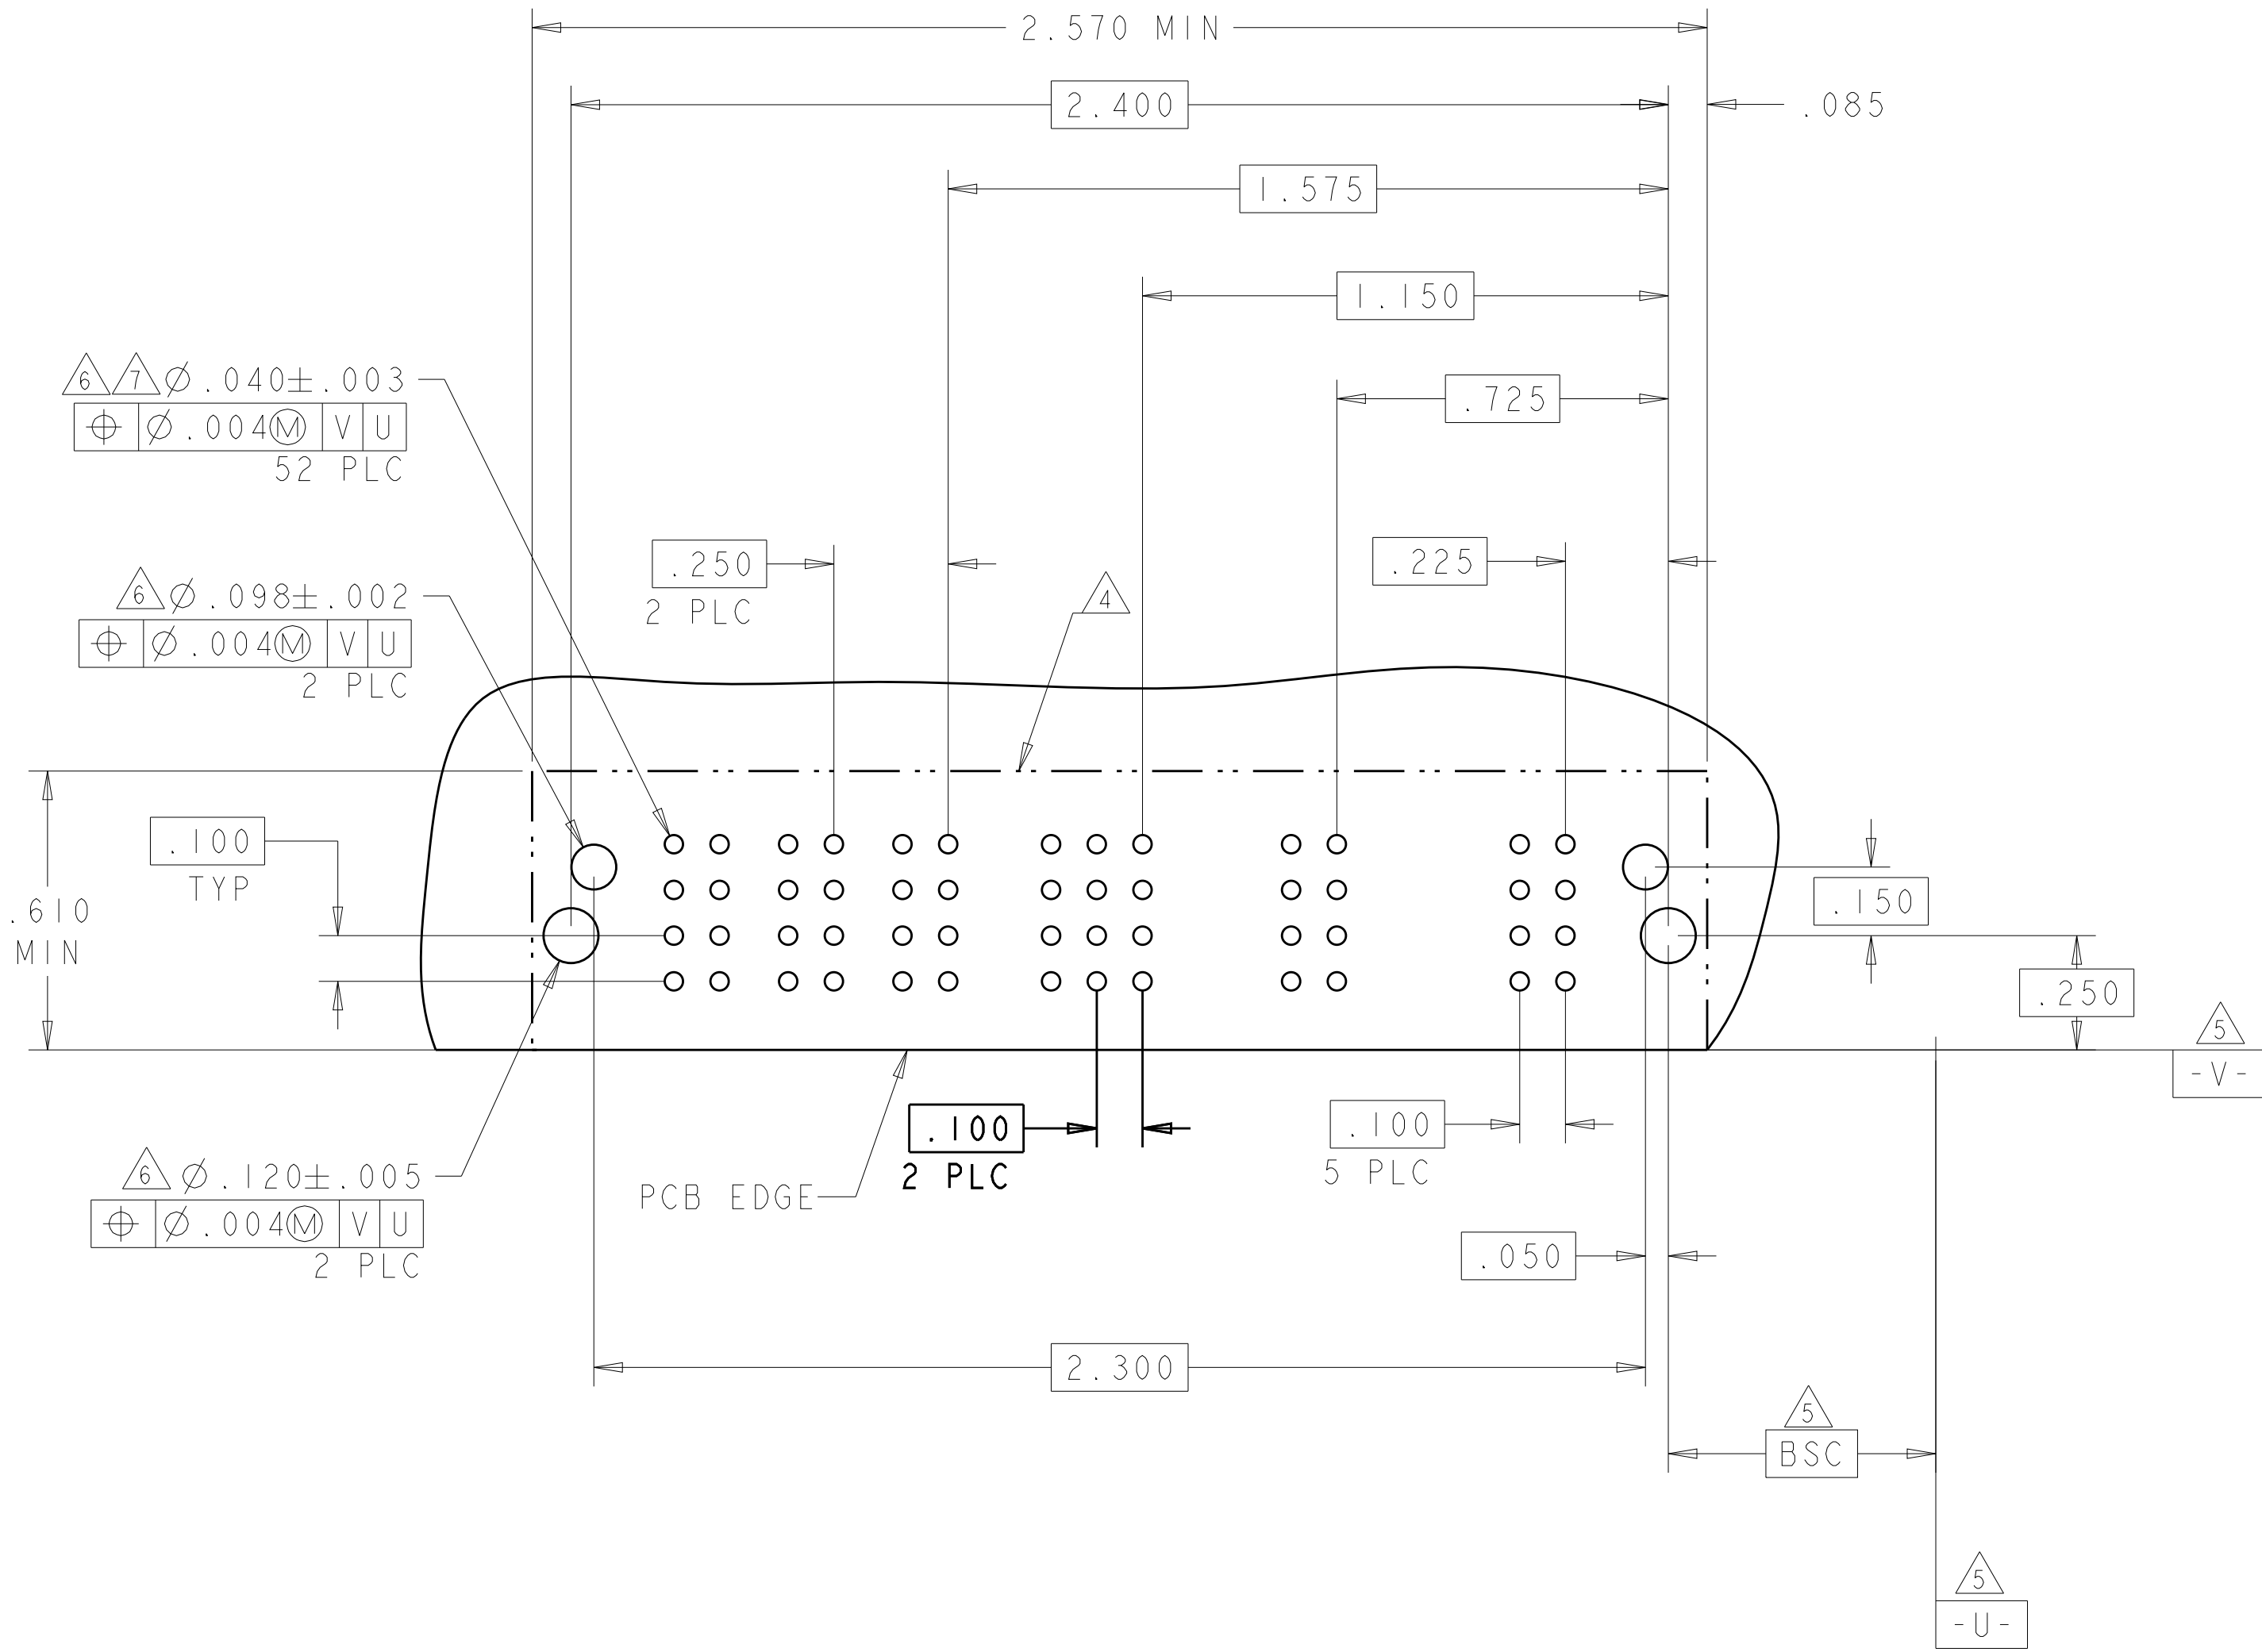

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
C. ZHOU
CHK
S. ZHAO
APVD
S. ZHAO

11OCT2007
11OCT2007
-

DIMENSIONS:
INCHES

0 PLC ±.1
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.002
ANGLES ±.2°
FINISH

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

PRODUCT SPEC
108-2292
APPLICATION SPEC
114-13251
WEIGHT
Customer Drawing

NAME
RIGHT ANGLE RECEPTACLE
SHORT END MODULE
MULTI-BEAM XLE

SIZE
A100779

CAGE CODE
C=6450870

DRAWING NO.
114-13251

RESTRICTED TO
-

SCALE
4:1


SHEET
12

OF
20

REV
K2

TE Connectivity

PART NUMBER	ROWS		POWER		SIGNAL				POWER		
		P4	P3	4	3	2	1	P2	P1		
2-6450870-2	D		RM	RM	H	H	H	H	RM	RM	
	C				G	G	G	G			
	B				F	F	F	F			
	A	HD			E	E	E	E			HD
2P + 16S + 2P											


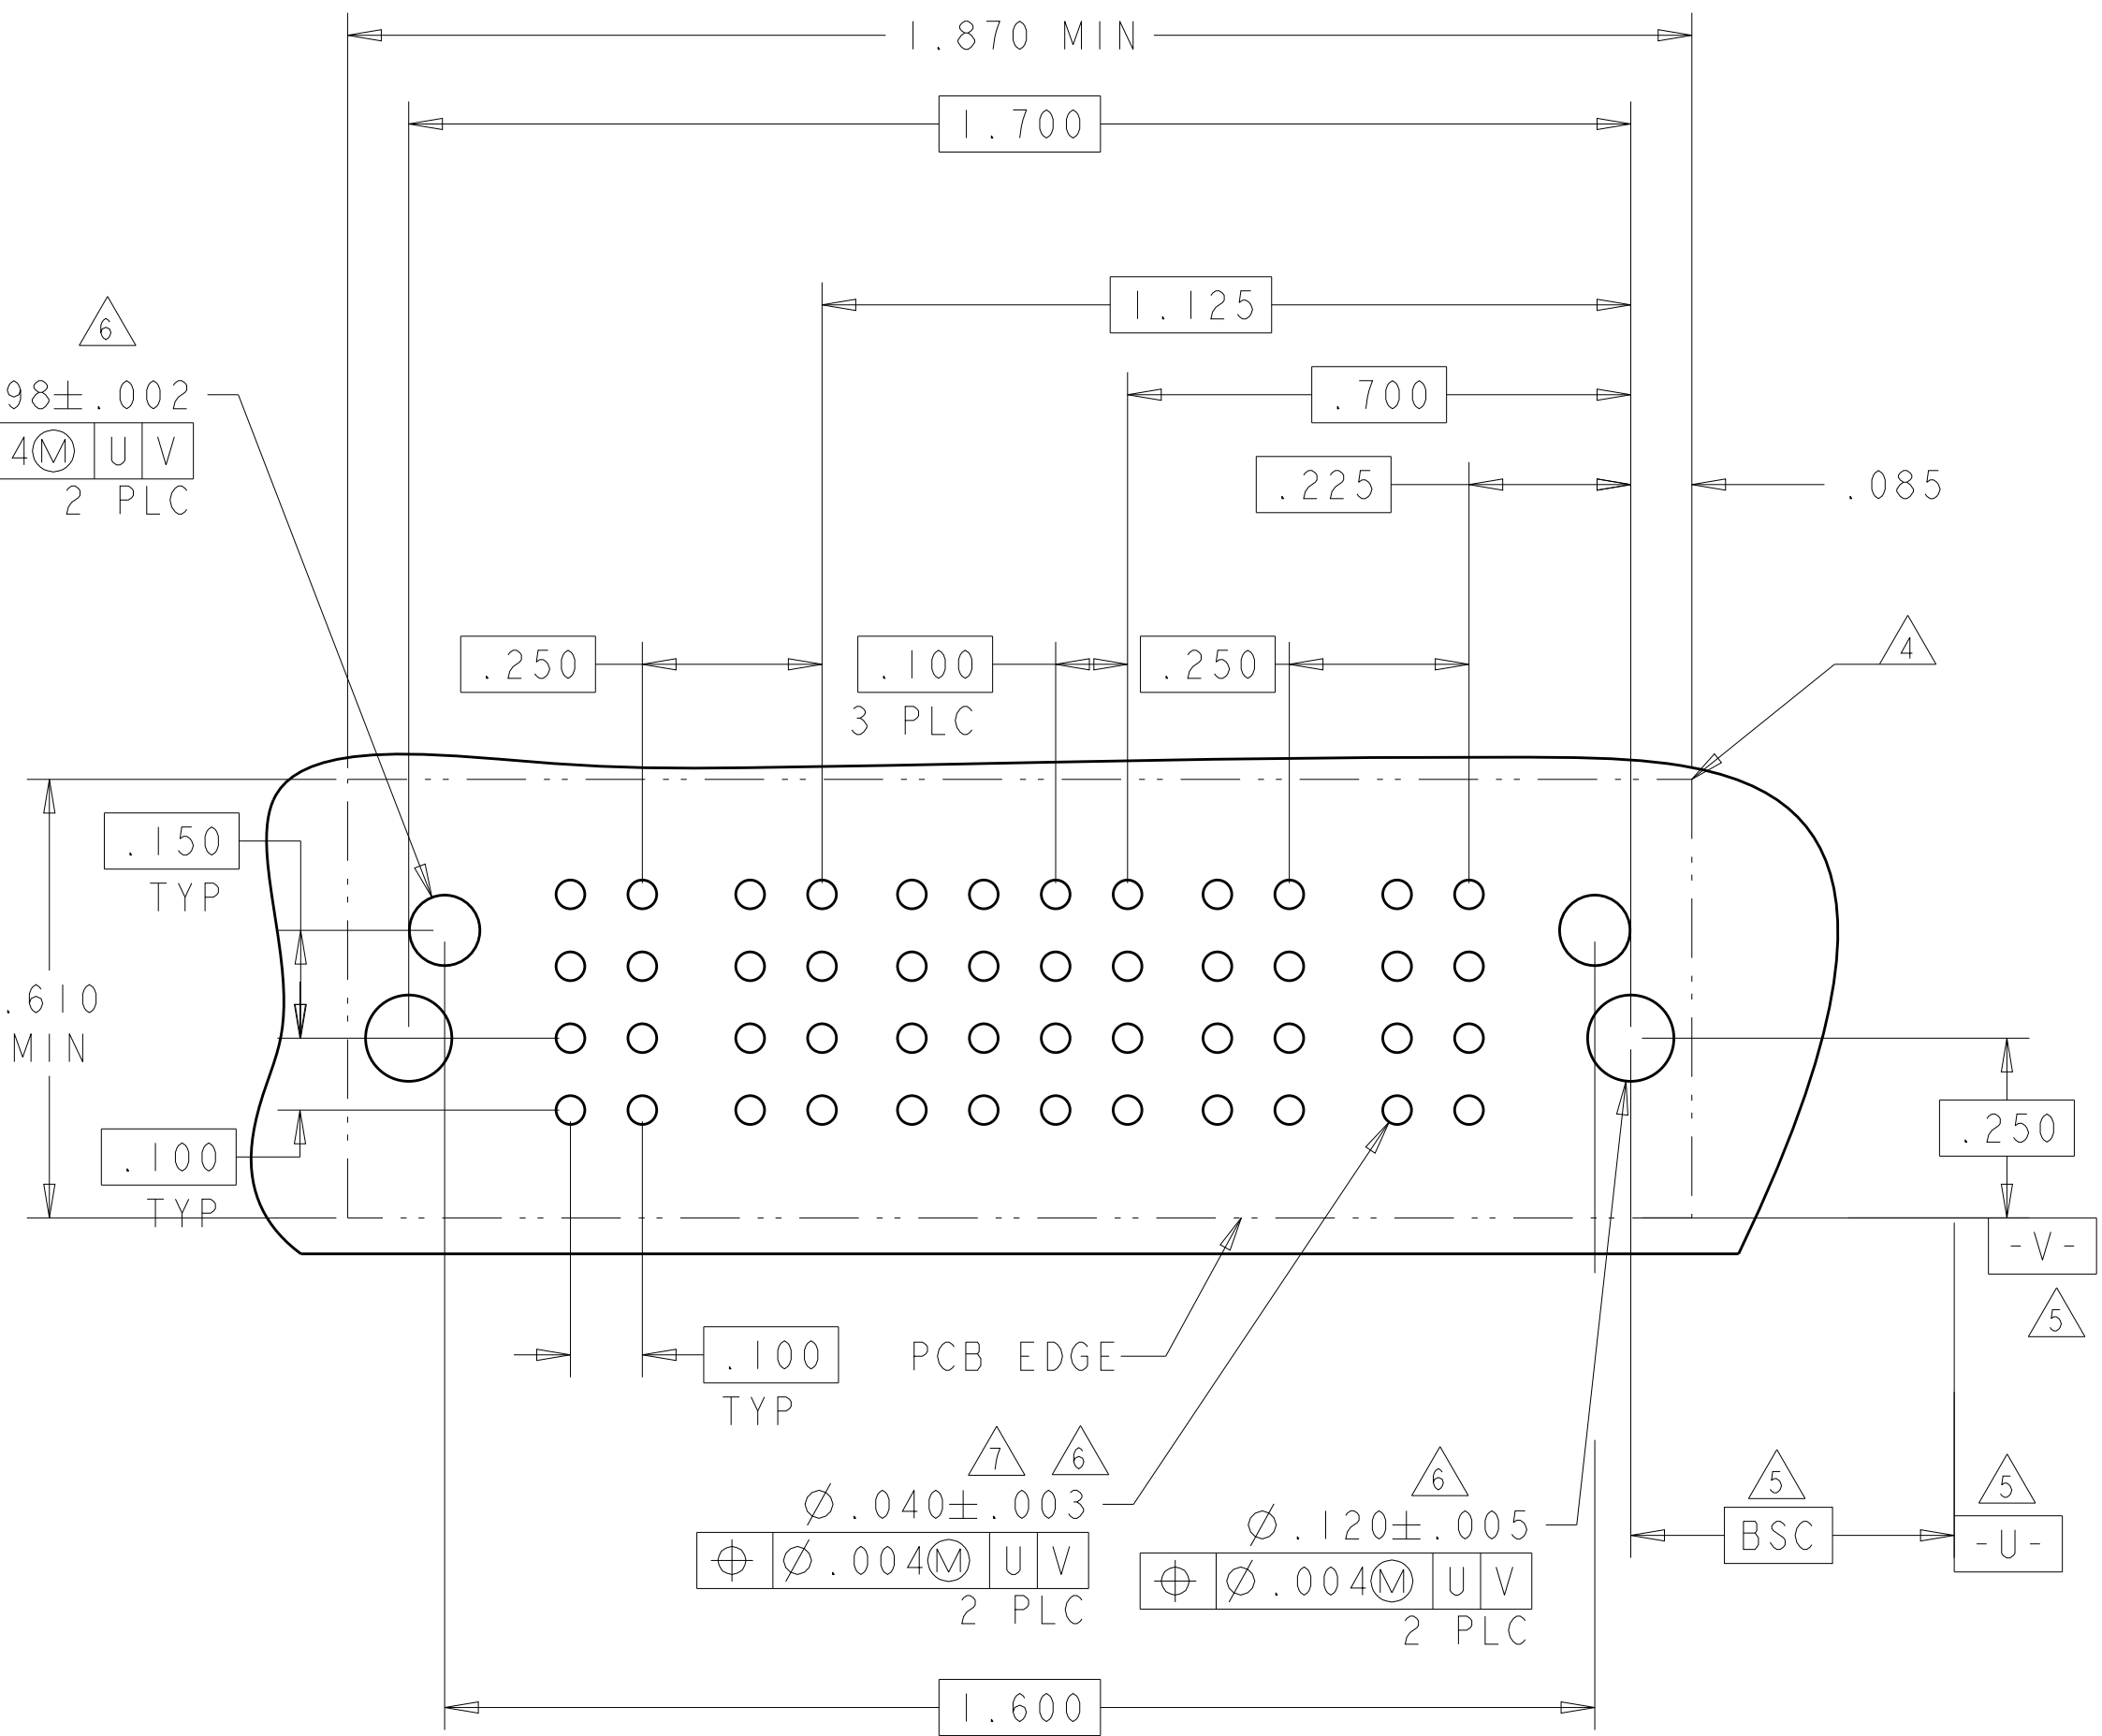
4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		LOW POWER		SIGNAL								LOW POWER		
			LP2		8	7	6	5	4	3	2	1	LP1		
2-6450870-3	D		LM		H		H		H		H		LM		
	C			G		G		G		G					
	B			F		F		F		F					
	A			E		E		E		E					
1LP + 32S + 1LP															


NO CONTACTS LOADED

PART NUMBER	ROWS		POWER		SIGNAL		POWER			
			P5	P4	2	1	P3	P2	P1	
2-6450870-4	D		RM	RM	H	H	RA	RM	RM	
	C				G	G				
	B				F	F				
	A				E	E				
3ACP + 8S + 2P										

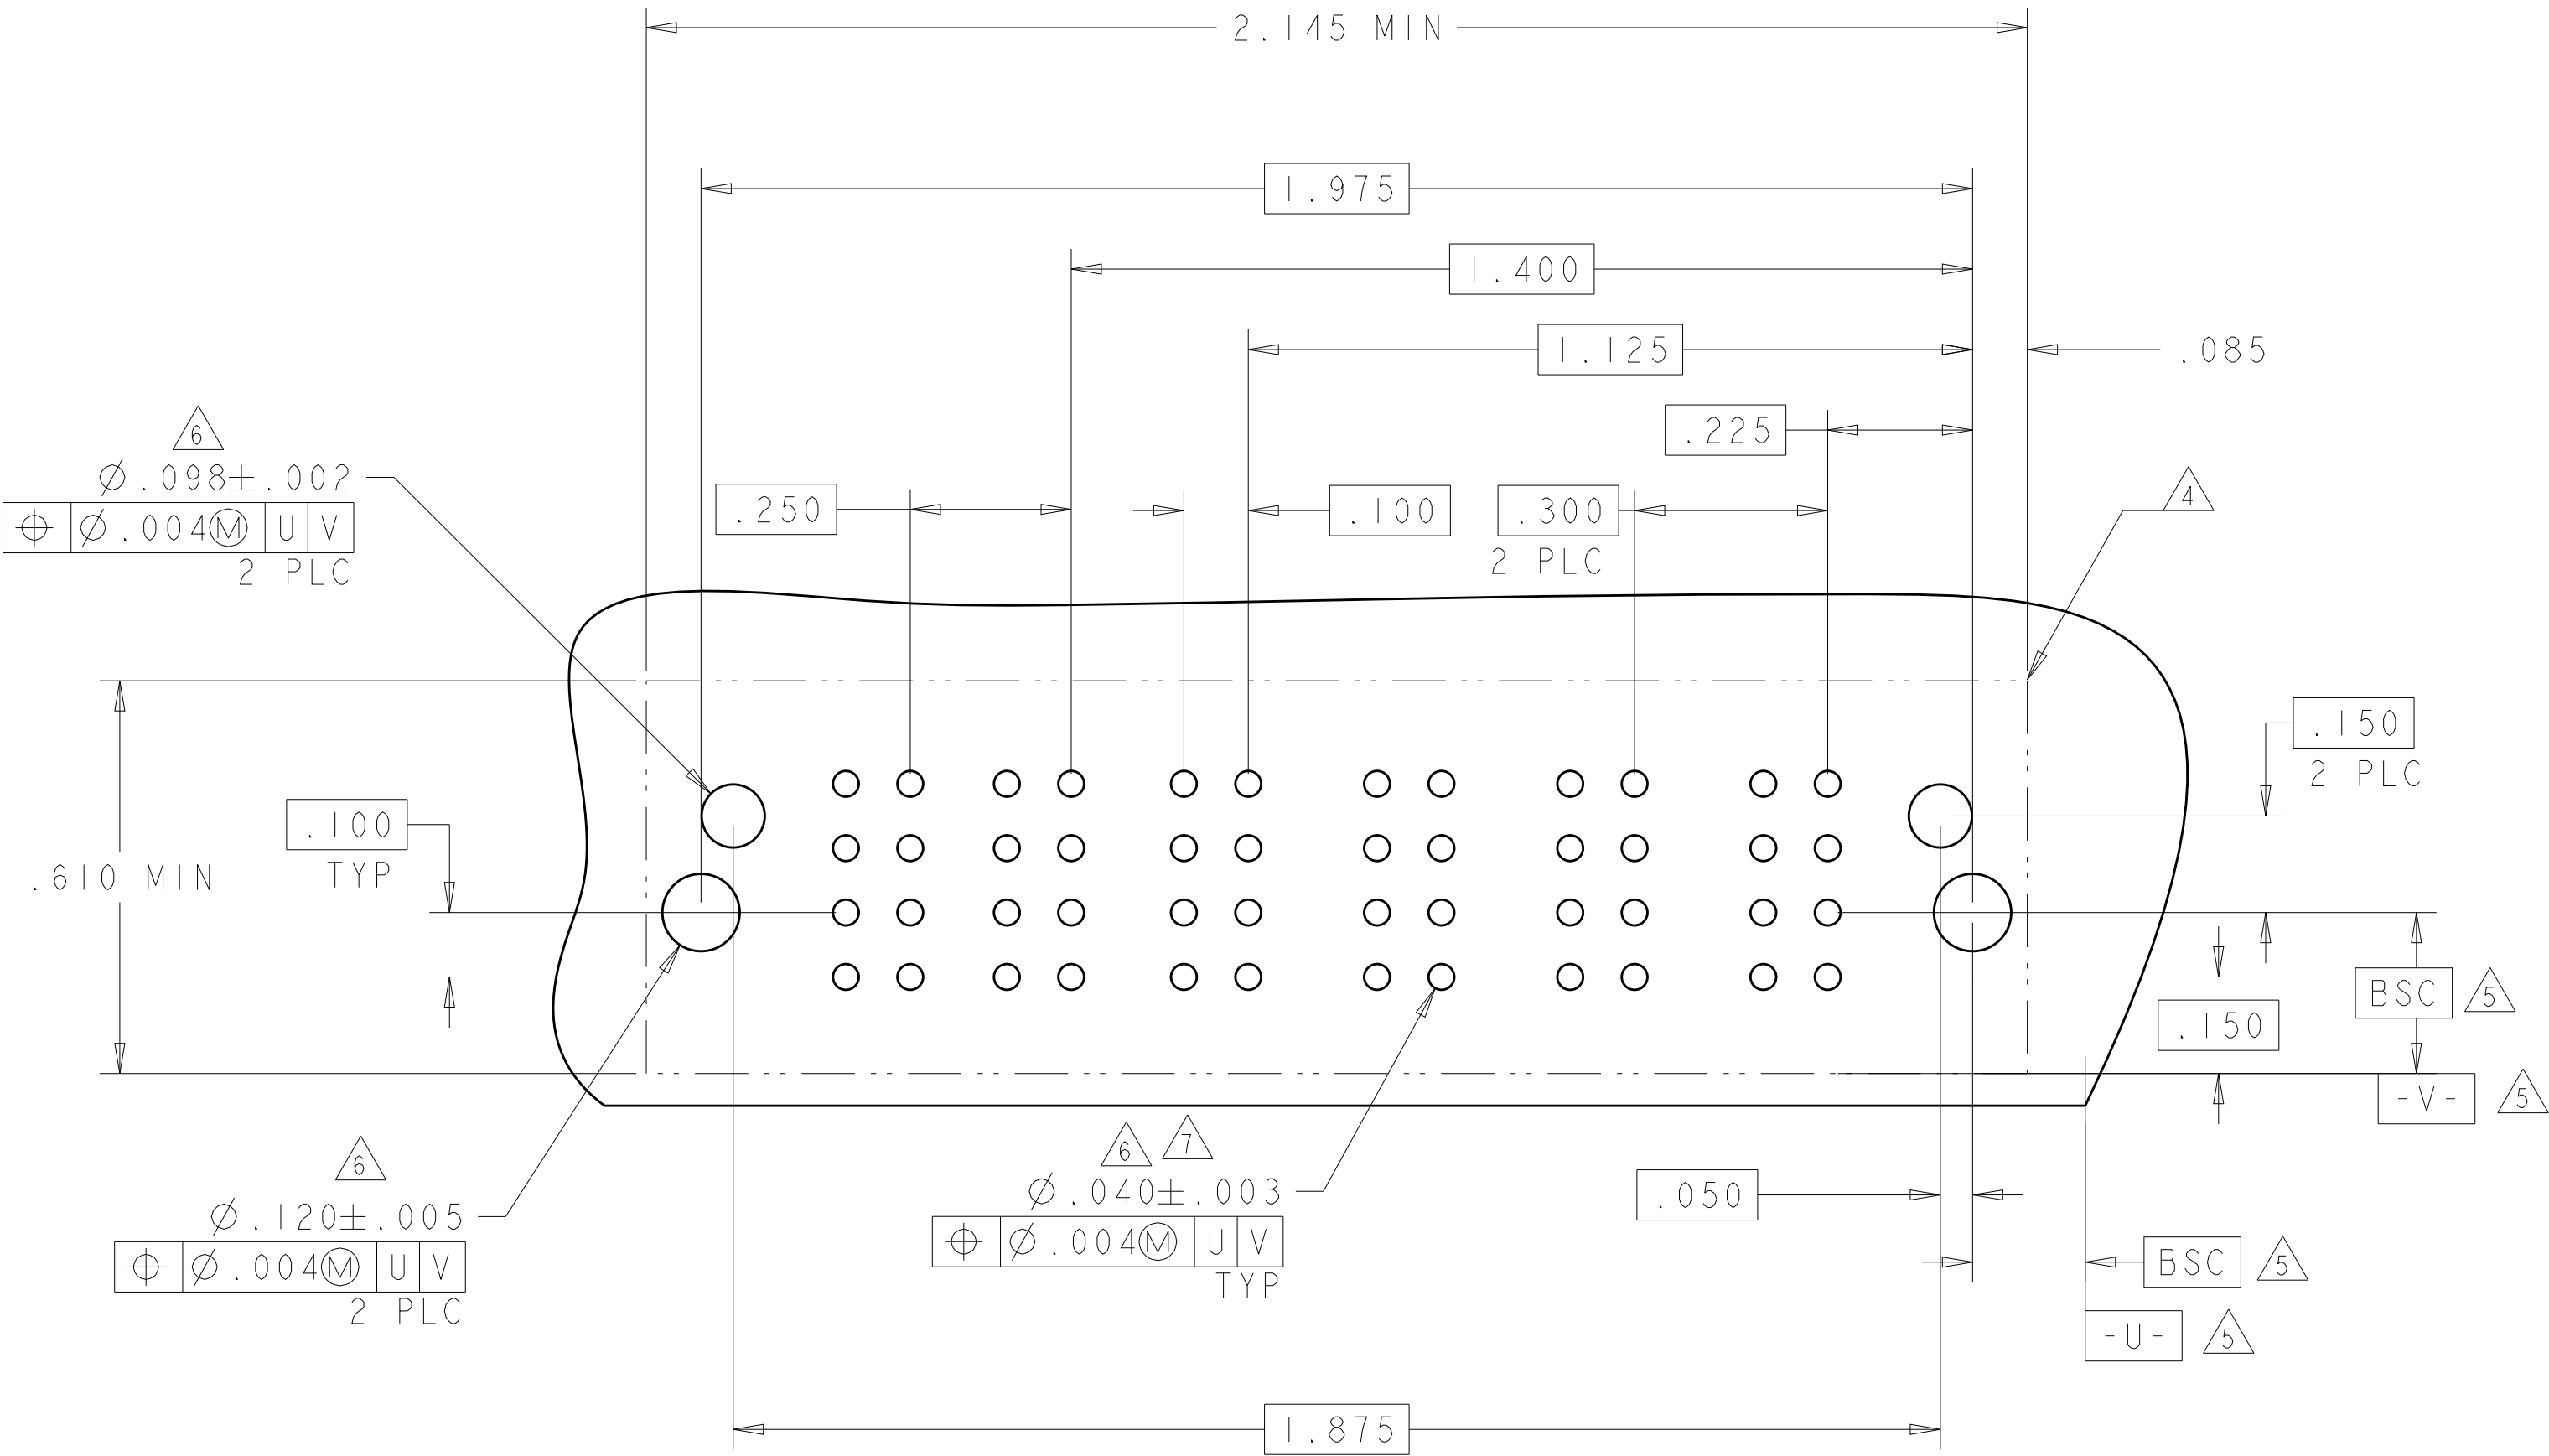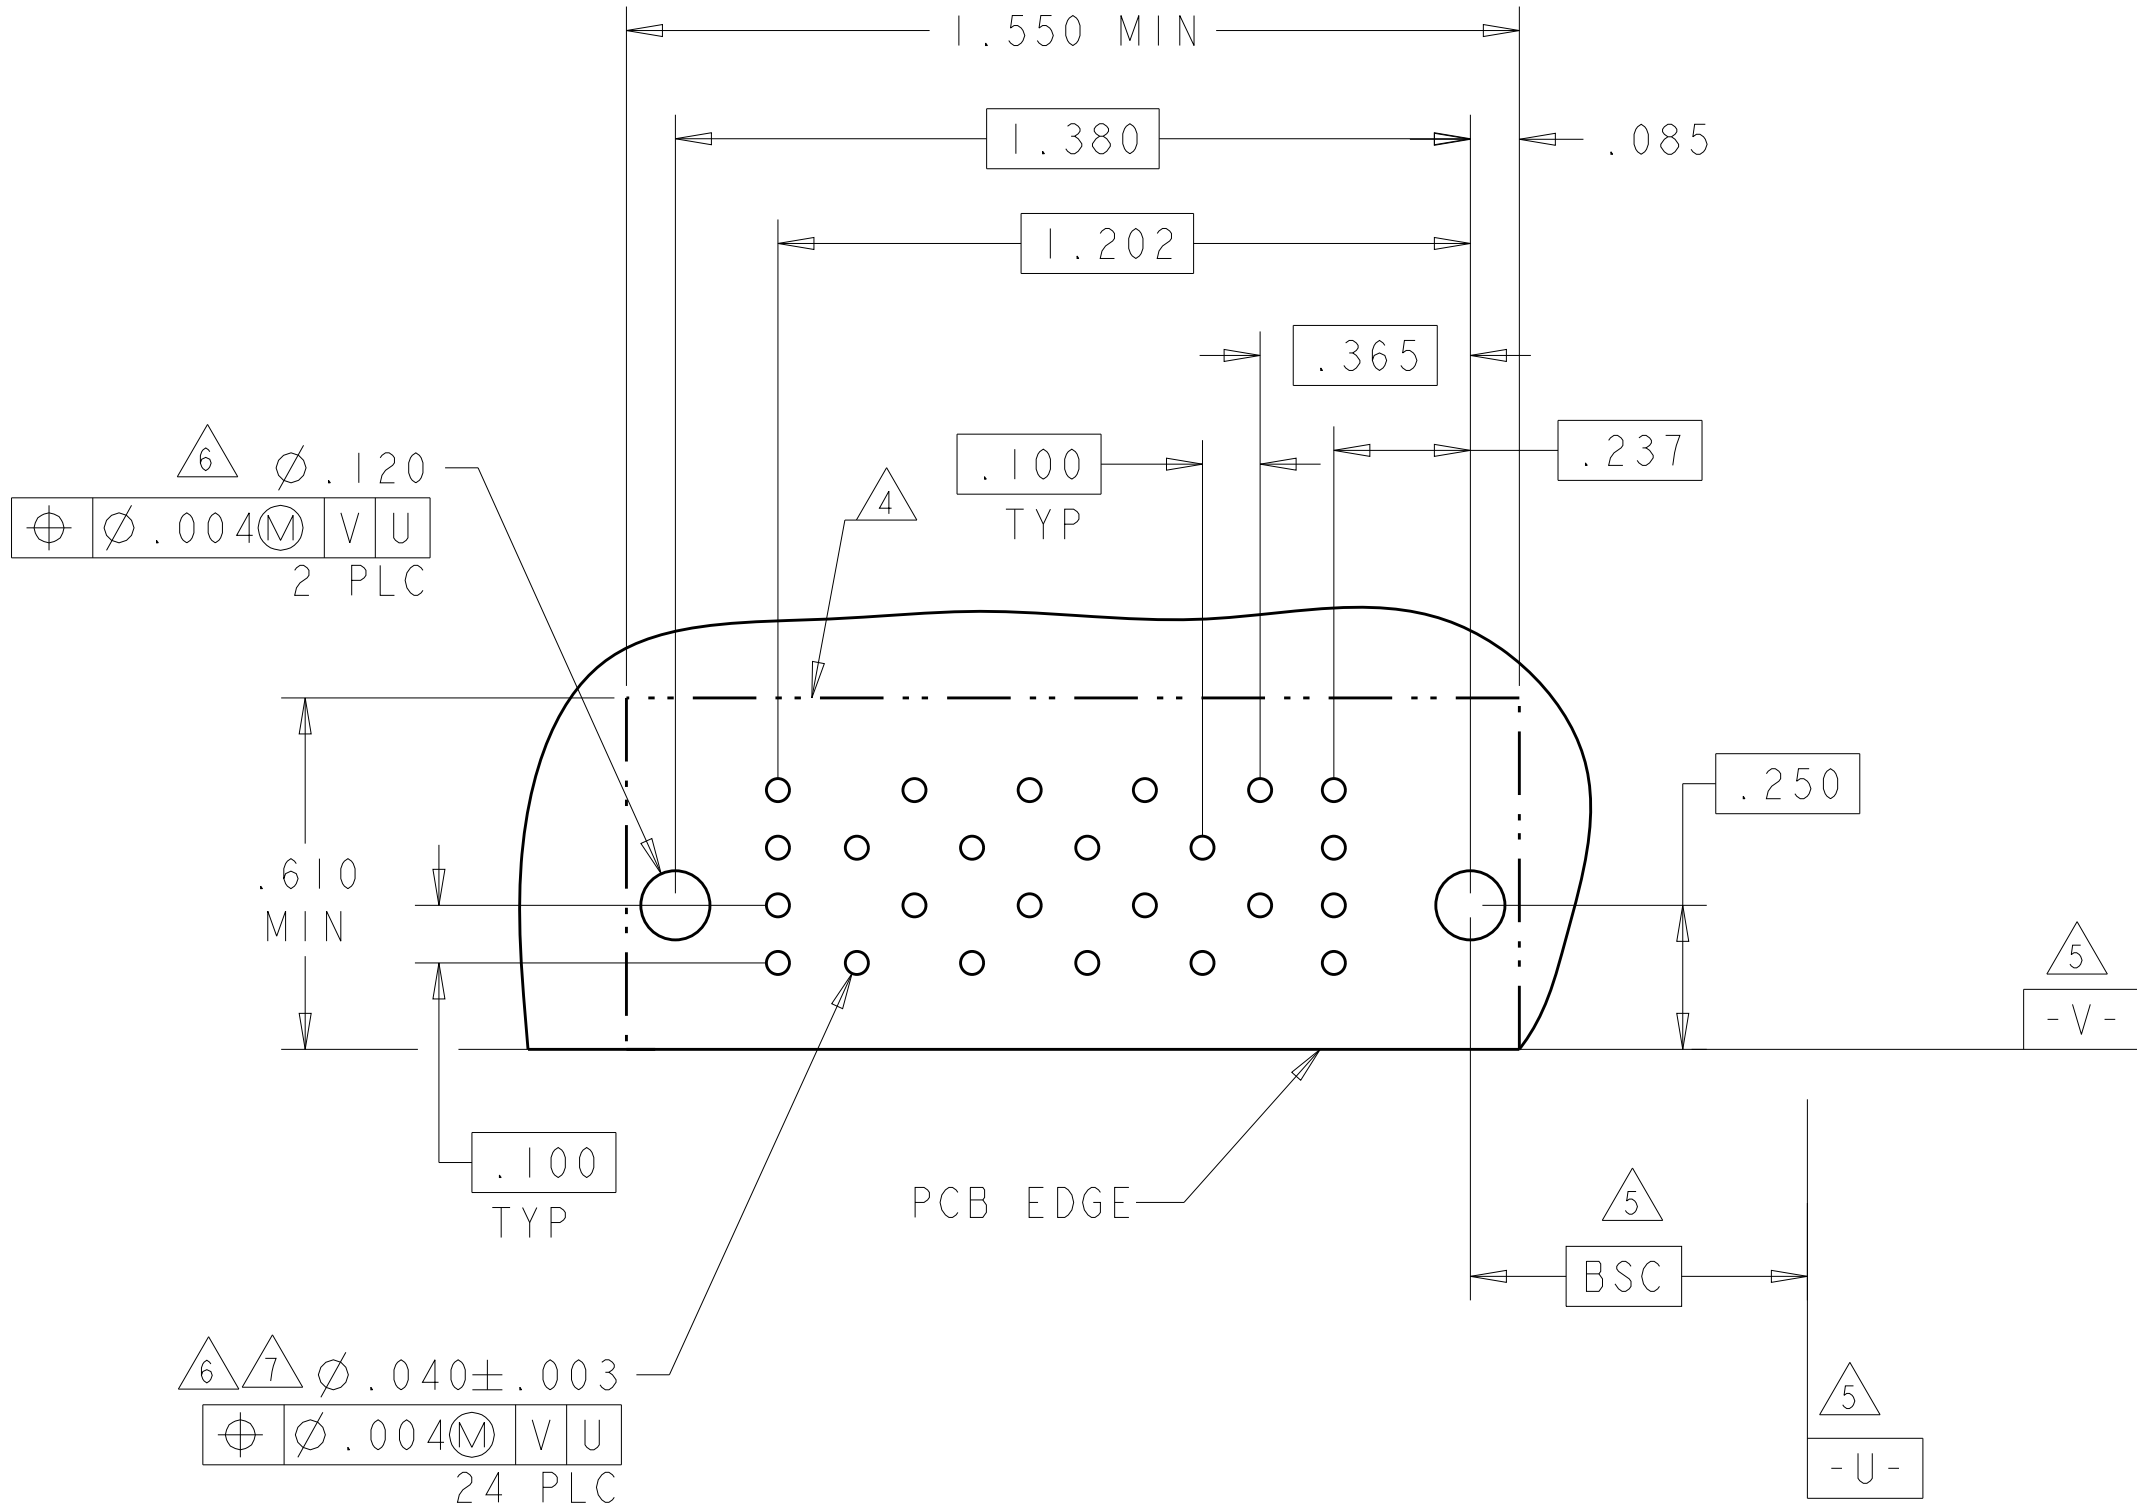



LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER					SIGNAL											POWER									
			P10	P9	P8	P7	P6	12	11	10	9	8	7	6	5	4	3	2	1	P5	P4	P3	P2		P1			
2-6450870-5	D C B A			RM	RM	RM	RM	RM												RM	RM	RM	RM	RM				
									H	H	H	H	H	H	H	H	H	H	H							H	H	H
									G	G	G	G	G	G	G	G	G	G	G							G	G	G
									F	F	F	F	F	F	F	F	F	F	F							F	F	F
5P + 48S + 5P																												

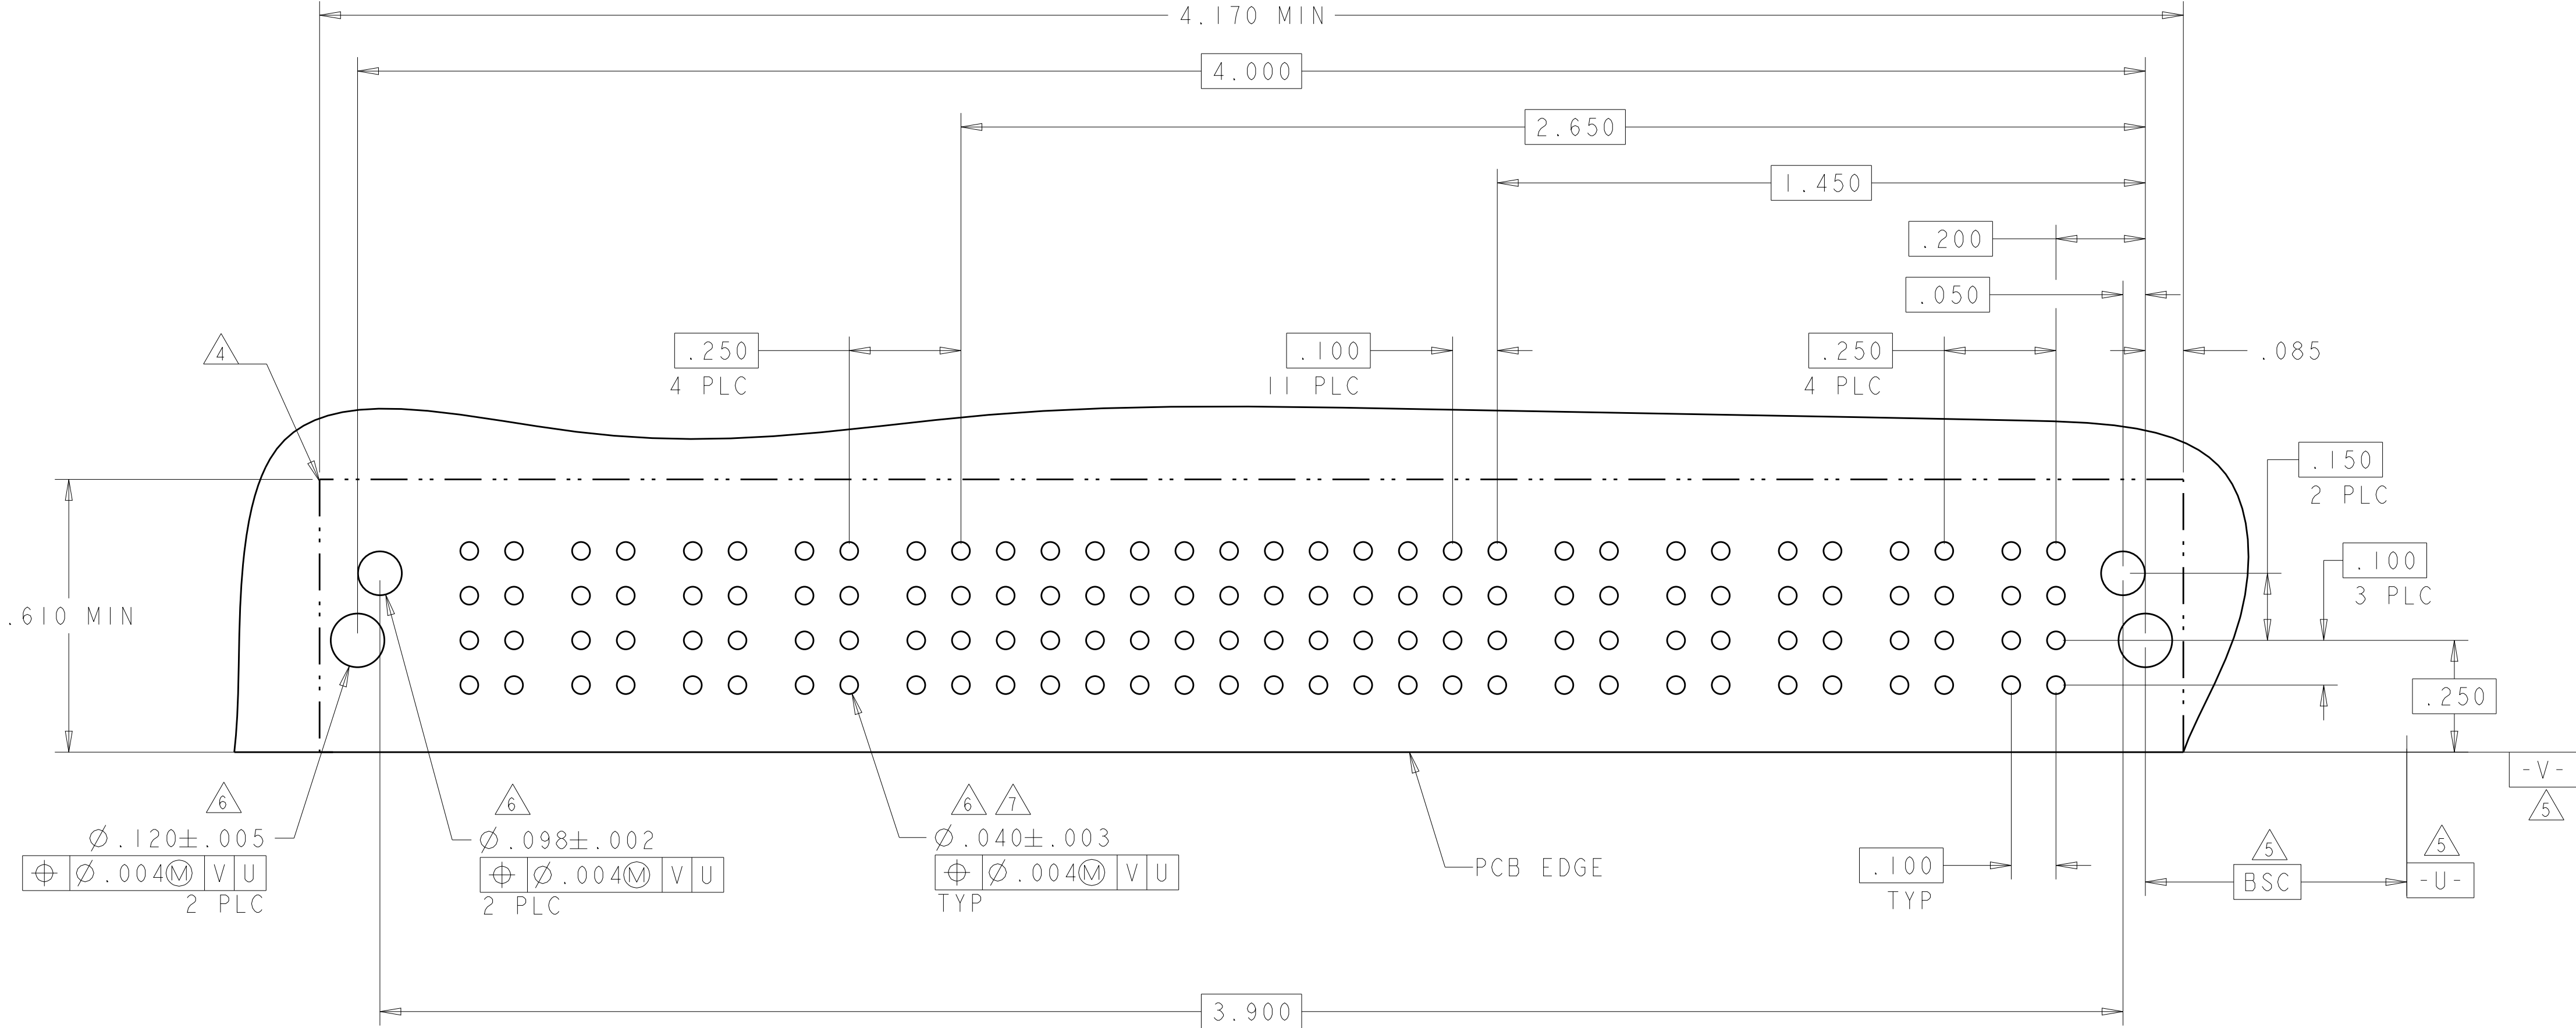

PART NUMBER	ROWS	POWER				SIGNAL				POWER				
		P7	P6	P5	P4	4	3	2	1	P3	P2	P1		
2-6450870-6	D		RM	RM	RM	RM	H	H	H	H	RM	RM	RM	
	G						G	G	G					
	F						F	F	F					
	E						E	E	E					
	A	HD												HD
3ACP + 16S + 4P														

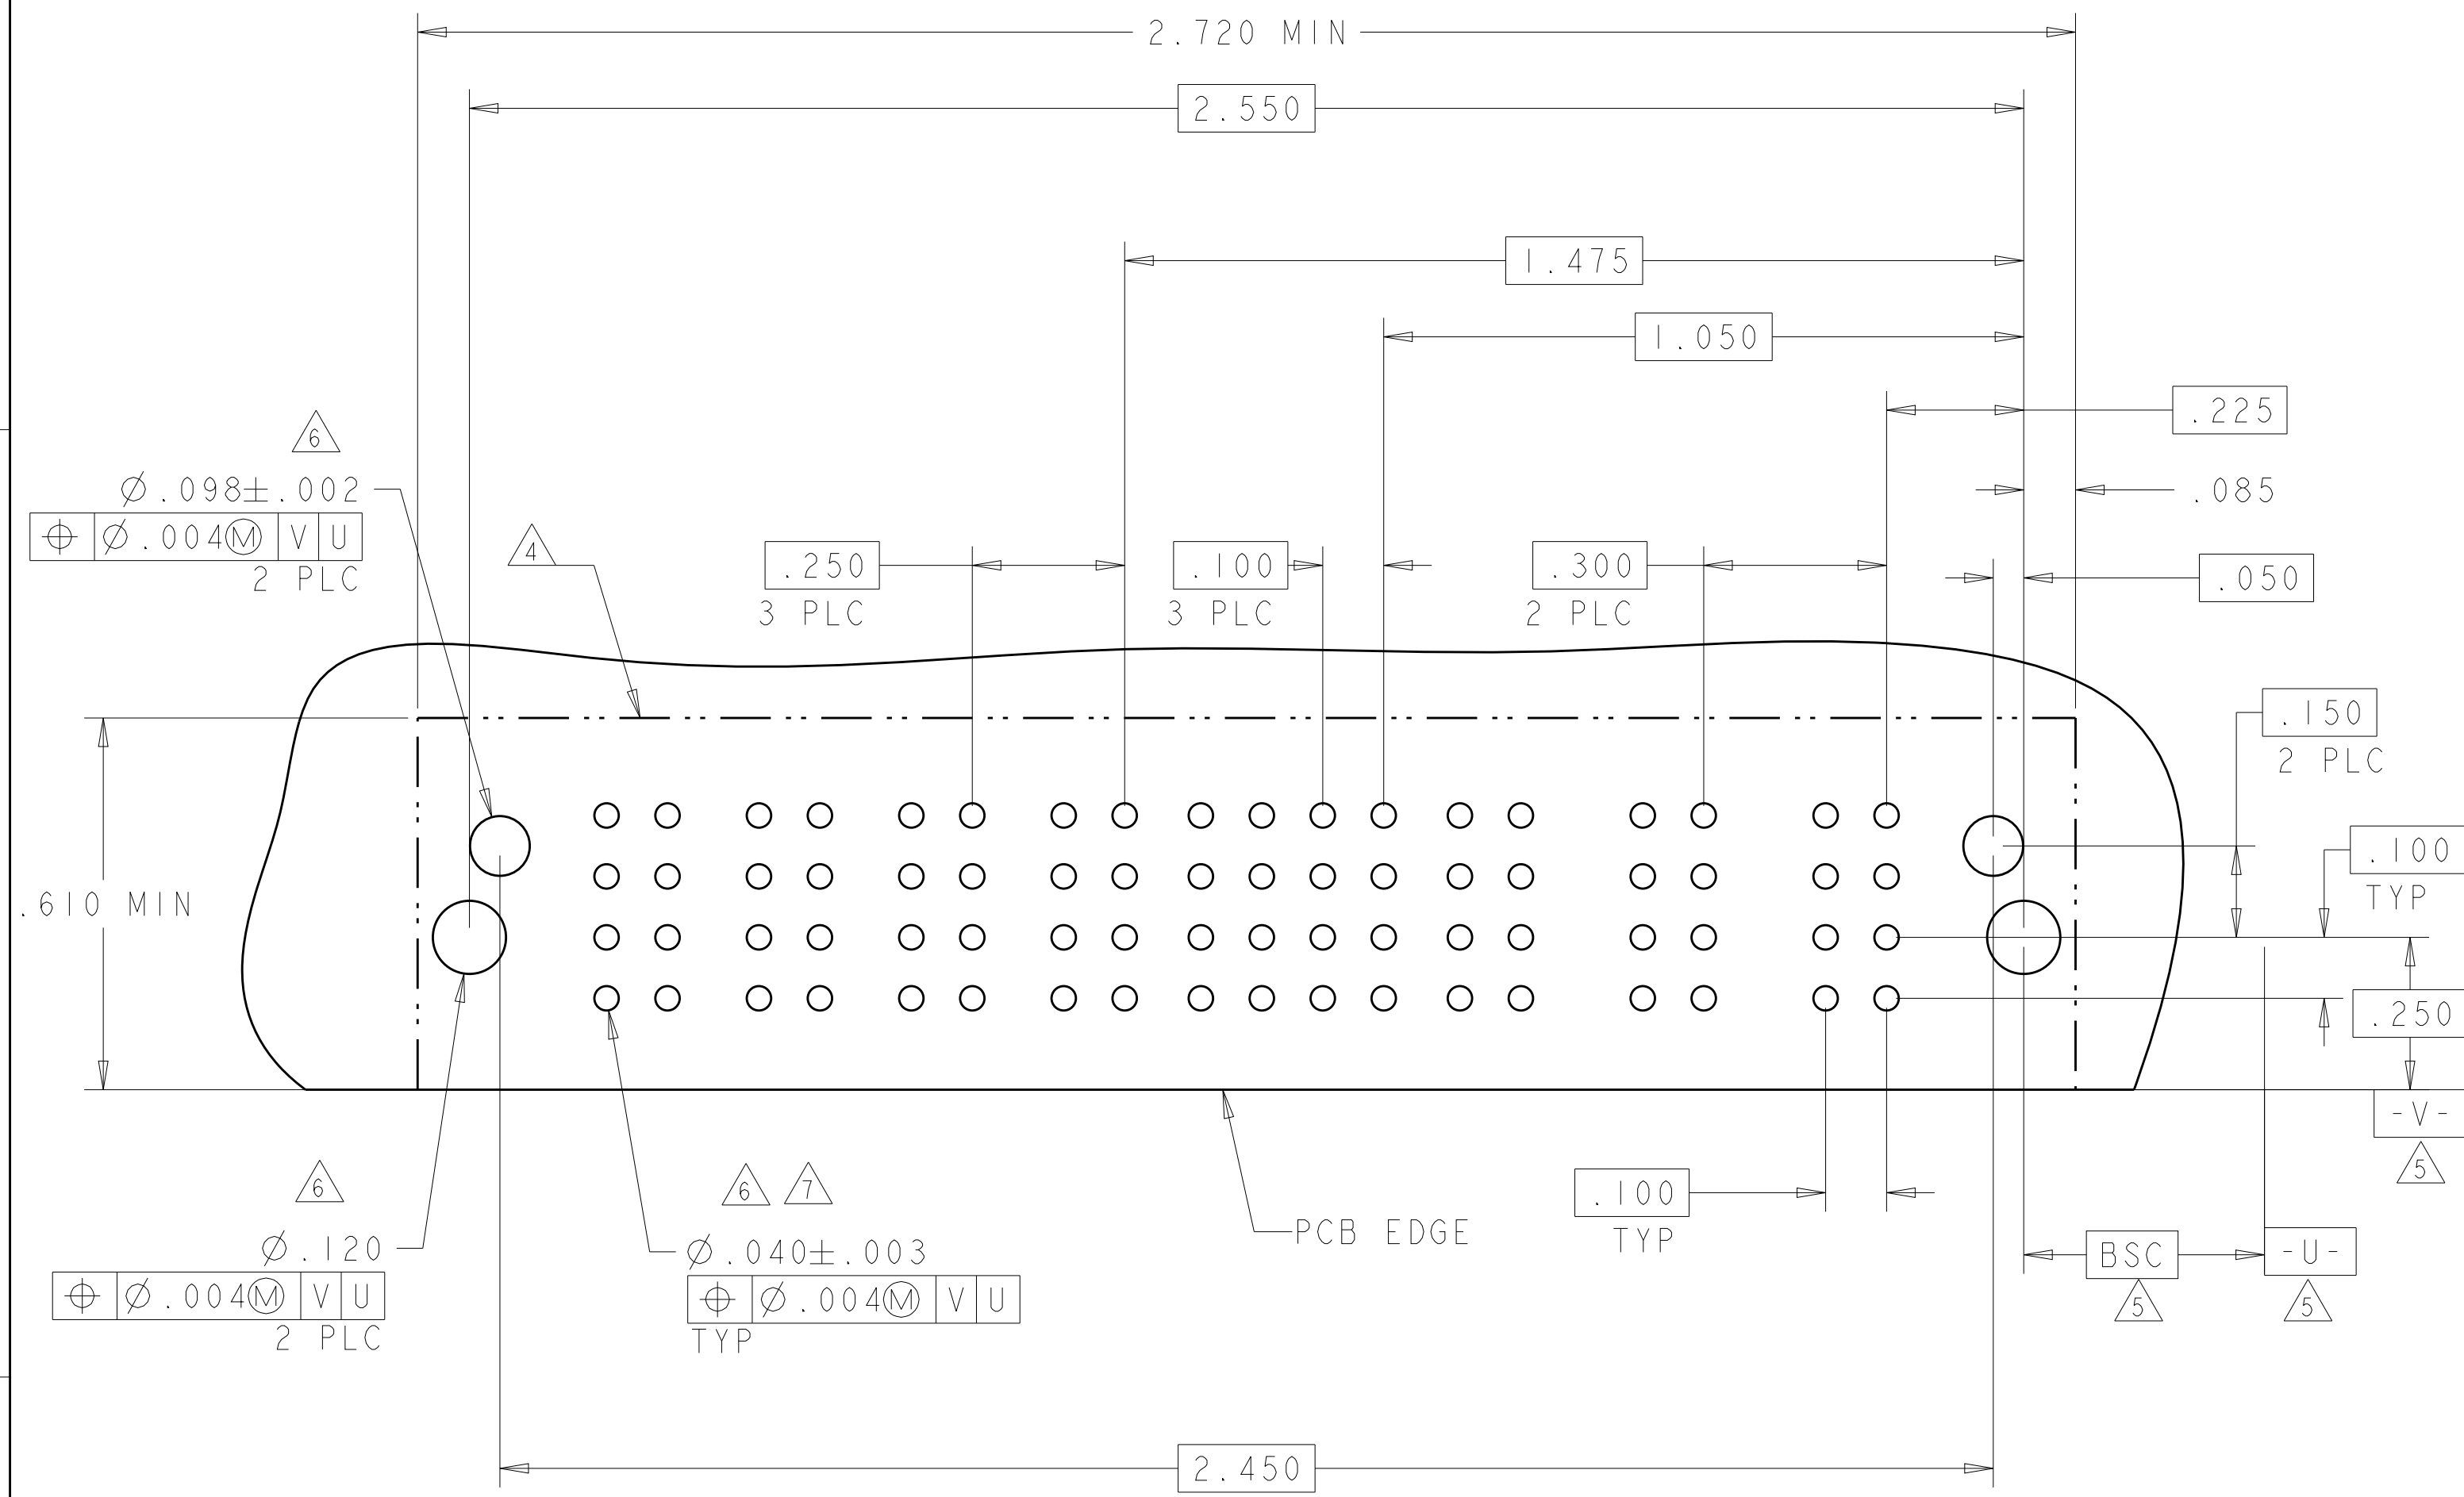



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.ZHOU	110CT2007	 TE Connectivity	
		CW S.ZHAO	110CT2007		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		APVD S.ZHAO		RIGHT ANGLE RECEPTACLE SHORT END MODULE MULTI-BEAM XLE	
		PRODUCT SPEC			
		108-2292			
		APPLICATION SPEC			
		114-13251		SIZE CAGE CODE DRAWING NO RESTRICTED TO	
MATERIAL	FINISH	WEIGHT -		A 100779 ©=6450870 -	
		Customer Drawing		SCALE 4:1 SHEET 16 OF 20 REV K2	





LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-


J

PART NUMBER	ROWS		POWER	SIGNAL						POWER							
				P8	6	5	4	3	2	1	P7	P6	P5	P4	P3	P2	
2-6450870-8	D	C	RA	H	H	H	H	H	H	RM	RM	RM	RM	RM	RM	RA	D
	G			G	G	G	G	G									
	F			F	F	F	F	F									
	E			E	E	E	E	E									
7ACP + 24S + 1P																	

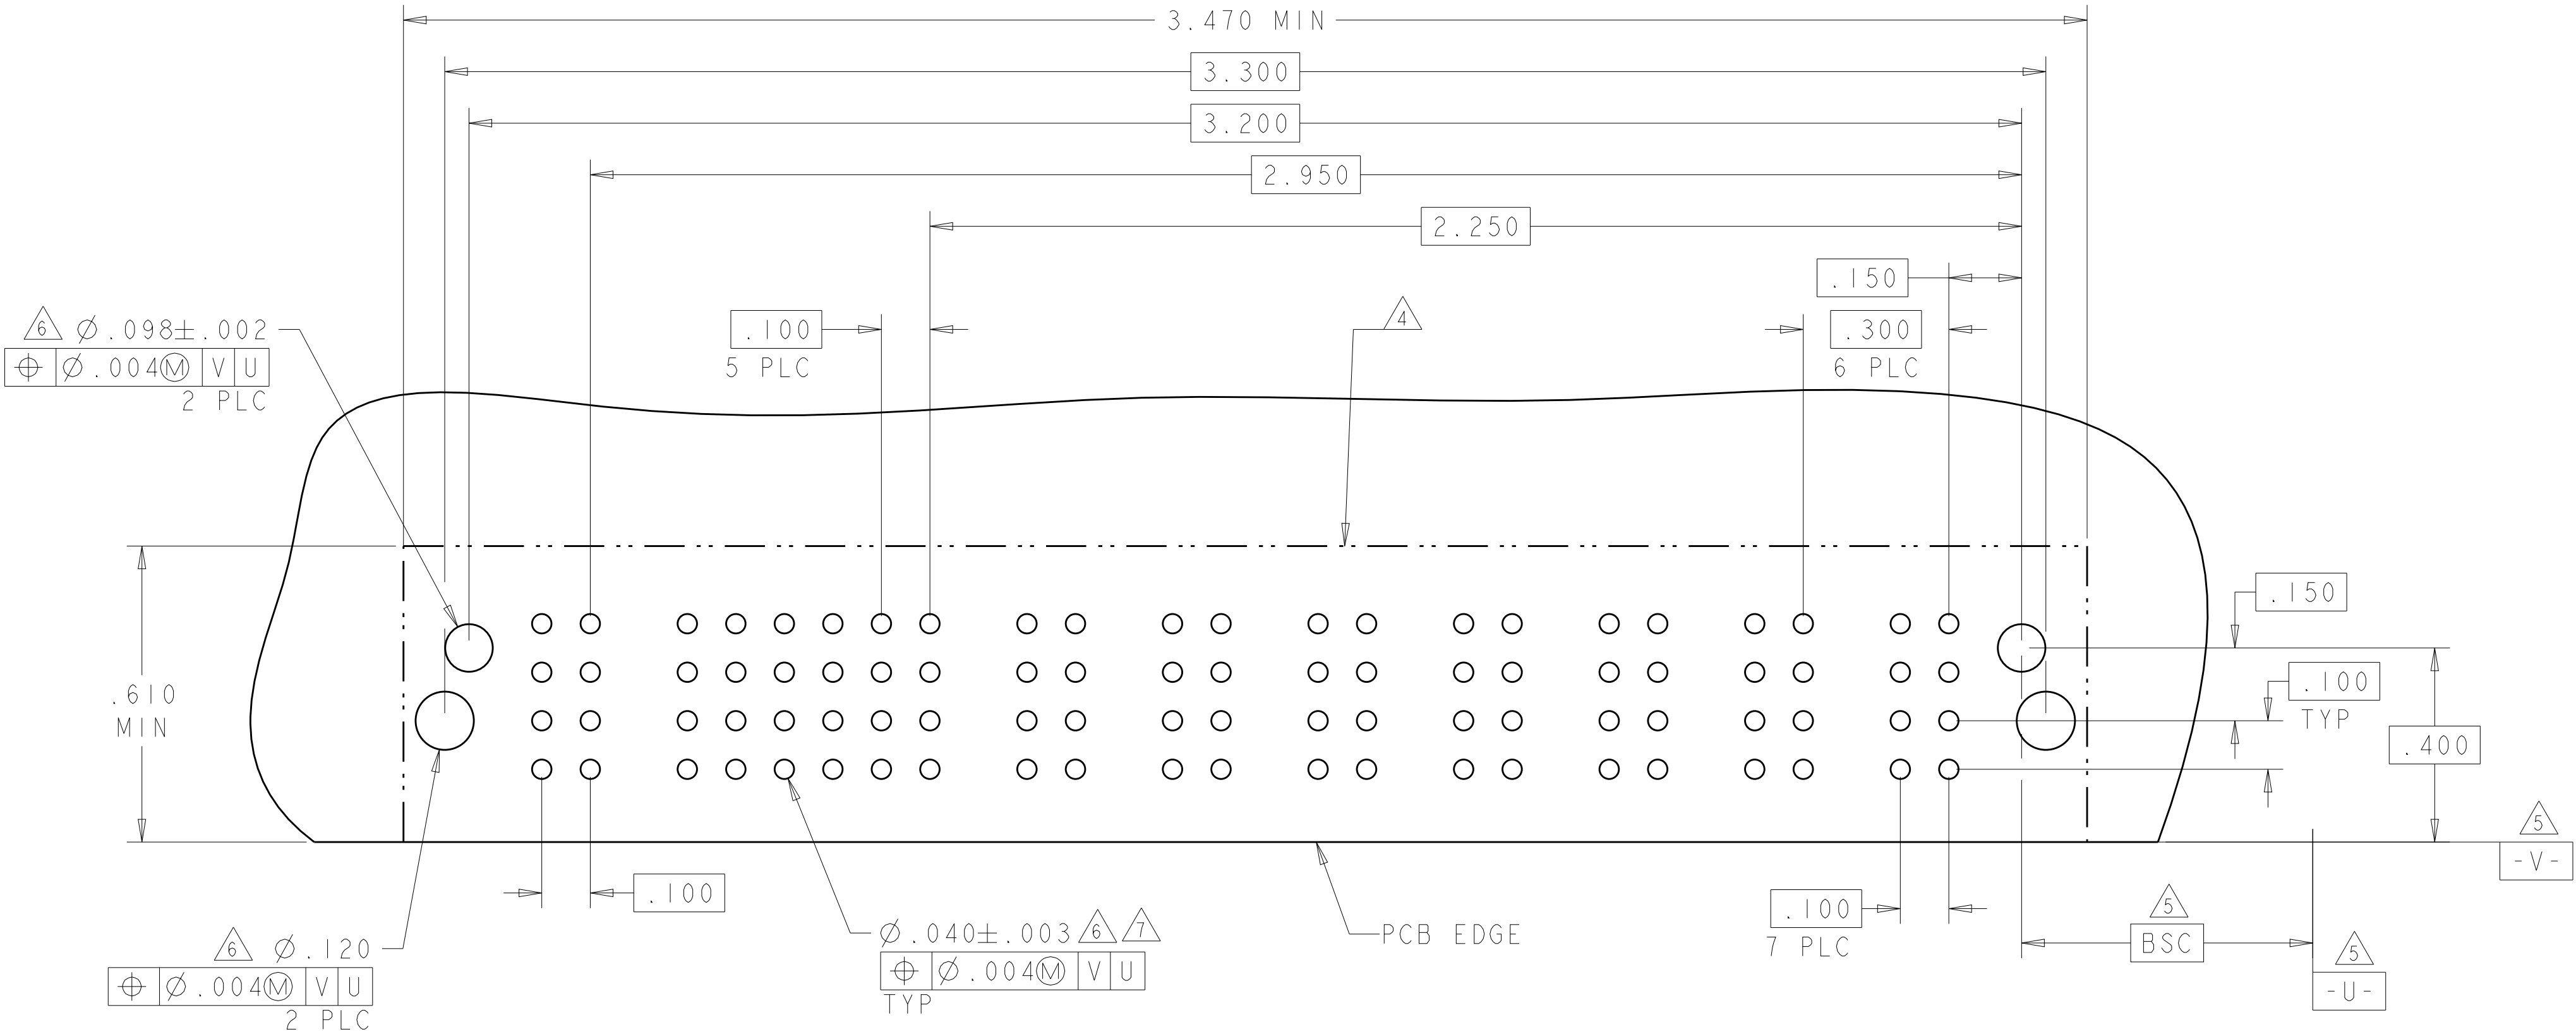

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. ZHOU	11OCT2007	 TE Connectivity	
DIMENSIONS: INCHES		CHK S. ZHAO	11OCT2007		
		APVD S. ZHAO	-	NAME	
		PRODUCT SPEC		RIGHT ANGLE RECEPTACLE SHORT END MODULE MULTI-BEAM XLE	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC		SIZE	
0 PLC ±.1		114-13251		CAGE CODE	
1 PLC ±.1		WEIGHT		DRAWING NO	
2 PLC ±.01		Customer Drawing		A100779	
3 PLC ±.005		SCALE		C=6450870	
4 PLC ±.0020		SHEET		17 OF 20	
ANGLES ±2°		REV		K2	
FINISH					

PART NUMBER	ROWS		POWER			SIGNAL				POWER			
			P6	P5	P4	4	3	2	1	P3	P2	P1	
3-6450870-0	D C B A												
3P + 16S + 3P													

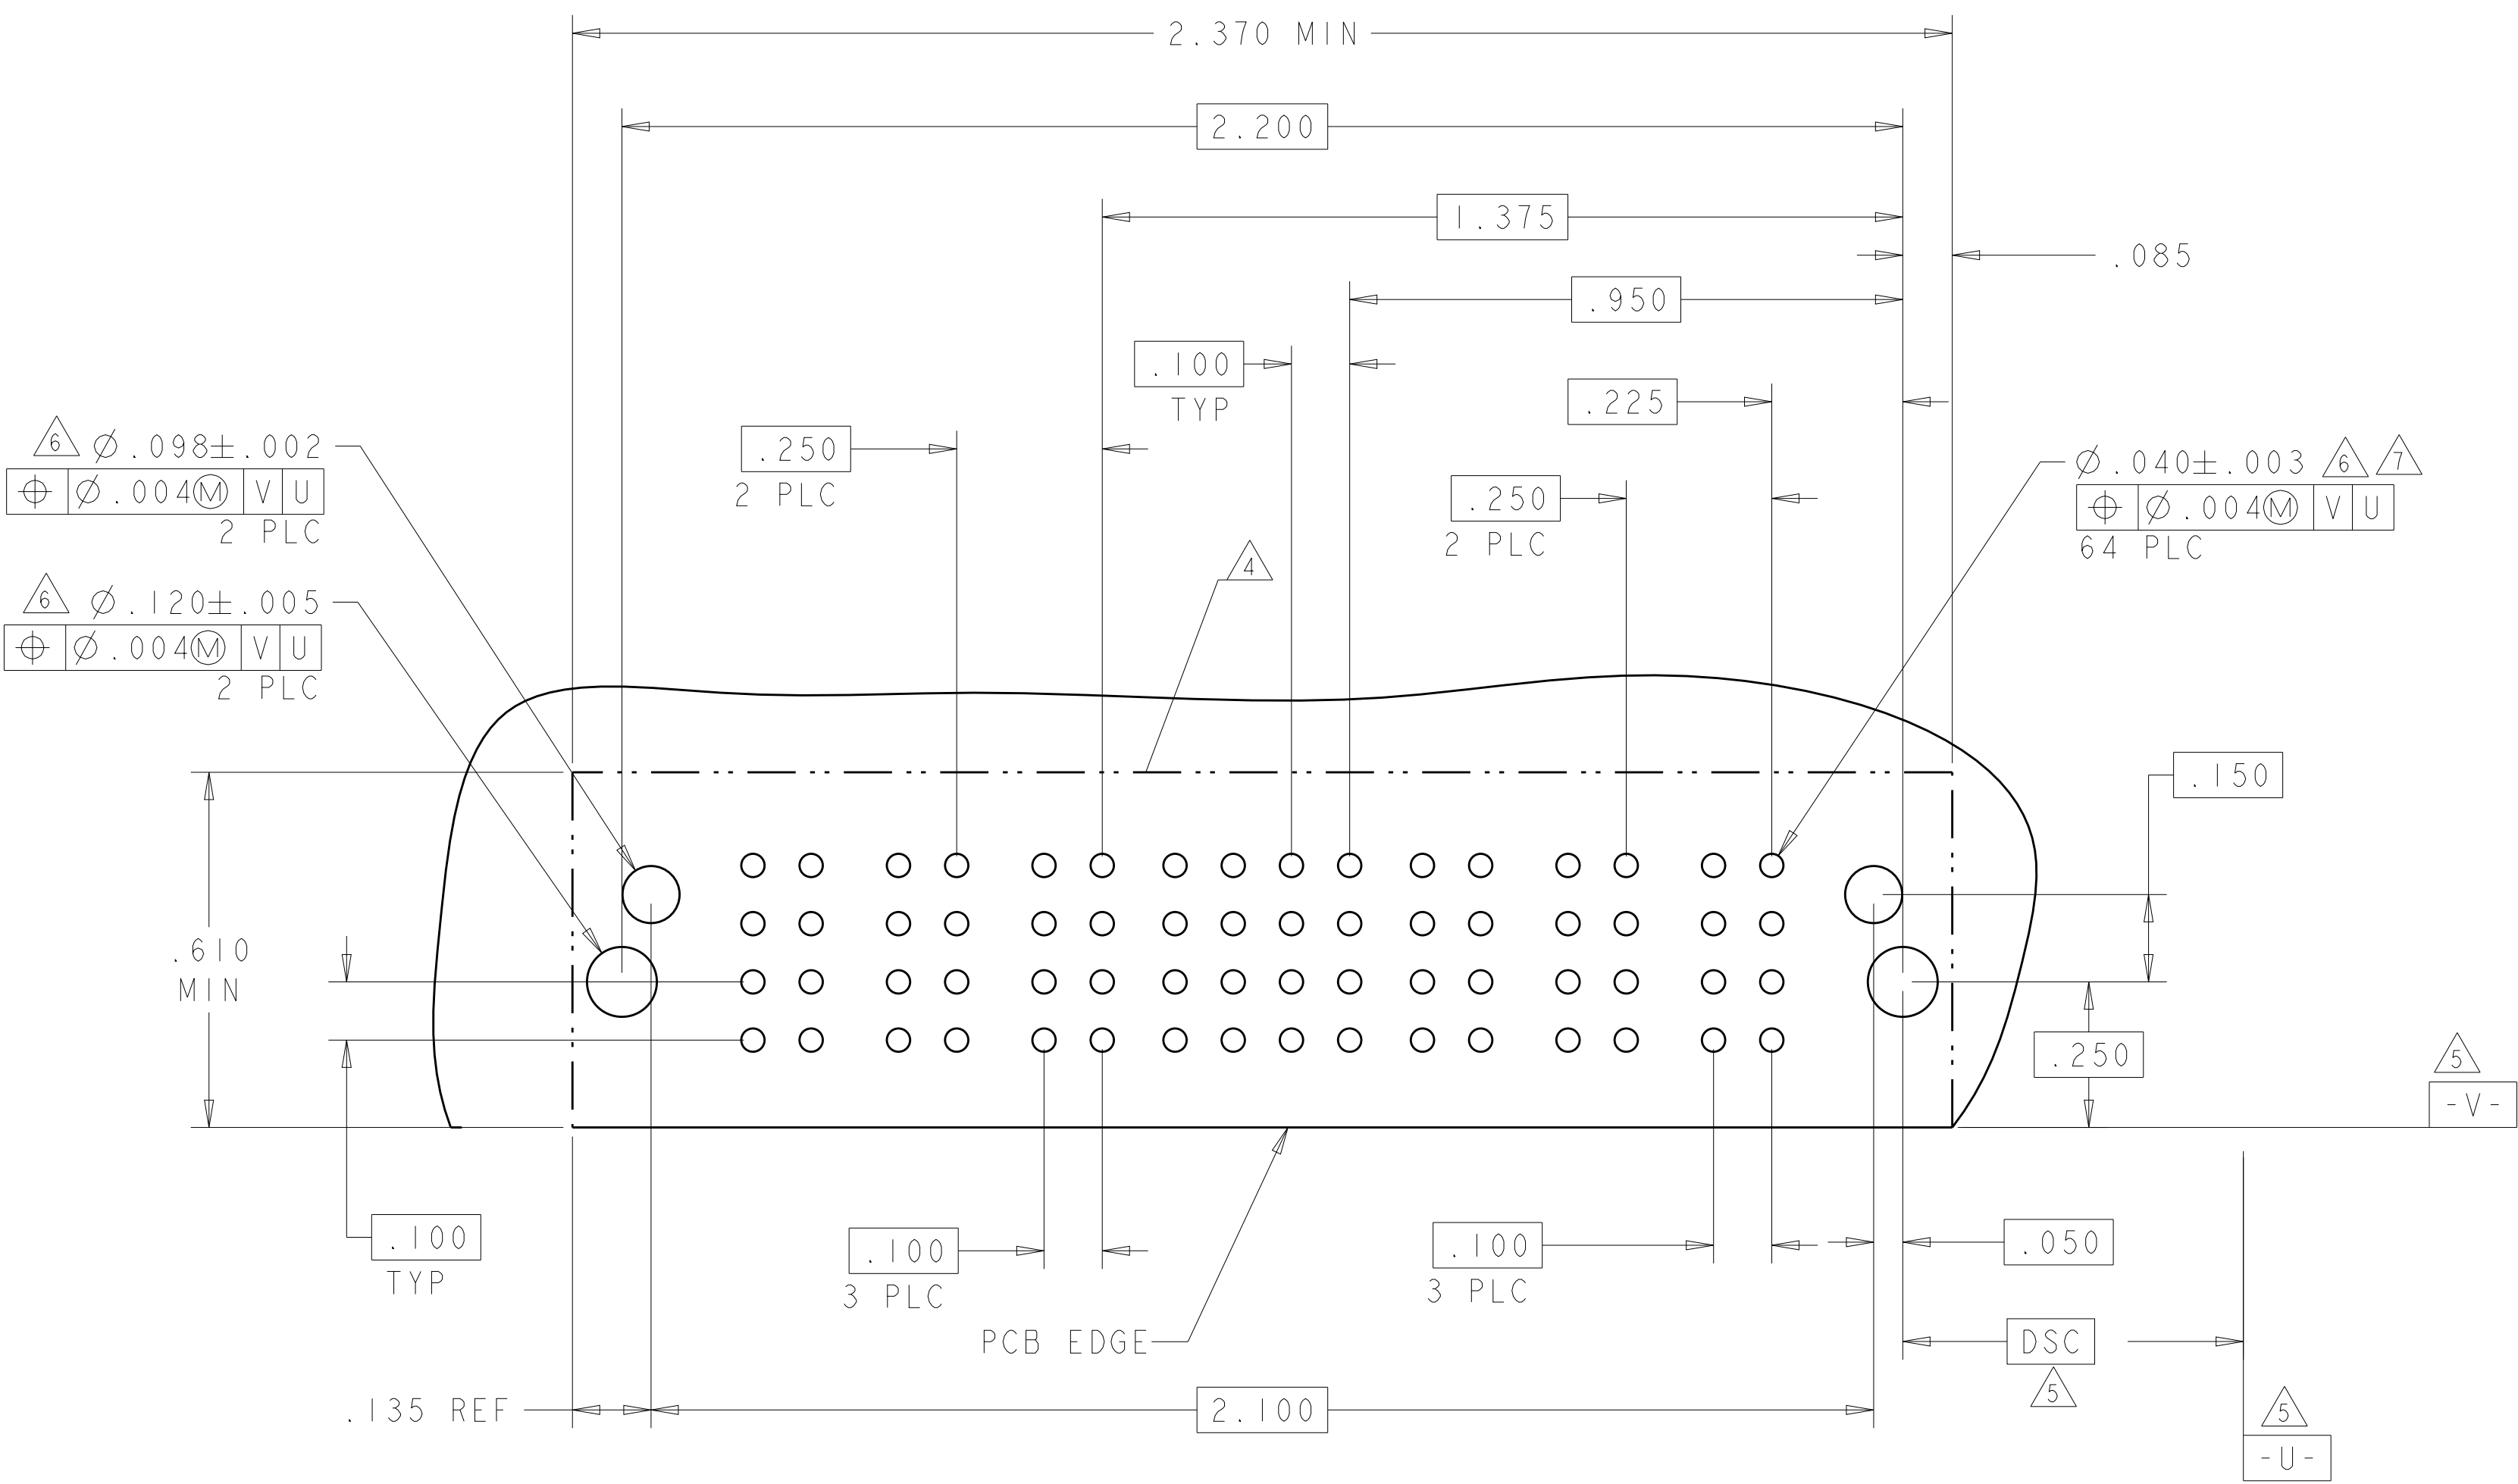4805 (3/11)

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

ALL RIGHTS RESERVED.

LOCES

DIST00

REVISONS

P

CTR

DESCRIPTION

DATE

OWN

APVD

-

-

SEE SHEET I

-

-


-

J9

PART NUMBER	ROWS		LOW POWER				SIGNAL			LOW POWER			
			LP7	LP6	LP5	LP4	3	2	1	LP3	LP2	LP1	
3-6450870-1	D		LM	LM	LM	LM	H	H	H	LM	LM	LM	
	C						G	G	G				
	B						F	F	F				
	A						E	E	E				
3LP + 12S + 4LP													

PART NUMBER	ROWS		POWER	SIGNAL											POWER					
			P5	12	11	10	9	8	7	6	5	4	3	2	1	P4	P3	P2		P1
3-6450870-2	D		RM	H		H	H		H		H	H	H		H	RM	RM	RM	RM	
	C			G		G		G	G	G	G									
	B			F		F	F		F	F	F	F								
	A			E		E		E	E	E	E	E								
4P + 48S + 1P																				

PART NUMBER	ROWS		LOW POWER	SIGNAL								LOW POWER	
			LP2	8	7	6	5	4	3	2	1	LP1	
3-6450870-4	D		LM	H	G	H	H	H	H	H	H	LM	
	C			G	G	G	G	G	G	G			
	B			F	F	F	F	F	F	F			
	A			E	E	E	E	E	E	E			
1LP + 32S + 1LP													

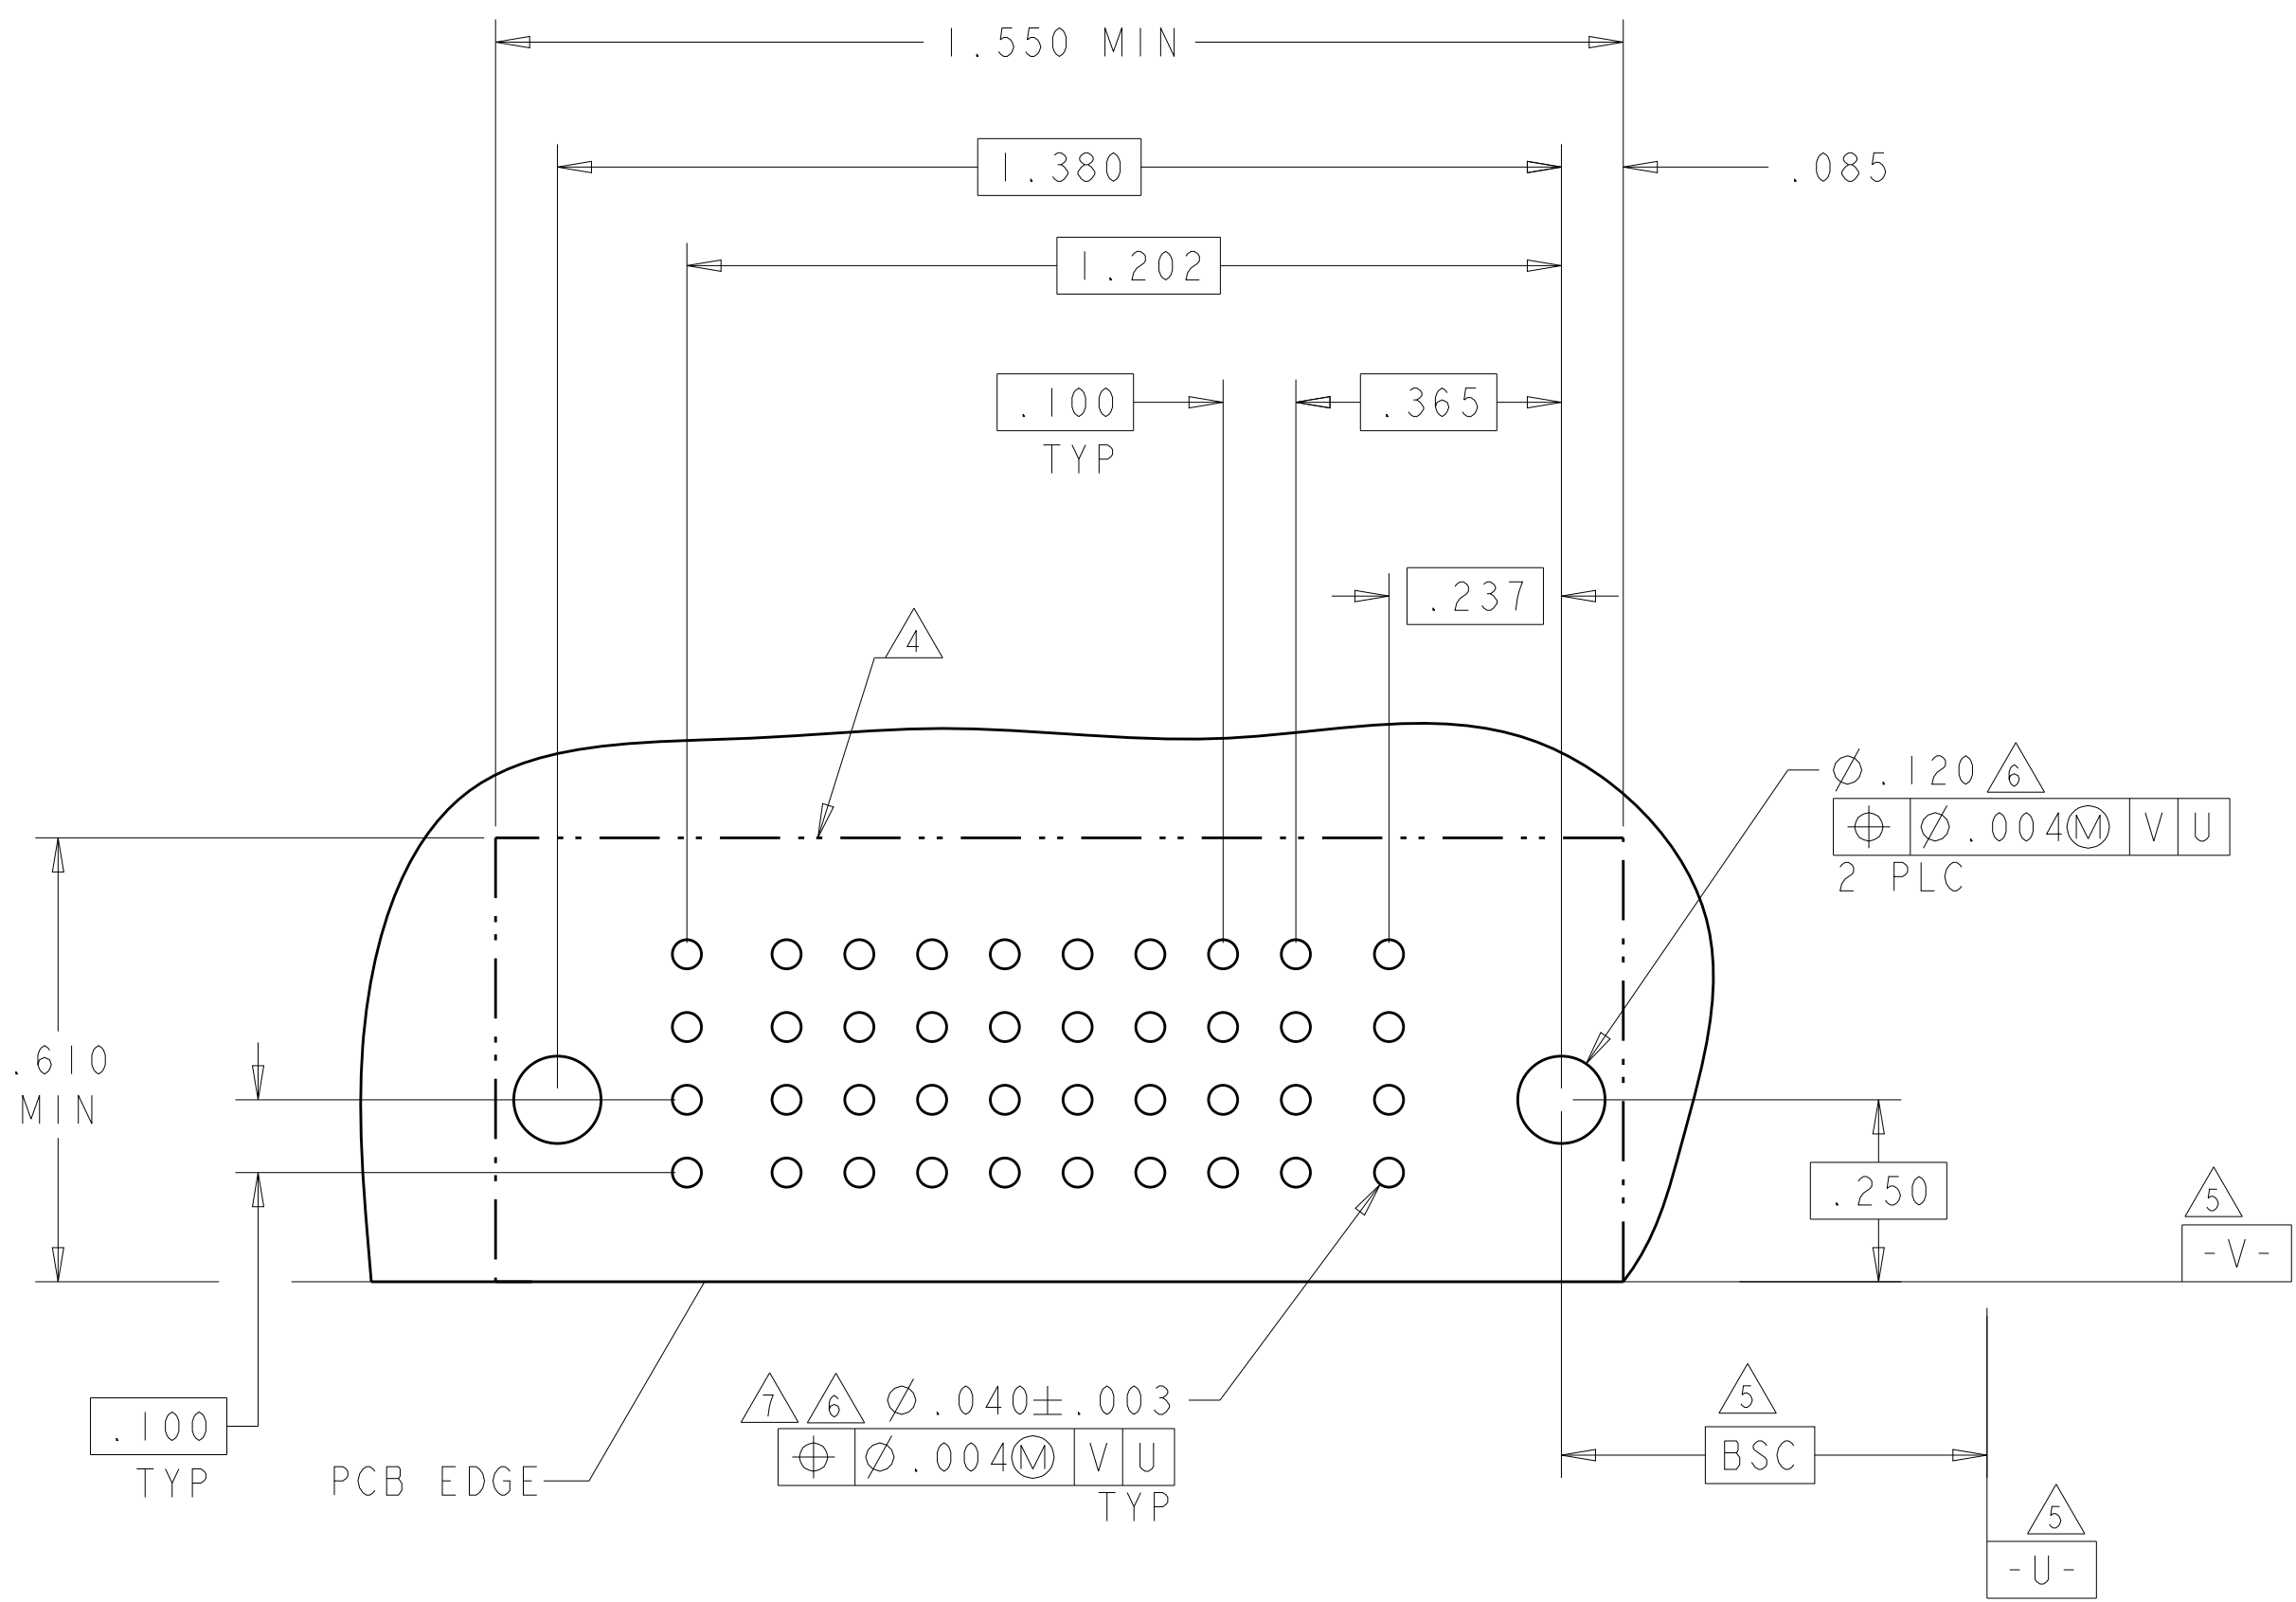

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 110CT2007 C.ZHOU CHW 110CT2007 S.ZHAO APVD S.ZHAO		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±.1 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±°		NAME RIGHT ANGLE RECEPTACLE SHORT END MODULE MUTLI-BEAM XLE	
		PRODUCT SPEC 108-2292 APPLICATION SPEC 114-13251		SIZE CAGE CODE DRAWING NO RESTRICTED TO A 100779 ©6450870 -	
MATERIAL FINISH		WEIGHT Customer Drawing		SCALE 4:1 SHEET 20 OF 20 REV K2	

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9