

MOS FET Relays

G3VM-41UR10/51UR

World's Smallest New VSON Package with Low Output Capacitance and Low ON Resistance (Low C × R)

- RoHS Compliant

■ Application Examples

- Semiconductor test equipment
- Test & measurement devices
- Data loggers
- Communication equipment



NEW

Note: The actual product is marked differently from the image shown here.

■ List of Models


Package type	Contact form	Terminals	Load voltage (peak value)	Continuous Load Current (peak value)	Model	Minimum Packaging Quantity
VSON4	SPST-NO (1FormA)	Surface-mounting terminals	40 VAC or VDC	120 mA	G3VM-41UR10	---
					G3VM-41UR10(TR05)	500
			50 VAC or VDC	300 mA	G3VM-51UR	---
					G3VM-51UR(TR05)	500

Note: G3VM-41UR10 and G3VM-51UR, without "(TR05)", are provided as a Tape-cut versions, for sample purposes. Tape-cut VSON's are packaged without humidity resistance. Use manual soldering to mount them.


■ Dimensions

Note: All units are in millimeters unless otherwise indicated.

**G3VM-41UR10
G3VM-51UR**

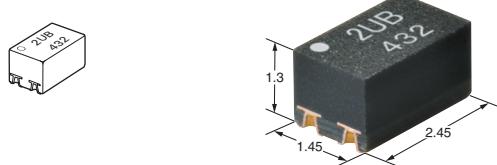


Note: The actual product is marked differently from the image shown here.

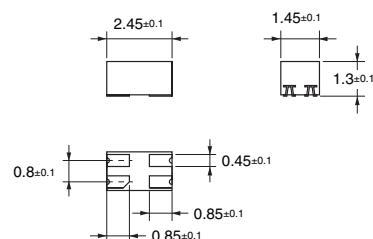

Weight: 0.01 g


■ Terminal Arrangement/Internal Connections (Top View)

**G3VM-41UR10
G3VM-51UR**




Note: The actual product is marked differently from the image shown here.

**VSON (Very Small Outline Non-leaded)
VSON4**



■ Actual Mounting Pad Dimensions (Recommended Value, Top View)

**G3VM-41UR10
G3VM-51UR**



■ Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)


Item	Symbol	G3VM-41UR10	G3VM-51UR	Unit	Measurement Conditions
Input	LED forward current	I_F	30	mA	
	LED forward current reduction rate	$\Delta I_F/\text{ }^\circ\text{C}$	-0.3	mA/ $\text{ }^\circ\text{C}$	$T_a \geq 25^\circ\text{C}$
	LED reverse voltage	V_R	5	V	
	Connection temperature	T_j	125	$^\circ\text{C}$	
Output	Load voltage (AC peak/DC)	V_{OFF}	40	50	V
	Continuous load current	I_O	120	300	mA
	ON current reduction rate	$\Delta I_{\text{ON}}/\text{ }^\circ\text{C}$	-1.2	-3	mA/ $\text{ }^\circ\text{C}$
	Pulse ON current	I_{OP}	360	900	mA
	Connection temperature	T_j	125	$^\circ\text{C}$	
Dielectric strength between input and output (See note 1.)		V_{I-O}	300	V_{rms}	AC for 1 min
Ambient operating temperature		T_a	-40 to +85	$^\circ\text{C}$	With no icing or condensation
Ambient storage temperature		T_{stg}	-40 to +125	$^\circ\text{C}$	
Soldering temperature		---	260	$^\circ\text{C}$	10 s

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.


■ Electrical Characteristics ($T_a = 25^\circ\text{C}$)

Item	Symbol	G3VM-41UR10	G3VM-51UR	Unit	Measurement conditions
Input	LED forward voltage	Minimum	1.1	V	$I_F = 10 \text{ mA}$
		Typical	1.27		
		Maximum	1.4		
	Reverse current	I_R	10	μA	$V_R = 5 \text{ V}$
	Capacity between terminals	C_T	Typical	30	pF
	Trigger LED forward current	I_{FT}	Maximum	3.0	mA
Output	Maximum resistance with output ON	Typical	12	1	Ω
		Maximum	14	1.5	$I_F = 5 \text{ mA}, t < 1 \text{ s}$ -41UR10 : $I_O = 120 \text{ mA}$ -51UR : $I_O = 300 \text{ mA}$
	Current leakage when the relay is open	I_{LEAK}	Maximum	1	nA
	Capacity between terminals	Typical	0.45	12	$V = 0, f = 100 \text{ MHz}, t < 1 \text{ s}$
		Maximum	0.8	20	pF
	Capacity between I/O terminals	C_{I-O}	Typical	1	pF
Insulation resistance between I/O terminals		R_{I-O}	Typical	10^8	M Ω
Turn-ON time		t_{ON}	Maximum	0.2	ms
Turn-OFF time		t_{OFF}	Maximum	0.3	ms
Equivalent rise time		ERT	Typical	---	ps
			Maximum	40	$I_F = 5 \text{ mA}, V_{DD} = 0.25 \text{ V}$ $Tr(\text{in})=25\text{ps}$ (See note 3.)
			---	90	

Note: 2. Turn-ON and Turn-OFF Times



Note: 3. Equivalent Rise Time

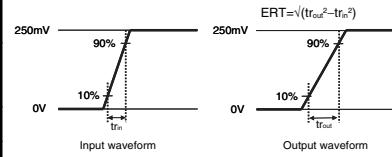

■ Recommended Operating Conditions

For usage with high reliability, the Recommended Operating Conditions are measures that takes into account the derating of the Absolute Maximum ratings and the Electrical Characteristics. Each item on this list is an independent condition, not simultaneously satisfying several conditions.

Item	Symbol	G3VM-41UR10	G3VM-51UR	Unit
Load voltage (AC peak/DC)	V_{DD}	Maximum	32	V
Operating LED forward current	I_F	Minimum	5	
		Typical	7.5	
		Maximum	20	
Continuous load current (AC peak/DC)	I_O	Maximum	120	mA
Ambient Operating temperature	T_a	Minimum	-20	
		Maximum	65	$^\circ\text{C}$


■ Approved Standards

Applying for UL recognition

■ Engineering Data


LED forward current vs.

Ambient temperature

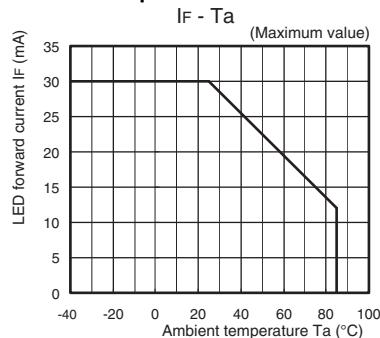


Continuous load current vs.

Ambient temperature

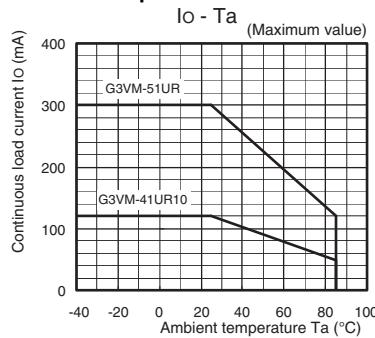


LED forward current vs.

LED forward voltage

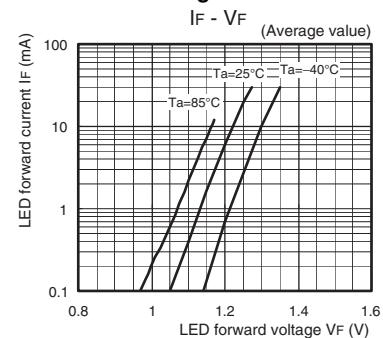


Continuous load current vs.

On-state voltage

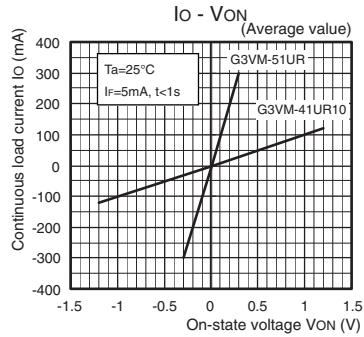


On-state resistance vs. Ambient temperature

G3VM-41UR10

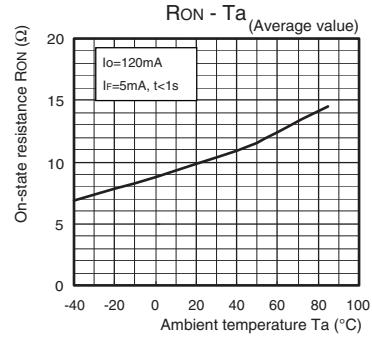


G3VM-51UR

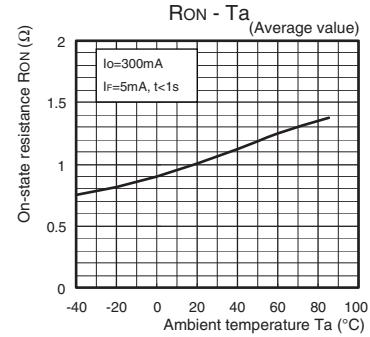


Trigger LED forward current vs.

Ambient temperature

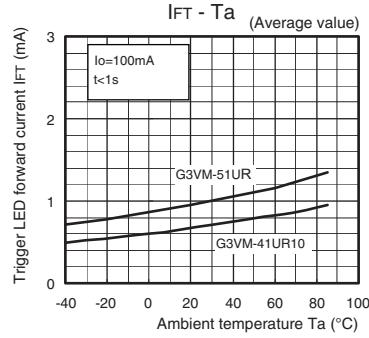


Turn ON, Turn OFF time vs.

LED forward current

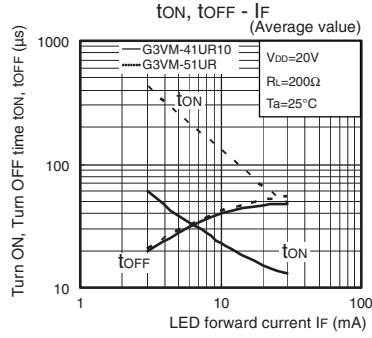


Turn ON, Turn OFF time vs.

Ambient temperature

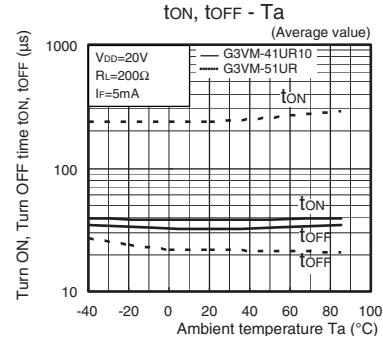


Current leakage vs.

Load voltage

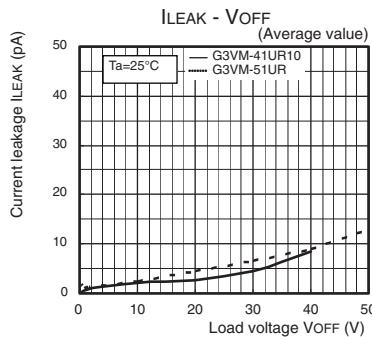


Current Leakage vs.

Ambient Temperature

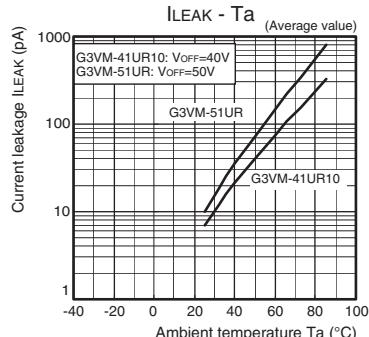

Output terminal capacitance vs.

Load voltage

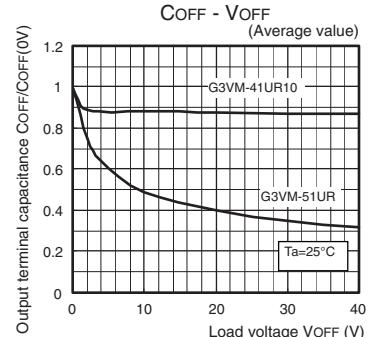

All sales are subject to Omron Electronic Components LLC standard terms and conditions of sale, which can be found at http://www.components.omron.com/components/web/webfiles.nsf/sales_terms.html

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

OMRON
OMRON ELECTRONIC
COMPONENTS LLC
847-882-2288

Cat. No. K268-E-01

09/14

Specifications subject to change without notice

OMRON ON-LINE

Global - <http://www.omron.com>
USA - <http://www.components.omron.com>

Printed in USA

Данный компонент на территории Российской Федерации**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru
moschip.ru_4

moschip.ru_6
moschip.ru_9