

THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION
ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
H	—		A	INITIAL RELEASE	07APR2014	YC	BvH


UNSHIELDED

3, 4 and 5 pos PUR & PVC



3x 0.34mm²



4x 0.34mm²




5x 0.34mm²

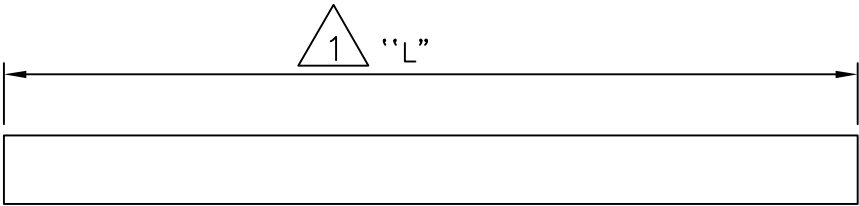

1 NOTE: Length "L" to be determined by online configurator

8 Pos PUR ONLY


8x 0.25mm²




SHIELDED

3, 4 and 5 pos PUR & PVC


3x 0.34mm²



4x 0.34mm²




5x 0.34mm²



8 Pos PUR ONLY

8x 0.25mm²



PVC	5	0.34	22	Grey	5x0.34mm ² PVC CABLE SHIELDED	3-2273231-3
	4	0.34	22	Grey	4x0.34mm ² PVC CABLE SHIELDED	3-2273231-2
	3	0.34	22	Grey	3x0.34mm ² PVC CABLE SHIELDED	3-2273231-1
PUR	8	0.25	24	Grey	8x0.25mm ² PUR CABLE SHIELDED	2-2273231-4
	5	0.34	22	Grey	5x0.34mm ² PUR CABLE SHIELDED	2-2273231-3
	4	0.34	22	Grey	4x0.34mm ² PUR CABLE SHIELDED	2-2273231-2
	3	0.34	22	Grey	3x0.34mm ² PUR CABLE SHIELDED	2-2273231-1
SHIELDED						
PVC	5	0.34	22	Black	5x0.34mm ² PVC CABLE UNSHIELDED	1-2273231-3
	4	0.34	22	Black	4x0.34mm ² PVC CABLE UNSHIELDED	1-2273231-2
	3	0.34	22	Black	3x0.34mm ² PVC CABLE UNSHIELDED	1-2273231-1
PUR	8	0.25	24	Grey	8x0.25mm ² PUR CABLE UNSHIELDED	2273231-4
	5	0.34	22	Black	5x0.34mm ² PUR CABLE UNSHIELDED	2273231-3
	4	0.34	22	Black	4x0.34mm ² PUR CABLE UNSHIELDED	2273231-2
	3	0.34	22	Black	3x0.34mm ² PUR CABLE UNSHIELDED	2273231-1
UNSHIELDED						

#cond	mm ²	AWG	JACKET COLOR	DESCRIPTION	TEPN
-------	-----------------	-----	--------------	-------------	------

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL
—

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± —
1 PLC ± —
2 PLC ± —
3 PLC ± —
4 PLC ± —
ANGLES ± —
FINISH —

DWN
YATHISH C
07APR2014

CHK
B.VELDHOVEN
15APR2014

APVD
A.VAN ZANDVOORT
15APR2014

PRODUCT SPEC
—

APPLICATION SPEC
—

WEIGHT
—

CUSTOMER DRAWING

TE Connectivity

NAME
M8 M12 BULK CABLE TYPES

SIZE
A3

CAGE CODE
00779

DRAWING NO
C=2273231


RESTRICTED TO
—

SCALE
NTS

SHEET
1 of 5

REV
A

4		3		2		1																																					
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION - . -		LOC H		DIST —		REVISIONS																																			
© COPYRIGHT — By —		ALL RIGHTS RESERVED.				P	LTR	DESCRIPTION		DATE	DWN	APVD																															
							—	SEE SHEET 1		—	—	—																															
Unshielded PUR																																											
2273231—1		<table><tr><td colspan="2">PUR CABLE</td></tr><tr><td>No./diameter of wires</td><td>3 x 0.34 mm²</td></tr><tr><td>Wire isolation</td><td>PP (br, wh, bk)</td></tr><tr><td>C—track properties</td><td>5 million</td></tr><tr><td>Jacket</td><td>PUR (UL/CSA)</td></tr><tr><td>Outer diameter</td><td>approx. 4.3 mm</td></tr><tr><td>Bend radius (moving)</td><td>10 x outer diameter</td></tr><tr><td>Temperature range (fixed)</td><td>—40...+80 °C</td></tr><tr><td>Temperature range (mobile)</td><td>—25...+80 °C</td></tr></table>		PUR CABLE		No./diameter of wires	3 x 0.34 mm ²	Wire isolation	PP (br, wh, bk)	C—track properties	5 million	Jacket	PUR (UL/CSA)	Outer diameter	approx. 4.3 mm	Bend radius (moving)	10 x outer diameter	Temperature range (fixed)	—40...+80 °C	Temperature range (mobile)	—25...+80 °C	2273231—4		<table><tr><td colspan="2">PUR CABLE</td></tr><tr><td>No./diameter of wires</td><td>8 x 0.25 mm²</td></tr><tr><td>Wire isolation</td><td>PP (br, wh, bl, bk, gr, pk, vi, or)</td></tr><tr><td>C—track properties</td><td>2 million</td></tr><tr><td>Jacket</td><td>PUR (UL/CSA)</td></tr><tr><td>Outer diameter</td><td>approx. 6.0 mm</td></tr><tr><td>Bend radius (moving)</td><td>10 x outer diameter</td></tr><tr><td>Temperature range (fixed)</td><td>—40...+80 °C</td></tr><tr><td>Temperature range (mobile)</td><td>—20...+80 °C</td></tr></table>		PUR CABLE		No./diameter of wires	8 x 0.25 mm ²	Wire isolation	PP (br, wh, bl, bk, gr, pk, vi, or)	C—track properties	2 million	Jacket	PUR (UL/CSA)	Outer diameter	approx. 6.0 mm	Bend radius (moving)	10 x outer diameter	Temperature range (fixed)	—40...+80 °C	Temperature range (mobile)	—20...+80 °C
PUR CABLE																																											
No./diameter of wires	3 x 0.34 mm ²																																										
Wire isolation	PP (br, wh, bk)																																										
C—track properties	5 million																																										
Jacket	PUR (UL/CSA)																																										
Outer diameter	approx. 4.3 mm																																										
Bend radius (moving)	10 x outer diameter																																										
Temperature range (fixed)	—40...+80 °C																																										
Temperature range (mobile)	—25...+80 °C																																										
PUR CABLE																																											
No./diameter of wires	8 x 0.25 mm ²																																										
Wire isolation	PP (br, wh, bl, bk, gr, pk, vi, or)																																										
C—track properties	2 million																																										
Jacket	PUR (UL/CSA)																																										
Outer diameter	approx. 6.0 mm																																										
Bend radius (moving)	10 x outer diameter																																										
Temperature range (fixed)	—40...+80 °C																																										
Temperature range (mobile)	—20...+80 °C																																										
2273231—2		<table><tr><td colspan="2">PUR CABLE</td></tr><tr><td>No./diameter of wires</td><td>4 x 0.34 mm²</td></tr><tr><td>Wire isolation</td><td>PP (br, wh, bl, bk)</td></tr><tr><td>C—track properties</td><td>5 million</td></tr><tr><td>Jacket</td><td>PUR (UL/CSA)</td></tr><tr><td>Outer diameter</td><td>approx. 4.7 mm</td></tr><tr><td>Bend radius (moving)</td><td>10 x outer diameter</td></tr><tr><td>Temperature range (fixed)</td><td>—40...+80 °C</td></tr><tr><td>Temperature range (mobile)</td><td>—25...+80 °C</td></tr></table>		PUR CABLE		No./diameter of wires	4 x 0.34 mm ²	Wire isolation	PP (br, wh, bl, bk)	C—track properties	5 million	Jacket	PUR (UL/CSA)	Outer diameter	approx. 4.7 mm	Bend radius (moving)	10 x outer diameter	Temperature range (fixed)	—40...+80 °C	Temperature range (mobile)	—25...+80 °C																						
PUR CABLE																																											
No./diameter of wires	4 x 0.34 mm ²																																										
Wire isolation	PP (br, wh, bl, bk)																																										
C—track properties	5 million																																										
Jacket	PUR (UL/CSA)																																										
Outer diameter	approx. 4.7 mm																																										
Bend radius (moving)	10 x outer diameter																																										
Temperature range (fixed)	—40...+80 °C																																										
Temperature range (mobile)	—25...+80 °C																																										
2273231—3		<table><tr><td colspan="2">PUR CABLE</td></tr><tr><td>No./diameter of wires</td><td>5 x 0.34 mm²</td></tr><tr><td>Wire isolation</td><td>PP (br, wh, bl, bk, gnye)</td></tr><tr><td>C—track properties</td><td>yes</td></tr><tr><td>Jacket</td><td>PUR (UL/CSA)</td></tr><tr><td>Outer diameter</td><td>approx. 5.0 mm</td></tr><tr><td>Bend radius (moving)</td><td>10 x outer diameter</td></tr><tr><td>Temperature range (fixed)</td><td>—50...+80 °C</td></tr><tr><td>Temperature range (mobile)</td><td>—25...+80 °C</td></tr></table>		PUR CABLE		No./diameter of wires	5 x 0.34 mm ²	Wire isolation	PP (br, wh, bl, bk, gnye)	C—track properties	yes	Jacket	PUR (UL/CSA)	Outer diameter	approx. 5.0 mm	Bend radius (moving)	10 x outer diameter	Temperature range (fixed)	—50...+80 °C	Temperature range (mobile)	—25...+80 °C																						
PUR CABLE																																											
No./diameter of wires	5 x 0.34 mm ²																																										
Wire isolation	PP (br, wh, bl, bk, gnye)																																										
C—track properties	yes																																										
Jacket	PUR (UL/CSA)																																										
Outer diameter	approx. 5.0 mm																																										
Bend radius (moving)	10 x outer diameter																																										
Temperature range (fixed)	—50...+80 °C																																										
Temperature range (mobile)	—25...+80 °C																																										
THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONS: mm TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± — MATERIAL — FINISH — DWN YATHISH C 07APR2014 CHK B.VELDHOVEN 15APR2014 APVD A.VAN ZANDVOORT 15APR2014 PRODUCT SPEC — APPLICATION SPEC — WEIGHT — NAME M8 M12 BULK CABLE TYPES SIZE A3 CAGE CODE 00779 DRAWING NO. C=2273231 RESTRICTED TO — SCALE NTS SHEET 2 OF 5 REV A CUSTOMER DRAWING 1470—19 (3/11)																																											

4		3		2		1																																																																
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION -,-		LOC H		DIST —		REVISIONS																																																														
© COPYRIGHT — By —		ALL RIGHTS RESERVED.				P	LTR	DESCRIPTION		DATE	DWN	APVD																																																										
							—	SEE SHEET 1		—	—	—																																																										
Unshielded PVC 1—2273231—1 <table><tr><td colspan="2">PVC CABLE</td></tr><tr><td>No./diameter of wires</td><td>3 x 0.34 mm²</td></tr><tr><td>Wire isolation</td><td>PVC (br, bl, bk)</td></tr><tr><td>C—track properties</td><td>n.a.</td></tr><tr><td>Jacket</td><td>PVC (UL/CSA)</td></tr><tr><td>Outer diameter</td><td>approx. 4.6 mm</td></tr><tr><td>Bend radius (moving)</td><td>10 x outer diameter</td></tr><tr><td>Temperature range (fixed)</td><td>−30...+80 °C</td></tr><tr><td>Temperature range (mobile)</td><td>−5...+80 °C</td></tr></table> 1—2273231—2 <table><tr><td colspan="2">PVC CABLE</td></tr><tr><td>No./diameter of wires</td><td>4 x 0.34 mm²</td></tr><tr><td>Wire isolation</td><td>PVC (br, wh, bl, bk)</td></tr><tr><td>C—track properties</td><td>n.a.</td></tr><tr><td>Jacket</td><td>PVC (UL/CSA)</td></tr><tr><td>Outer diameter</td><td>approx. 5.0 mm</td></tr><tr><td>Bend radius (moving)</td><td>10 x outer diameter</td></tr><tr><td>Temperature range (fixed)</td><td>−30...+80 °C</td></tr><tr><td>Temperature range (mobile)</td><td>−5...+80 °C</td></tr></table> 1—2273231—3 <table><tr><td colspan="2">PVC CABLE</td></tr><tr><td>No./diameter of wires</td><td>5 x 0.34 mm²</td></tr><tr><td>Wire isolation</td><td>PP (br, wh, bl, bk, gnye)</td></tr><tr><td>C—track properties</td><td>n.a.</td></tr><tr><td>Jacket</td><td>PVC (UL/CSA)</td></tr><tr><td>Outer diameter</td><td>approx. 5.2 mm</td></tr><tr><td>Bend radius (moving)</td><td>10 x outer diameter</td></tr><tr><td>Temperature range (fixed)</td><td>−30...+80 °C</td></tr><tr><td>Temperature range (mobile)</td><td>−5...+80 °C</td></tr></table>													PVC CABLE		No./diameter of wires	3 x 0.34 mm ²	Wire isolation	PVC (br, bl, bk)	C—track properties	n.a.	Jacket	PVC (UL/CSA)	Outer diameter	approx. 4.6 mm	Bend radius (moving)	10 x outer diameter	Temperature range (fixed)	−30...+80 °C	Temperature range (mobile)	−5...+80 °C	PVC CABLE		No./diameter of wires	4 x 0.34 mm ²	Wire isolation	PVC (br, wh, bl, bk)	C—track properties	n.a.	Jacket	PVC (UL/CSA)	Outer diameter	approx. 5.0 mm	Bend radius (moving)	10 x outer diameter	Temperature range (fixed)	−30...+80 °C	Temperature range (mobile)	−5...+80 °C	PVC CABLE		No./diameter of wires	5 x 0.34 mm ²	Wire isolation	PP (br, wh, bl, bk, gnye)	C—track properties	n.a.	Jacket	PVC (UL/CSA)	Outer diameter	approx. 5.2 mm	Bend radius (moving)	10 x outer diameter	Temperature range (fixed)	−30...+80 °C	Temperature range (mobile)	−5...+80 °C	THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONS: mm  TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± − 1 PLC ± − 2 PLC ± − 3 PLC ± − 4 PLC ± − ANGLES ± − MATERIAL − FINISH − DWN YATHISH C 07APR2014 CHK B.VELDHOVEN 15APR2014 APVD A.VAN ZANDVOORT 15APR2014 PRODUCT SPEC — APPLICATION SPEC — WEIGHT — CUSTOMER DRAWING TE Connectivity NAME M8 M12 BULK CABLE TYPES SIZE A3 CAGE CODE 00779 DRAWING NO C=2273231 RESTRICTED TO — SCALE NTS SHEET 3 of 5 REV A			
PVC CABLE																																																																						
No./diameter of wires	3 x 0.34 mm ²																																																																					
Wire isolation	PVC (br, bl, bk)																																																																					
C—track properties	n.a.																																																																					
Jacket	PVC (UL/CSA)																																																																					
Outer diameter	approx. 4.6 mm																																																																					
Bend radius (moving)	10 x outer diameter																																																																					
Temperature range (fixed)	−30...+80 °C																																																																					
Temperature range (mobile)	−5...+80 °C																																																																					
PVC CABLE																																																																						
No./diameter of wires	4 x 0.34 mm ²																																																																					
Wire isolation	PVC (br, wh, bl, bk)																																																																					
C—track properties	n.a.																																																																					
Jacket	PVC (UL/CSA)																																																																					
Outer diameter	approx. 5.0 mm																																																																					
Bend radius (moving)	10 x outer diameter																																																																					
Temperature range (fixed)	−30...+80 °C																																																																					
Temperature range (mobile)	−5...+80 °C																																																																					
PVC CABLE																																																																						
No./diameter of wires	5 x 0.34 mm ²																																																																					
Wire isolation	PP (br, wh, bl, bk, gnye)																																																																					
C—track properties	n.a.																																																																					
Jacket	PVC (UL/CSA)																																																																					
Outer diameter	approx. 5.2 mm																																																																					
Bend radius (moving)	10 x outer diameter																																																																					
Temperature range (fixed)	−30...+80 °C																																																																					
Temperature range (mobile)	−5...+80 °C																																																																					
1470—19 (3/11)																																																																						

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	- , - .
© COPYRIGHT - By -		ALL RIGHTS RESERVED.

LOC H	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

Shielded PUR

2-2273231-1

PUR CABLE	
No./diameter of wires	3 x 0.34 mm ²
Wire isolation	PVC (br, wh, bk)
C-track properties	
Jacket	PUR/PVC (UL/CSA)
Outer diameter	approx. 5.9 mm
Bend radius (moving)	15 x outer diameter
Temperature range (fixed)	−30...+80 °C
Temperature range (mobile)	−5...+70 °C

2-2273231-4


PUR CABLE	
No./diameter of wires	8 x 0.25 mm ²
Wire isolation	PP (br, wh, bl, bk, gr, pk, vi, or)
C-track properties	2 million
Jacket	PUR (UL/CSA)
Outer diameter	approx. 7.0 mm
Bend radius (moving)	10 x outer diameter
Temperature range (fixed)	-40...+80 °C
Temperature range (mobile)	-20...+80 °C

2-2273231-2

PUR CABLE	
No./diameter of wires	4 x 0.34 mm ²
Wire isolation	PVC (br, wh, bl, bk)
C-track properties	
Jacket	PUR/PVC (UL/CSA)
Outer diameter	approx. 5.9 mm
Bend radius (moving)	15 x outer diameter
Temperature range (fixed)	−30...+80 °C
Temperature range (mobile)	−5...+70 °C

2-2273231-3

PUR CABLE	
No./diameter of wires	5 x 0.34 mm ²
Wire isolation	PVC (br, wh, bl, bk, gnye)
C-track properties	
Jacket	PUR/PVC (UL/CSA)
Outer diameter	approx. 5.9 mm
Bend radius (moving)	15 x outer diameter
Temperature range (fixed)	−40...+80 °C
Temperature range (mobile)	−5...+70 °C

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN YATHISH C		07APR2014		TE Connectivity							
		CHK B.VELDHoven		15APR2014									
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		APVD A.VAN ZANDVOORT		15APR2014		NAME					
				PRODUCT SPEC		—		M8 M12 BULK CABLE TYPES					
				APPLICATION SPEC		—							
				SIZE		CAGE CODE				DRAWING NO		RESTRICTED TO	
				A3		00779				C=2273231		—	
MATERIAL —		FINISH —		WEIGHT —		CUSTOMER DRAWING		SCALE NTS		SHEET 4 OF 5		REV A	

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9