

DUAL OPERATIONAL AMPLIFIER


■ GENERAL DESCRIPTION

The **NJM2740** is a dual low supply voltage operational amplifier with low saturation output voltage.

It can operate with single supply when proper input bias has given.

It is suitable for audio section of portable sets and PCs.

■ PACKAGR OUTLINE



NJM2740M




NJM2740V

■ FEATURES

- Operating Voltage (± 1.1 to $\pm 3.5V$)
- Low Saturation Output Voltage ($\pm 2.2V$ typ. at $R_L=2.5k\Omega$)
- High Slew Rate ($4V/\mu s$ typ.)
- Bipolar Technology
- Package Outline DMP8,SSOP8


■ PIN CONFIGURATION

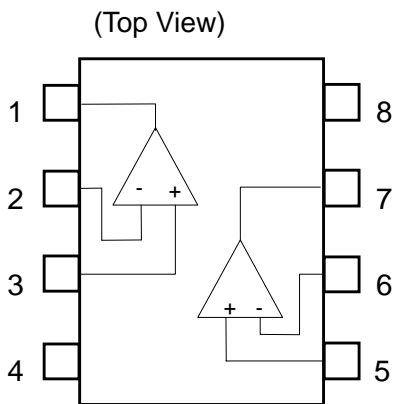

PIN FUNCTION

1. OUTPUT1
2. -INPUT1
3. +INPUT1
4. V^-
5. +INPUT2
6. -INPUT2
7. OUTPUT2
8. V^+

■ EQUIVALENT CIRCUIT

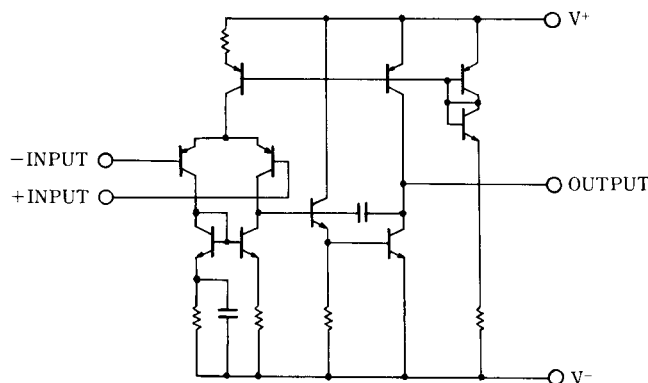

NJM2740

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V^+/V^-	±4	V
Differential Input Voltage	V_{ID}	±7	V
Common Mode Input Voltage	V_{IC}	±3.5	V
Power Dissipation	P_D	300 (DMP8) 250 (SSOP8)	mW
Operating Temperature Range	T_{opr}	-40 to +85	°C
Storage Temperature Range	T_{stg}	-40 to +125	°C

■ RECOMMENDED OPERATING CONDITION

(Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Operating Voltage Range	V^+/V^-		±1.1	-	±3.5	V

■ DC CHARACTERISTICS

($V^+/V^- = \pm 2.5V$, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Operating Current	I_{CC}	No Signal, $R_L = \infty$	-	3.5	5	mA
Input Offset Voltage	V_{IO}	$R_S \leq 10k\Omega$	-	1.0	6.0	mV
Input Bias Current	I_B		-	100	300	nA
Input Offset Current	I_{IO}		-	5	100	nA
Open Loop Voltage Gain	A_v	$R_L > 10k\Omega$	60	80	-	dB
Common Mode Rejection	CMR		60	74	-	dB
Supply Voltage Rejection	SVR	$V^+/V^- = \pm 1.2$ to 3.5V	60	80	-	dB
Maximum Output Voltage	V_{OM}	$R_L > 2.5k\Omega$	±2	±2.2	-	V
Input Common Mode Voltage Range	V_{ICM}		-1.4/ +1.5	-	-	V

■ AC CHARACTERISTICS

($V^+/V^- = \pm 2.5V$, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Gain Bandwidth product	GB	$f = 10kHz$	-	12	-	MHz

■ TRANSIENT CHARACTERISTICS


($V^+/V^- = \pm 2.5V$, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Slew Rate	SR	$A_v = 1, V_{IN} = \pm 1V$	-	4	-	V/ μs

■ TYPICAL CHARACTERISTICS


Operating Current vs. Operating Voltage

$V_{IN}=0V, no\ load$

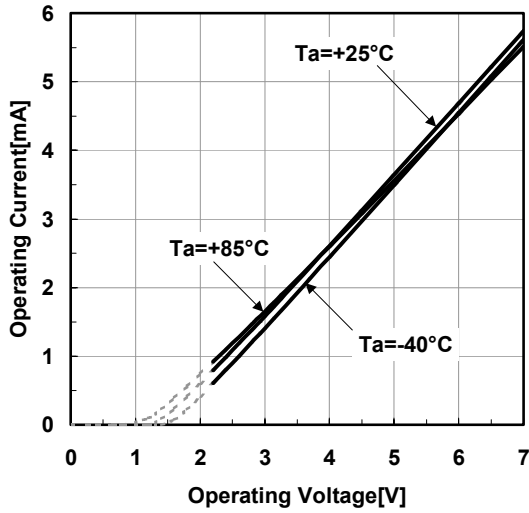


Operating Current vs. Temperature

$V_{IN}=0V, no\ load$

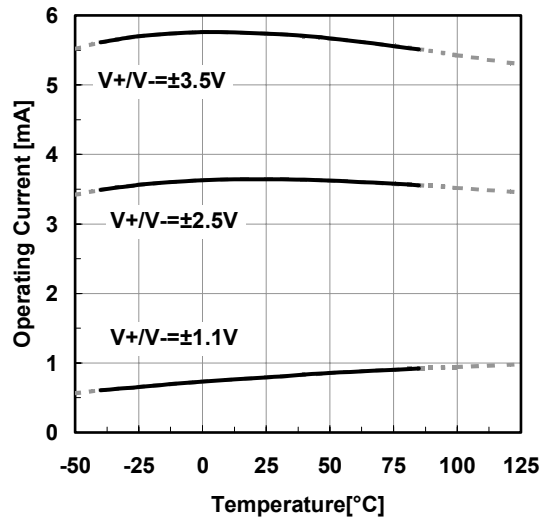


Input Offset Voltage vs. Temperature

$R_S=10k\Omega$

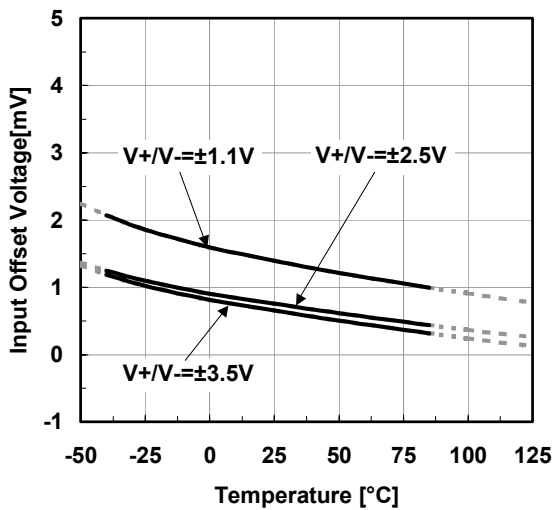


Input Offset Voltage vs. Operating Voltage

$R_S=10k\Omega$

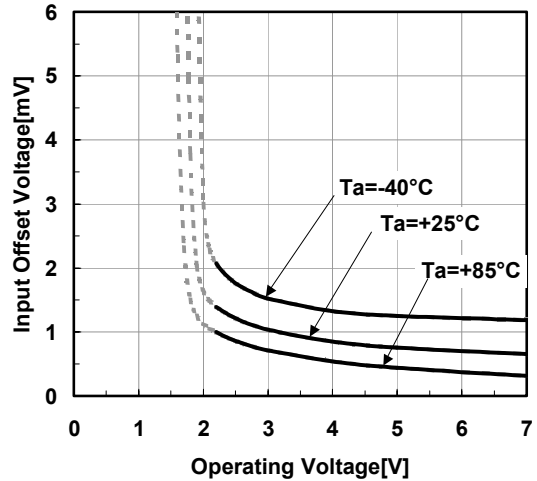


Common Mode Rejection Ratio vs. Temperature

$V_{+}/V_{-}=\pm 2.5V, V_{IN}=\pm 1.5V$

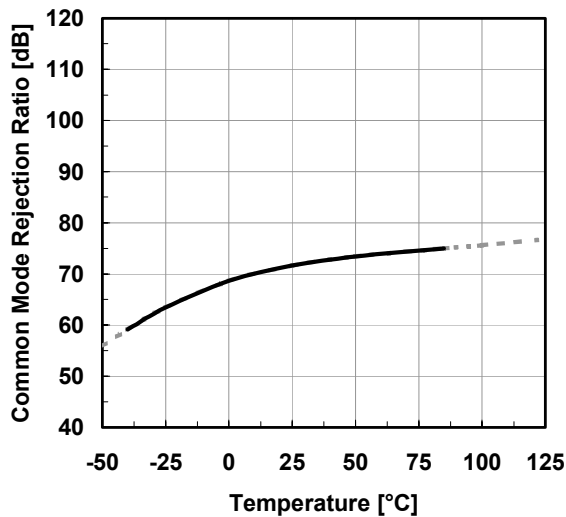


Supply Voltage Rejection Ratio vs. Temperature


$V_{+}/V_{-}=\pm 1.1V\ to\ \pm 3.5V$

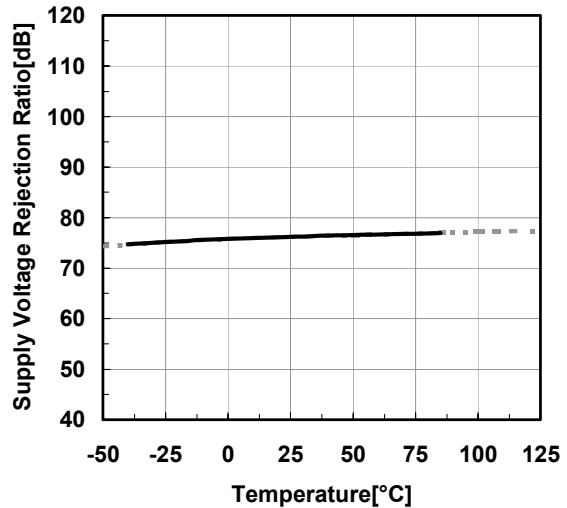


Input Offset Voltage vs. Input Common Mode Voltage

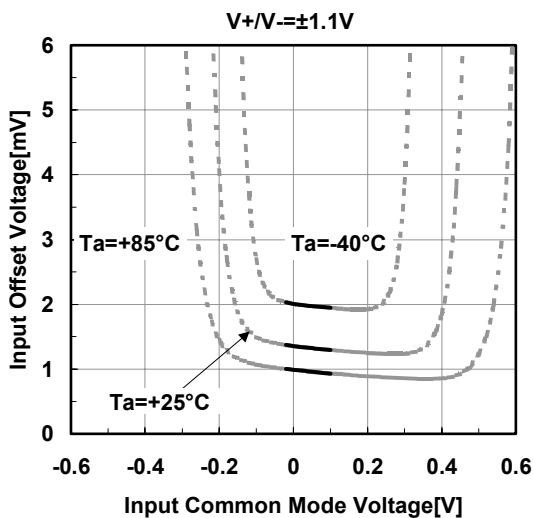


Input Offset Voltage vs. Input Common Mode Voltage

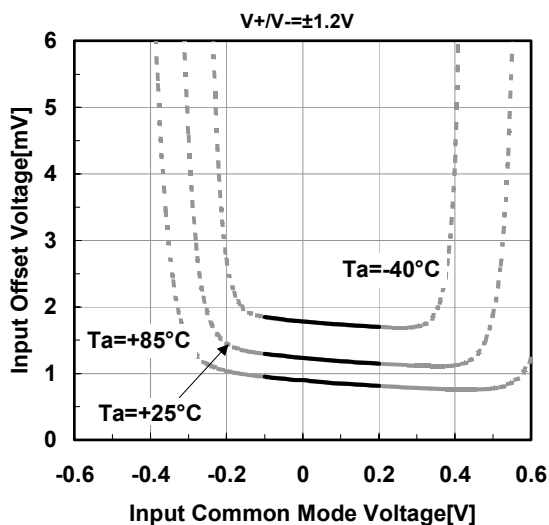


Input Offset Voltage vs. Input Common Mode Voltage

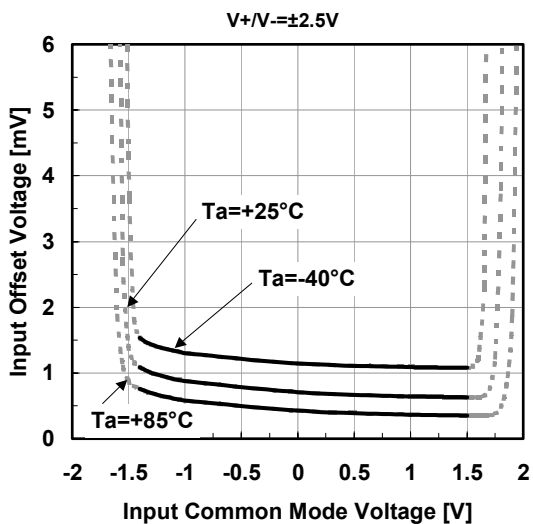


Input Bias Current vs. Temperature

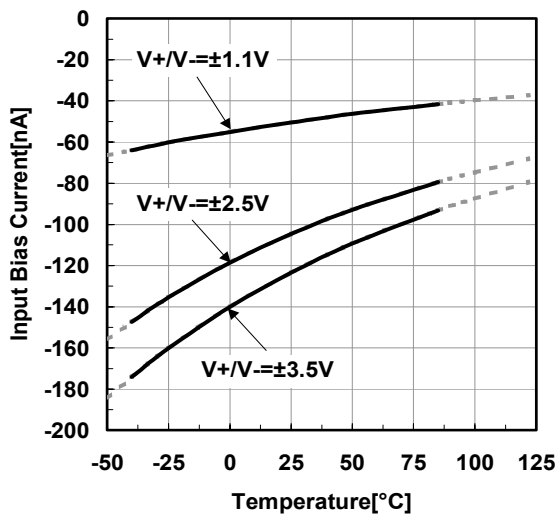


Input Offset Current vs. Temperature

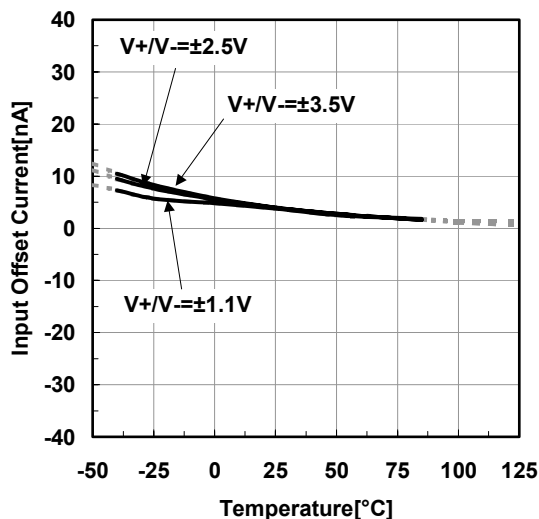


Maximum Output Voltage vs. Load Resistans
 $V_+/V_-=2.5V$, open loop

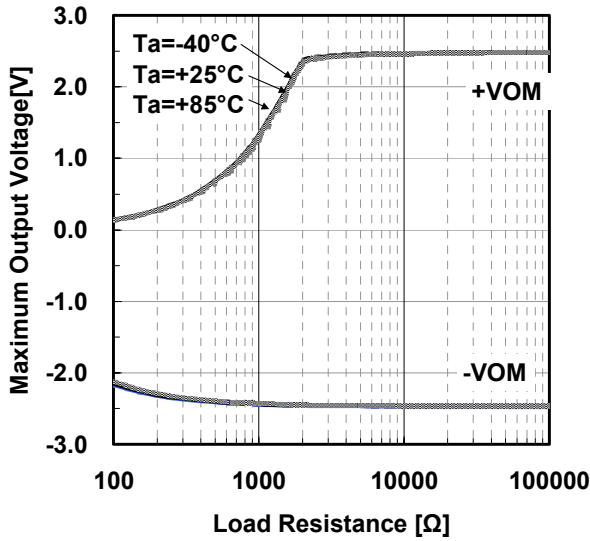


Maximum Output Voltage vs. Temperature
 $V_+/V_-=\pm 2.5V, R_L=2.5k\Omega$

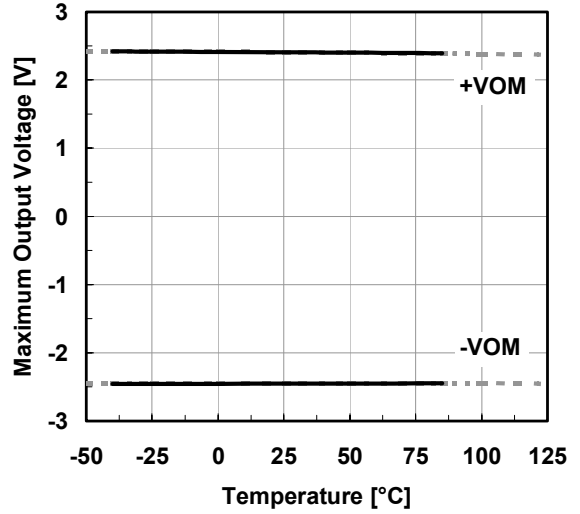


Maximum Output Voltage vs. Operating Voltage
 $R_L=2.5k\Omega$

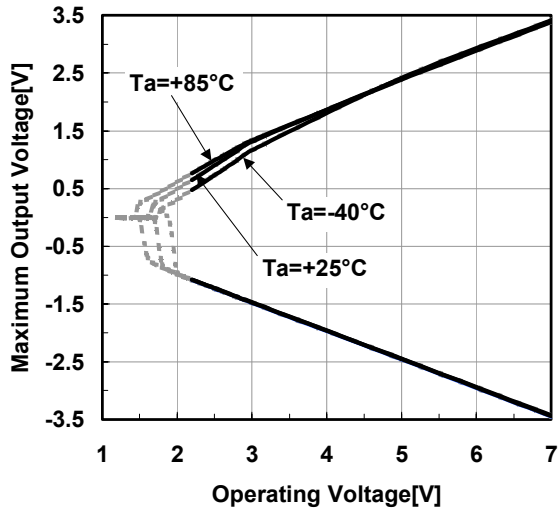

Maximum Output Voltage Swing vs. Frequency
 $V_+/V_-=\pm 2.5V, R_L=2.5k\Omega, T_a=25^\circ C$

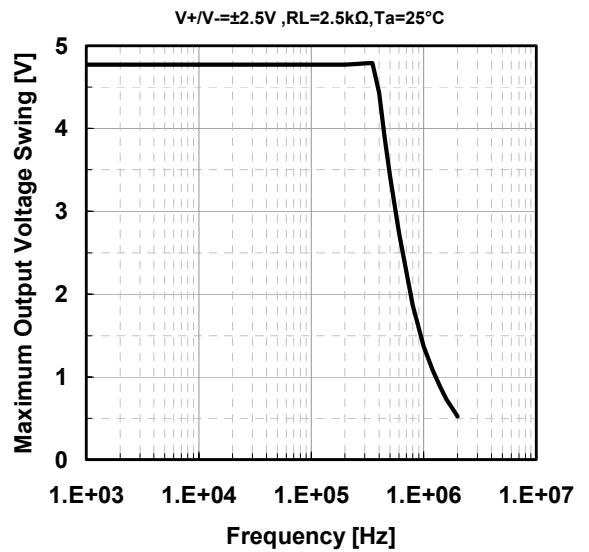


Open Loop Voltage Gain vs. Temperature
 $V_+/V_-=\pm 2.5V, R_L=10k\Omega$

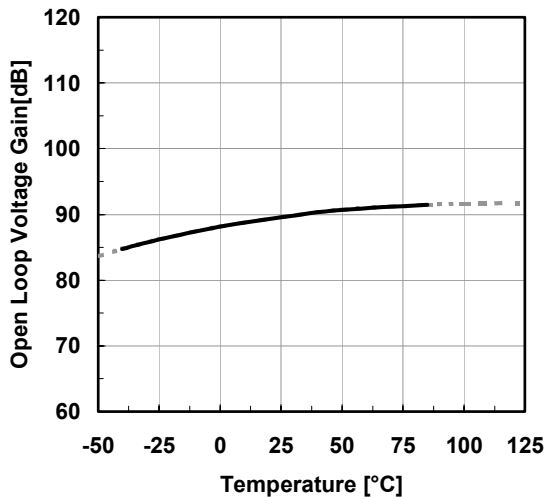


Voltage Gain & Phase vs. Frequency

V+/V- = ±1.1V, GV=40dB, RF=100kΩ,
RG=1kΩ, RL=2.5kΩ, CL=0pF

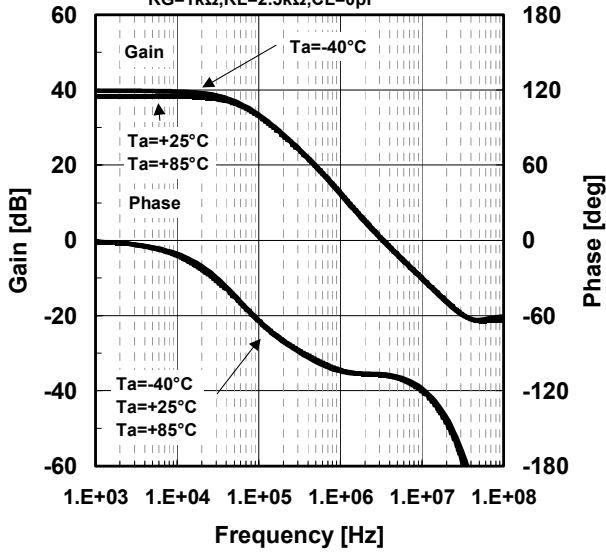


Voltage Gain & Phase vs. Frequency

V+/V- = ±2.5V, GV=40dB, RF=100kΩ,
RG=1kΩ, RL=2.5kΩ, CL=0pF

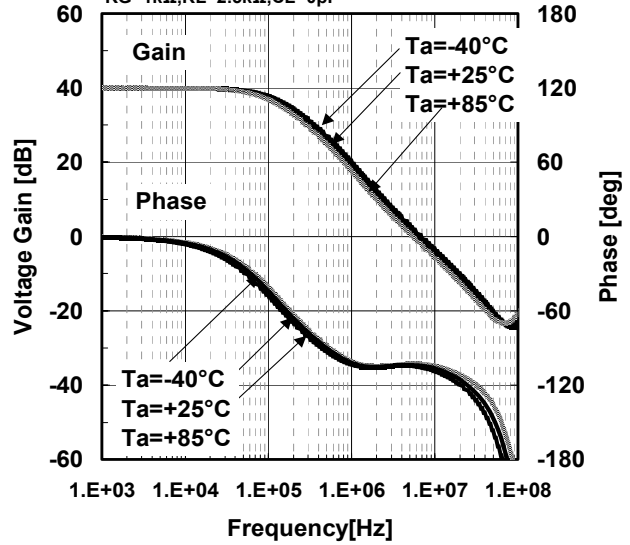


Voltage Gain & Phase vs. Frequency

V+/V- = ±3.5V, GV=40dB, RF=100kΩ,
RG=1kΩ, RL=2.5kΩ, CL=0pF

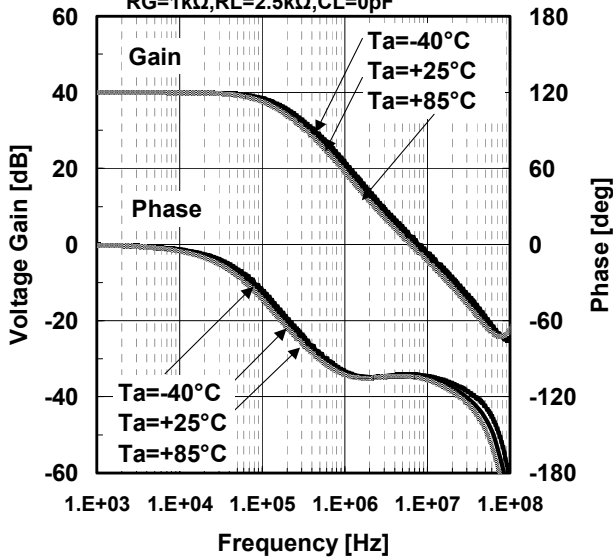


Voltage Gain & Phase vs. Frequency

GV=40dB, RF=100kΩ, RG=1kΩ,
RL=2.5kΩ, CL=0pF, Ta=25°C

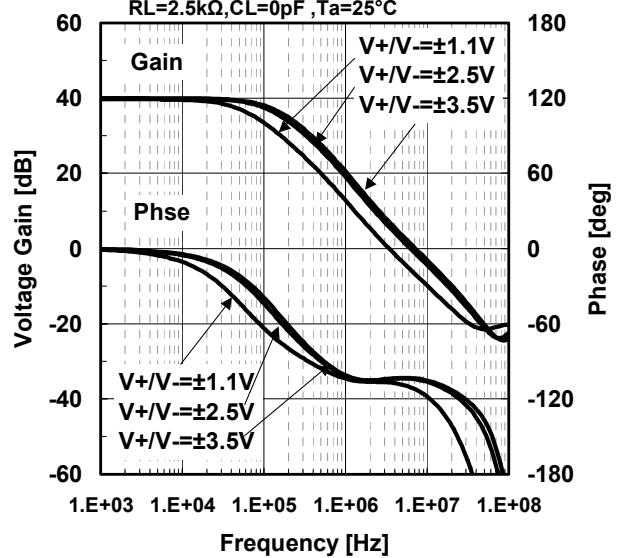


Peak Gain of Voltage Follower

V+/V- = 2.5V, GV=0dB, RS=50Ω,
RL=10kΩ, Ta=+25°C

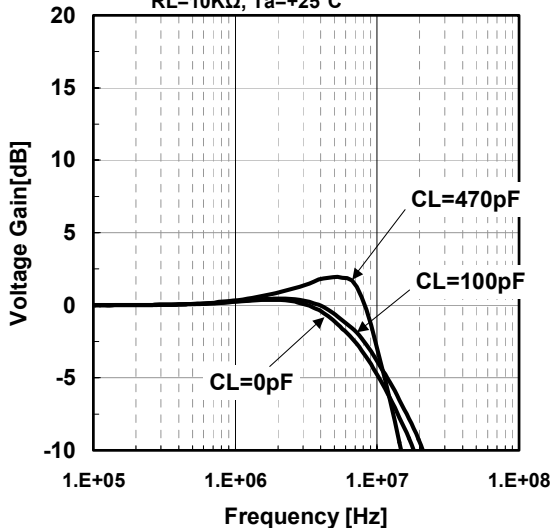


Phase Margin vs. Load Capacitance

V+/V- = ±2.5V, GV=40dB,
RF=100kΩ, RG=1kΩ, RL=2.5kΩ, Ta=+25°C

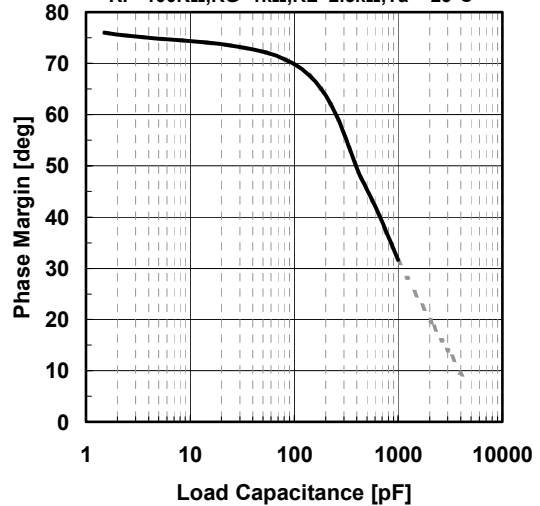


**Equivalent Input Noise Voltage
vs. Input Resistance**

$V+/V- = \pm 3.0V$, $R_F = 100k\Omega$, $R_G = 100\Omega$, JIS A, $T_a = 25^\circ C$

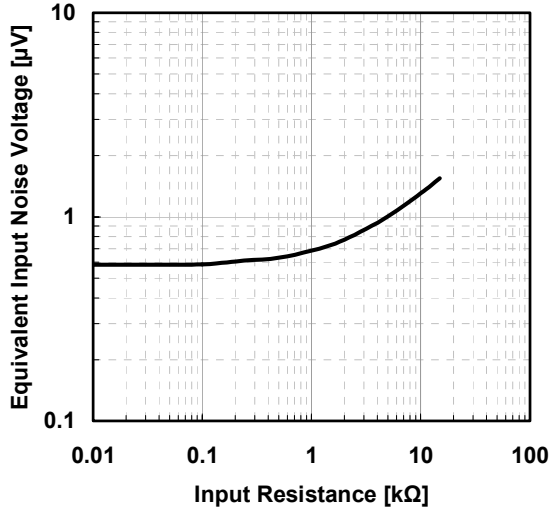


**Total Harmonic Distortion
vs. Output Voltage**

$V+/V- = \pm 3.0V$, $GV = 10dB$, $R_L = 4K\Omega$, $T_a = 25^\circ C$

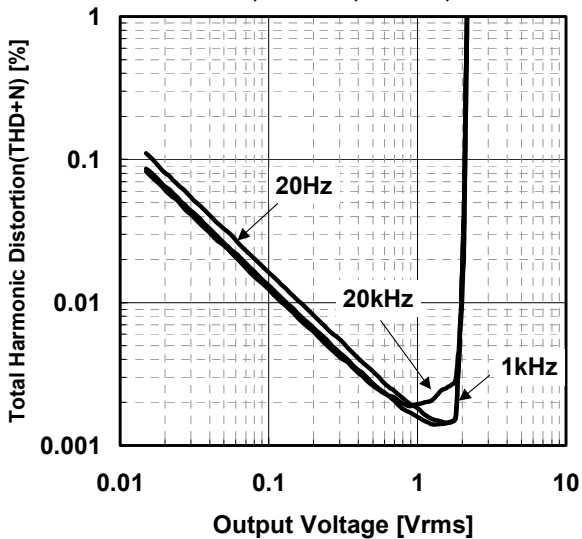


Pulse Response (Rise)

$V+/V- = \pm 2.5V$, $AV = 0dB$, $f = 100kHz$,
 $V_{IN} = \pm 1V$, $R_L = 10K\Omega$, $C_L = 0pF$

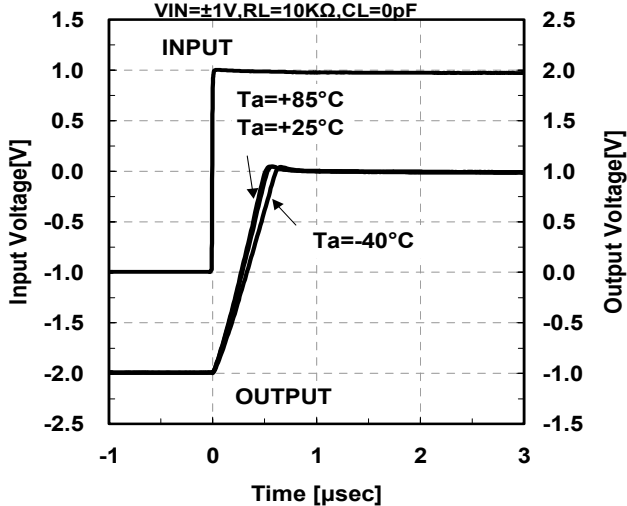

Pulse Response (Fall)

$V+/V- = \pm 2.5V$, $AV = 0dB$, $f = 100kHz$,
 $V_{IN} = \pm 1V$, $R_L = 10K\Omega$, $C_L = 0pF$

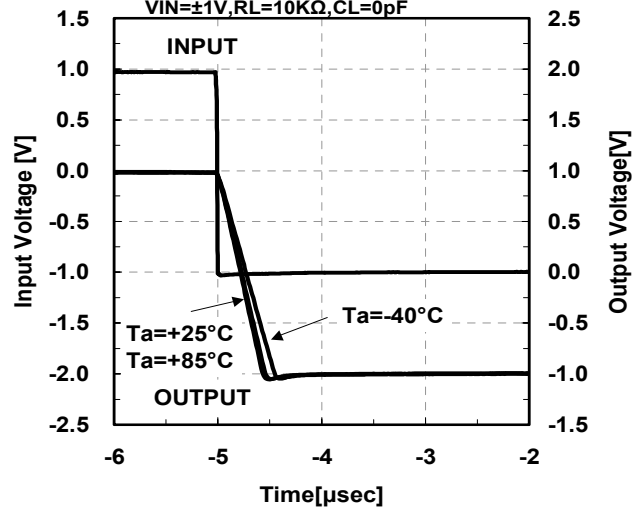

■ MEMO

[CAUTION]

The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJM2740V-TE1](#) [NJM2740M-TE2](#) [NJM#2740M-TE2](#) [NJM#2740V-TE1](#)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9