


SECTION 2


COMBINATION D-SUB CONNECTORS

Combination D-SUB Connectors provide the ideal solution for applications to require power, signal and coaxial connections within one connector. This series of connectors achieves space saving on PCB's and I/O designs.

Within this product family are various pin out configurations possible. Almost endless selections can be created mixing power, signal and coaxial contacts.

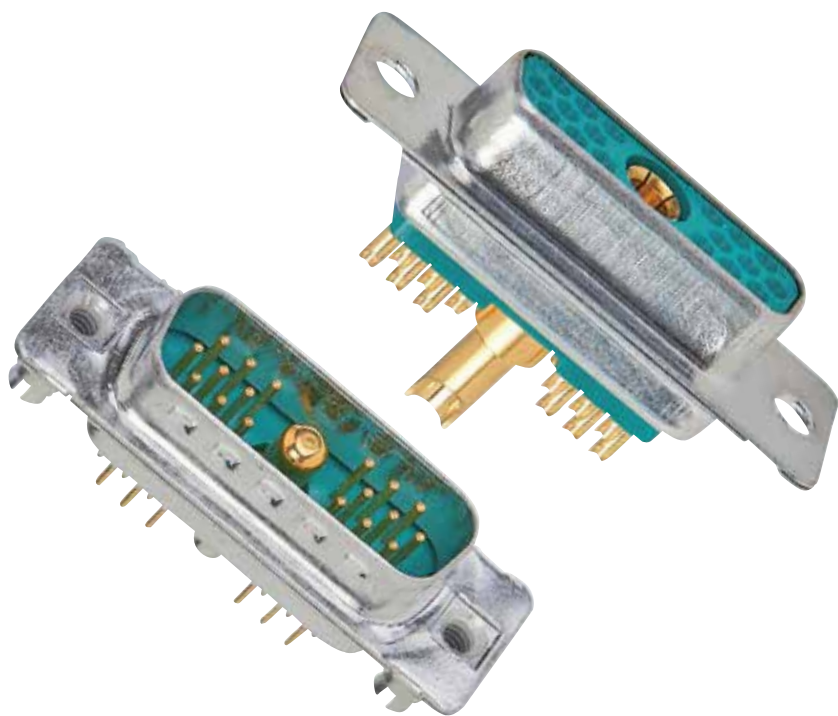

Examples are coaxial contacts handling frequencies up to 2 GHz. Power contacts from 10 amp to 40 amp current handling. Signal contacts in various styles complete the product offering.

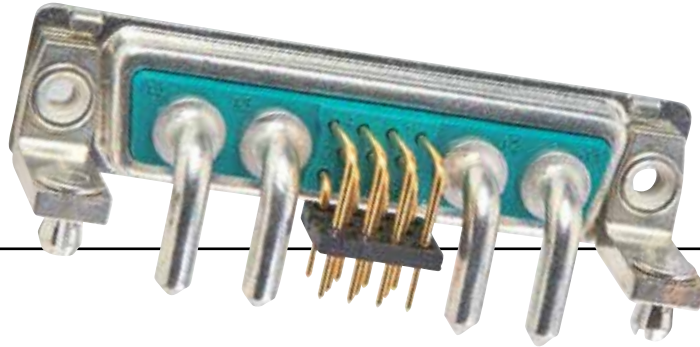

Industry standard terminations types, solder cup, PCB contacts in straight and angled pin configurations. Crimp types and wire wrap contacts.

Here are just a few Product characteristics:

- Space savings on the PCB
- Different wire terminations are possible in a single connector
- Cost savings - mixed layout
- Insertable and removable coaxial, power, high voltage and signal contacts
- Precision machined contacts
- Various quality classes are available
- Wide product range

A wide range of standard pin configurations fully loaded with signal contacts are available. Specially configured contacts with power, coaxial and signal contacts can be constructed. Please use the Part Number Creator on page 2 | 2 and 2 | 3 or contact technical support at your closest CONEC office.



PART NUMBER CREATOR

for standard version

3 003W3 S X X 6 1 A 1 O X

Product Line

- 3 = Shell steel tin plated
 1 = Brass tin plated*
 5 = Shell yellow chromated* (not RoHS compliant)
 A = Stainless steel*

*on request

Shell size and design

- 1 = 5W1, 2W2C
 2 = 3W3, 7W2, 11W1, 3W3C
 3 = 5W5, 9W4, 13W3, 17W2, 21W1
 4 = 8W8, 13W6, 17W5, 21W4, 25W3, 27W2
 5 = 24W7, 36W4, 43W2, 47W1

Empty positions ADD „0“ = 003W3

Contact type

- P = Plug connector
 S = Socket connector

Surface/Quality class for SIGNAL contacts

- A = Quality class 3 = 50 mating cycles
 B = Quality class 2 = 200 mating cycles*
 C = Quality class 1 = 500 mating cycles
 J = Special application = > 500 mating cycles (on request)*
 X = Crimp and 3W3, 5W5, 8W8, 2W2C, 3W3C (no contacts are supplied with the connector)

*on request

Termination only for SIGNAL contacts

- K = Crimp without contacts
 M = Solder cup
 N = Wire wrap, .500" / 12.7 mm
 P = Press fit
 R = Solder pin, straight, .220" / 5.6 mm
 T = Solder pin, angled, .280" / 7.19 mm
- U = Solder pin, angled, .370" / 9.40 mm
 W* = Solder pin, angled, .450" / 11.43 mm
 X = 3W3, 5W5, 8W8, 2W2C, 3W3C
 Z* = Solder pin, angled, .540" / 13.84 mm
 * = please contact us

Termination for HIGH POWER- or COAXIAL contacts

Quality class 3/Quality class 1

- C1 = Solder/Crimp angled 10 A
 C2 = Solder/Crimp angled 20 A
 C3 = Solder/Crimp angled 30 A
 C4 = Solder/Crimp angled 40 A
 F2,61/F1,41 = Solder cup 10 A
 F4,62/F3,42 = Solder cup 20 A
 F6,63/F5,43 = Solder cup 30 A
 F8,64/F7,44 = Solder cup 40 A
 68/48 = Solder pin, straight 20 A, D= .077" / 1.95 mm
 69/49 = Solder pin, straight 20 A, D= .102" / 2.60 mm
 70/50 = Solder pin, straight 20 A, D= .110" / 2.85 mm
 71/51 = Solder pin, straight 30 A, D= .130" / 3.18 mm
 72/52 = Solder pin, straight 40 A, D= .150" / 3.75 mm

Quality class 3/Quality class 1

- 59/55 = Solder pin, angled 15 A
 73/56 = Solder pin, angled 20 A
 74/57 = Solder pin, angled 30 A
 75/58 = Solder pin, angled 40 A
 77/60 = Solder pin, angled 40 A
 81/66 = Solder pin, angled 20 A
 82/67 = Solder pin, angled 30 A
 85/65 = Solder pin, angled 30 A
 G7/76 = 3 Solder pins Straight 50 Ω
 G9/78 = 3 Solder pins angled 50 Ω
 H1/79 = 3 Solder pins angled 50 Ω
 H4/80 = 5 Solder pins angled 50 Ω
 G8/86 = 3 Solder pins Straight 75 Ω

Quality class 3/Quality class 1

- H2/88 = 3 Solder pins angled 75 Ω
 H3/89 = 3 Solder pins angled 75 Ω
 H5/90 = 5 Solder pins angled 75 Ω
 91 = Screw termination 20 A
 /P1 = press fit 30A
 /P2 = press fit 30A
 /P4 = press fit 30A
 99 = no high power, coax or crimp contacts loaded
 Coaxial contacts with cable termination must be ordered separately.

Mounting style

- A1 = Riveted
 A2 = M3 threaded insert
 A3 = 4-40 UNC threaded insert
 A4 = M3 threaded rear spacer
 A5 = 4-40 UNC threaded rear spacer
 A6 = Float fastening
 A7 = Threaded rear spacer for M3 press fit
 A8 = Threaded rear spacer for 4-40 UNC press fit
 C1 = M3 threaded rear spacer with PCB clip, PCB .063" / 1.60 mm
 C2 = 4-40 UNC threaded rear spacer with PCB clip, PCB .063" / 1.60 mm
 C3 = M3 threaded rear spacer with PCB clip, PCB .091" / 2.30 mm
 C4 = 4-40 UNC threaded rear spacer with PCB clip, PCB .091" / 2.30 mm
 C5 = M3 threaded rear spacer with PCB clip, PCB .126" / 3.20 mm
 C6 = 4-40 UNC Threaded rear spacer with PCB clip, PCB .126" / 3.20 mm
 D1 = M3 clip and threaded rear spacer with PCB clip, PCB .063" / 1.60 mm
 D2 = 4-40 UNC clip and threaded rear spacer with PCB clip, PCB .063" / 1.60 mm
 D3 = M3 clip and threaded rear spacer with PCB clip, PCB .091" / 2.30 mm
 D4 = 4-40 UNC clip and threaded rear spacer with PCB clip, PCB .091" / 2.30 mm
 D5 = M3 clip and threaded rear spacer with PCB clip, PCB .126" / 3.20 mm
 D6 = 4-40 UNC clip and threaded rear spacer with PCB clip, PCB .126" / 3.20 mm
 E1 = M3 threaded rear spacer with PCB clip, PCB .063" / 1.60 mm
 E2 = 4-40 UNC threaded rear spacer with PCB clip, PCB .063" / 1.60 mm
 E3 = M3 threaded rear spacer with PCB clip, PCB .091" / 2.30 mm
 E4 = 4-40 UNC threaded rear spacer with PCB clip, PCB .091" / 2.30 mm
 E5 = M3 threaded rear spacer with PCB clip, PCB .126" / 3.20 mm
- E6 = 4-40 UNC threaded rear spacer with PCB clip, PCB .126" / 3.20 mm
 F1 = M3 clip and threaded rear spacer with PCB clip, PCB .063" / 1.60 mm
 F2 = 4-40 UNC clip and threaded rear spacer with PCB clip, PCB .063" / 1.60 mm
 F3 = M3 clip and threaded rear spacer with PCB clip, PCB .091" / 2.30 mm
 F4 = 4-40 UNC clip and threaded rear spacer with PCB clip, PCB .091" / 2.30 mm
 F5 = M3 clip and threaded rear spacer with PCB clip, PCB .126" / 3.20 mm
 F6 = 4-40 UNC clip and threaded rear spacer with PCB clip, PCB .126" / 3.20 mm
 G1 = Metal bracket, M3 threaded insert for .370" / 9.40 mm
 G2 = Metal bracket, 4-40 UNC threaded insert for .370" / 9.40 mm
 G3 = Metal bracket, M3 threaded insert and clip for .370" / 9.40 mm
 G4 = Metal bracket, 4-40 UNC threaded insert and clip for .370" / 9.40 mm
 H1 = Metal bracket, M3 threaded lock for .370" / 9.40 mm
 H2 = Metal bracket, 4-40 UNC threaded lock for .370" / 9.40 mm
 H3 = Metal bracket, M3 threaded lock and clip for .370" / 9.40 mm
 H4 = Metal bracket, 4-40 UNC threaded lock and clip for .370" / 9.40 mm
 N1 = Metal bracket, M3 threaded insert for .280" / 7.19 mm
 N2 = Metal bracket, 4-40 UNC threaded insert for .280" / 7.19 mm
 N3 = Metal bracket, M3 threaded insert and clip for .280" / 7.19 mm
 N4 = Metal bracket, 4-40 UNC threaded insert and clip for .280" / 7.19 mm
 P1 = Metal bracket, M3 threaded lock for .280" / 7.19 mm
 P2 = Metal bracket, 4-40 UNC threaded lock for .280" / 7.19 mm
 P3 = Metal bracket, M3 threaded lock and clip for .280" / 7.19 mm
 P4 = Metal bracket, 4-40 UNC threaded lock and clip for .280" / 7.19 mm
 W1 = Threaded rear spacer with M3 press in pin
 W2 = Threaded rear spacer with 4-40 UNC press in pin

OX = Standard

TECHNICAL DATA


Standard version

Materials	Connector with signal contacts	Coaxial contacts	High power contacts	High voltage contacts
Insulator Green standard / black crimp	PBTP, GV (UL94 V-0)			
Shell	steel tin plated brass tin / stainless steel on request			
Contact plating	Gold plated over nickel			
Contact material	CU alloy			
Retaining clip		CU alloy		
Insulator		PTFE/PBTP/PI		PTFE
Mechanical and electrical characteristics				
Current rating	7,5A (UL) / 5A (CSA, VDE)			
Test voltage between 2 contacts contact and shell	1000 V, 50Hz 1 min.		1000 V, 50Hz 1 min.	
Resistance between mated contacts	max. 8 mΩ	max. 2.7 mΩ	max. 1 mΩ	max. 2.7 mΩ
Insulation resistance	≥5 GΩ	≥ 10 GΩ	≥ 5 GΩ	≥ 2x10 ⁷ MΩ
Volume resistivity	10 ¹⁶ Ωcm			
Dielectric impedance	50KV/mm			
Characteristic impedance		50/75 Ω		
VSWR-value at according MIL-C-39012	1.2GHz 1.5GHz 2.0GHz	≤1,2 ≤1,3 ≤1,5		
Dielectric voltage		750V 50Hz		3.8kV
Frequency range		0-2GHz		
Working voltage	250 V	250 V	250 V	max. 2.8kV
Temperature range	-55°C to +125°C			
Insertion force per contact	3.4N	7N	7N	5N
Extraction force per contact	0.2N	7N	approx. 5N	approx. 2.5N
Mating cycles	A = Quality class 3 = 50 mating cycles, B = Quality class 2 = 200 mating cycles, C = Quality class 1 = 500 mating cycles			


Technical specifications are subject to change without notice.

PIN CONFIGURATION – MATING SIDE OF SOCKET CONNECTOR


SHELL SIZE 1




SHELL SIZE 2

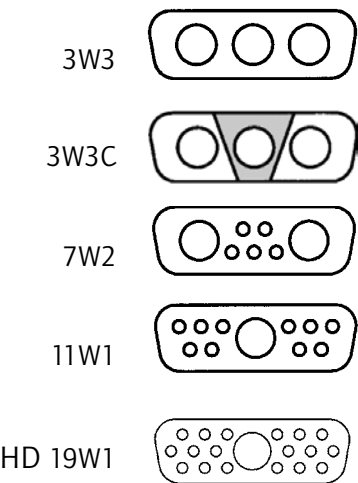


SHELL SIZE 3

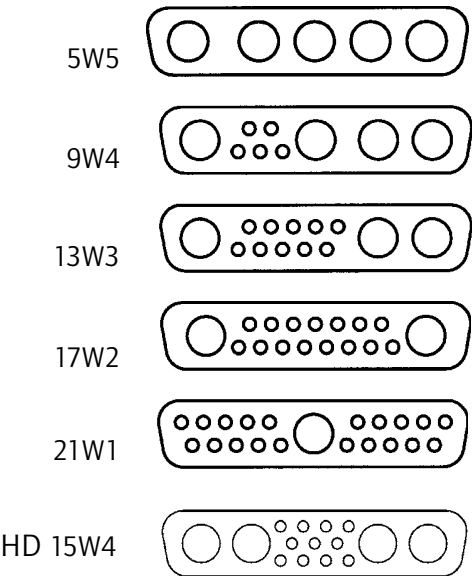

SHELL SIZE 4

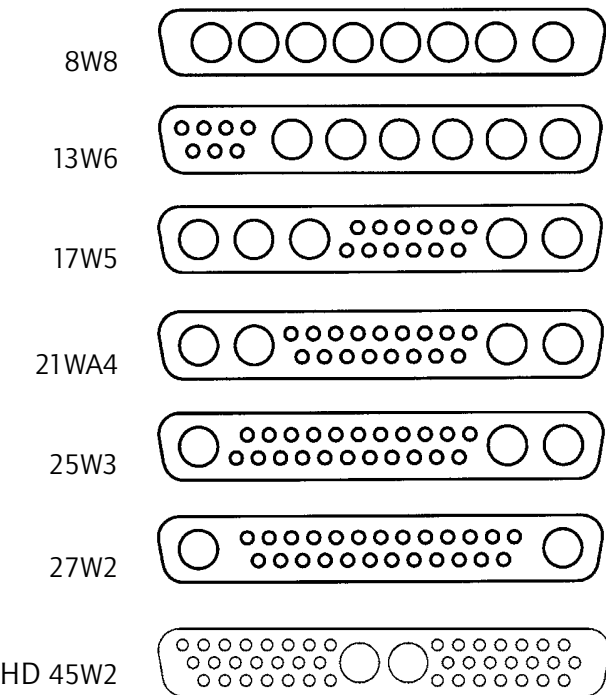

SHELL SIZE 5

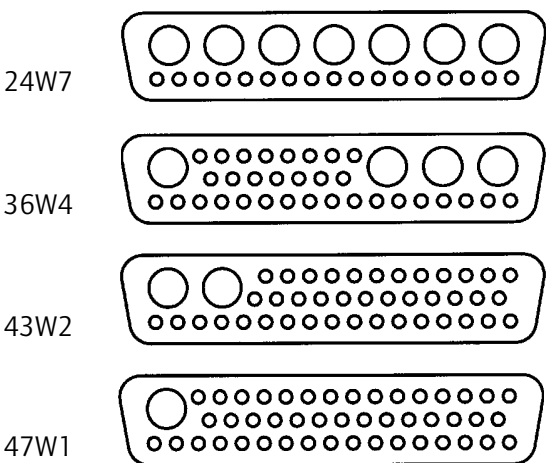

Connectors 3W3, 5W5 and 8W8 with female insulators: Socket contacts are fingerprobe safe according to UL 1950 and CSA 22.2.950.

TECHNICAL INFORMATION

SKIN EFFECT

Alternating currents do not uniformly occupy the entire cross section of the conductor, rather inductance effect in the conductor deflects the current towards the surface of the conductor, whereby this deflection increases with the frequency.

The resistive attenuation of a transmission line increases with the frequency as a result of this skin effect.

The skin depth (equivalent thickness of the layer in which current flows) can be determined using

$$\delta = \frac{1}{\sqrt{f \pi \sigma \mu_0 \mu_r}}$$

f = frequency

σ = conductivity of the conductor material

$\sigma_{Ag} = 62 \times 10^6 \text{ S/m}$

$\sigma_{Cu} = 58 \times 10^6 \text{ S/m}$

$\mu_0 = 1,256 \cdot 10^{-6} \text{ Vs / Am}$

μ_r ... relative permeability constant for the employed material

VSWR-VALUE

The ratio between the value of the largest and the smallest voltages on a loss-free line is known as the ripple or voltage standing wave ratio s (where $1 \leq s < \infty$). The reciprocal value of the VSWR is known as the inverse voltage standing wave ratio m (where $0 < m \leq 1$).

(VSWR = Voltage standing wave ratio)


The value of s is linked with the $\rightarrow$ reflection coefficient r on s transmission line according to the equation

$$s = \frac{(1 + |r|)}{(1 - |r|)}$$

DERATING CURVE


Measurement is according to DIN 41640 part 3 whereas all power contacts are connected in series.

For test procedure – product-no. 3008W8SXX99A has been equipped with 132C11049X and 3008W8PXX99AA10X with 131C11049X.

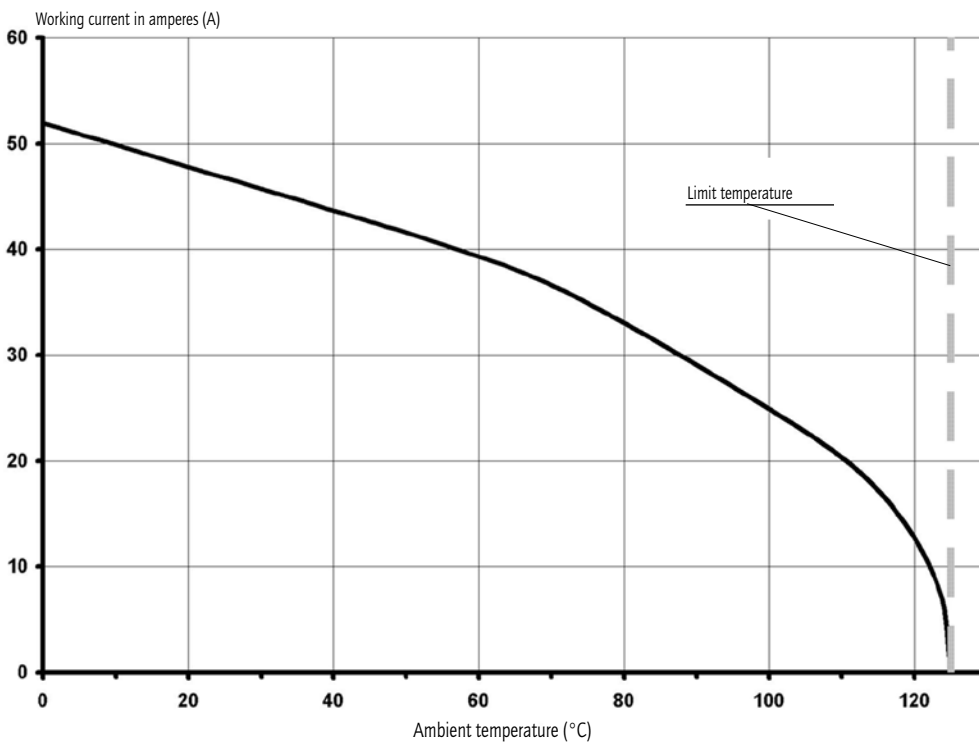


MATING CONDITIONS


Float mount tolerance guide

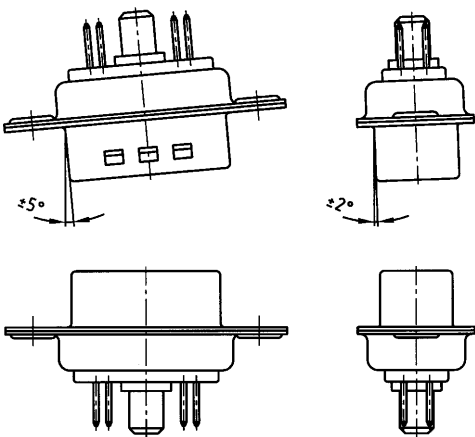

Rigid mount tolerance guide

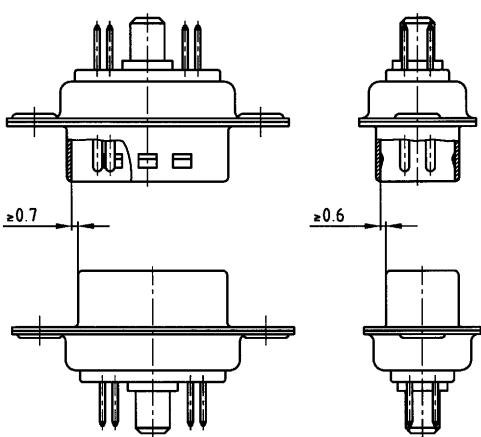


Rigid mount vertical to tolerance guide




PANEL CUT-OUT

Rear panel mounting

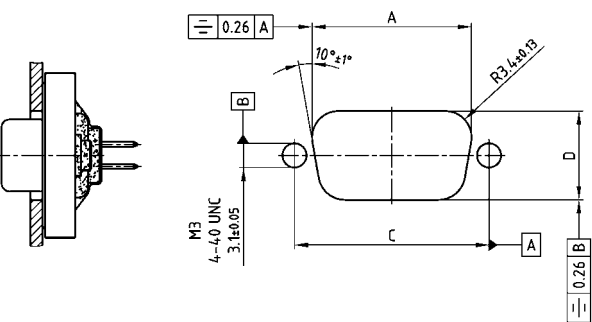


Front panel mounting

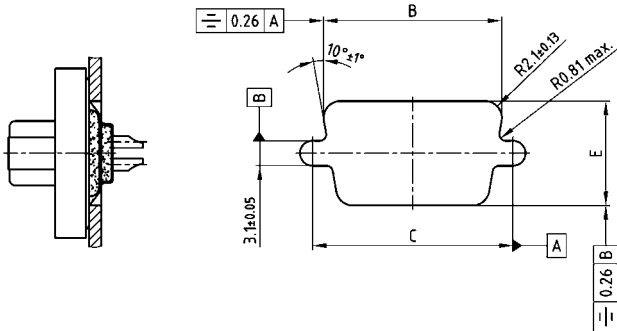

Shell size	A ± 0,13	B ± 0,13	C ± 0,13	D ± 0,13	E ± 0,13
1	20.50	22.20	25.00	11.40	13.00
2	28.80	30.50	33.30	11.40	13.00
3	42.50	44.30	47.04	11.40	13.00
4	59.10	60.70	63.50	11.40	13.00
5	56.30	58.30	61.10	14.10	15.80

CRIMPING INSTRUCTIONS FOR COAX CONTACTS

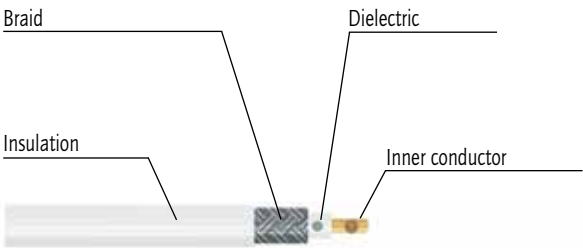

Strip the wire
Using dimensions shown on the
individual product drawings



Slide sleeve over coax cable



Crimp the inner contact on the
inner conductor



Snap the inner contact into
the outer contact



Slide braid over outer contact



Crimp the sleeve on to outer
contact

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9