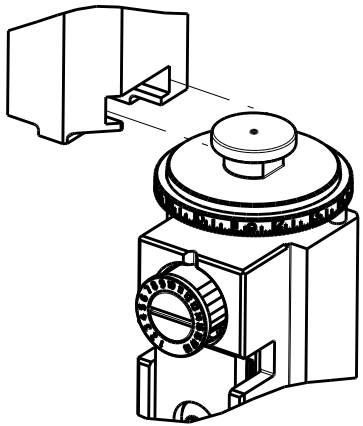




|                                                                                  |                |                          |                          |
|----------------------------------------------------------------------------------|----------------|--------------------------|--------------------------|
| 8                                                                                |                | 7                        |                          |
| THIS DRAWING IS UNPUBLISHED.                                                     |                | RELEASED FOR PUBLICATION |                          |
| © COPYRIGHT 20                                                                   |                | 20                       |                          |
| BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.                            |                |                          |                          |
| ATLANTIC VERSION<br>TERMINATOR<br>INTERFACE ADAPTER                              | PART<br>NUMBER | REVISION                 | DESCRIPTION              |
|  | 2151279-1      | B                        | FINE CRIMP HEIGHT ADJUST |
|                                                                                  | 2151279-2      | B                        | FINE CRIMP HEIGHT ADJUST |
|                                                                                  | 2151279-5      | B                        | FINE CRIMP HEIGHT ADJUST |
|                                                                                  | 2151279-6      | B                        | NON-CRIMP HEIGHT ADJUST  |
|                                                                                  | 2151279-7      | B                        | FINE CRIMP HEIGHT ADJUST |
|                                                                                  | 7-2151279-7    | A                        | CRIMP TOOLING KIT        |

|                         |                  |                                                                                   |  |
|-------------------------|------------------|-----------------------------------------------------------------------------------|--|
| APPLICATOR DATA         |                  |                                                                                   |  |
| CRIMP                   | SIZE             | TYPE                                                                              |  |
| WIRE                    | 2.03 mm [ .080 ] | F                                                                                 |  |
| INSUL                   | 2.54 mm [ .100 ] | O                                                                                 |  |
| APPLICATOR INSTRUCTIONS |                  |  |  |
| 408-10389               |                  |                                                                                   |  |


|                                      |                                                                                   |                                                                                   |                                |
|--------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--------------------------------|
| TERMINAL DATA: TE TERMINAL           |                                                                                   | TE CRIMP SPECIFICATION                                                            |                                |
| TERMINAL NAME: MICRO TIMER 2 CONTACT |                                                                                   |                                                                                   |                                |
| WIRE STRIP LENGTH                    |                                                                                   |  | INSULATION DIAMETER RANGE      |
| 4.00-4.60 mm [ .157-.181 IN ]        |                                                                                   |                                                                                   | Ø1.40-2.10 mm [ .055-.083 IN ] |
| TERMINAL                             | (A)114-18081                                                                      | -                                                                                 | -                              |
| APPLICATION                          |  |                                                                                   |                                |
| SPECIFICATION                        | (B)114-18082                                                                      | -                                                                                 | -                              |
| TERMINALS APPLIED                    |                                                                                   |                                                                                   |                                |
| TE TERMINAL                          | TE TERMINAL                                                                       | TE TERMINAL                                                                       | TE TERMINAL                    |
| (A) 962943-1                         | (A) 962943-5                                                                      | (B) 962948-2                                                                      | (B) 963900-4                   |
| (A) 962943-2                         | (A) 962943-6                                                                      | (B) 963900-1                                                                      |                                |
| (A) 962943-3                         | (A) 968052-1                                                                      | (B) 963900-2                                                                      |                                |
| (A) 962943-4                         | (B) 962948-1                                                                      | (B) 963900-3                                                                      |                                |

|           |                              |                                |
|-----------|------------------------------|--------------------------------|
| WIRE SIZE | CRIMP HEIGHT mm [ INCH ]     | CRIMP HEIGHT REFERENCE SETTING |
| 1.00mm2   | 1.20+/-0.05 [ .047+/- .002 ] | 5.0                            |
| 0.75mm2   | 1.18+/-0.05 [ .046+/- .002 ] | 5.2                            |
| 0.50mm2   | 1.15+/-0.05 [ .045+/- .002 ] | 5.3                            |

- 


RECOMMENDED SPARE PARTS
- 

GREASE BEARING SURFACES LIGHTLY
3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.
- 

APPLICATOR SPECIFIC DATA TO BE ENTERED INTO BLANK MEMORY CHIP AT ASSEMBLY. SEE BELOW FOR PART NUMBER:  
MECHANICAL FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151279-4  
PNEUMATIC FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151279-4  
SERVO FEED WITH "FINE CRIMP HEIGHT ADJUST": 8-2151279-5  
SERVO FEED WITH "NON-CRIMP HEIGHT ADJUST": 8-2151279-6
5. ADJUSTMENT OF THE STRIPPER MAY BE REQUIRED WHEN MOVING THE APPLICATOR BETWEEN BENCH AND LEADMAKER APPLICATIONS.
- 

APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEM 50.62 & 242 FOR -6 ONLY APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEM 37.50 & 242.
- 

GREASE THREADS, GROOVE AND O-RING ON ITEMS 35 & 252.
- 

MAGNET, ITEM 166 MUST BE ORIENTED CORRECTLY IN ORDER TO PROPERLY ACTUATE THE COUNTER.
- 

CRIMP HEIGHT REFERENCE SETTING WAS THE SETTING USED WHEN THE APPLICATOR WAS QUALIFIED AT THE FACTORY. ADJUSTMENT MAY BE NECESSARY WHEN RUNNING APPLICATOR IN THE FIELD.
- 

SPARE FEED CAM STORAGE LOCATION REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.
- 

TO CONVERT THE APPLICATOR TO A NON-CARRIER CUTTING STYLE, REMOVE ITEM 13 AND ATTACH TO THE LOCATION ON THE BACK SIDE OF THE HOUSING. REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.
- 

WHEN ASSEMBLING -6 NON-CRIMP HEIGHT ADJUST APPLICATOR USE SHIM PACK 2119957-2 TO ALIGN APPLICATOR'S MAXIMUM WIRE CRIMP HEIGHT AT NORMAL TERMINATOR SHUT HEIGHT


\*WARNING  
ON INSTALLATION, SET WIRE DISC, ITEM 40 TO LARGEST WIRE SIZE SETTING. USE OF SETTINGS BELOW MINIMUM REQUIRED CRIMP HEIGHT SETTING WILL CAUSE DAMAGE TO CRIMP TOOLING.

|     |    |    |    |    |    |           |                                 |         |
|-----|----|----|----|----|----|-----------|---------------------------------|---------|
| -   | -  | 1  | -  | -  | -  | 2119957-2 | APPLICATOR SHIM PACK            | 260     |
| -   | 1  | -  | 1  | 1  | 1  | 8-21084-0 | O-RING, .676 ID, .070 DIA. MAT. | 252     |
| -   | -  | -  | -  | 1  | -  | 2119640-1 | PUSH ROD, AIR FEED              | 250     |
| -   | -  | -  | -  | 1  | -  | 2079988-1 | BUSHING, LCH5-12, MISUMI        | 249     |
| -   | -  | -  | -  | 1  | -  | 2119641-1 | FEED CAM, AIR FEED              | 248     |
| -77 | -7 | -6 | -5 | -2 | -1 | PART NO   | DESCRIPTION                     | ITEM NO |

ATLANTIC VERSION  
Shown on sheets 1 of 4 & 2 of 4  
(Pacific version shown on sheets 3 of 4 & 4 of 4)

|                           |          |            |                       |  |           |     |      |
|---------------------------|----------|------------|-----------------------|--|-----------|-----|------|
| SET UP GAUGE<br>2119599-1 | LOC<br>A | DIST<br>66 | REVISIONS             |  |           |     |      |
|                           | P        | LTR        | DESCRIPTION           |  | DATE      | DWN | APVD |
|                           |          | A          | RELEASED              |  | 06APR2012 | KH  | SX   |
|                           |          | B          | REVISED ECR-13-005732 |  | 03APR2013 | CC  | TE   |
|                           |          |            |                       |  |           |     |      |

|     |     |     |     |     |     |             |                                     |         |
|-----|-----|-----|-----|-----|-----|-------------|-------------------------------------|---------|
| -   | 1   | -   | 1   | 1   | 1   | 2119798-1   | DETENT PIN                          | 247     |
| -   | 1   | -   | 1   | 1   | 1   | 1-22279-3   | SPRING, COMPRESSION                 | 246     |
| -   | -   | 1   | -   | -   | -   | 2119758-1   | RAM, AMP STYLE, SIDE FEED, NON-ADJ. | 245     |
| -   | 1   | 1   | 1   | 1   | 1   | 2119082-9   | CAM, SNAIL, INSULATION ADJUSTMENT   | 244     |
| -   | 1   | 1   | 1   | 1   | 1   | 2079764-1   | WASHER, WAVE SPRING, CREST-TO-CREST | 243     |
| -   | 1   | 1   | 1   | 1   | 1   | 2119083-1   | RETAINER, INSULATION DIAL           | 242     |
| -   | 1   | 1   | 1   | 1   | 1   | 7-18023-7   | SCR, SKT HD CAP M3 X 4.0            | 241     |
| -   | -   | 2   | 2   | -   | -   | 2168400-6   | SHCS, LOW HEAD, RoHS, M5 X 16       | 240     |
| -   | -   | -   | -   | -   | 1   | 2119580-1   | MECHANICAL FEED ASSEMBLY            | 239     |
| -   | -   | -   | -   | 1   | -   | 2063440-1   | AIR FEED MODULE                     | 238     |
| -   | -   | 1   | 1   | -   | -   | 2119740-2   | TAG, IDENTIFICATION                 | 213     |
| -   | -   | 1   | 1   | -   | -   | 1901094-3   | SPACER, FEEDER                      | 198     |
| -   | 1   | 1   | 1   | 1   | 1   | 993111-1    | PIN, SLOTTED SPRING 3.0 X 20.0      | 177     |
| -   | 1   | 1   | 1   | 1   | 1   | 8-22280-7   | SPRING, COMPRESSION                 | 176     |
| -   | 1   | 1   | 1   | 1   | 1   | 1752353-2   | GUIDE PIN,HOLDDOWN                  | 175     |
| -   | 1   | 1   | 1   | 1   | 1   | 1901680-2   | GUIDE PIN,HOLDDOWN                  | 174     |
| -   | -   | -   | -   | 2   | -   | 21045-3     | RING, RETAIN, EXTERN, 3/16 CRESCENT | 172     |
| -   | 1   | 1   | 1   | 1   | 1   | 994969-1    | MAGNET, RARE EARTH HIGH ENERGY      | 166     |
| -   | REF | REF | REF | REF | REF | 994970-2    | COUNTER, MAGNETIC                   | 164     |
| -   | -   | -   | -   | 1   | -   | 240638-1    | SPRING, FEED FINGER                 | 163     |
| -   | -   | -   | -   | 1   | -   | 3-23627-7   | PIN, RETAIN, GRVD, 3/16 X .854      | 137     |
| -   | -   | -   | -   | 1   | -   | 2119799-1   | HOLDER,FEED FINGER, AF              | 136     |
| -   | -   | REF | REF | -   | -   | SEE NOTE 4  | MEMORY CHIP, PROGRAMMED             | 135     |
| -   | -   | 1   | 1   | -   | -   | 1633743-1   | SERVO FEED LATCH ASM                | 133     |
| -   | 1   | 1   | 1   | 1   | 1   | 1-18028-2   | WASHER, FLAT, REG M4                | 119     |
| -   | -   | REF | REF | -   | -   | 2119944-1   | FEED FINGER ASSEMBLY,SF             | 117     |
| -   | 1   | 1   | 1   | 1   | 1   | 455888-5    | SPACER, CRIMPER                     | 82      |
| -   | 1   | 1   | 1   | 1   | 1   | 2119956-1   | DOCUMENTATION PACKAGE               | 71      |
| -   | 1   | -   | -   | 1   | 1   | 2119740-1   | TAG,IDENTIFICATION                  | 67      |
| -   | 2   | 2   | 2   | 2   | 2   | 2168078-1   | SCREW, DRIVE, RH, RoHS              | 66      |
| -   | 1   | -   | 1   | 1   | 1   | 2119793-1   | LIMITER, ADJUSTMENT BOLT            | 63      |
| -   | 3   | -   | 3   | 3   | 3   | 992763-5    | SCR, SET, SOC, CONE POINT, M3 x 4.0 | 62      |
| -   | 1   | 1   | 1   | 1   | 1   | 2079383-4   | SCR, BHSC, RoHS (M4 X 8)            | 60      |
| -   | -   | -   | -   | 1   | 1   | 5-18022-5   | SCR, HEX HD CAP, M4 X 6.0           | 59      |
| -   | -   | -   | -   | 1   | 1   | 1338685-1   | PAWL, FEED                          | 56      |
| -   | 4   | 4   | 4   | 4   | 4   | 2168400-1   | SHCS, LOW HEAD, RoHS, M4 X 12       | 54      |
| -   | 1   | 1   | 1   | 1   | 1   | 1-5018030-0 | NUT, HEX, REG, RoHS, M3.5           | 52      |
| -   | 1   | 1   | 1   | 1   | 1   | 1901681-1   | HOLDDOWN, TERMINAL                  | 51      |
| -   | 1   | 1   | 1   | 1   | 1   | 1-1752354-7 | STANDOFF,HOLD-DOWN                  | 50      |
| -   | -   | -   | -   | 1   | 2   | 18023-9     | SCR, SKT HD CAP M4 X 6.0            | 49      |
| -   | -   | -   | -   | -   | 1   | 2119652-1   | FEED CAM, PRE FEED                  | 48      |
| -   | -   | -   | -   | -   | 1   | 2119653-1   | FEED CAM, POST FEED                 | 47      |
| -   | 1   | 1   | 1   | 1   | 1   | 2119656-9   | APPLICATOR BASIC ASSEMBLY, SF       | 46      |
| -   | 1   | -   | 1   | 1   | 1   | 2119370-1   | RAM, AMP STYLE, SIDE FEED           | 44      |
| -   | 1   | 1   | 1   | 1   | 1   | 2079383-7   | SCR, BHSC, RoHS (M8 X 25)           | 41      |
| -   | 1   | -   | 1   | 1   | 1   | 2119645-1   | DISC, NUMBERED FA WIRE ADJUSTMENT   | 40      |
| -   | 1   | -   | 1   | 1   | 1   | 2119957-1   | APPLICATOR SHIM PACK                | 39      |
| -   | 1   | 1   | 1   | 1   | 1   | 2119644-1   | RAM WASHER, PRECISION               | 38      |
| -   | 1   | 1   | 1   | 1   | 1   | 2119085-1   | FA HEAD, ATLANTIC STYLE             | 37      |
| -   | 1   | -   | 1   | 1   | 1   | 2119092-1   | BOLT, ADJUSTMENT                    | 35      |
| -   | 1   | 1   | 1   | 1   | 1   | 1-1752356-8 | SUPPORT, TERMINAL                   | 34      |
| -   | 2   | 2   | 2   | 2   | 2   | 2079383-5   | SCR, BHSC, RoHS (M4 X 20)           | 33      |
| -   | 1   | 1   | 1   | 1   | 1   | 2161328-1   | HEX HEAD, FLANGED, M5 x 8mm LONG    | 32      |
| -   | 1   | 1   | 1   | 1   | 1   | 1-1320908-0 | SPACER, STRIP GUIDE                 | 30      |
| -   | 1   | 1   | 1   | 1   | 1   | 2119959-2   | ASSEMBLY, STRIP GUIDE               | 29      |
| -   | 1   | 1   | 1   | 1   | 1   | 1-455888-0  | SPACER, CRIMPER                     | 28      |
| -   | 1   | 1   | 1   | 1   | 1   | 1320928-2   | STRIP GUIDE                         | 24      |
| -   | 1   | 1   | 1   | 1   | 1   | 2168083-2   | SCR, SKT HD CAP, RoHS, M4 X 8.0     | 21      |
| -   | 1   | 1   | 1   | 1   | 1   | 1-18028-2   | WASHER, FLAT, REG M4                | 20      |
| -   | 1   | 1   | 1   | 1   | 1   | 2119533-1   | STRIPPER, SIDE FEED                 | 19      |
| -   | 1   | 1   | 1   | 1   | 1   | 2119806-1   | INSERT, SHEAR                       | 13      |
| -   | 1   | 1   | 1   | 1   | 1   | 3-22280-3   | SPRING, COMPRESSION                 | 12      |
| -   | 1   | 1   | 1   | 1   | 1   | 1-356885-4  | STOP, SHEAR                         | 11      |
| -   | 1   | 1   | 1   | 1   | 1   | 2119805-1   | SHEAR HOLDER, FRONT                 | 10      |
| -   | 1   | 1   | 1   | 1   | 1   | 454276-5    | FLOATING SHEAR, FRONT               | 9       |
| 1   | 1   | 1   | 1   | 1   | 1   | 1-1333204-5 | ANVIL, COMBINATION                  | 8       |
| -   | -   | -   | -   | -   | -   | -           | -                                   | 7       |
| -   | -   | -   | -   | -   | -   | -           | -                                   | 6       |
| -   | 1   | 1   | 1   | 1   | 1   | 2119757-4   | DEPRESSOR, SHEAR                    | 5       |
| -   | 1   | 1   | 1   | 1   | 1   | 238011-4    | BLOCK, CRIMPER SPACER               | 4       |
| 1   | 1   | 1   | 1   | 1   | 1   | 4-2119784-0 | CRIMPER, INSULATION O PREMIUM       | 3       |
| -   | 1   | 1   | 1   | 1   | 1   | 1-455888-3  | SPACER, CRIMPER                     | 2       |
| 1   | 1   | 1   | 1   | 1   | 1   | 1-456405-6  | CRIMPER, WIRE PREMIUM               | 1       |
| -77 | -7  | -6  | -5  | -2  | -1  | PART NO     | DESCRIPTION                         | ITEM NO |


|                                                                                                                                                                                                                                                                                                                                                   |  |  |  |                                        |           |                                              |  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|----------------------------------------|-----------|----------------------------------------------|--|
| THIS IS SUBJECT TO CHANGE AND DOES NOT CONSTITUTE AN ENDORSEMENT OR RECOMMENDATION BY THE U.S. GOVERNMENT. THE U.S. GOVERNMENT MAKES NO WARRANTY, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE U.S. GOVERNMENT SHALL BE CONTACTED FOR THE LATEST EDITION. |  |  |  | DWN<br>K. HUANG                        | 09DEC2011 | TE Connectivity<br>Harrisburg, PA 17105-3608 |  |
| DIMENSIONS:                                                                                                                                                                                                                                                                                                                                       |  |  |  | CHK<br>S. XI                           | 09DEC2011 | NAME<br>OCEAN SIDE FEED APPLICATOR           |  |
| mm                                                                                                                                                                                                                                                                                                                                                |  |  |  | APVD<br>J. CRUZ                        | 09DEC2011 | PRODUCT SPEC                                 |  |
|                                                                                                                                                                                                                                                              |  |  |  | TOLERANCES UNLESS OTHERWISE SPECIFIED: |           | APPLICATION SPEC                             |  |
| 0 PLC ±.1                                                                                                                                                                                                                                                                                                                                         |  |  |  | 1 PLC ±0.1                             |           | SIZE                                         |  |
| 2 PLC ±0.02                                                                                                                                                                                                                                                                                                                                       |  |  |  | 3 PLC ±0.005                           |           | CASE CODE                                    |  |
| 4 PLC ±0.0005                                                                                                                                                                                                                                                                                                                                     |  |  |  | ANGLES ±.0005                          |           | DRAWING NO                                   |  |
| FINISH                                                                                                                                                                                                                                                                                                                                            |  |  |  | MATERIAL                               |           | RESTRICTED TO                                |  |
| -                                                                                                                                                                                                                                                                                                                                                 |  |  |  | -                                      |           | -                                            |  |
| Customer Accessible Production Drawing                                                                                                                                                                                                                                                                                                            |  |  |  | WEIGHT                                 |           | A1 00779 ©=2151279                           |  |
| SCALE                                                                                                                                                                                                                                                                                                                                             |  |  |  | 1:1                                    |           | SHEET 1 OF 4                                 |  |
| REV                                                                                                                                                                                                                                                                                                                                               |  |  |  | B                                      |           |                                              |  |




DIMENSIONS AND TOLERANCING PER ASME Y14.5M-2009.

|                              |                                                       |
|------------------------------|-------------------------------------------------------|
| 8                            | 7                                                     |
| THIS DRAWING IS UNPUBLISHED. | RELEASED FOR PUBLICATION                              |
| 20                           | 20                                                    |
| COPYRIGHT 20                 | BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED. |


# FEED TYPE MECHANICAL

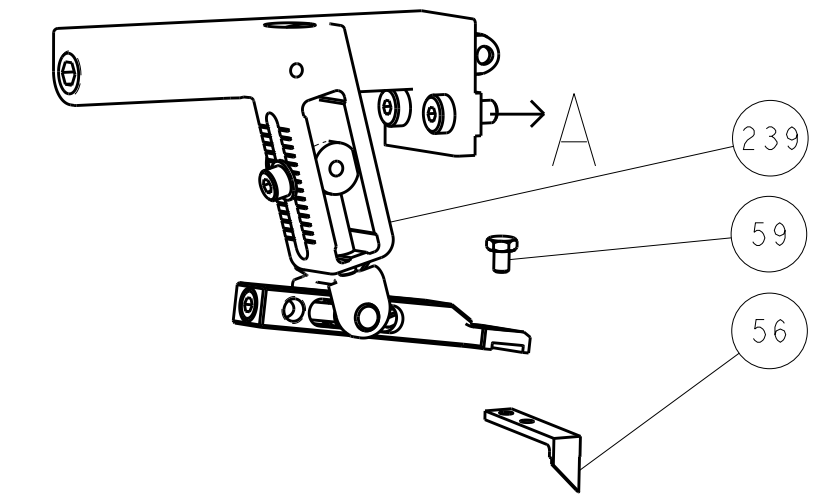




# PNEUMATIC

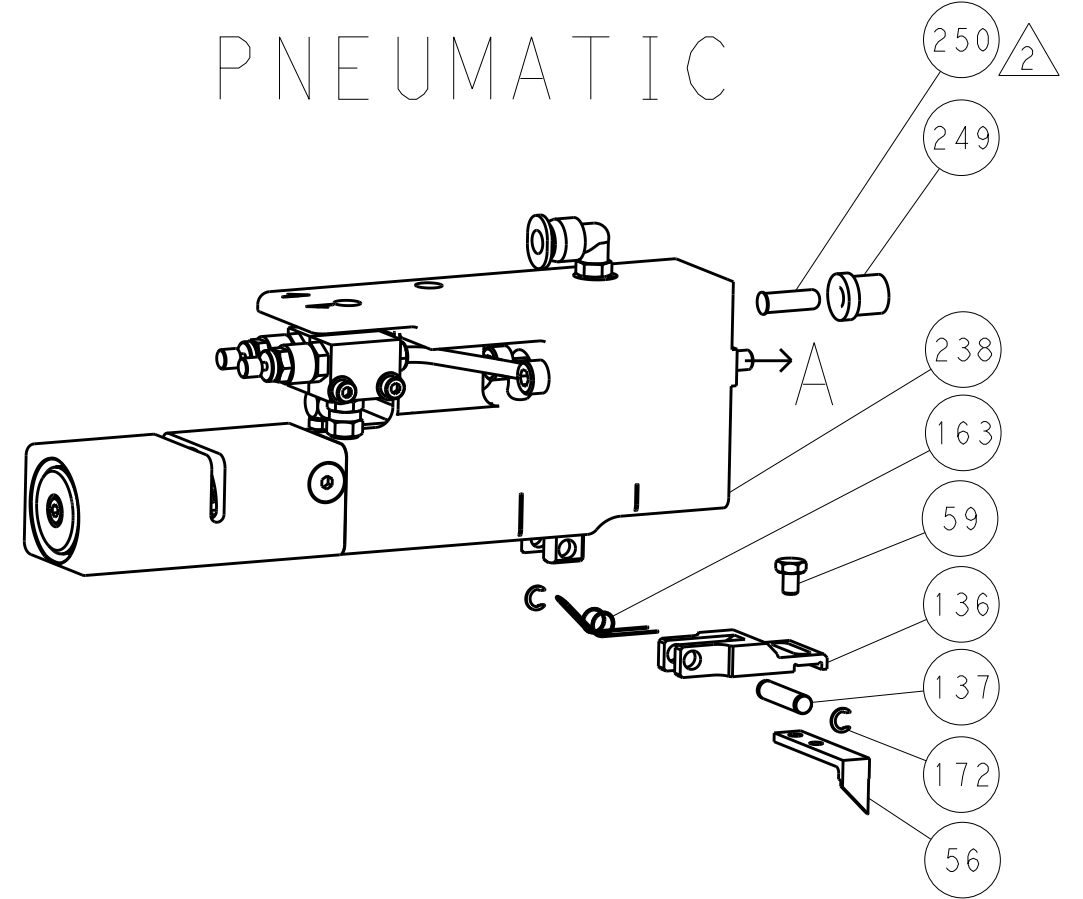


# SERVO LATCH PLATE

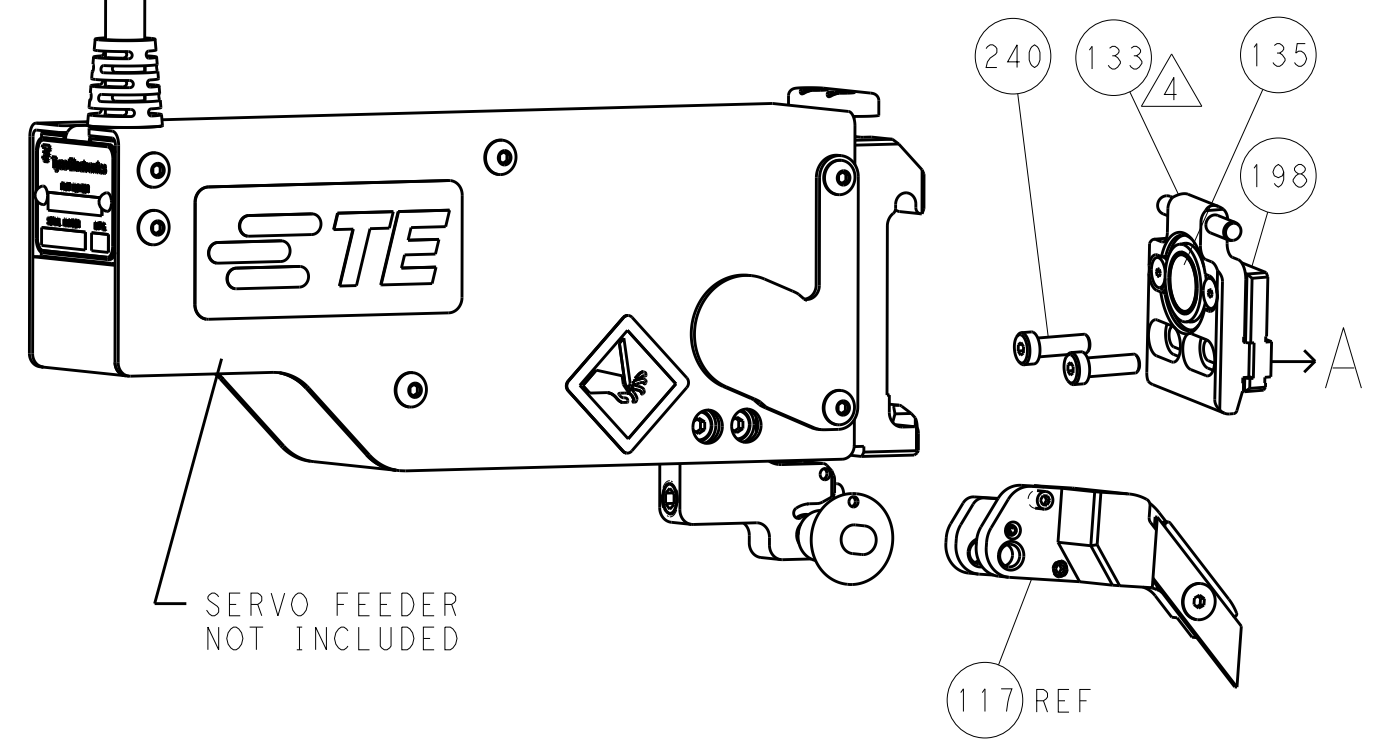


# CAM POSITIONS

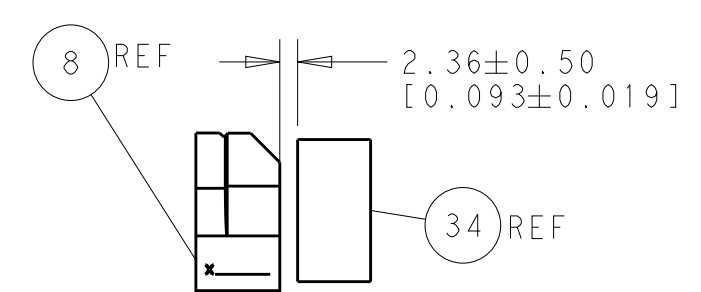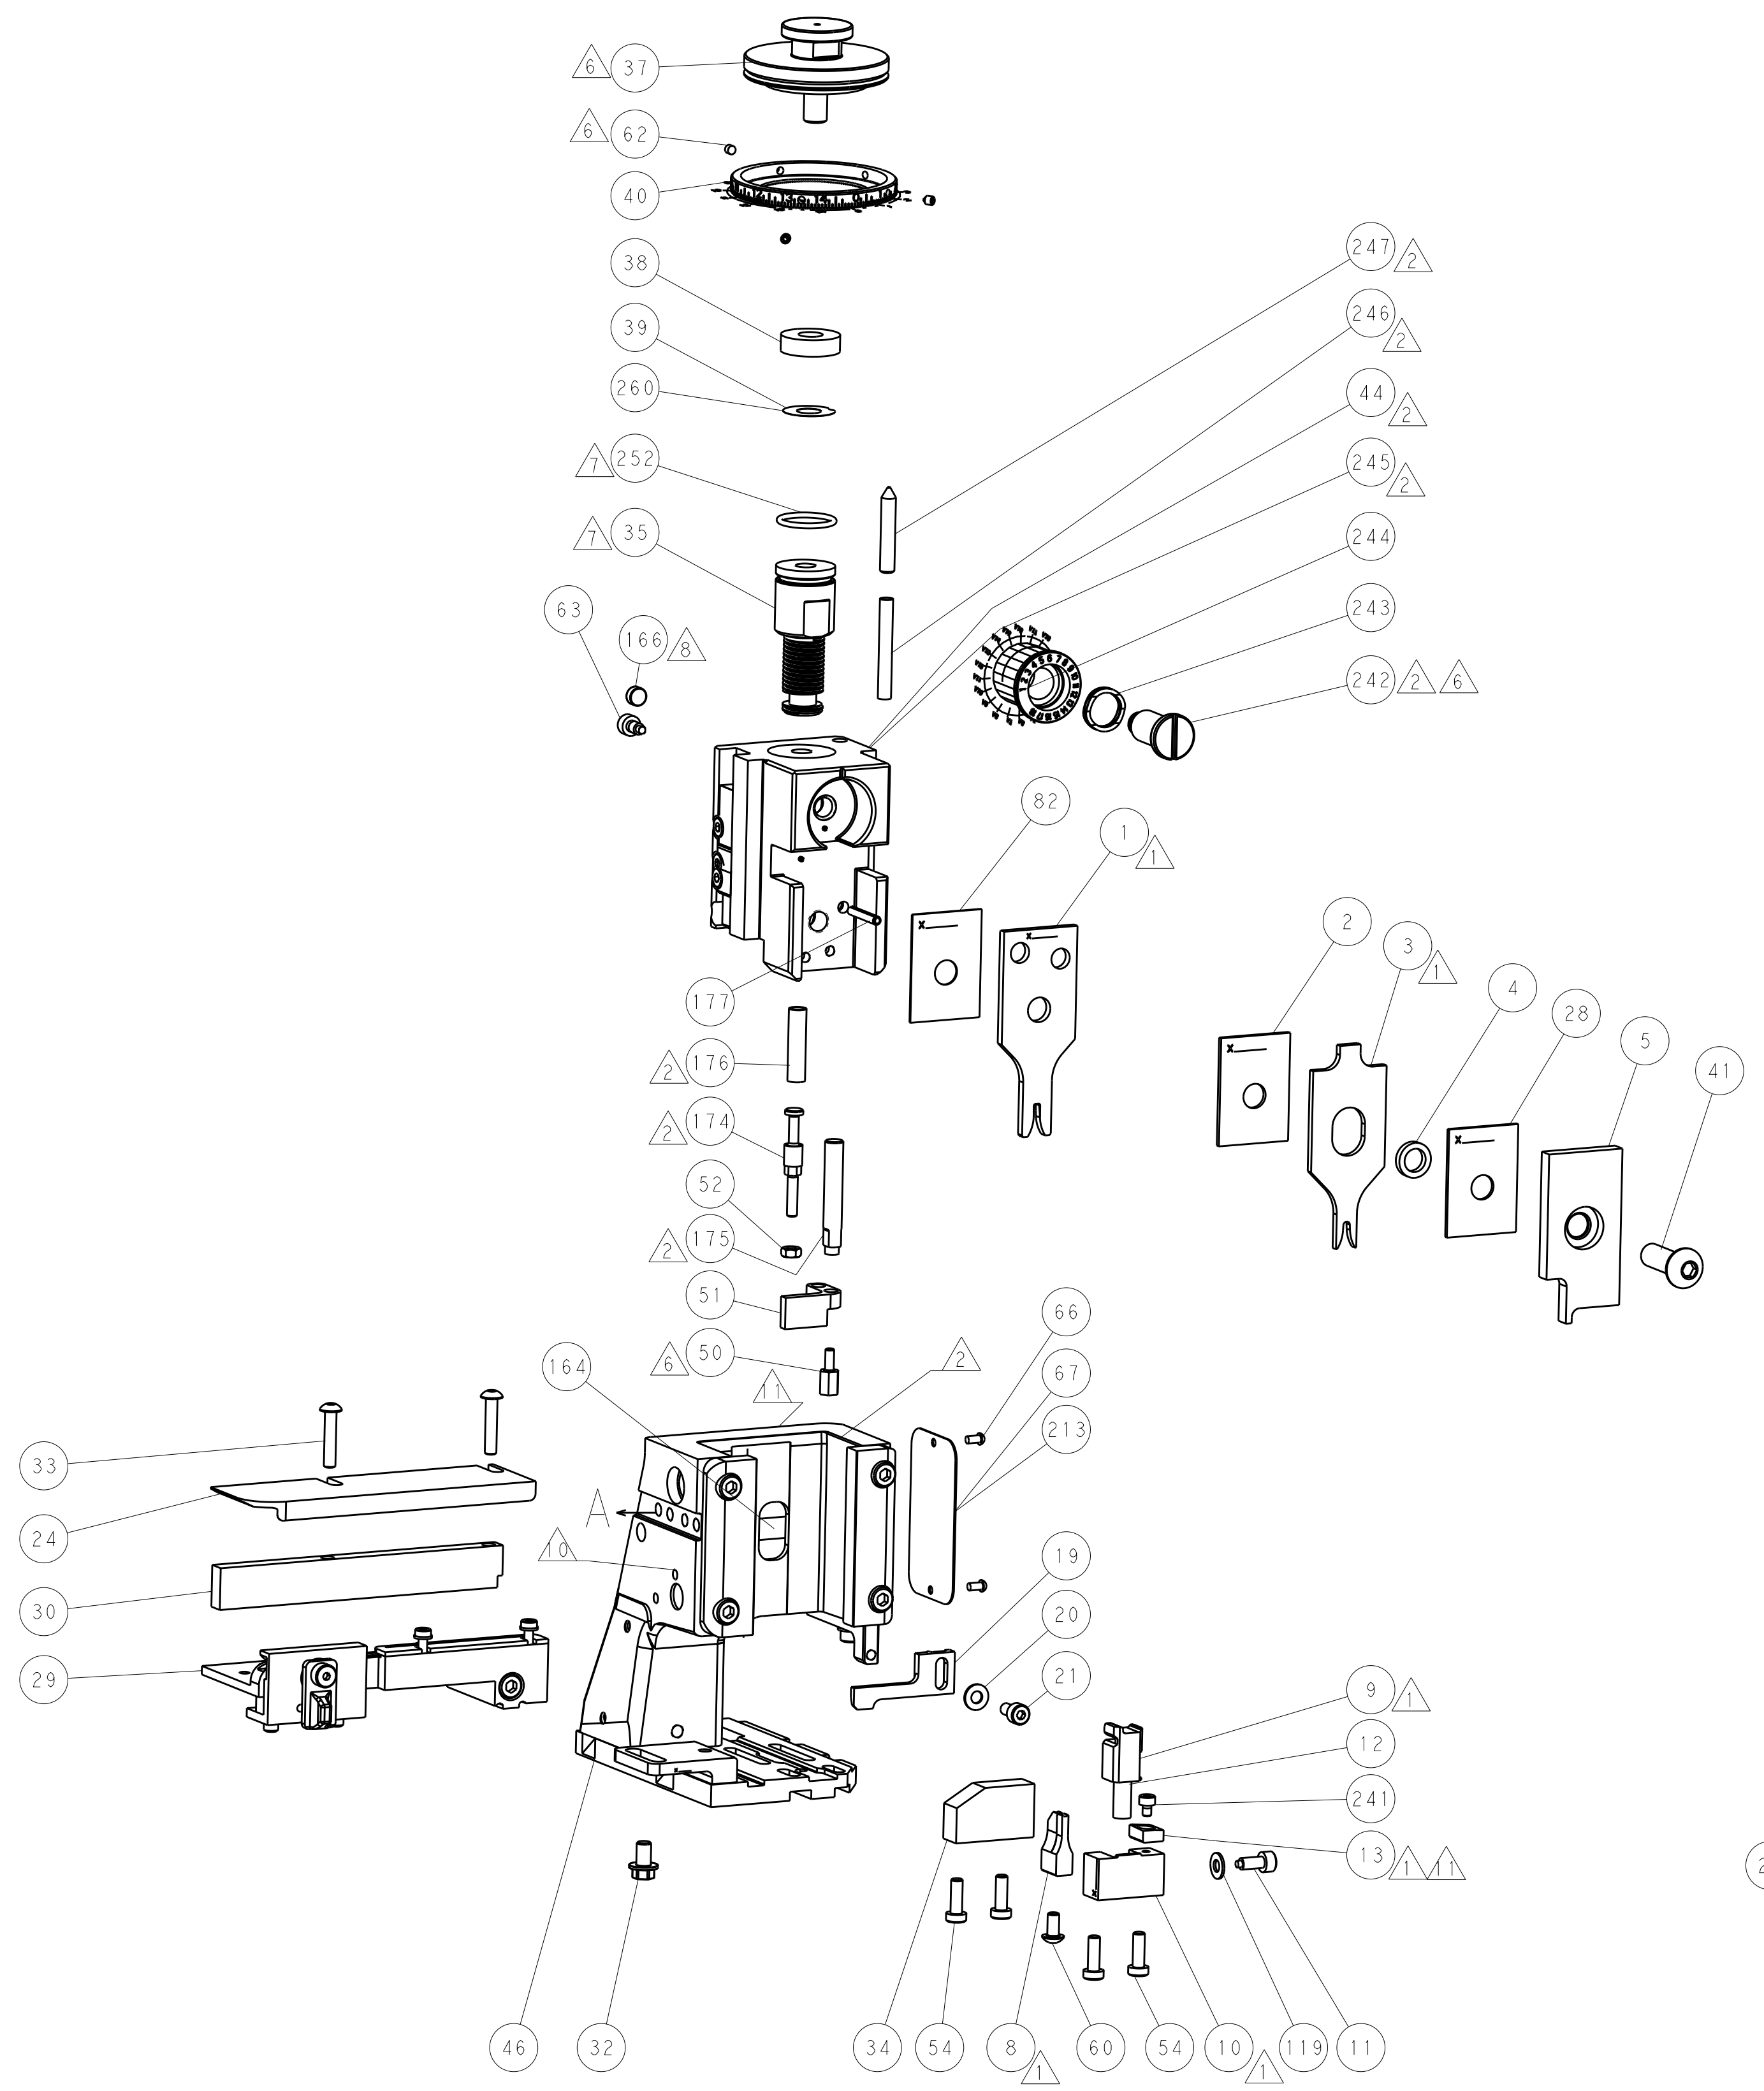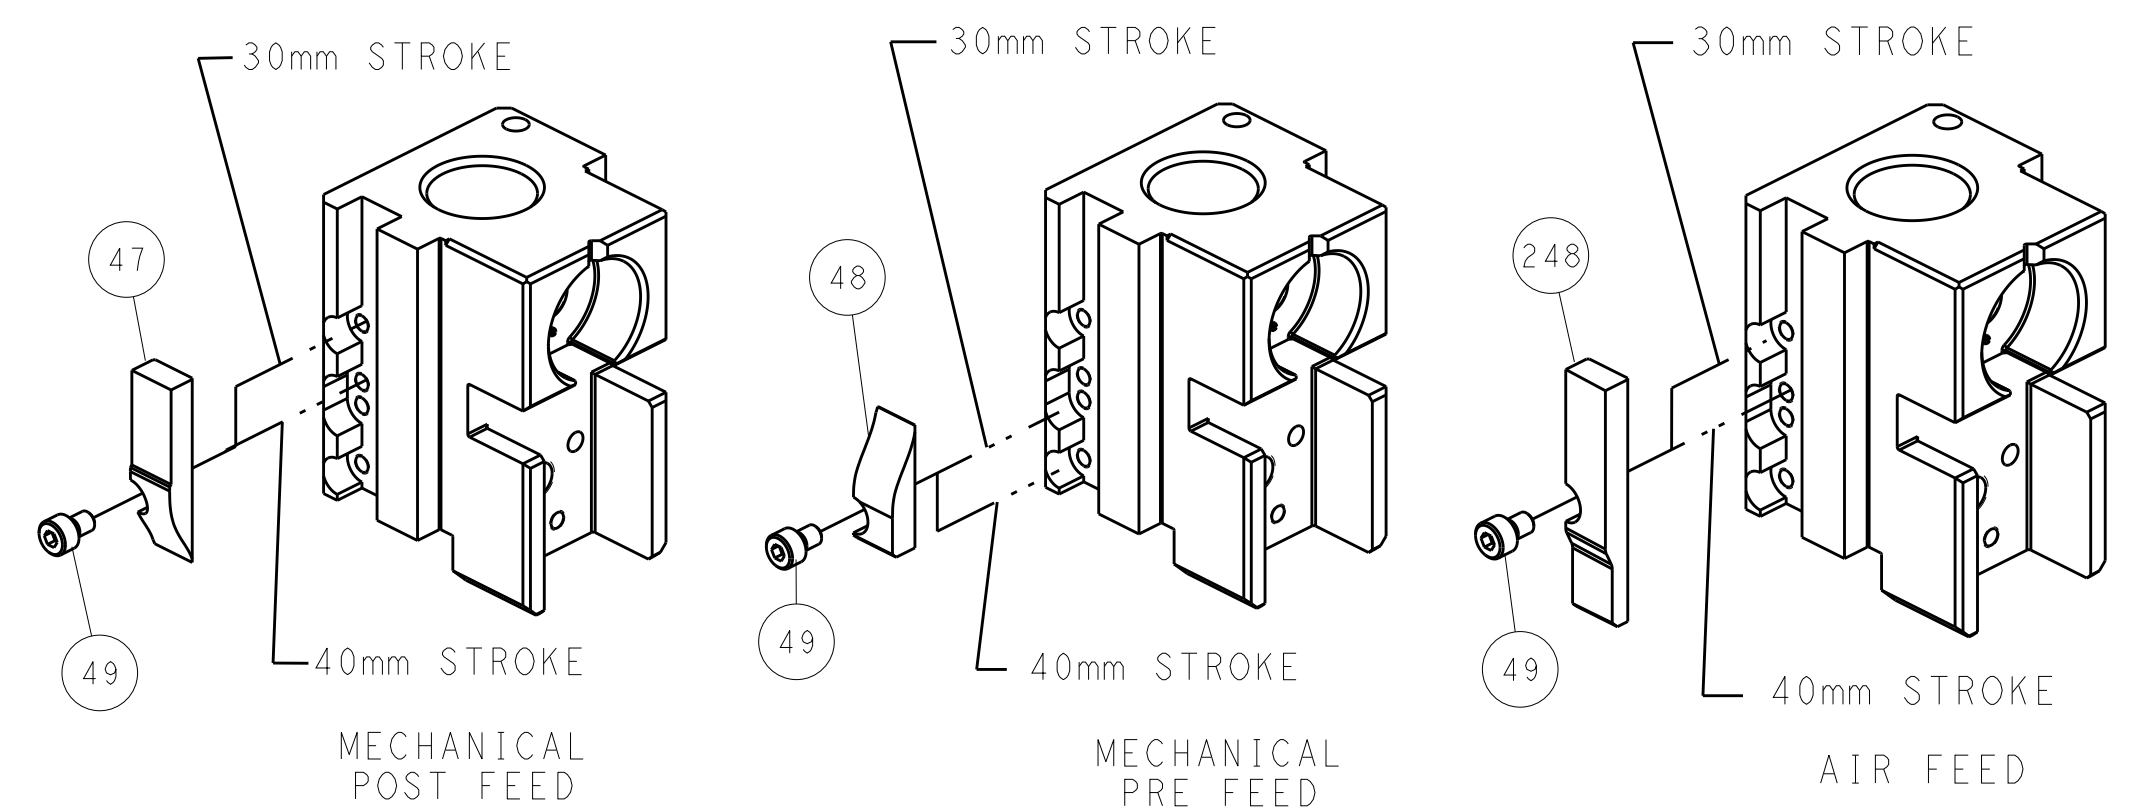

TERMINAL SUPPORT LOCATION

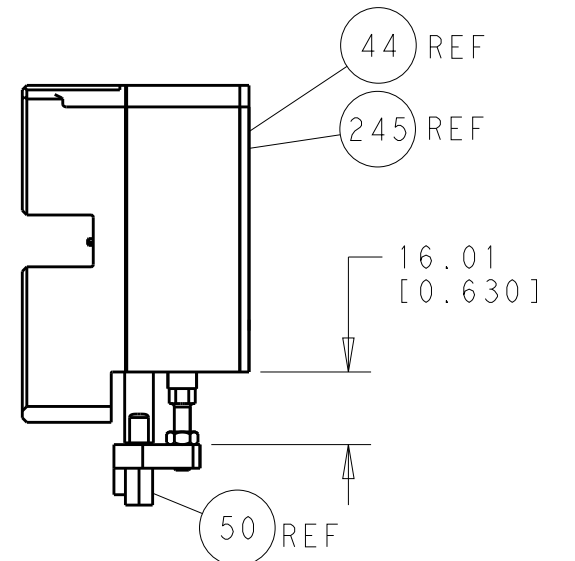

HOLDDOWN SET-UP

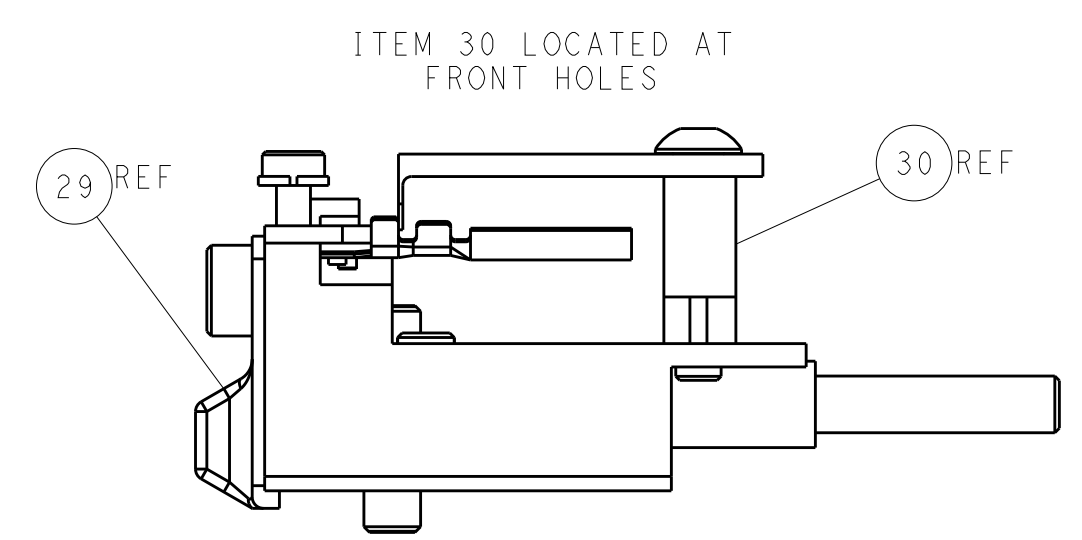

FEED TRACK POSITION  
GUIDE BY INSULATION BARREL

ATLANTIC VERSION  
Shown on sheets 1 of 4 & 2 of 4  
(Pacific version shown on sheets 3 of 4 & 4 of 4)

|                                                                                                                                 |        |                              |                                                                                                                                    |                        |
|---------------------------------------------------------------------------------------------------------------------------------|--------|------------------------------|------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| THIS DRAWING IS UNPUBLISHED. IT IS SUBJECT TO CHANGE AND SHOULD BE CONTACTED FOR THE LATEST REVISION.                           |        | DWN<br>K. HUANG<br>09DEC2011 |  TE Connectivity<br>Harrisburg, PA 17105-3608 |                        |
| DIMENSIONS:<br>mm                                                                                                               |        | CHK<br>S. XI<br>09DEC2011    |                                                                                                                                    |                        |
| TOLERANCES UNLESS OTHERWISE SPECIFIED:<br>0 PLC ±.1<br>1 PLC ±0.1<br>2 PLC ±0.02<br>3 PLC ±0.005<br>4 PLC ±0.0005<br>ANGLES ±.1 |        | APVD<br>J. CRUZ<br>09DEC2011 | PRODUCT SPEC                                                                                                                       |                        |
|                                            |        | APPLICATION SPEC             |                                                                                                                                    |                        |
| MATERIAL                                                                                                                        | FINISH | WEIGHT                       | SIZE<br>A   00779                                                                                                                  | CASE CODE<br>C-2151279 |
| Customer Accessible Production Drawing                                                                                          |        | SCALE<br>1:1                 | SHEET<br>2                                                                                                                         | OF<br>4                |
| REV<br>B                                                                                                                        |        | REV<br>B                     |                                                                                                                                    |                        |

SHEETS 3 & 4 ARE NOT REQUIRED FOR ATLANTIC VERSION







| LOC | DIST | REVISIONS |     |             |      |     |      |
|-----|------|-----------|-----|-------------|------|-----|------|
|     |      | P         | LTR | DESCRIPTION | DATE | DWN | APVD |
| A   | 66   | -         | -   | SEE SHEET 1 | -    | -   | -    |
|     |      |           |     |             |      |     |      |
|     |      |           |     |             |      |     |      |
|     |      |           |     |             |      |     |      |

DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009.

C

B


A

C


B

A


## FEED TYPE MECHANICAL

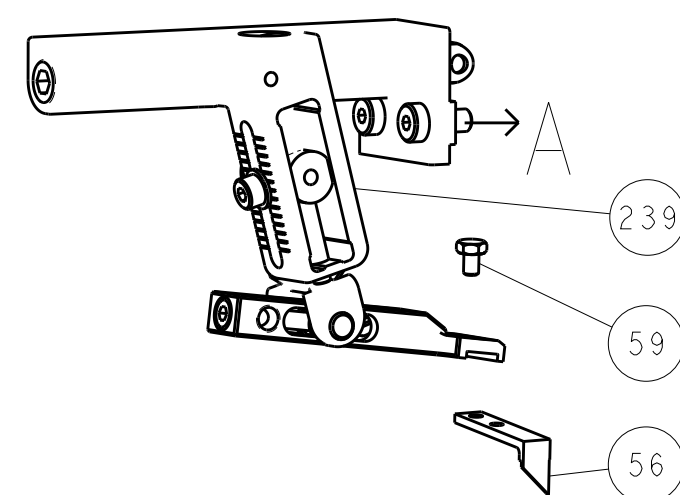




## PNEUMATIC

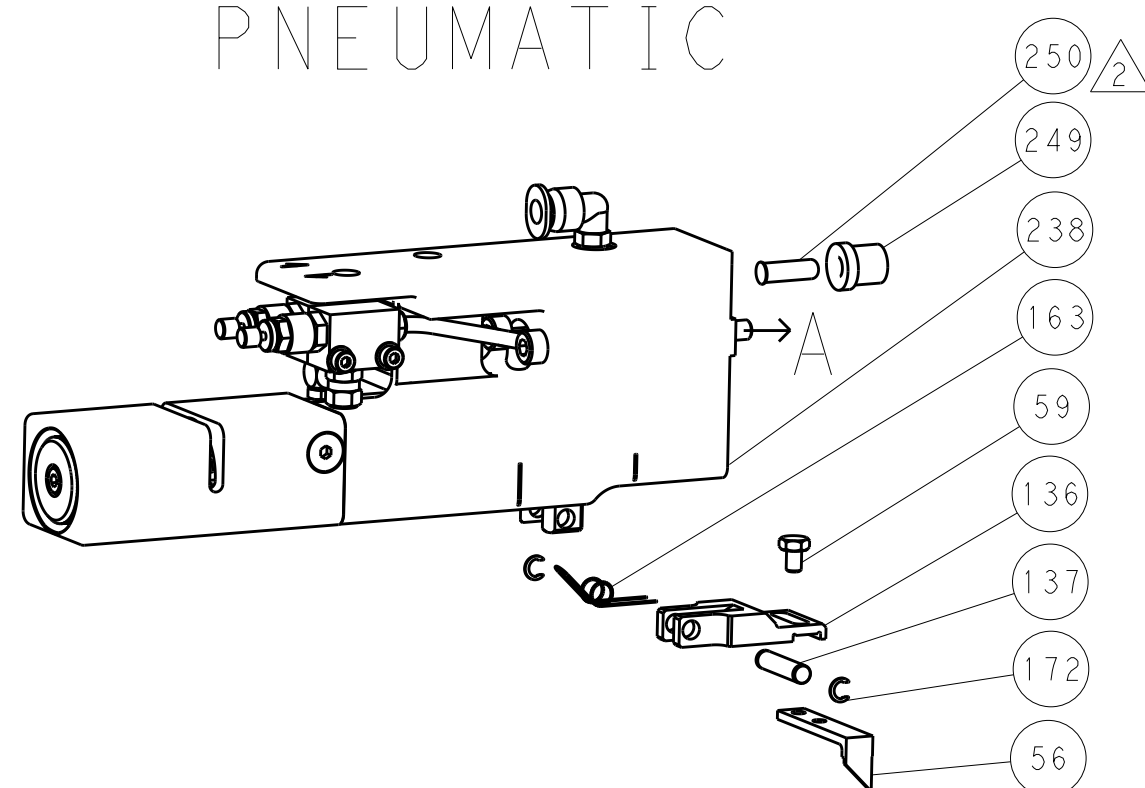


## SERVO LATCH PLATE

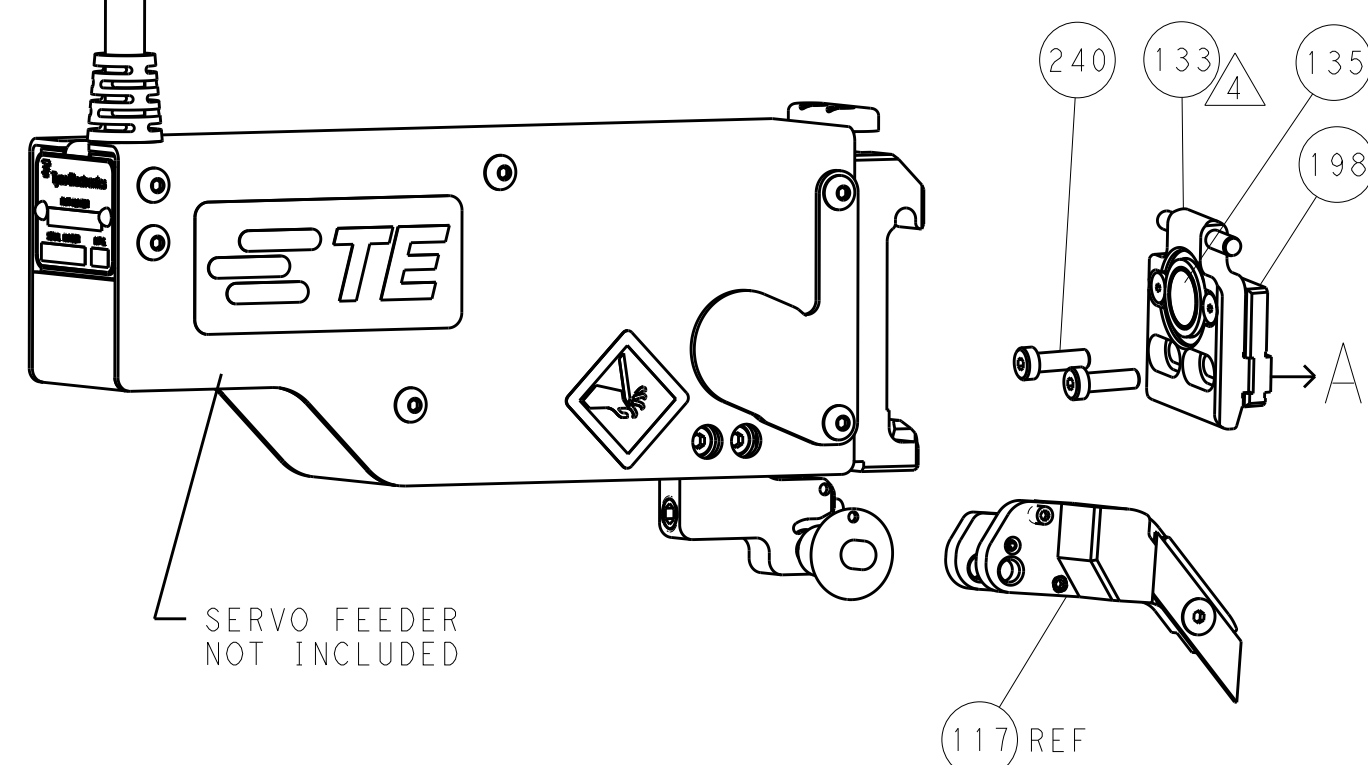


## CAM POSITIONS

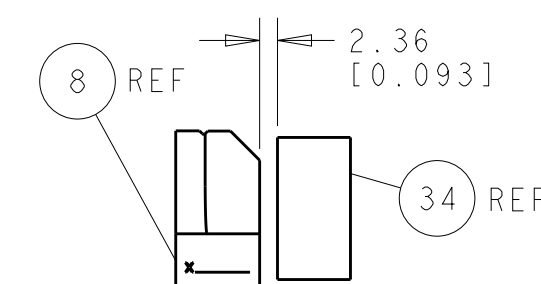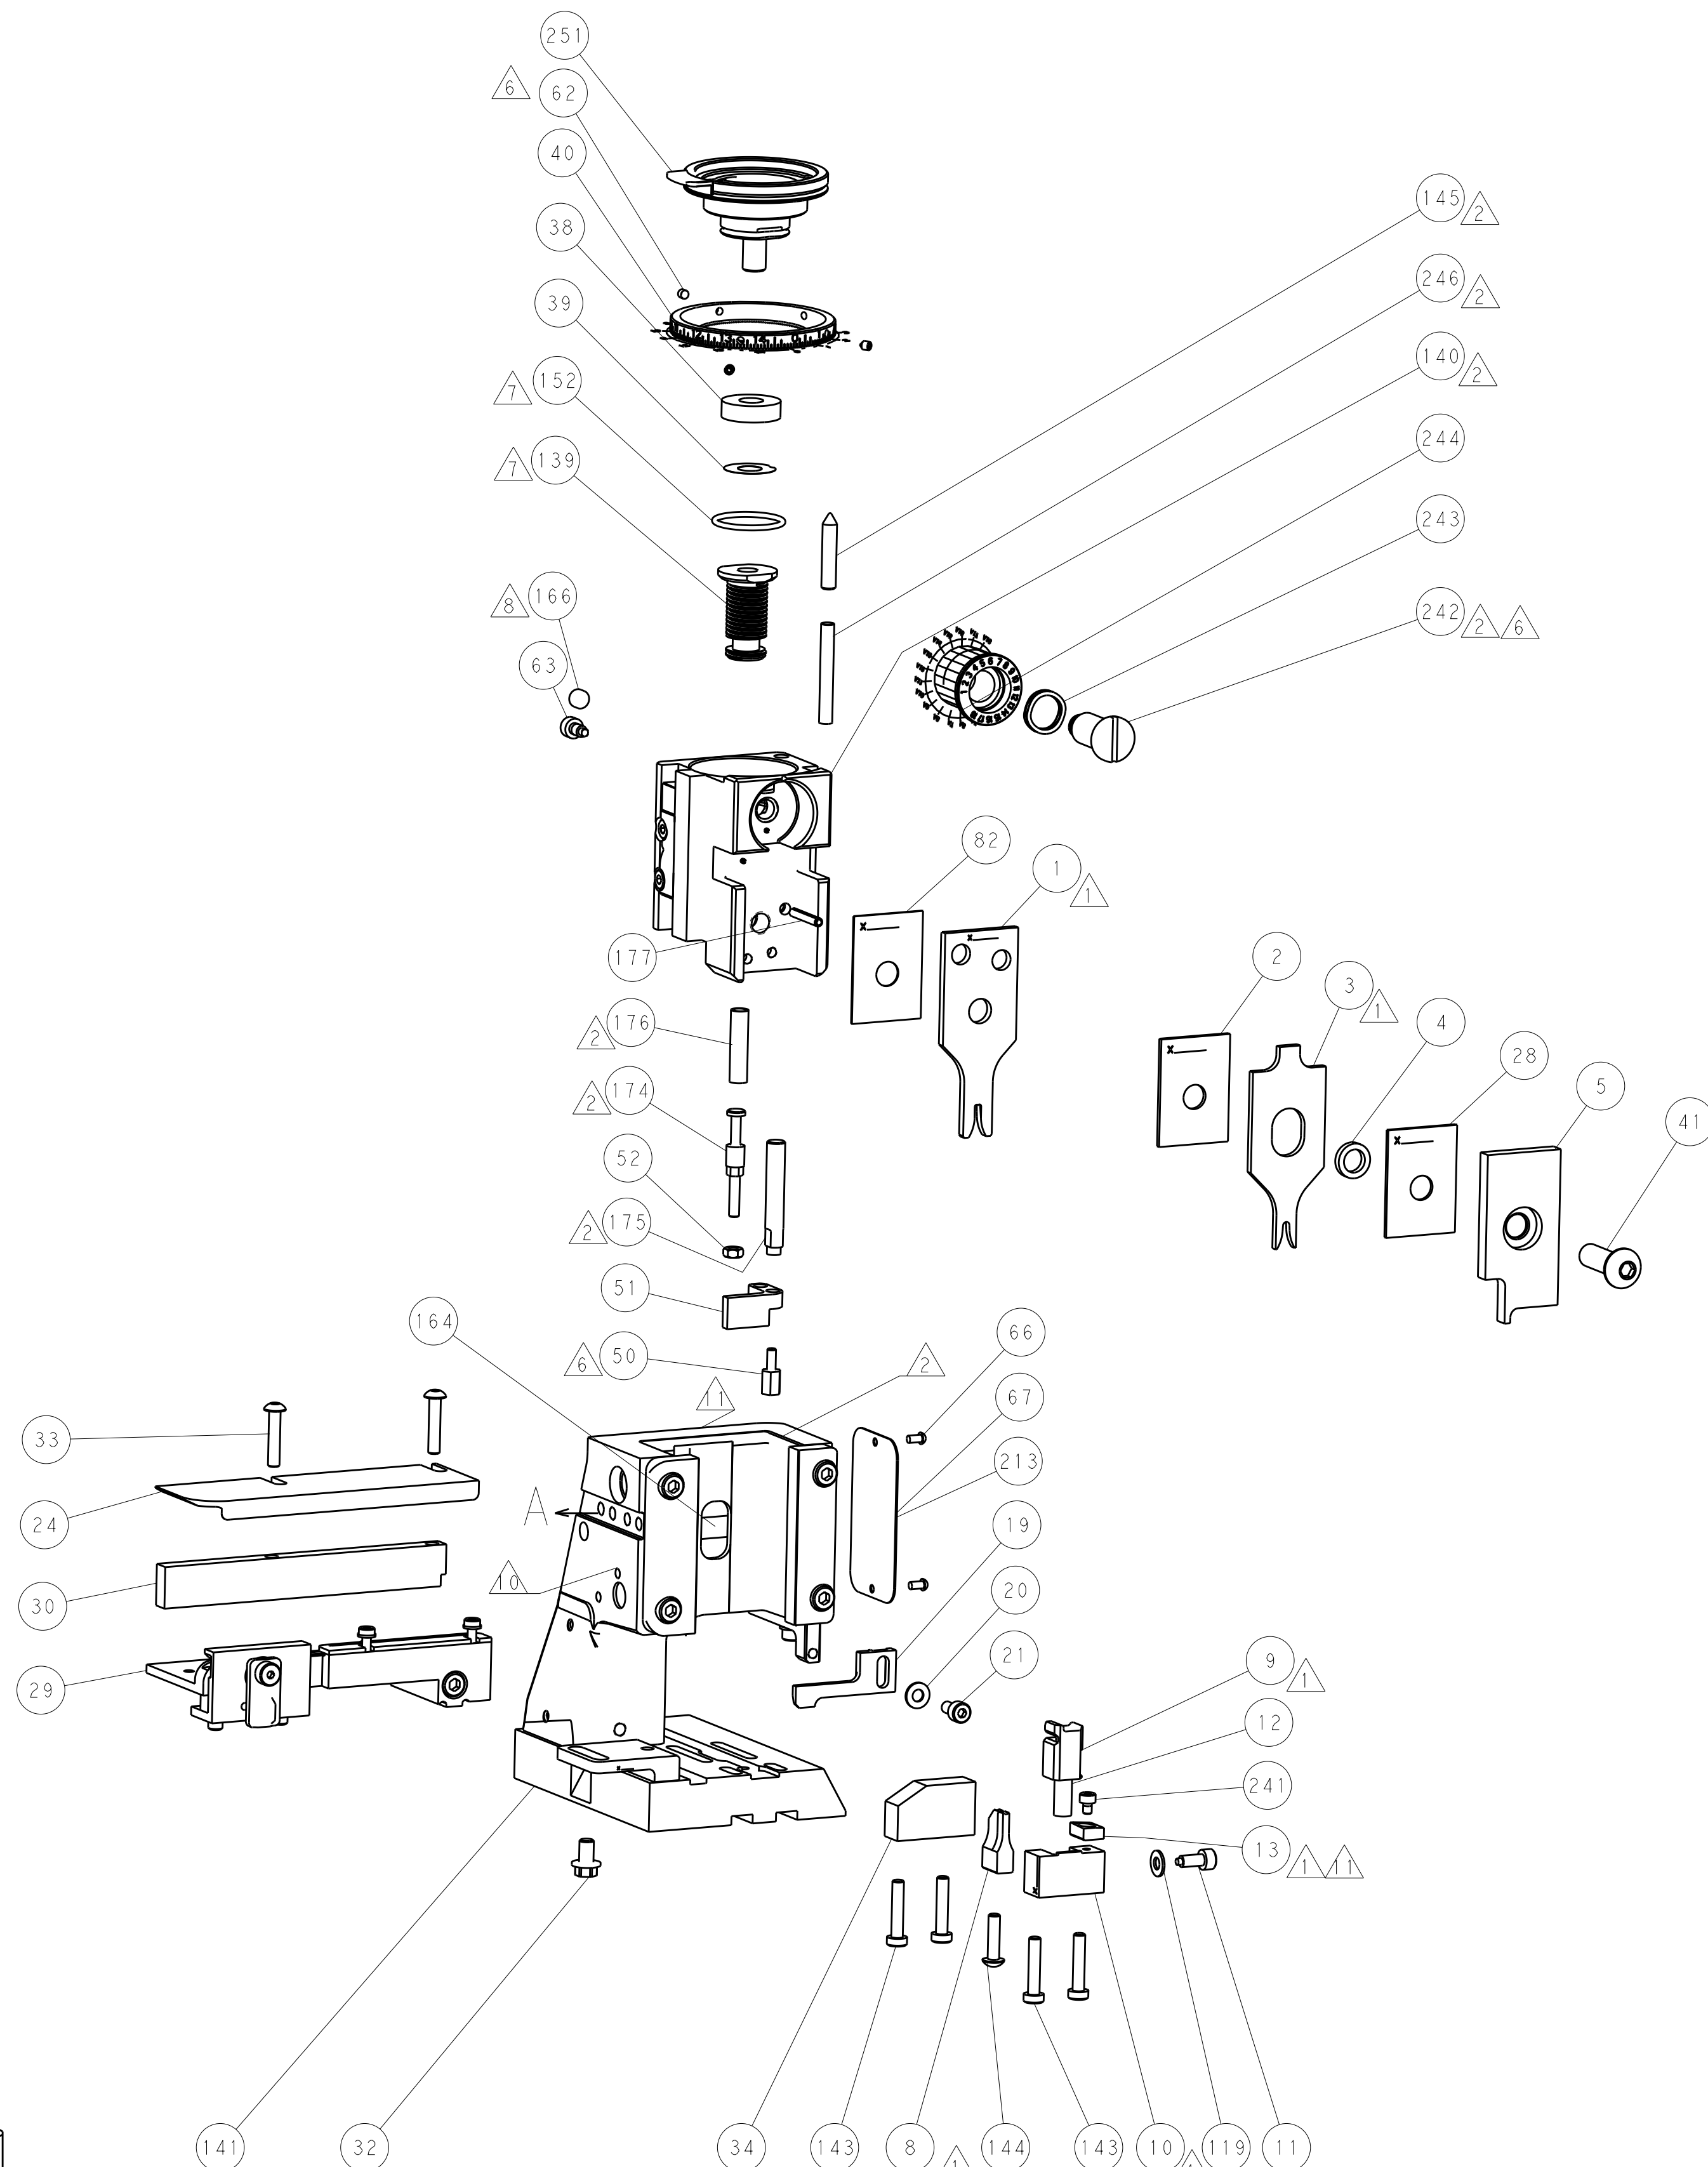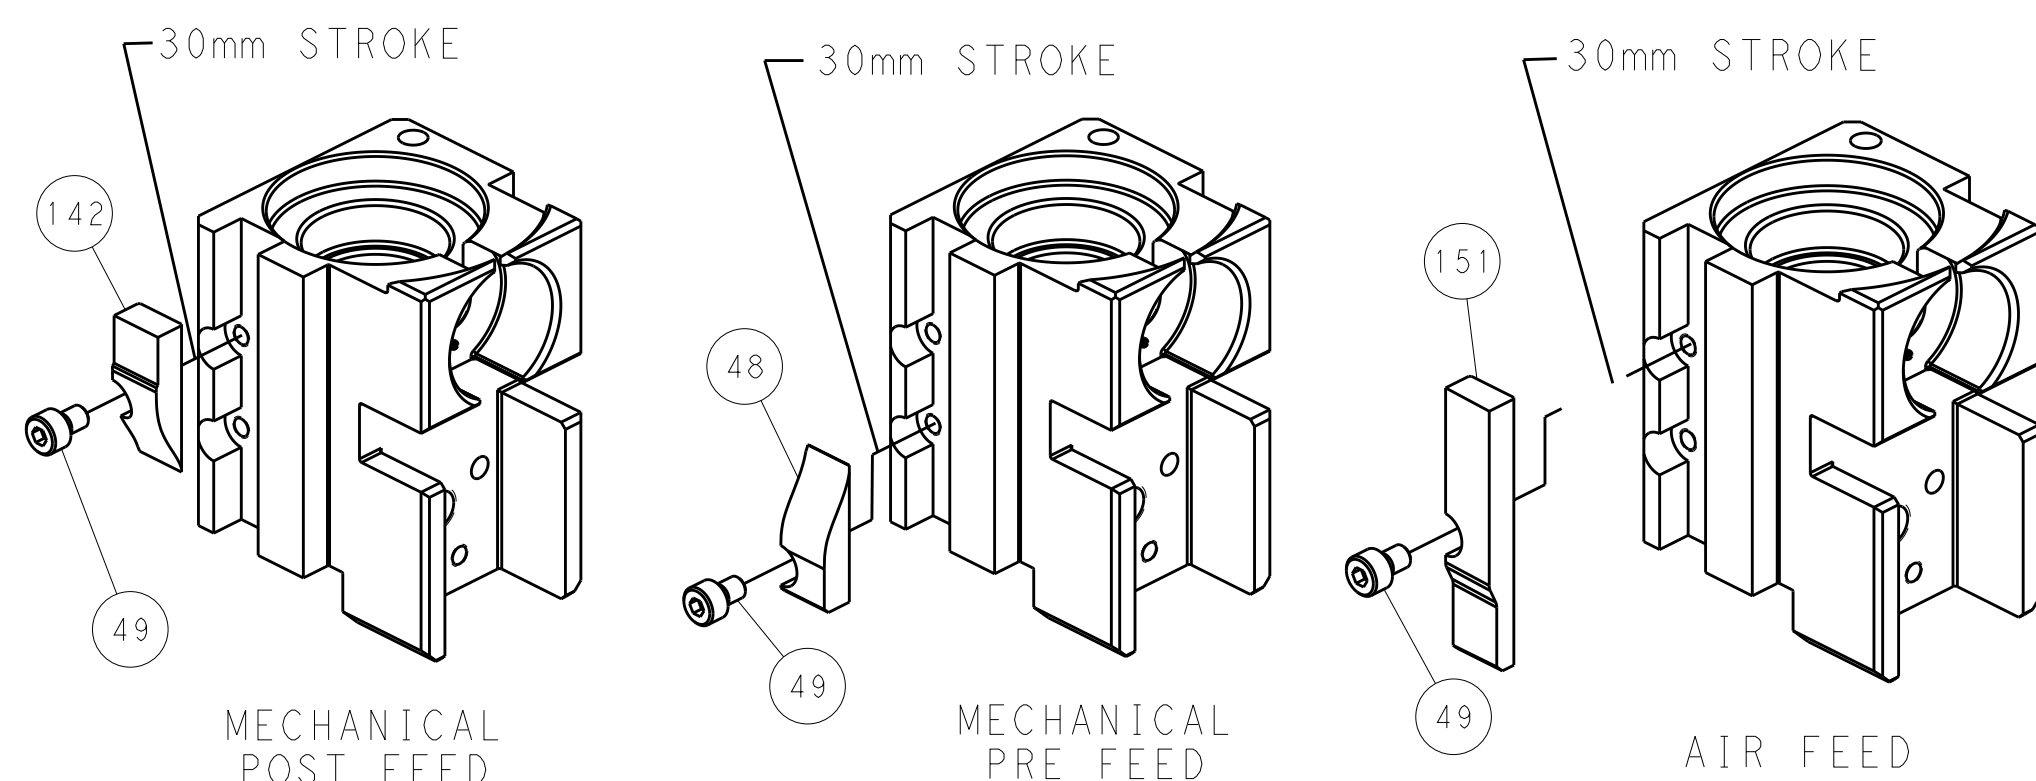

TERMINAL SUPPORT LOCATION

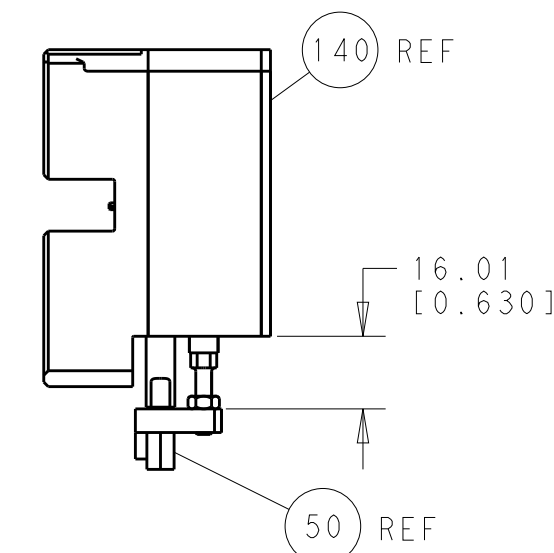

HOLDDOWN SET-UP

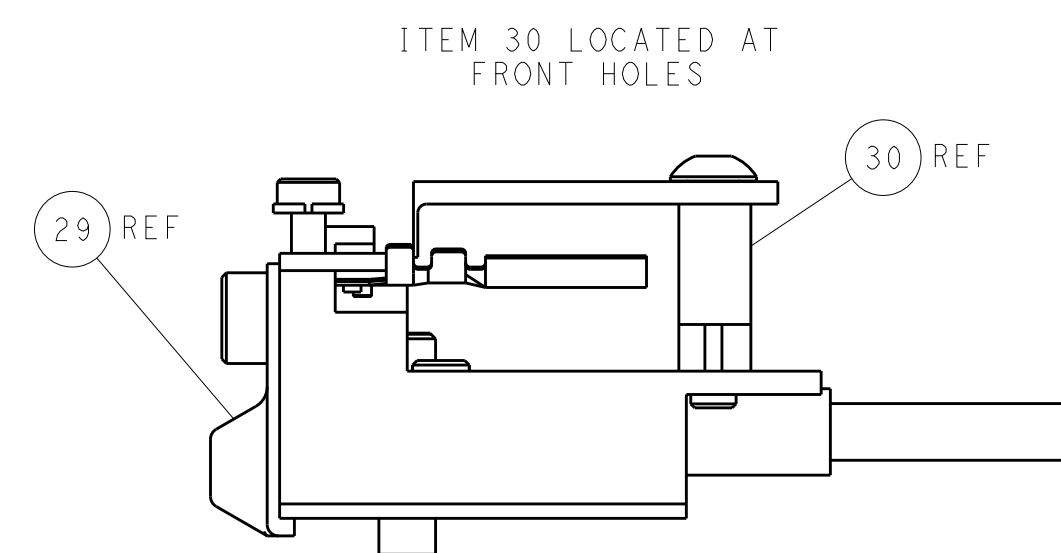

FEED TRACK POSITION  
GUIDE BY INSULATION BARREL

PACIFIC VERSION  
Shown on sheets 3 of 4 & 4 of 4  
(Atlantic version shown on sheets 1 of 4 & 2 of 4)

|             |  |                                        |  |                                        |  |              |  |         |  |                            |  |
|-------------|--|----------------------------------------|--|----------------------------------------|--|--------------|--|---------|--|----------------------------|--|
| DIMENSIONS: |  | TOLERANCES UNLESS OTHERWISE SPECIFIED: |  | DWN                                    |  | CHK          |  | APVD    |  | NAME                       |  |
| mm          |  | 0 PLC ±.1                              |  | K. HUANG                               |  | S. XI        |  | I. CRUZ |  | OCEAN SIDE FEED APPLICATOR |  |
| 1 PLC ±.02  |  | 2 PLC ±.02                             |  | 3 PLC ±.005                            |  | 4 PLC ±.0005 |  | FINISH  |  | SIZE                       |  |
| MATERIAL    |  | WEIGHT                                 |  | Customer Accessible Production Drawing |  | SCALE        |  | SHEET   |  | REV                        |  |
|             |  |                                        |  |                                        |  |              |  |         |  |                            |  |



## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9