
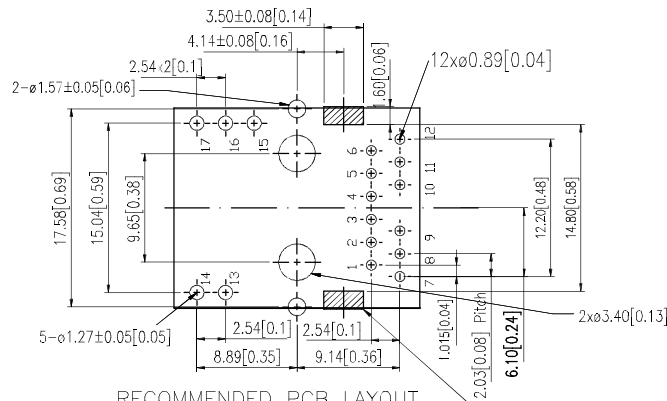
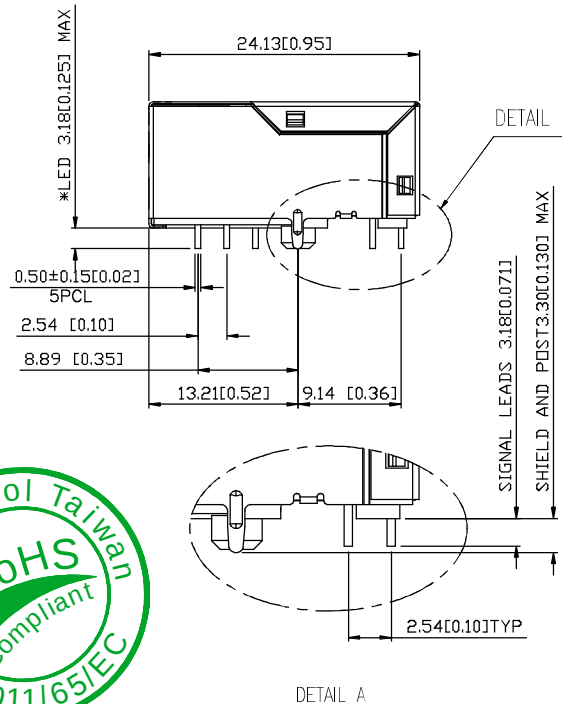
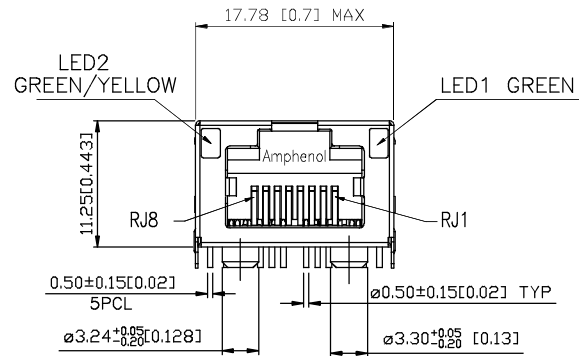
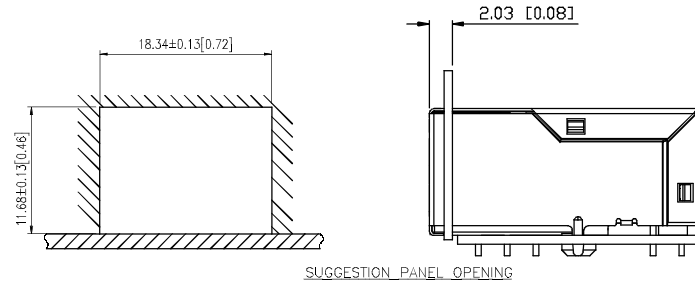


This document is the property of Amphenol Corporation and is delivered on the express condition that is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

The marking on this product doesn't contain environmental hazardous materials per Material Specification SS-00259 for Sony GP compliant or per directive 2011/65/EU for RoHS compliant.

CUSTOMER DRAWING

REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
A		NEW RELEASE	Apr.02.2010	Greg L
B		UPDATED THE DIMENSIONS	June.01.2010	Greg L
C		Change the LED design to directly LED	June.21.2011	Lawrence Chan
D		CHANGE DATA PIN LENGTH FROM 1.80 TO 3.18	Feb.09.2012	Roger Tsai
EX1		CORRECTION DIMENSION	Jan.25.2013	Roger Tsai
EX2		CORRECTION DIMENSION	Jan.28.2013	Roger Tsai

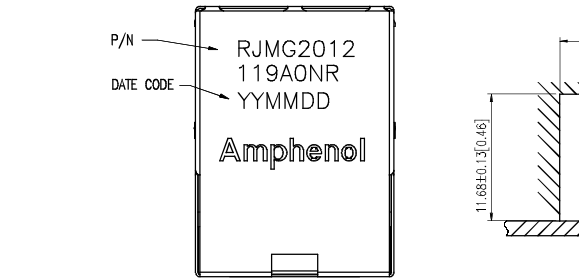

RECOMMENDED PCB LAYOUT
SEE FROM COMPONENT SIDE
GENERAL TOLERANCE:±0.05

IT IS RECOMMENDED THAT SHADED AREA OF CUSTOMER PC BOARD BE CLEAR OF ANY VIA HOLE COMPONENT AND CIRCUIT TRANCE



TOLERANCE	APPROVALS	DATE	TITLE		UNIT		SIZE	A3	PART No.	REV.	
X.X ±0.35 X.XX ±0.25 X.XXX ±0.15	DRAWN Devin Yen	01/28/2013	RJMG201X SERIES Single Port 1000 Base-T SERIES Ultra Low Profile Tab Up				mm	A3	RJMG2012119A0NR	EX2	
ANGULAR ±1°	CHECKED LiLy Zhao	01/28/2013									
UNLESS OTHERWISE SPECIFIED	APPROVED Roger Tsai	01/28/2013									
	DWG TYPE CUST DWG	PROJECT CODE GT363			SCALE NA		SHEET 1 OF 2		RJMG2012119A0NR		

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

The marking on this product doesn't contain environmental hazardous materials per Material Specification SS-00259 for Sony GP compliant or per directive 2011/65/EU for RoHS compliant.

CUSTOMER DRAWING

REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
A		NEW RELEASE	Apr.02.2010	Greg L
B		UPDATED THE DIMENSIONS	June.01.2010	Greg L
C		Change the LED design to directly LED	June.21.2011	Lawrence Chan
D		CHANGE DATA PIN LENGTH FROM 1.80 TO 3.18	Feb.09.2012	Roger Tsai
EX1		CORRECTION DIMENSION	Jan.25.2013	Roger Tsai
EX2		CORRECTION DIMENSION	Jan.28.2013	Roger Tsai

Compliant with IEEE 802.3ab Standard


CONNECTOR PERFORMANCE ELECTRICAL SPECIFICATION(@25° C)

PARAMETER	LIMITS (MAX. OR MIN.)	FREQUENCY RANGE/TEST CONDITIONS
INSERTION LOSS	-0.8dB MAX. -1.2dB MAX.	0.1-100 MHz 100-125 MHz
RETURN LOSS	-18dB MIN. -12+20 log(f/80MHz)dB MIN.	0.5-40 MHz 40-100 MHz
CM-CM REJECTION	-30dB MIN.	100 KHz-100 MHz
CM-DM REJECTION	-35dB MIN.	100 KHz-100 MHz
CROSSTALK ISOLATION	-30+20 log(f/100MHz)dB MIN.	100 KHz-100 MHz
HIPOT (ISOLATION)	2250KVDC 1mA	60S
OCL	350uH MIN.	100KHz 100mV 8mA
TURN RATIO	1:1±2%	



LED PERFORMANCE

PARAMETER	SINGLE COLOUR		BICOLOUR				UNITS
	GREEN	YELLOW	GREEN	YELLOW	GREEN	ORANGE	
FORWARD CURRENT IF MAX	30	30	30		30		mA
REVERSE CURRENT IR MAX	100	100	100		100		uA
REVERSE VOLTAGE VR MAX	-5	-5	-5		-5		V
T OPERATURE	-40~+85	-40~+85	-40~+85		-40~+85		°C
T SOLDERING	260+/-5	260+/-5	260+/-5		260+/-5		°C
POWER DISS. Pd	80	80	80		80		mW
PEAK WAVELENGTH	568	585	568	585	573	610	nM
FORWARD VOLTAGE TYP	2.2	2.2	2.2	2.2	2.2	2.2	(@IF=20mA)
FORWARD VOLTAGE MAX	2.5	2.5	2.5	2.5	2.5	2.5	(@IF=20mA)

LED 1 POLARITY			LED 2 POLARITY			
PIN 13	PIN 14	COLOR	PIN 15	PIN 16	PIN 17	COLOR
-	+	GREEN	-	+		YELLOW
				+	-	GREEN



SCHEMATIC DRAWING

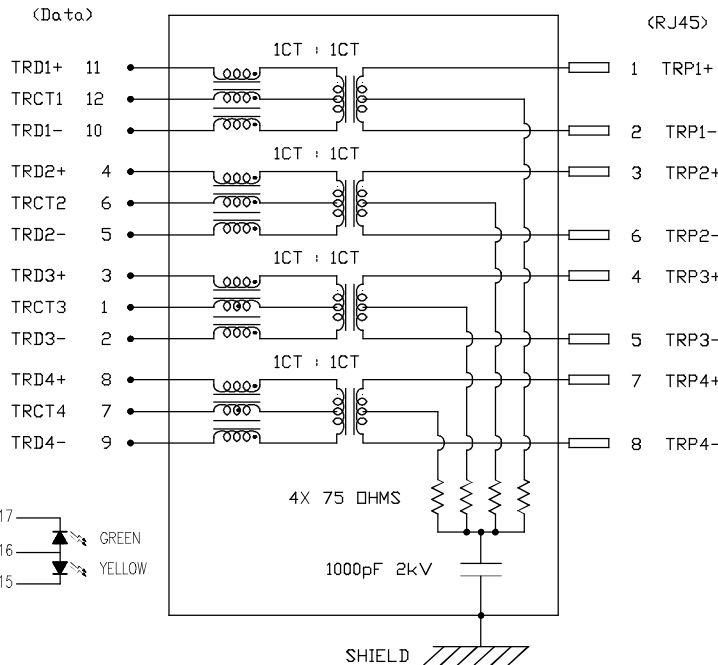

LED can be option available

1. Green
2. Yellow
8. Green/Orange (3 Pins)
9. Green/Yellow (3 Pins)

TOLERANCE		APPROVALS		DATE	TITLE				Amphenol® Amphenol Corporation Amphenol Taiwan Corporation				
X. X.X ±0.35 X.XX ±0.25 X.XXX ±0.15		DRAWN Devin Yen		01/28/2013	RJMG201X SERIES Single Port 1000 Base-T SERIES Ultra Low Profile Tab Up								
		CHECKED LiLy Zhao		01/28/2013									
		APPROVED Roger Tsai		01/28/2013		UNIT mm	SIZE A3	PART No. RJMG2012119A0NR					
ANGULAR ±1°		DWG TYPE CUST DWG		PROJECT CODE GT363	SCALE NA	SHEET 2 OF 2	DWG No. RJMG2012119A0NR			REV. EX2			
UNLESS OTHERWISE SPECIFIED													

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9