

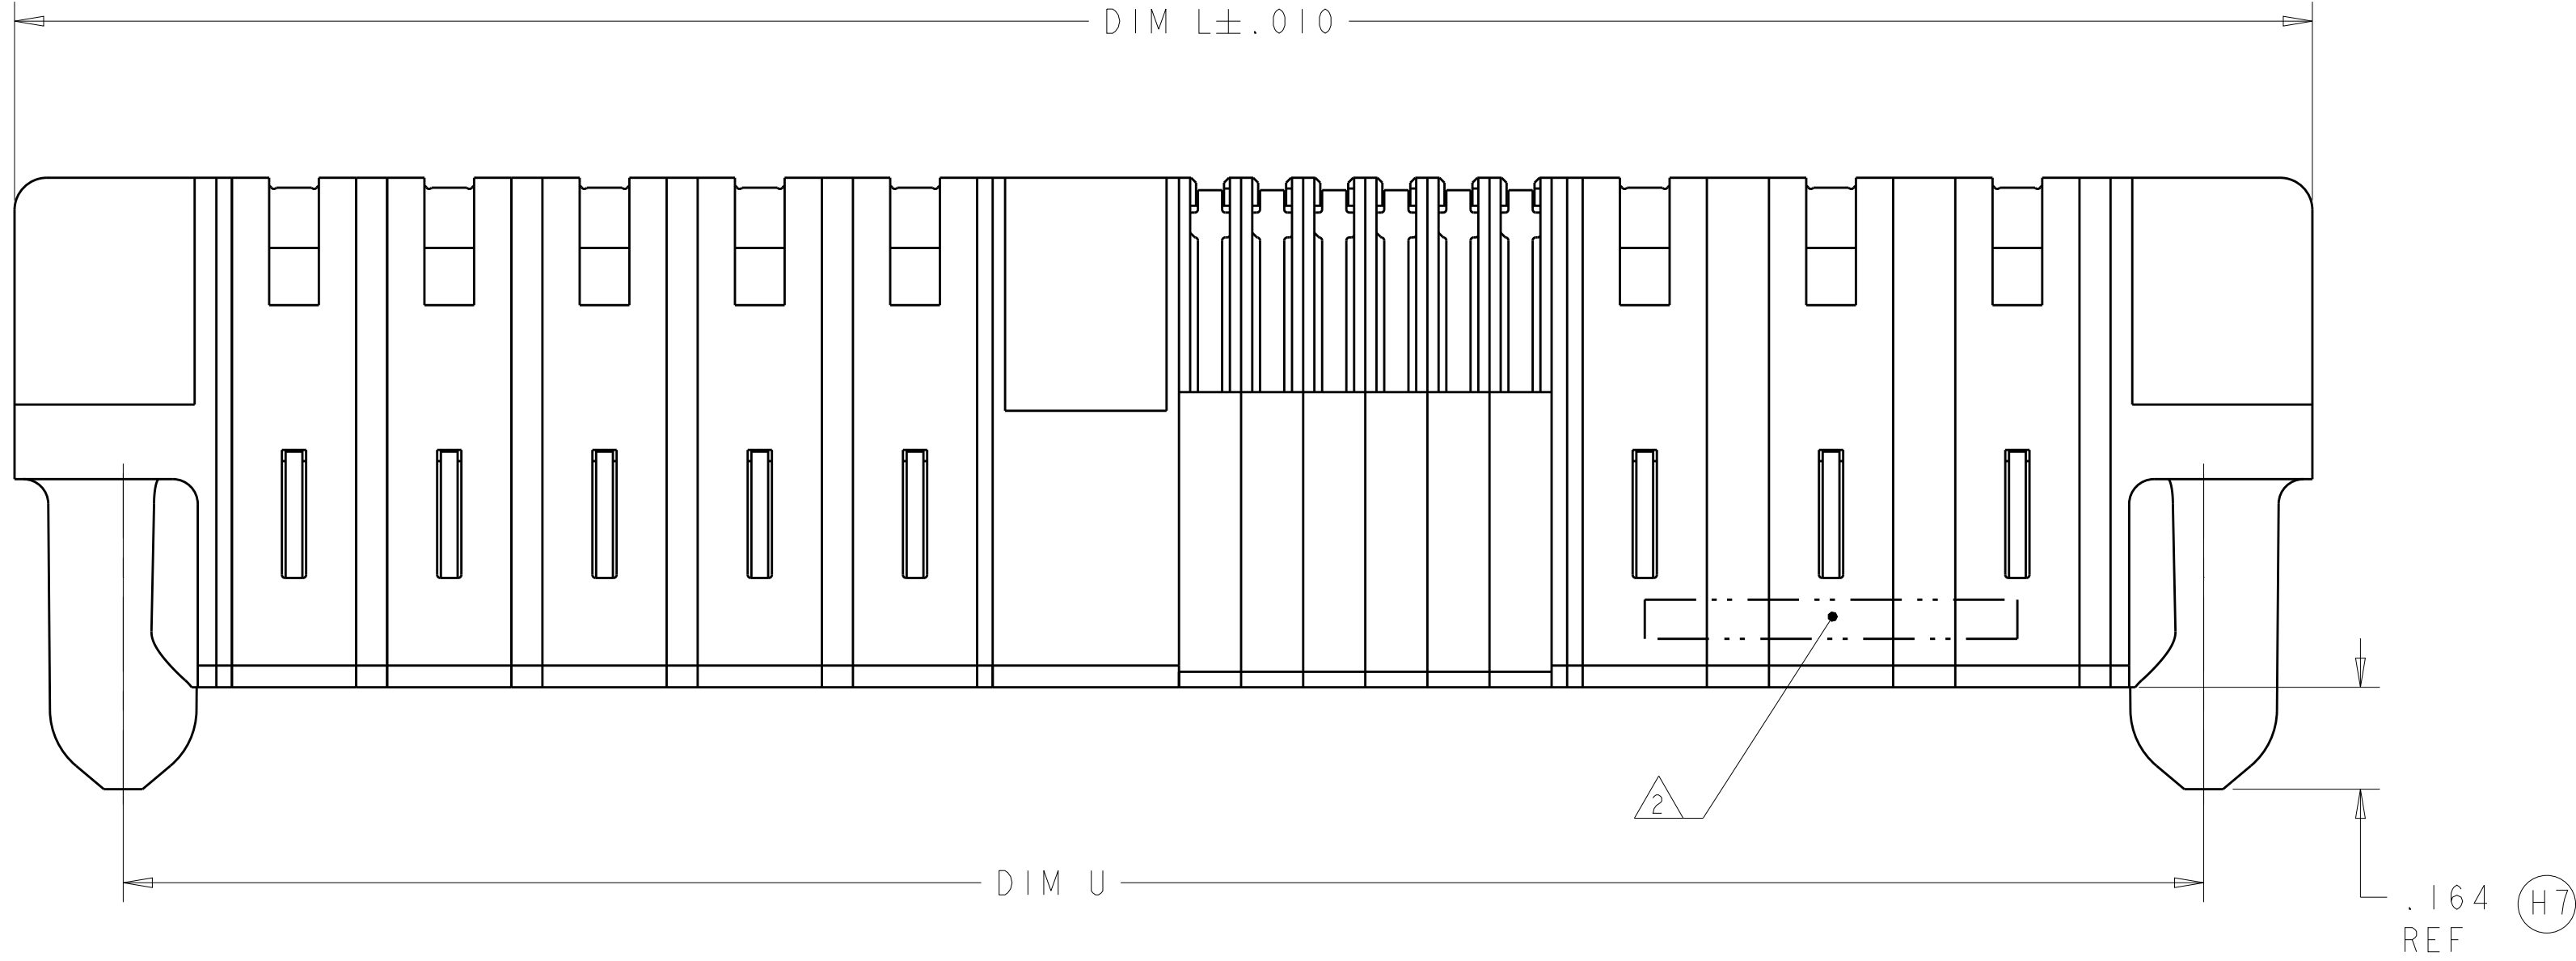
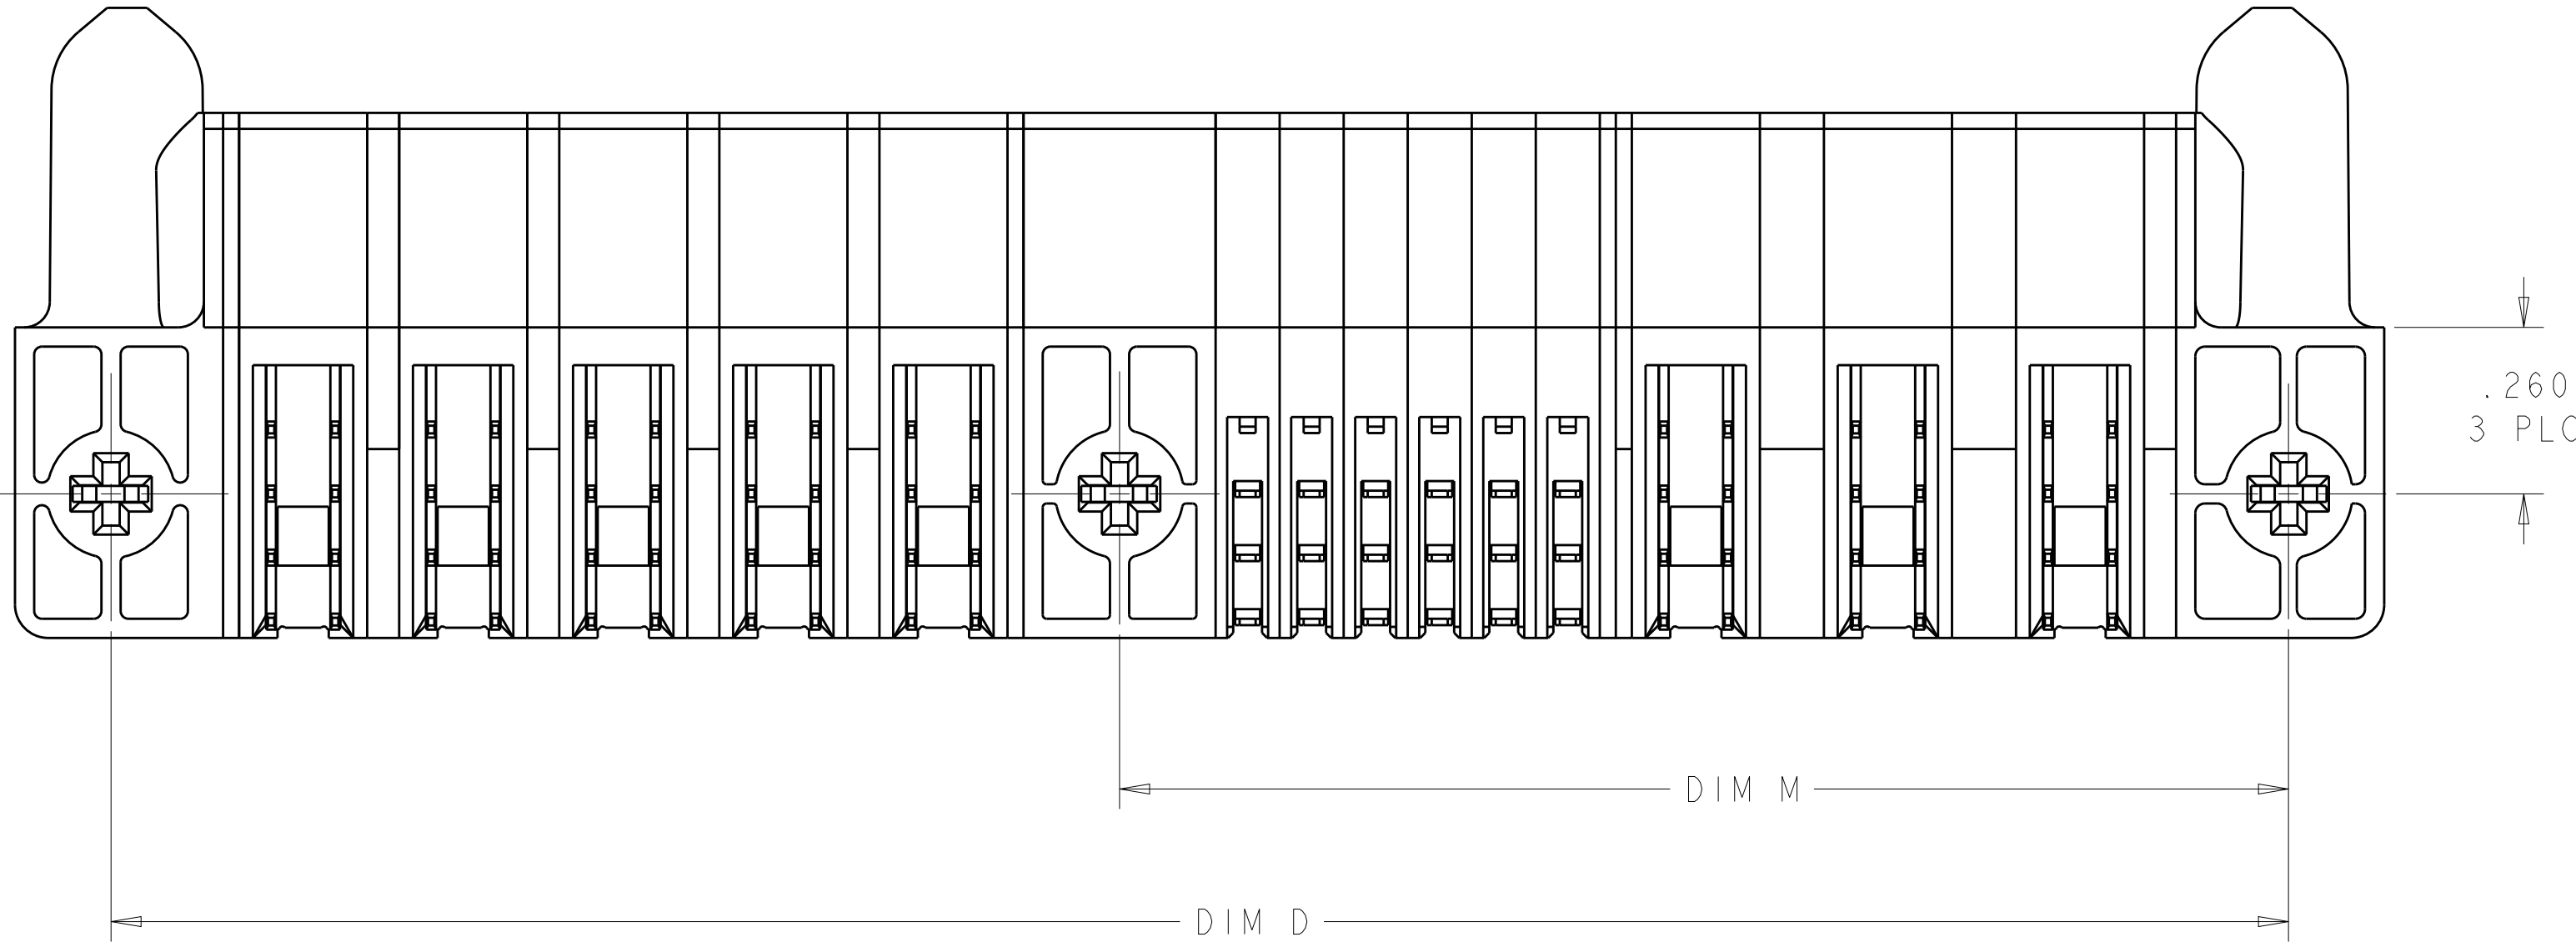


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00		J1	REV PER ECR-12-016975	25SEP2012	CZ
			J3	ADDED NEW DASH NUMBER 4-0	01FEB2013	SZ
			J5	ADDED NEW DASH NUMBER 4-1	25FEB2014	SZ

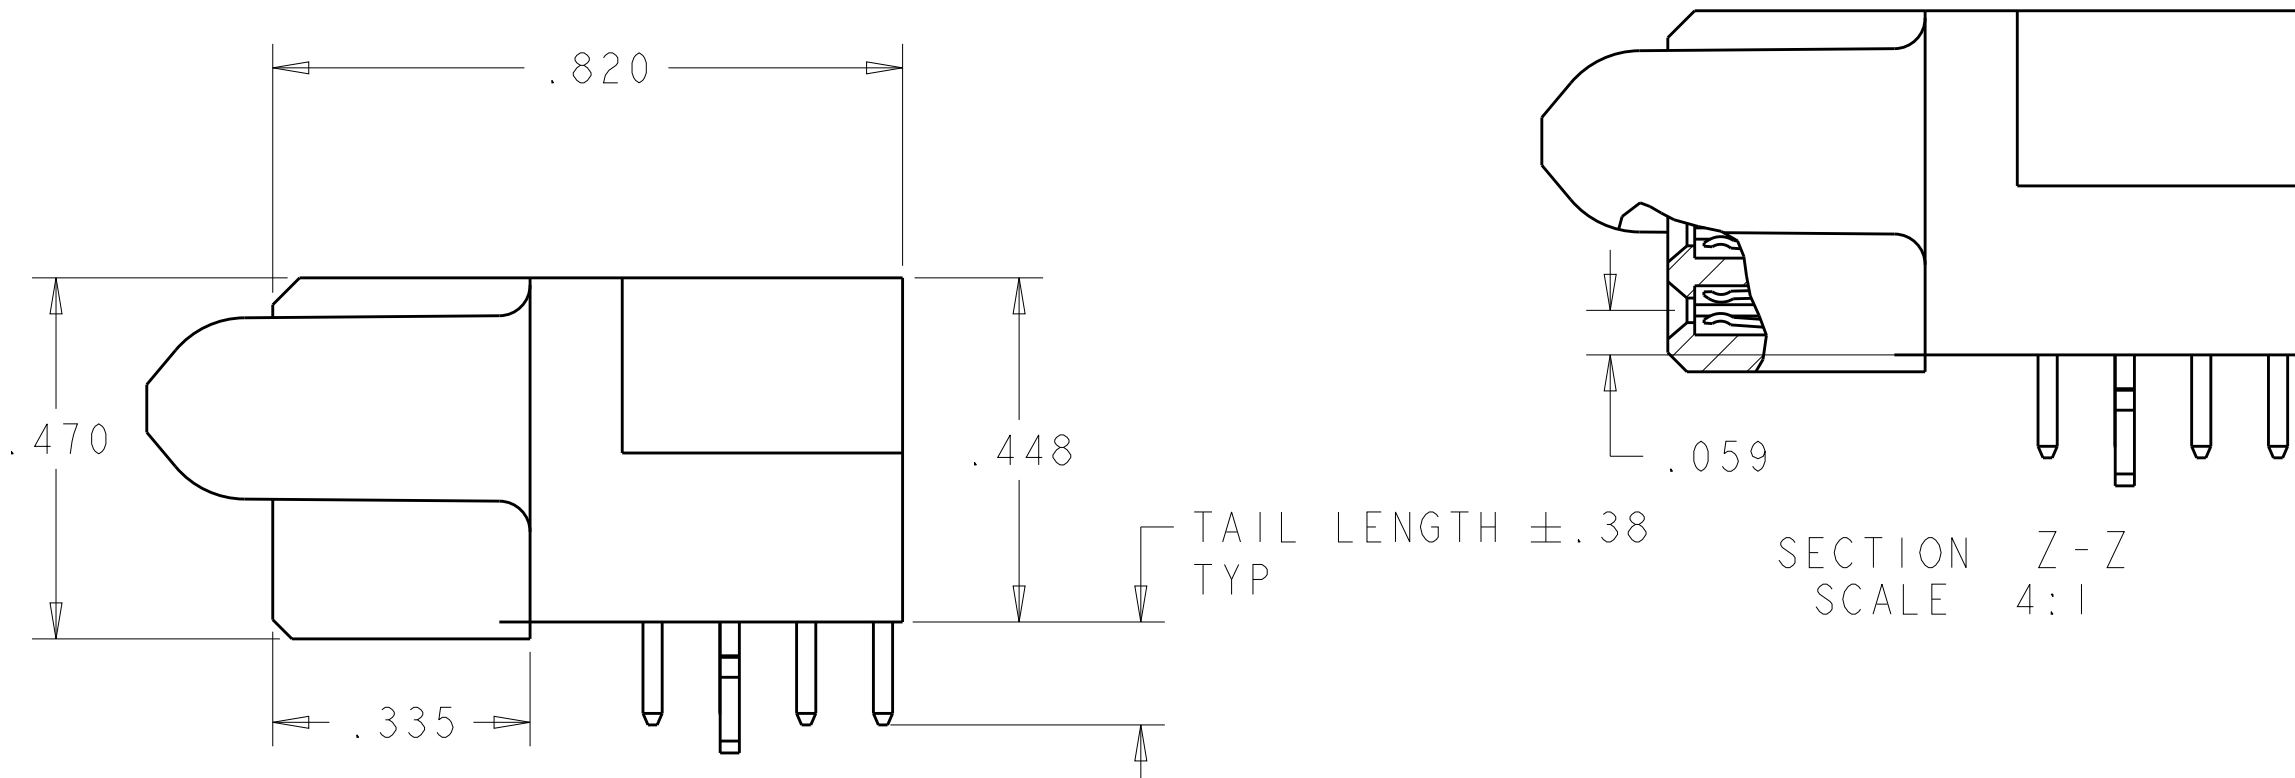

- △1 OPTIONAL CENTER MODULE, WITH .150 THRU HOLE OR HOLD DOWN FEATURE.
- △2 "AMP", PART NUMBER AND DATE CODE TO BE MARKED
- △3 MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, UL94 V-0.
SIGNAL CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- △4 CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA OF POWER AND SIGNAL CONTACTS
- △5 MECHANICAL CONNECTOR KEEP OUT ZONE.
- △6 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- △7 PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES
- △8 PCB - .0453±.0010 DRILLED HOLES PLATED WITH .0003 MIN Sn OVER .001 TO .003 Cu PLATING TO ACHIEVE A .040 DIAMETER HOLE

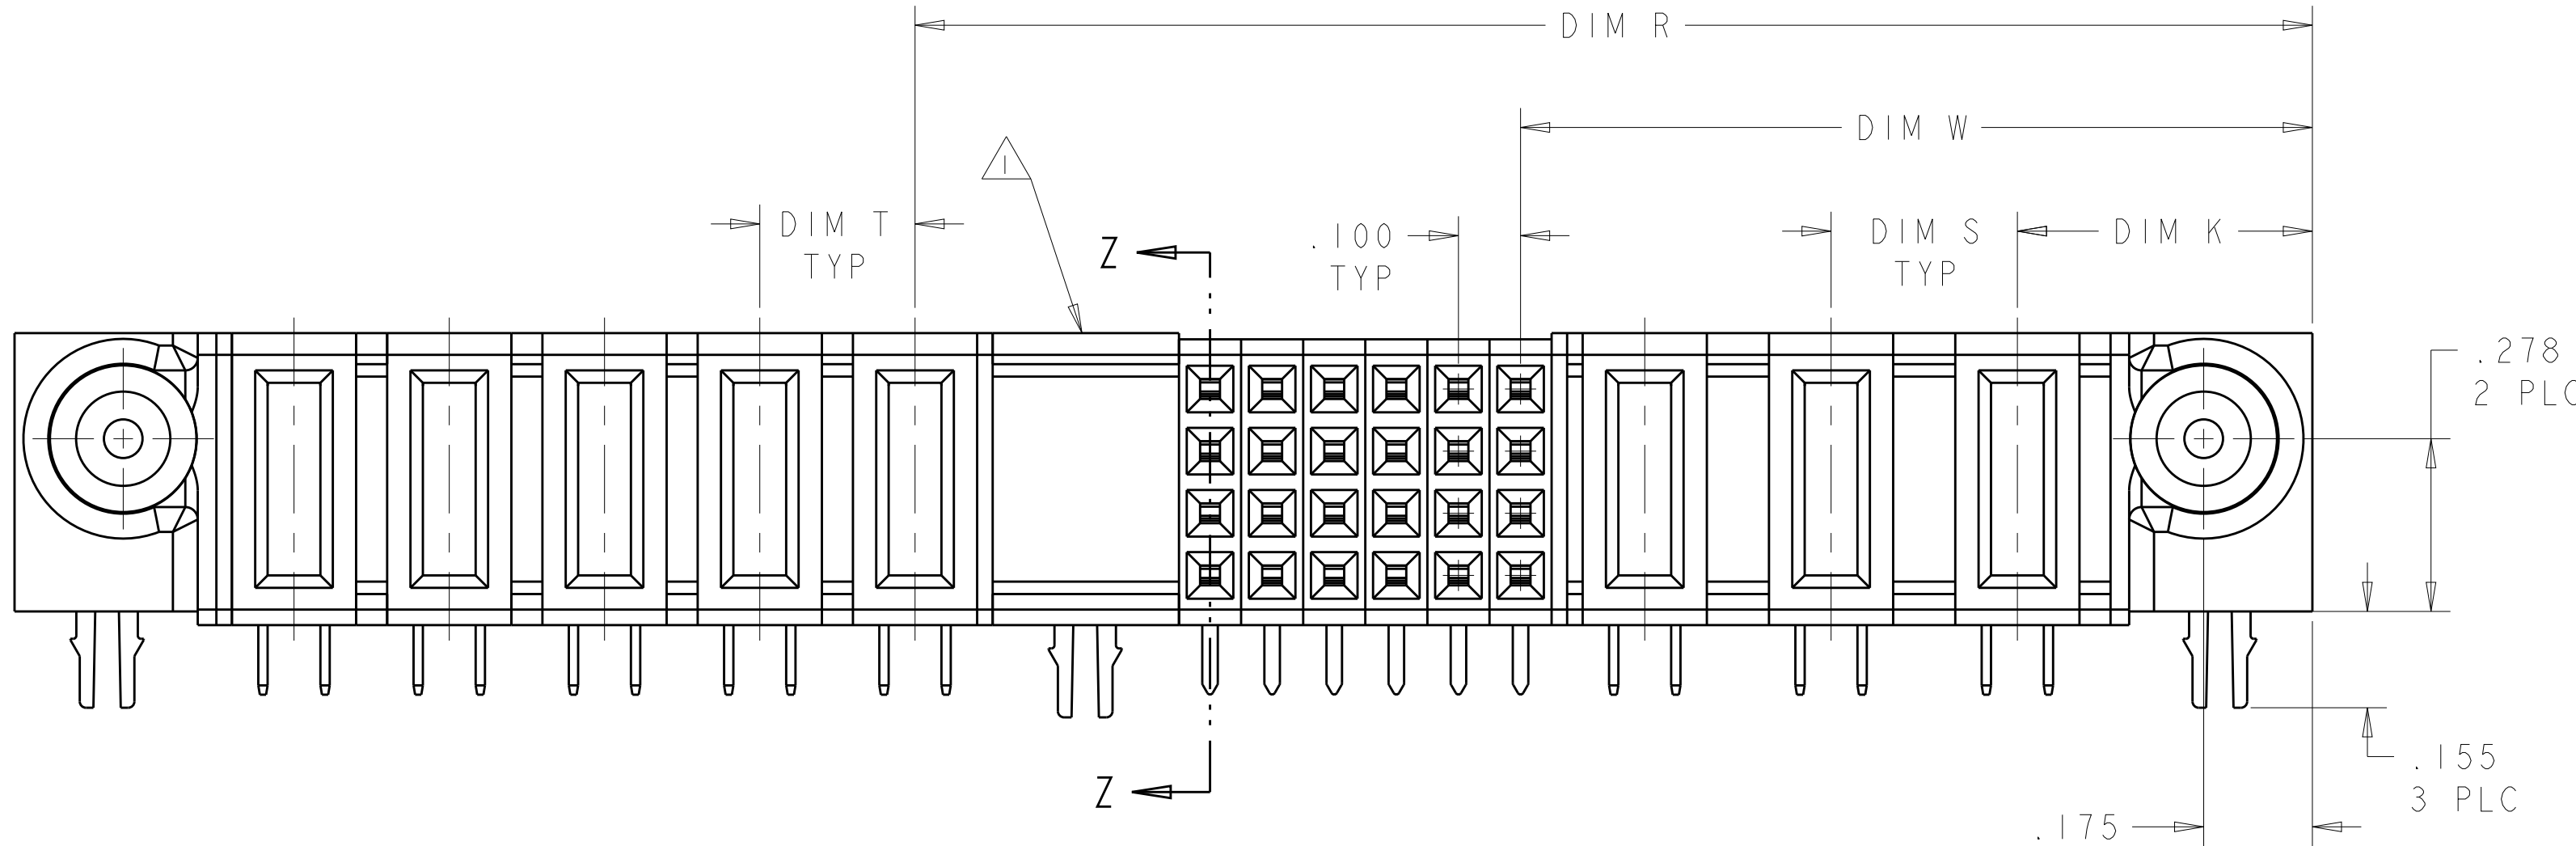


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.GRZYBOWSKI 21FEB05	TE Connectivity	
		CHK M.PERCHEKKE 21FEB05		
DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M.PERCHEKKE	NAME	
INCHES	0 PLC ±.01 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.002	PRODUCT SPEC 108-1973	RIGHT ANGLE RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
	ANGLES ±.0020	APPLICATION SPEC 114-13038	SIZE	CAGE CODE
MATERIAL	FINISH	WEIGHT	A100779	DRAWING NO
			C=6450170	RESTRICTED TO
			CUSTOMER DRAWING	SCALE 4:1 SHEET 1 OF 13 REV J5

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-

J4	2.650	.200	.250	1.550	.875	2.700	-	3.000	.450	2P + 24S + 6P	4-6450170-1
	3.100	.250	.250	2.250	1.875	3.150	-	3.450	.450	6P + 12S + 4P	4-6450170-0
	1.900	.250	.300	1.550	1.275	1.950	-	2.250	.475	3ACP + 8S + 2P	3-6450170-9
	1.800	-	-	1.700	.625	1.850	-	2.150	.450	1P + 40S + 1P	3-6450170-8
	1.600	-	-	1.500	.625	1.650	-	1.950	.450	1P + 32S + 1P	3-6450170-7
	1.700	.250	.250	1.350	.875	1.750	-	2.050	.450	2P + 16S + 2P	3-6450170-6
	1.550	.250	.250	1.200	.900	1.600	-	1.900	.450	2P + 8S + 2P	3-6450170-5
	2.350	.250	.250	1.250	.875	2.400	-	2.700	.450	2P + 12S + 5P	3-6450170-4
	2.325	.250	.300	1.975	1.600	2.375	-	2.675	.450	4ACP + 12S + 2P	3-6450170-3
	1.700	.250	.250	1.350	.875	1.750	-	2.050	.450	2P + 16S + 2P	3-6450170-1
	2.300	.250	.300	1.950	1.275	2.350	-	2.650	.450	3ACP + 24S + 2P	3-6450170-0
	2.400	.250	.250	1.800	1.125	2.450	-	2.750	.450	3P + 24S + 3P	2-6450170-9
	2.300	.250	.300	1.950	1.275	2.350	-	2.650	.450	3ACP + 24S + 2P	2-6450170-8
	2.400	.250	.250	1.800	1.125	2.450	-	2.750	.450	3P + 24S + 3P	2-6450170-7
	1.950	.250	.250	1.600	1.125	2.000	-	2.300	.450	3P + 16S + 2P	2-6450170-6
	1.300	-	-	1.200	.675	1.350	-	1.650	.450	1P + 16S + 1P	2-6450170-0
	2.200	.250	.250	1.350	.875	2.250	-	2.550	.450	2P + 16S + 4P	1-6450170-9
	2.800	.300	.250	2.075	1.375	2.850	-	3.150	.450	4P + 24S + 3ACP	1-6450170-8
	3.000	.250	.250	2.150	1.425	3.050	-	3.350	.450	4P + 24S + 4P	1-6450170-4
	2.600	.200	.200	1.925	1.175	2.650	-	2.950	.425	4P + 28S + 4P	1-6450170-1
	1.575	-	-	1.425	.700	1.625	-	1.925	.475	1P + 24S + 1P	1-6450170-0
	2.500	.250	.250	2.150	.875	2.550	-	2.850	.450	2P + 48S + 2P	6450170-9
	3.300	.250	.300	1.950	1.275	3.350	-	3.650	.475	3ACP +24S + 6P	6450170-8
	1.400	.250	.250	1.300	.625	1.450	-	1.750	.450	1P + 24S + 1P	6450170-6
	2.400	.250	.250	1.800	1.125	2.450	-	2.750	.450	3P + 24S + 3P	6450170-5
	4.350	.250	.250	3.500	2.625	4.400	-	4.700	.450	9P + 32S + 4P	6450170-4
	3.650	.250	.300	2.550	1.275	3.700	-	4.000	.475	3ACP + 48S + 5P	6450170-3
	3.050	.250	.300	1.950	1.275	3.100	-	3.400	.475	3ACP +24S + 5P	6450170-2
	2.550	.250	.300	2.200	1.525	2.600	-	2.900	.475	3ACP+1P+24S+2P	6450170-1
	DIM U	DIM T	DIM S	DIM R	DIM W	DIM D	DIM M	DIM L	DIM K	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES



MATERIAL
-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC
1 PLC
2 PLC
3 PLC
4 PLC
ANGLES
FINISH

±"
±.01
±.005
±.0020
#2°
-

DWN
R.GRZYBOWSKI

CHK
M.PERCHEKKE

APVD
M.PERCHEKKE

PRODUCT SPEC
108-1973

APPLICATION SPEC
114-13038

WEIGHT
-

CUSTOMER DRAWING

21FE805

21FE805

-

NAME
RIGHT ANGLE RECEPTACLE ASSEMBLY
WITH GUIDES
MULTI-BEAM XL

SIZE
A1

CAGE CODE
100779

DRAWING NO
6450170

RESTRICTED TO
-



SCALE
4:1

SHEET
2


OF
13

REV
J5


4805 (3/11)

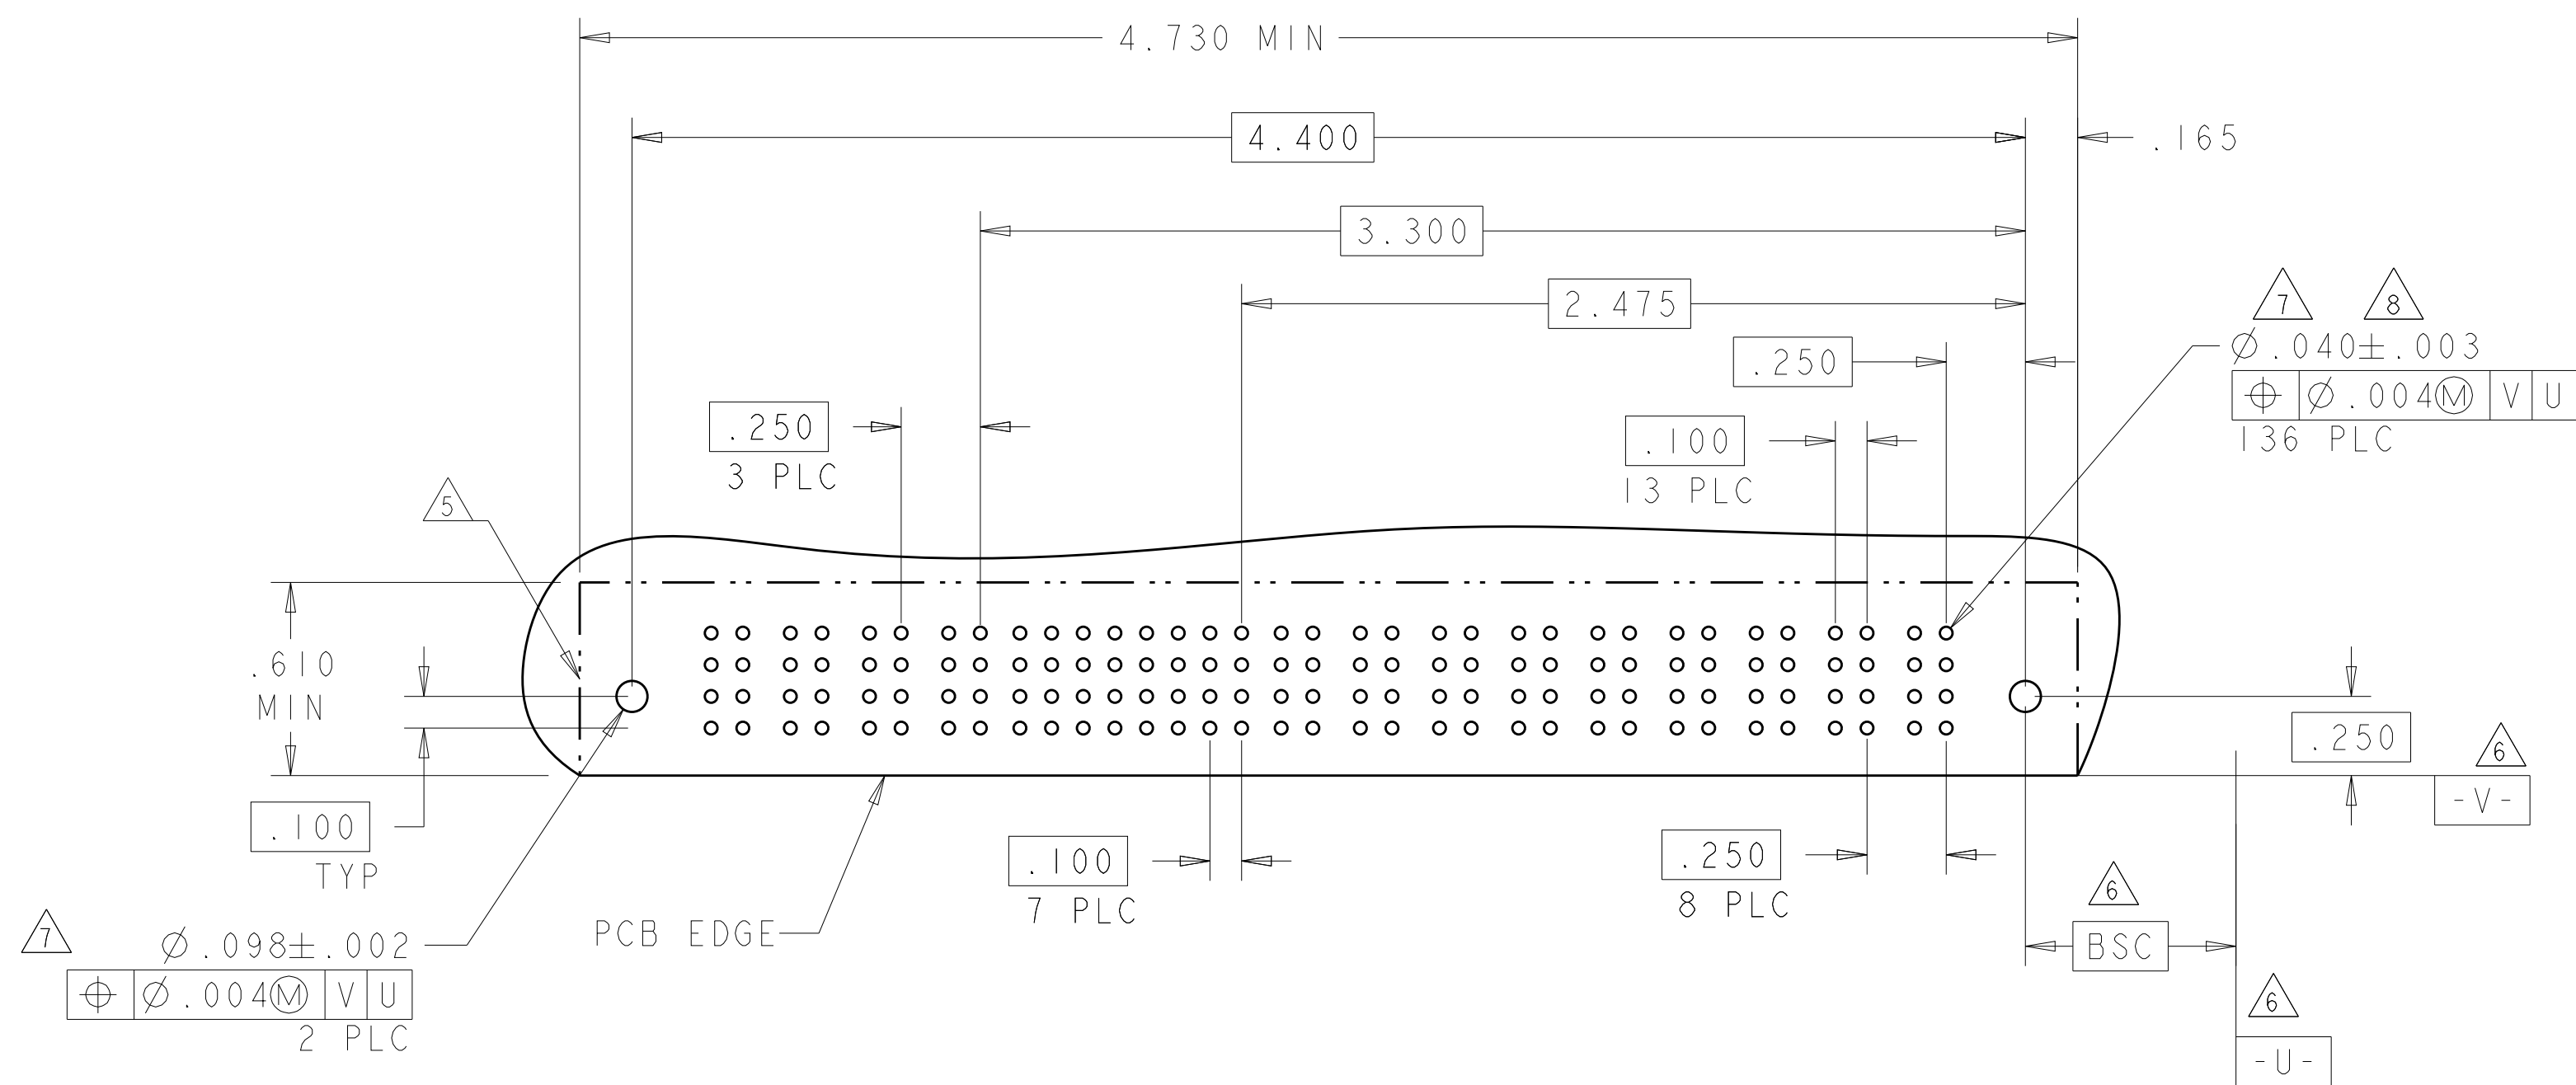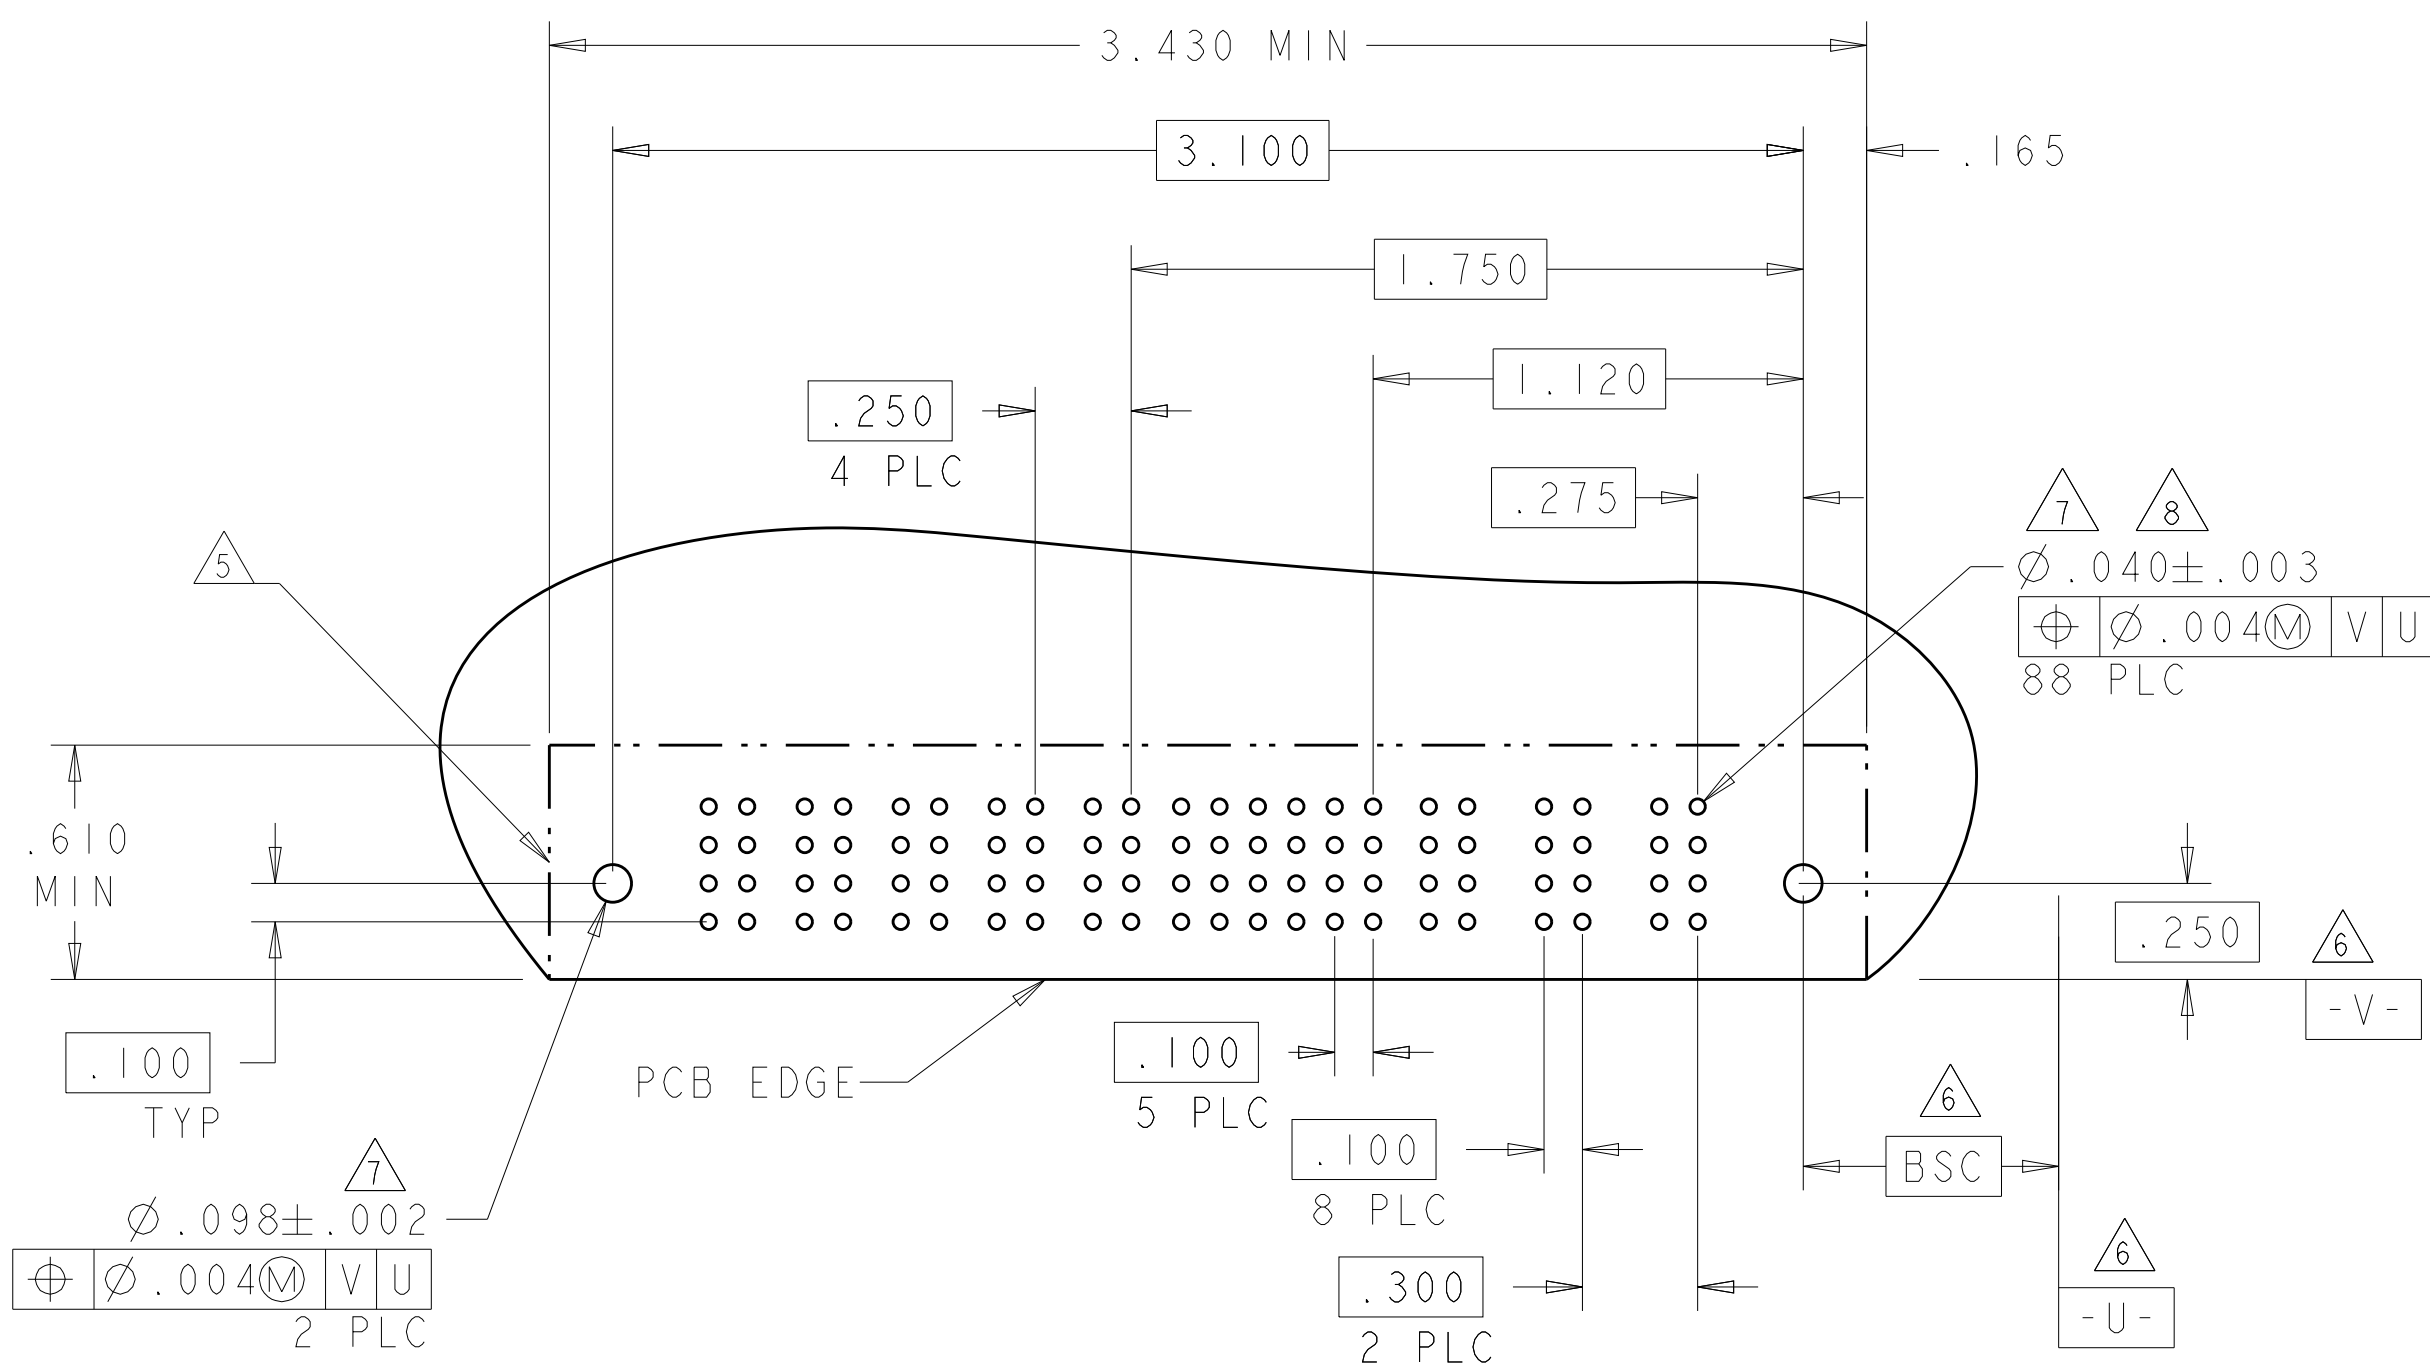


PART NUMBER	ROWS		POWER						SIGNAL						POWER			
			P9	P8	P7	P6	P5	P4	6	5	4	3	2	1	P3	P2	P1	
6450170-8	D C B A																	
																		
3ACP + 24S + 6P																		

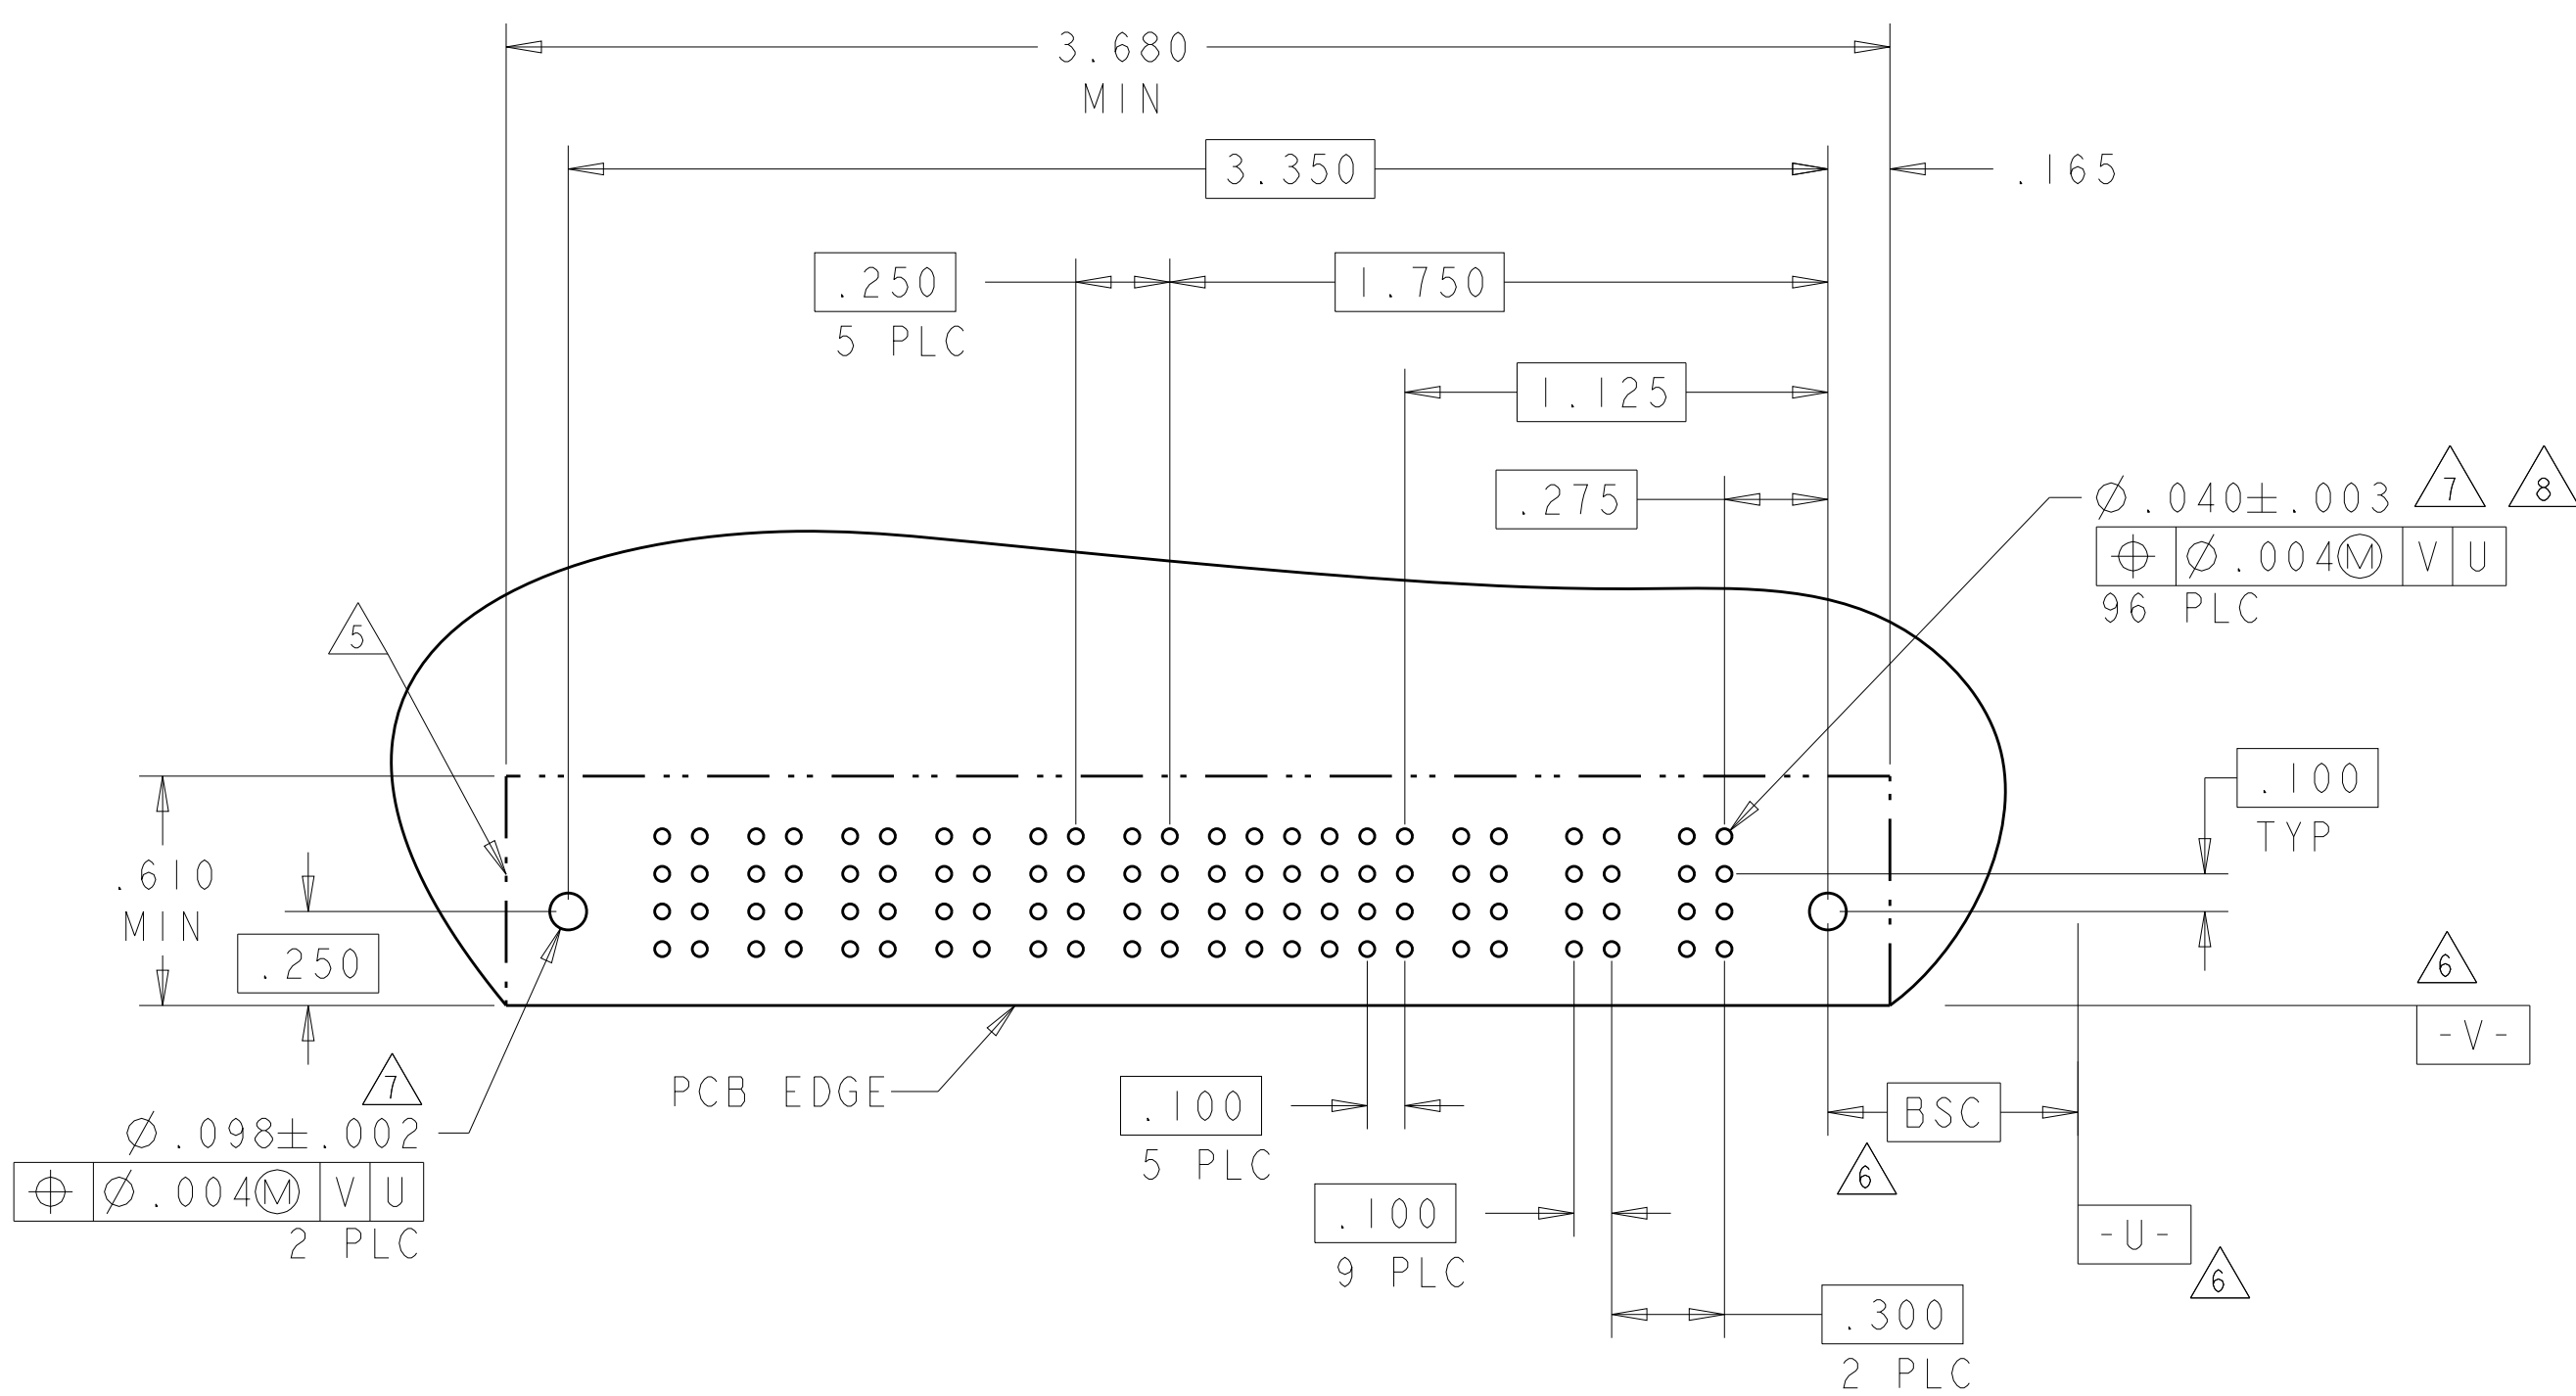


PART NUMBER	ROWS			POWER		SIGNAL																POWER														
		P4	P3	12	11	10	9	8	7	6	5	4	3	2	1	P2	P1																			
6450170-9	D C B A					RW	RA	H	H	H	H	G	G	G	G	H	H	H	H	G	G	G	G	H	H	H	H	RW	RA							
								F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F			F	F	F	F	F	F	
								E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E			E	E	E	E	E	E	E
2P + 48S + 2P																																				

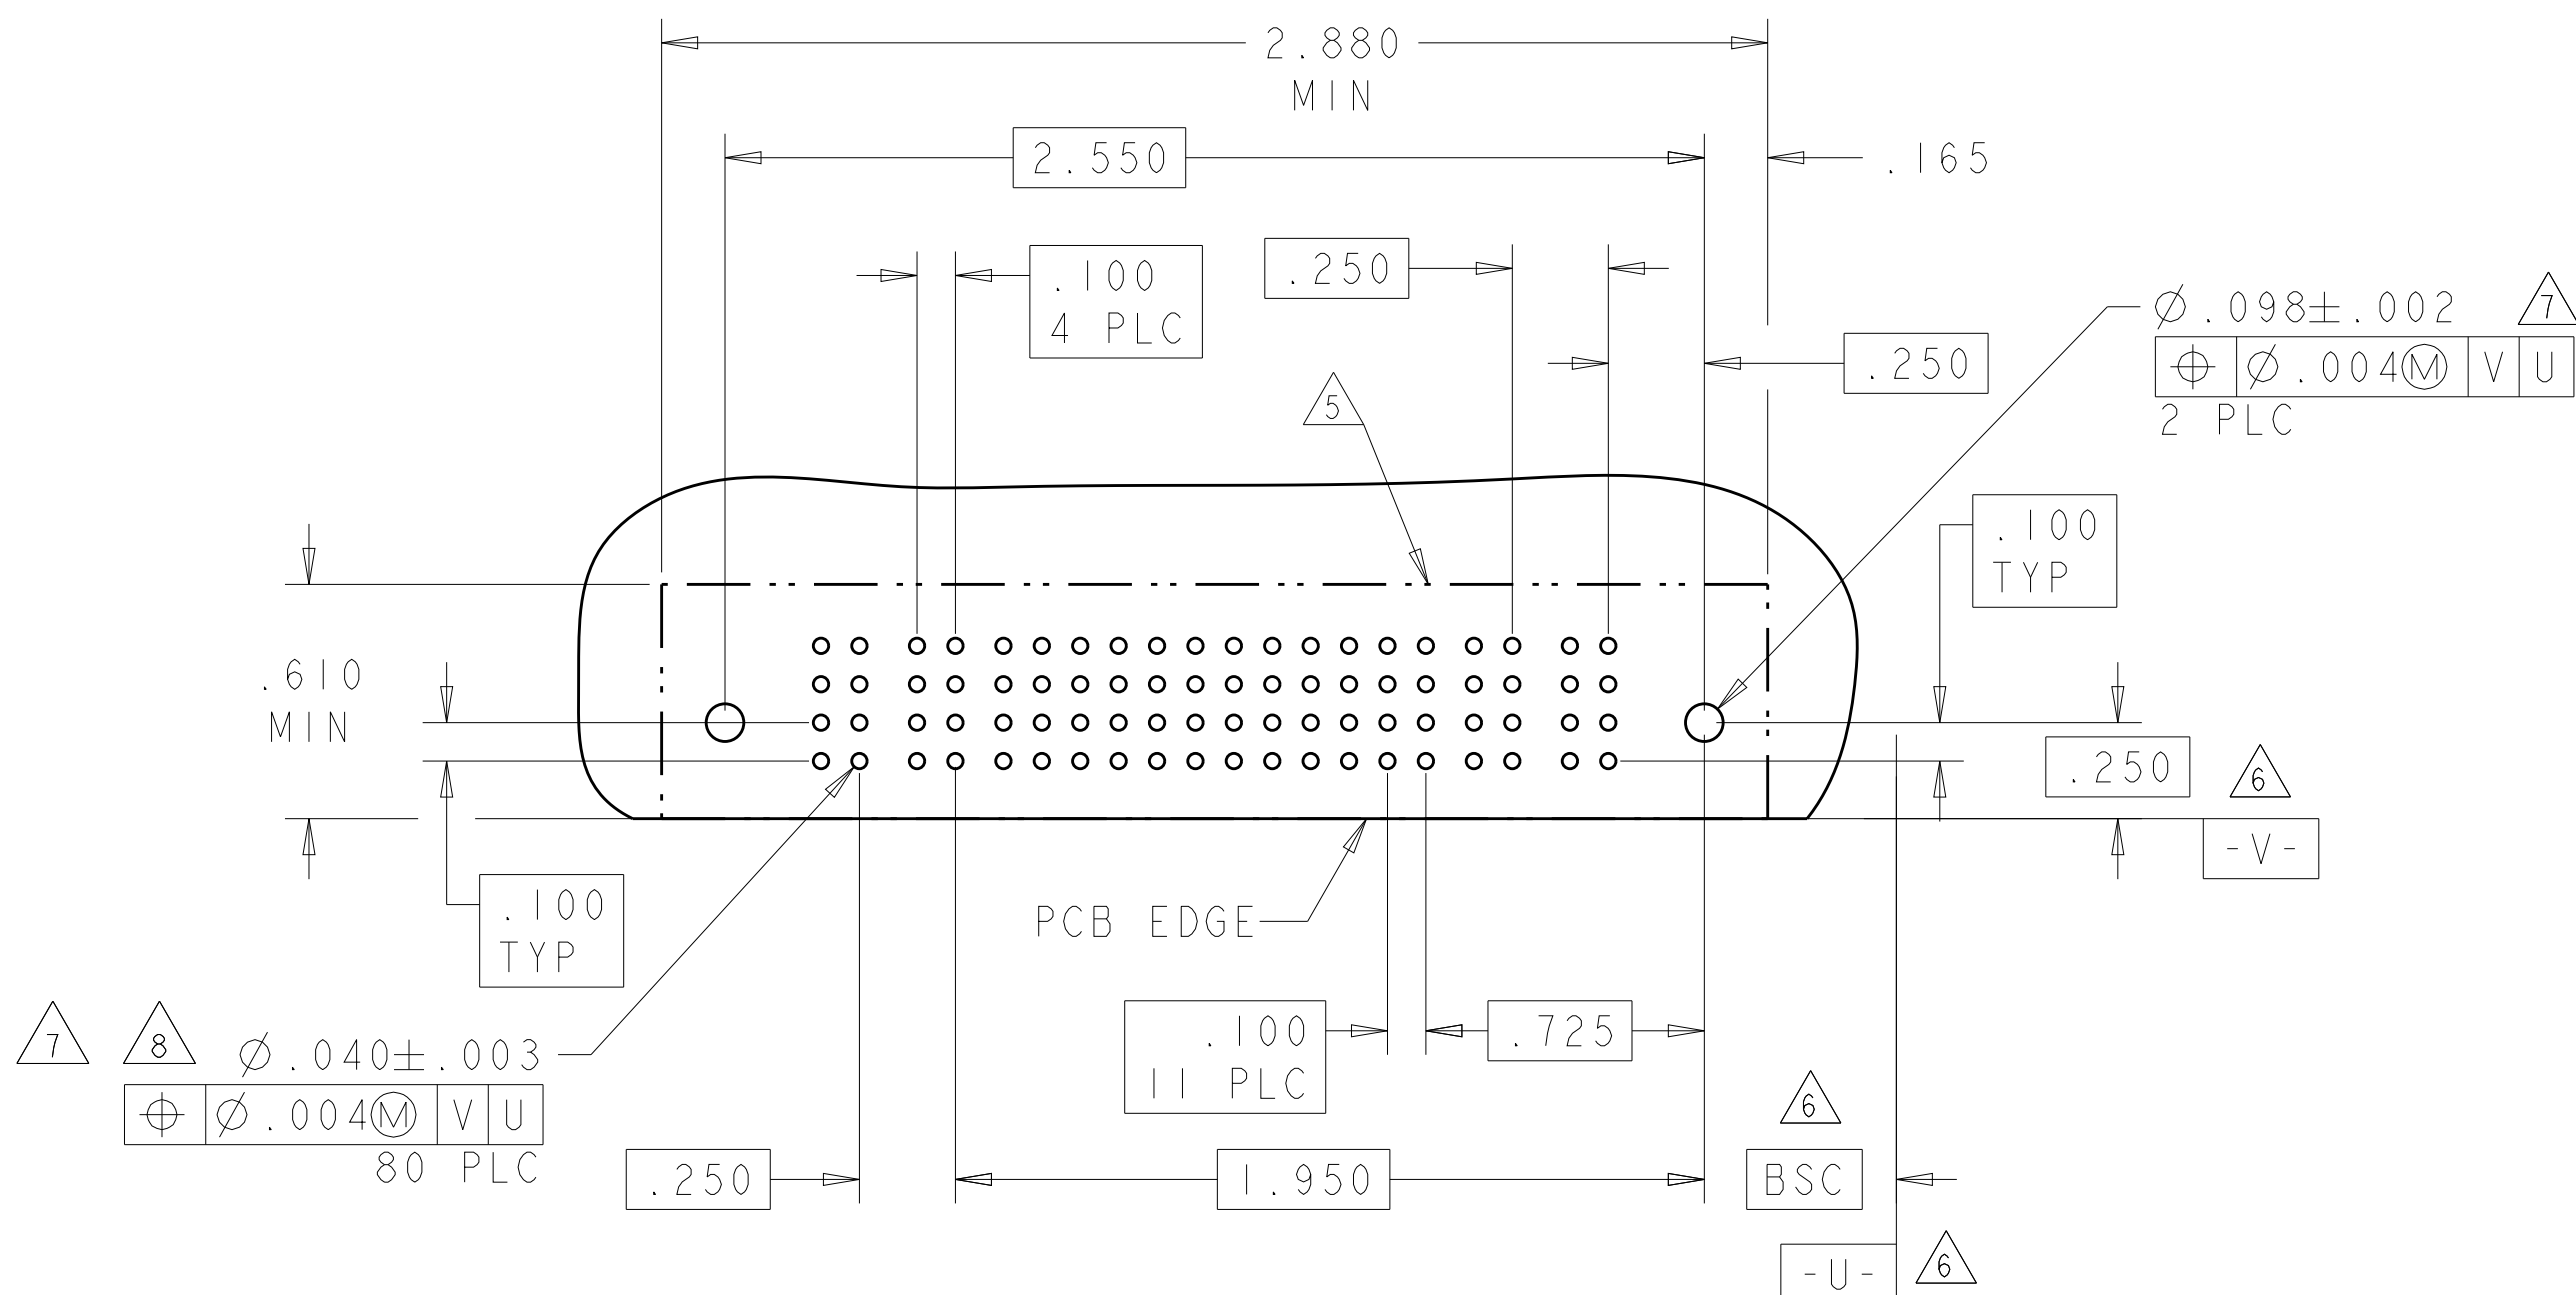4805 (3/11)

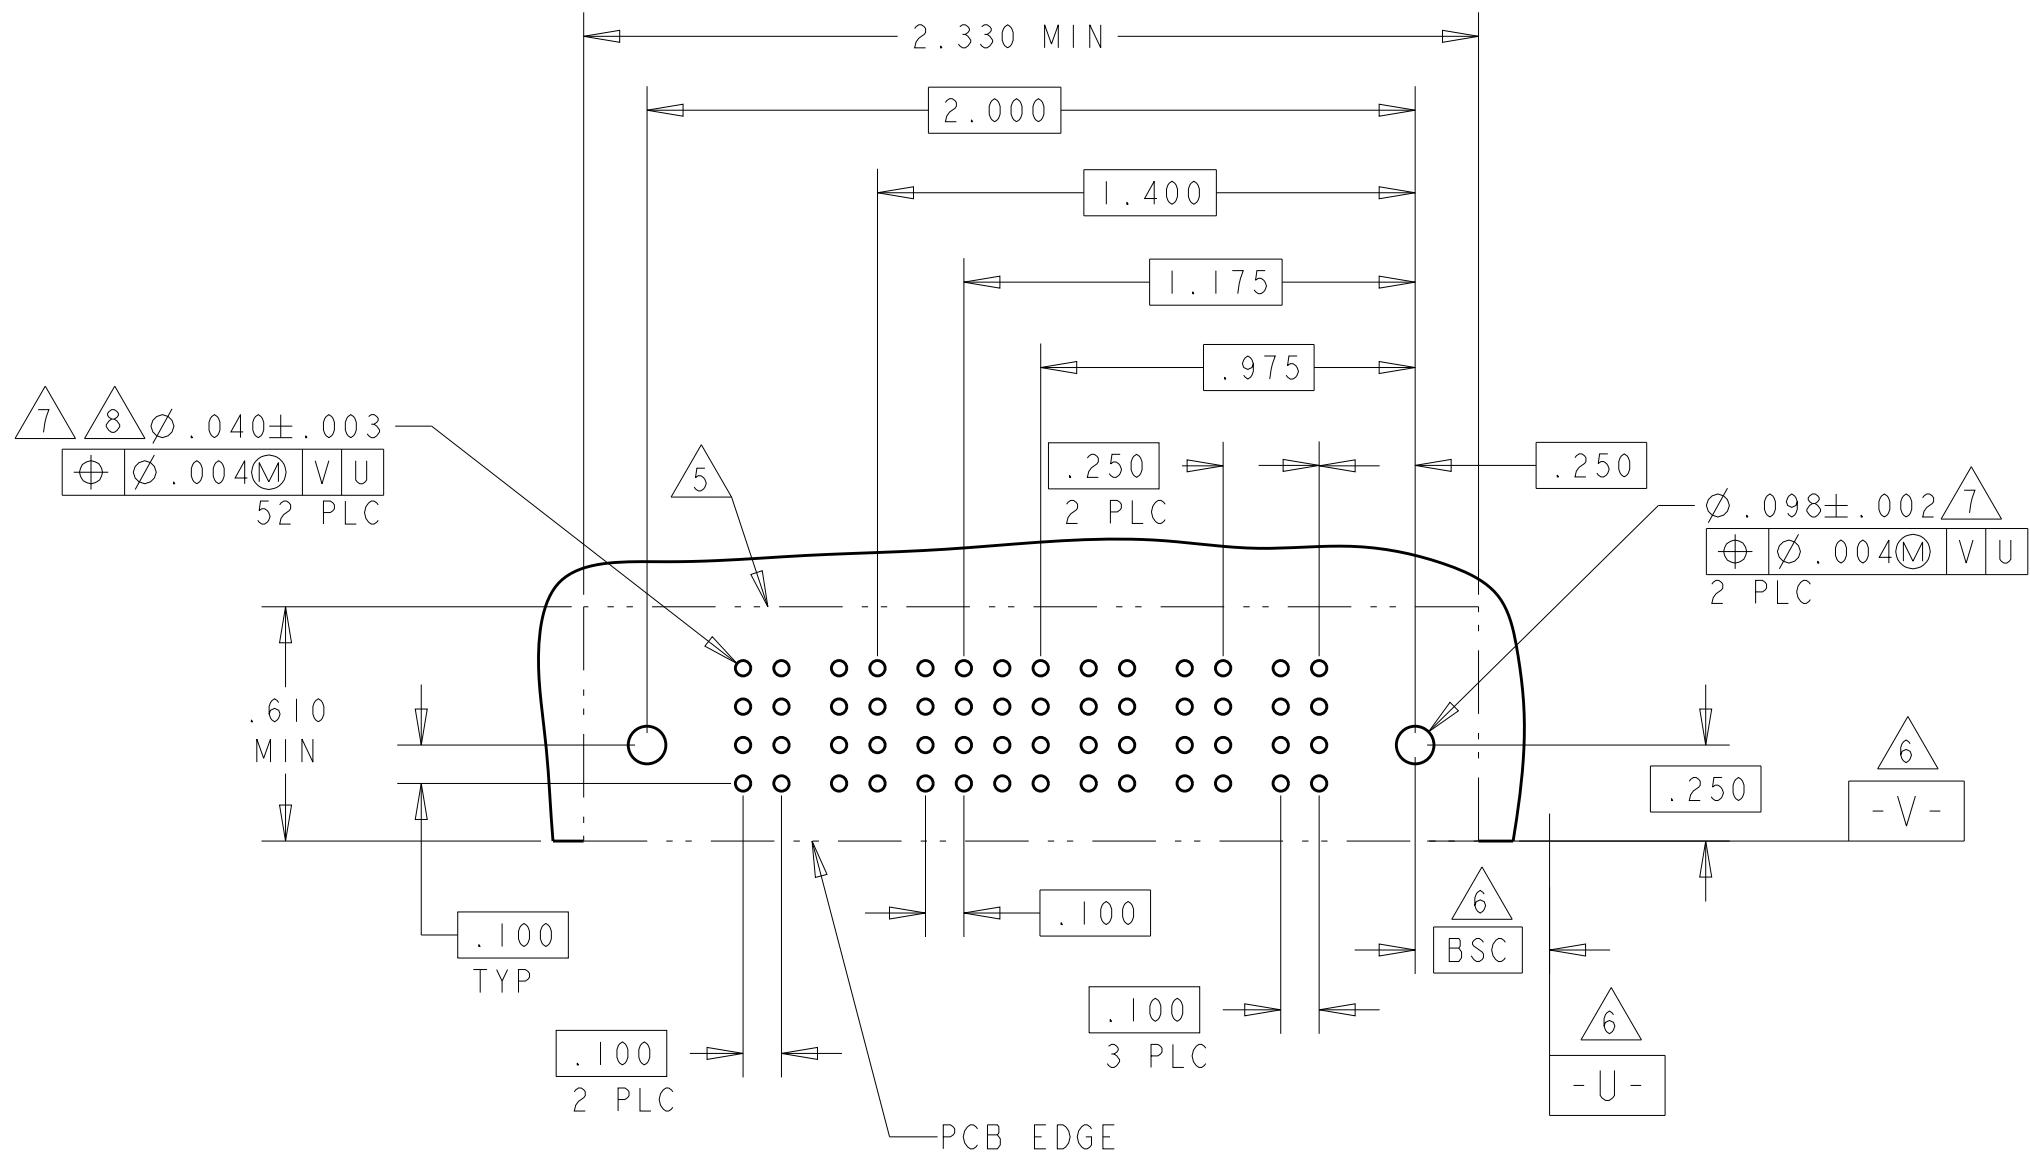[illegible]



PART NUMBER	ROWS		POWER			SIGNAL							POWER																			
			P6	P5	P4	6	5	4	3	2	1	P3	P2	P1																		
2-6450170-7	D C B A																															
3P + 24S + 3P																																







PART NUMBER	ROWS		POWER			SIGNAL							POWER																																																										
			P6	P5	P4	6	5	4	3	2	1	P3	P2	P1																																																									
2-6450170-9	D C B A		<table><tr><td>RM</td><td>RM</td><td>RA</td><td></td><td>H</td><td>H</td><td>H</td><td>H</td><td></td><td></td><td></td><td></td><td>RM</td><td>RM</td></tr><tr><td></td><td></td><td></td><td></td><td>G</td><td>G</td><td>G</td><td>G</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td>F</td><td>F</td><td>F</td><td>F</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td>E</td><td>E</td><td>E</td><td>E</td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>												RM	RM	RA		H	H	H	H					RM	RM					G	G	G	G											F	F	F	F											E	E	E	E							
RM	RM	RA		H	H	H	H					RM	RM																																																										
				G	G	G	G																																																																
				F	F	F	F																																																																
				E	E	E	E																																																																
3P + 24S + 3P																																																																							

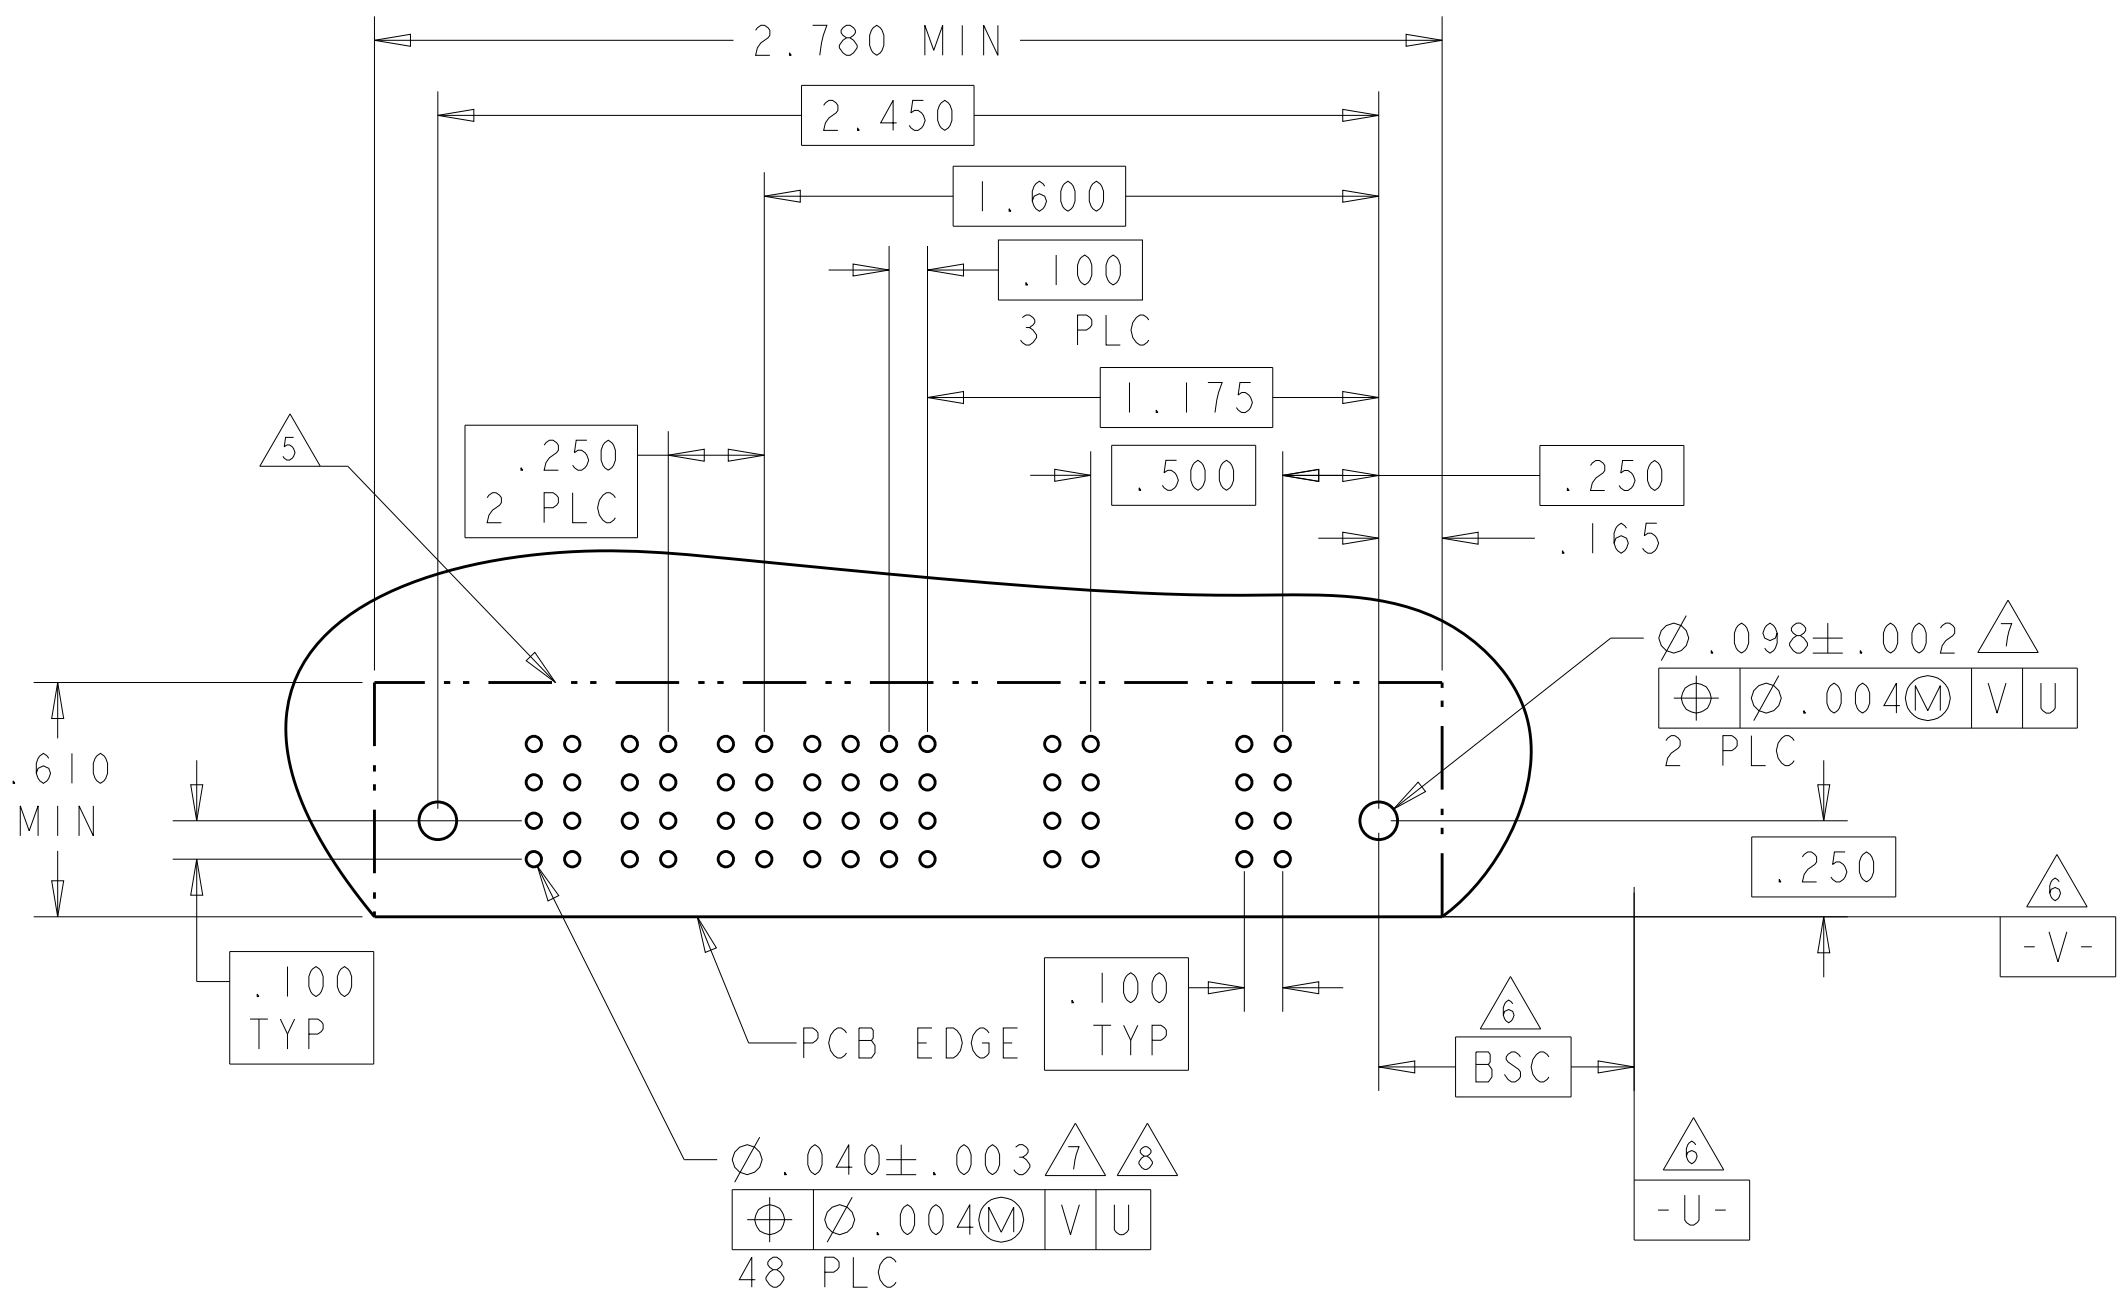


—NO CONTACTS LOADED


4805 (3/11)

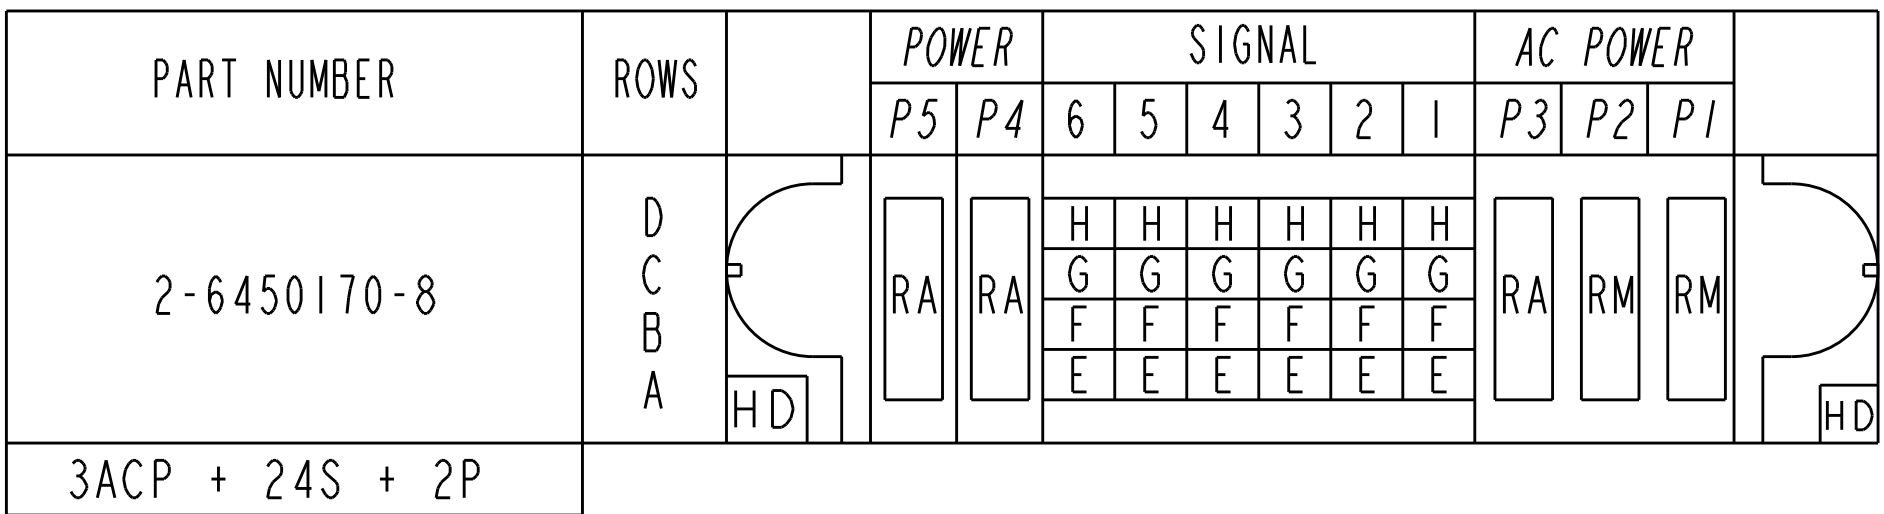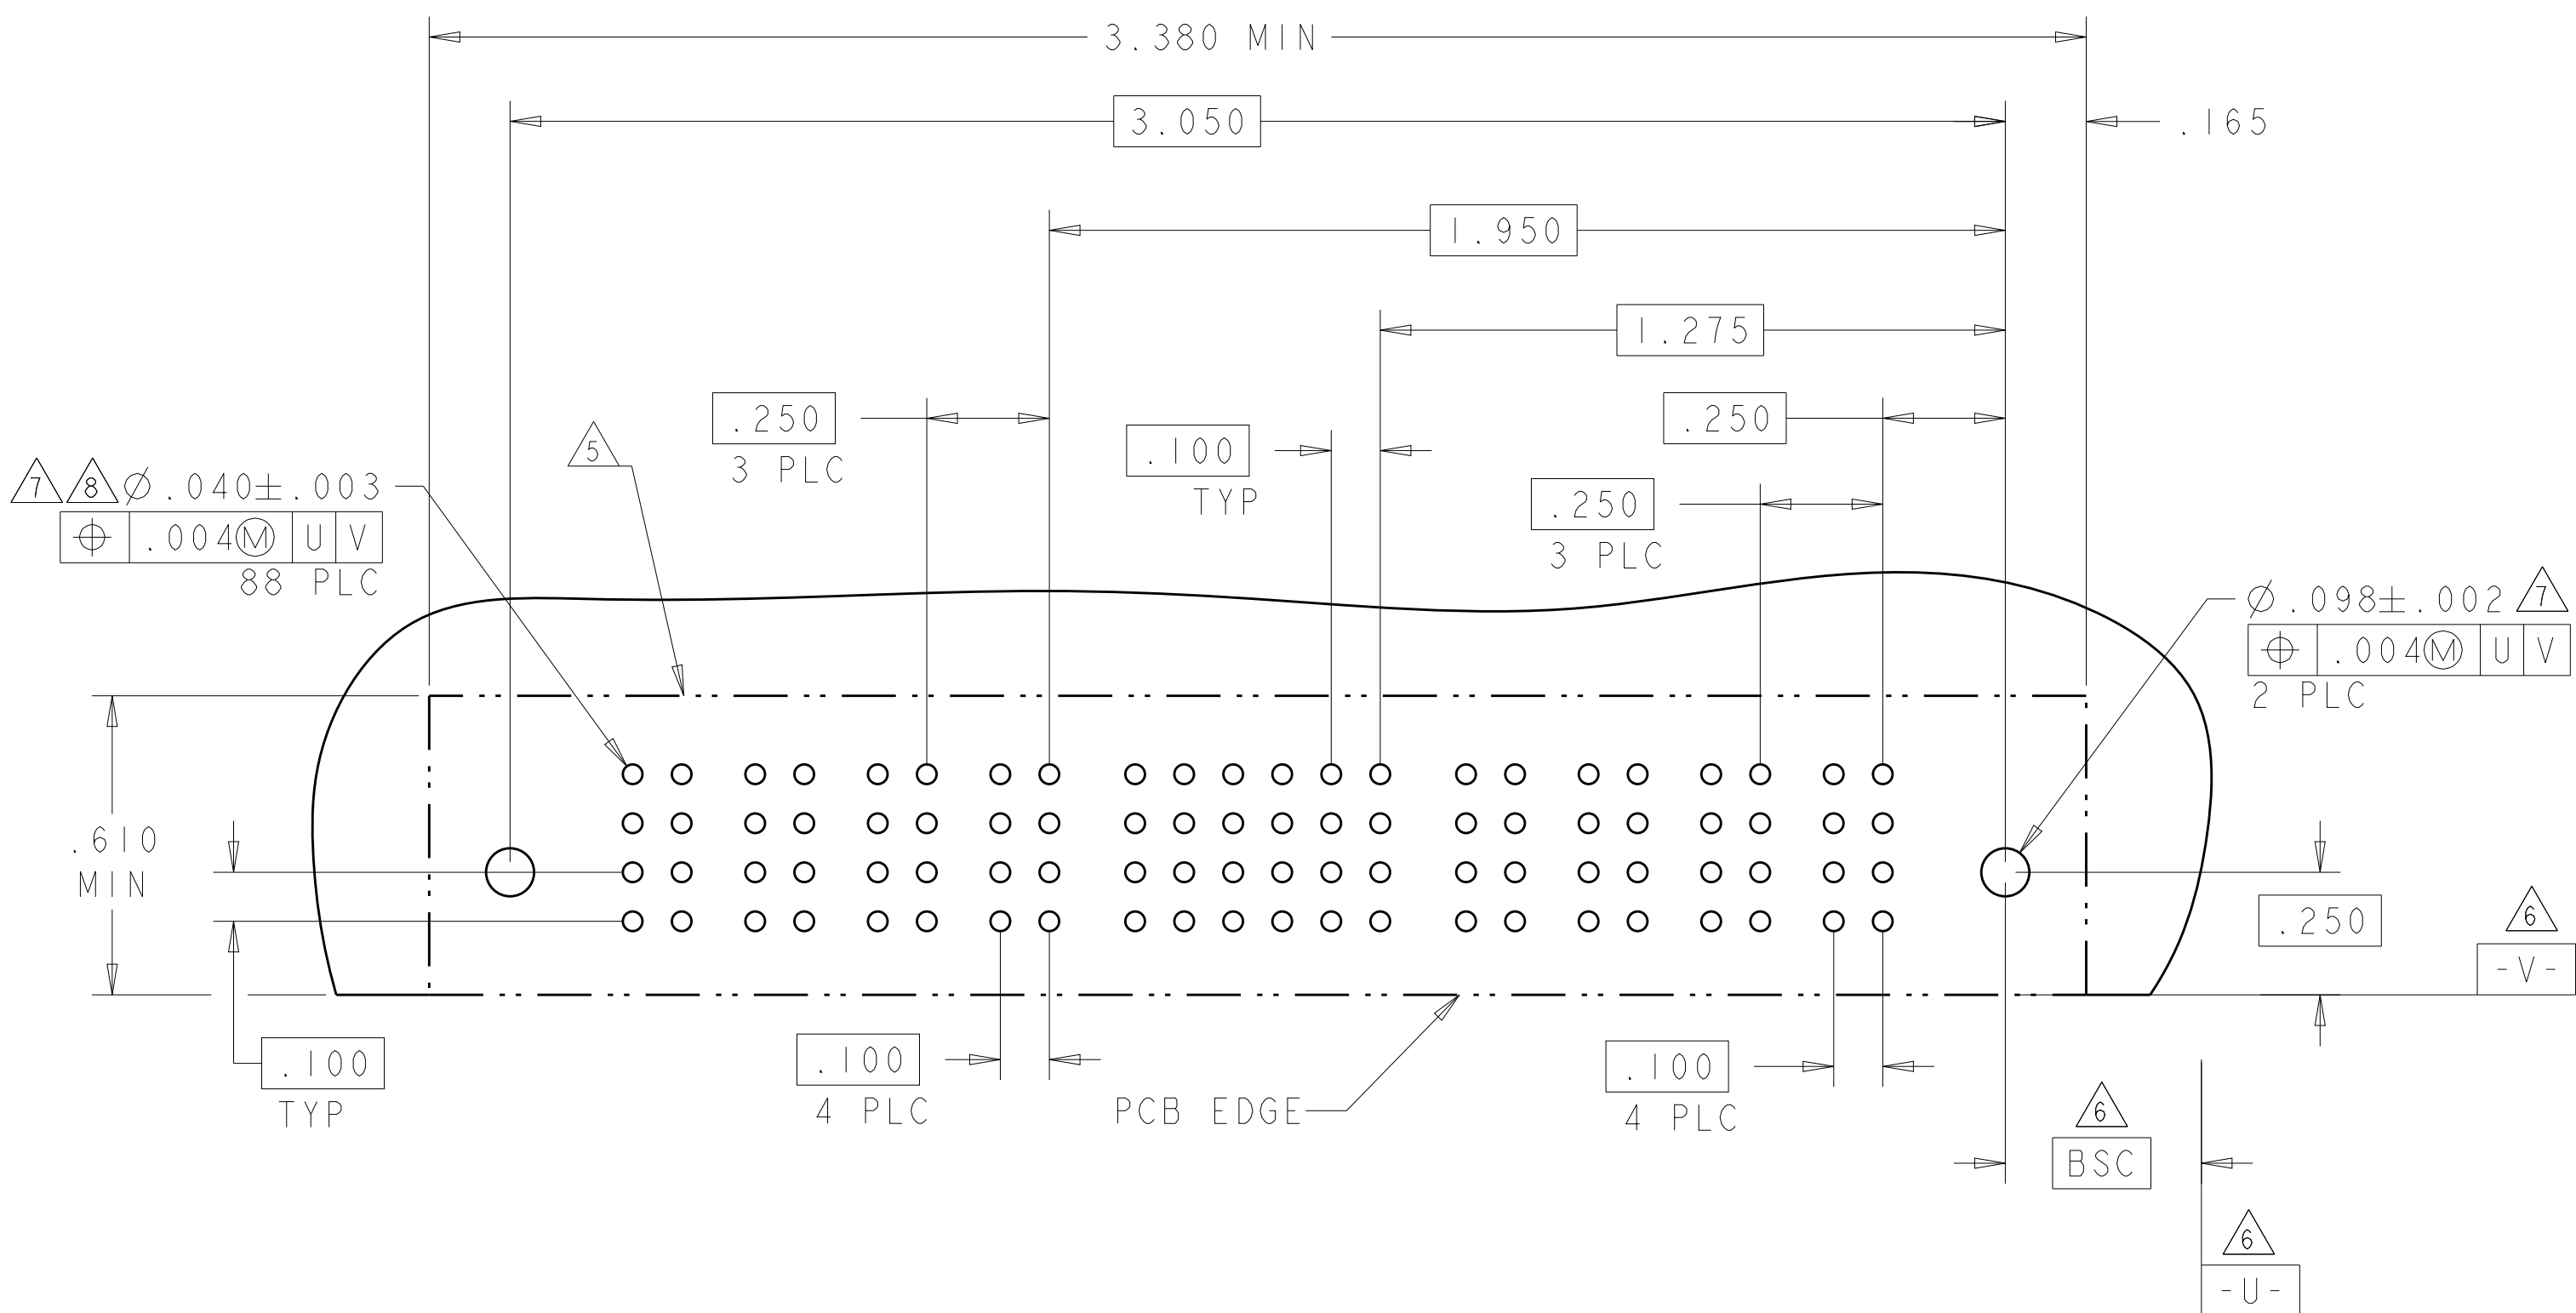[illegible]4805 (3/11)

PART NUMBER	ROWS		POWER		SIGNAL						AC POWER			
			P5	P4	6	5	4	3	2	1	P3	P2	P1	
3-6450170-0	D C B A				H	H	H	H	H	H				
					G	G	G	G	G	G				
					F	F	F	F	F	F				
					E	E	E	E	E	E				
3ACP + 24S + 2P														

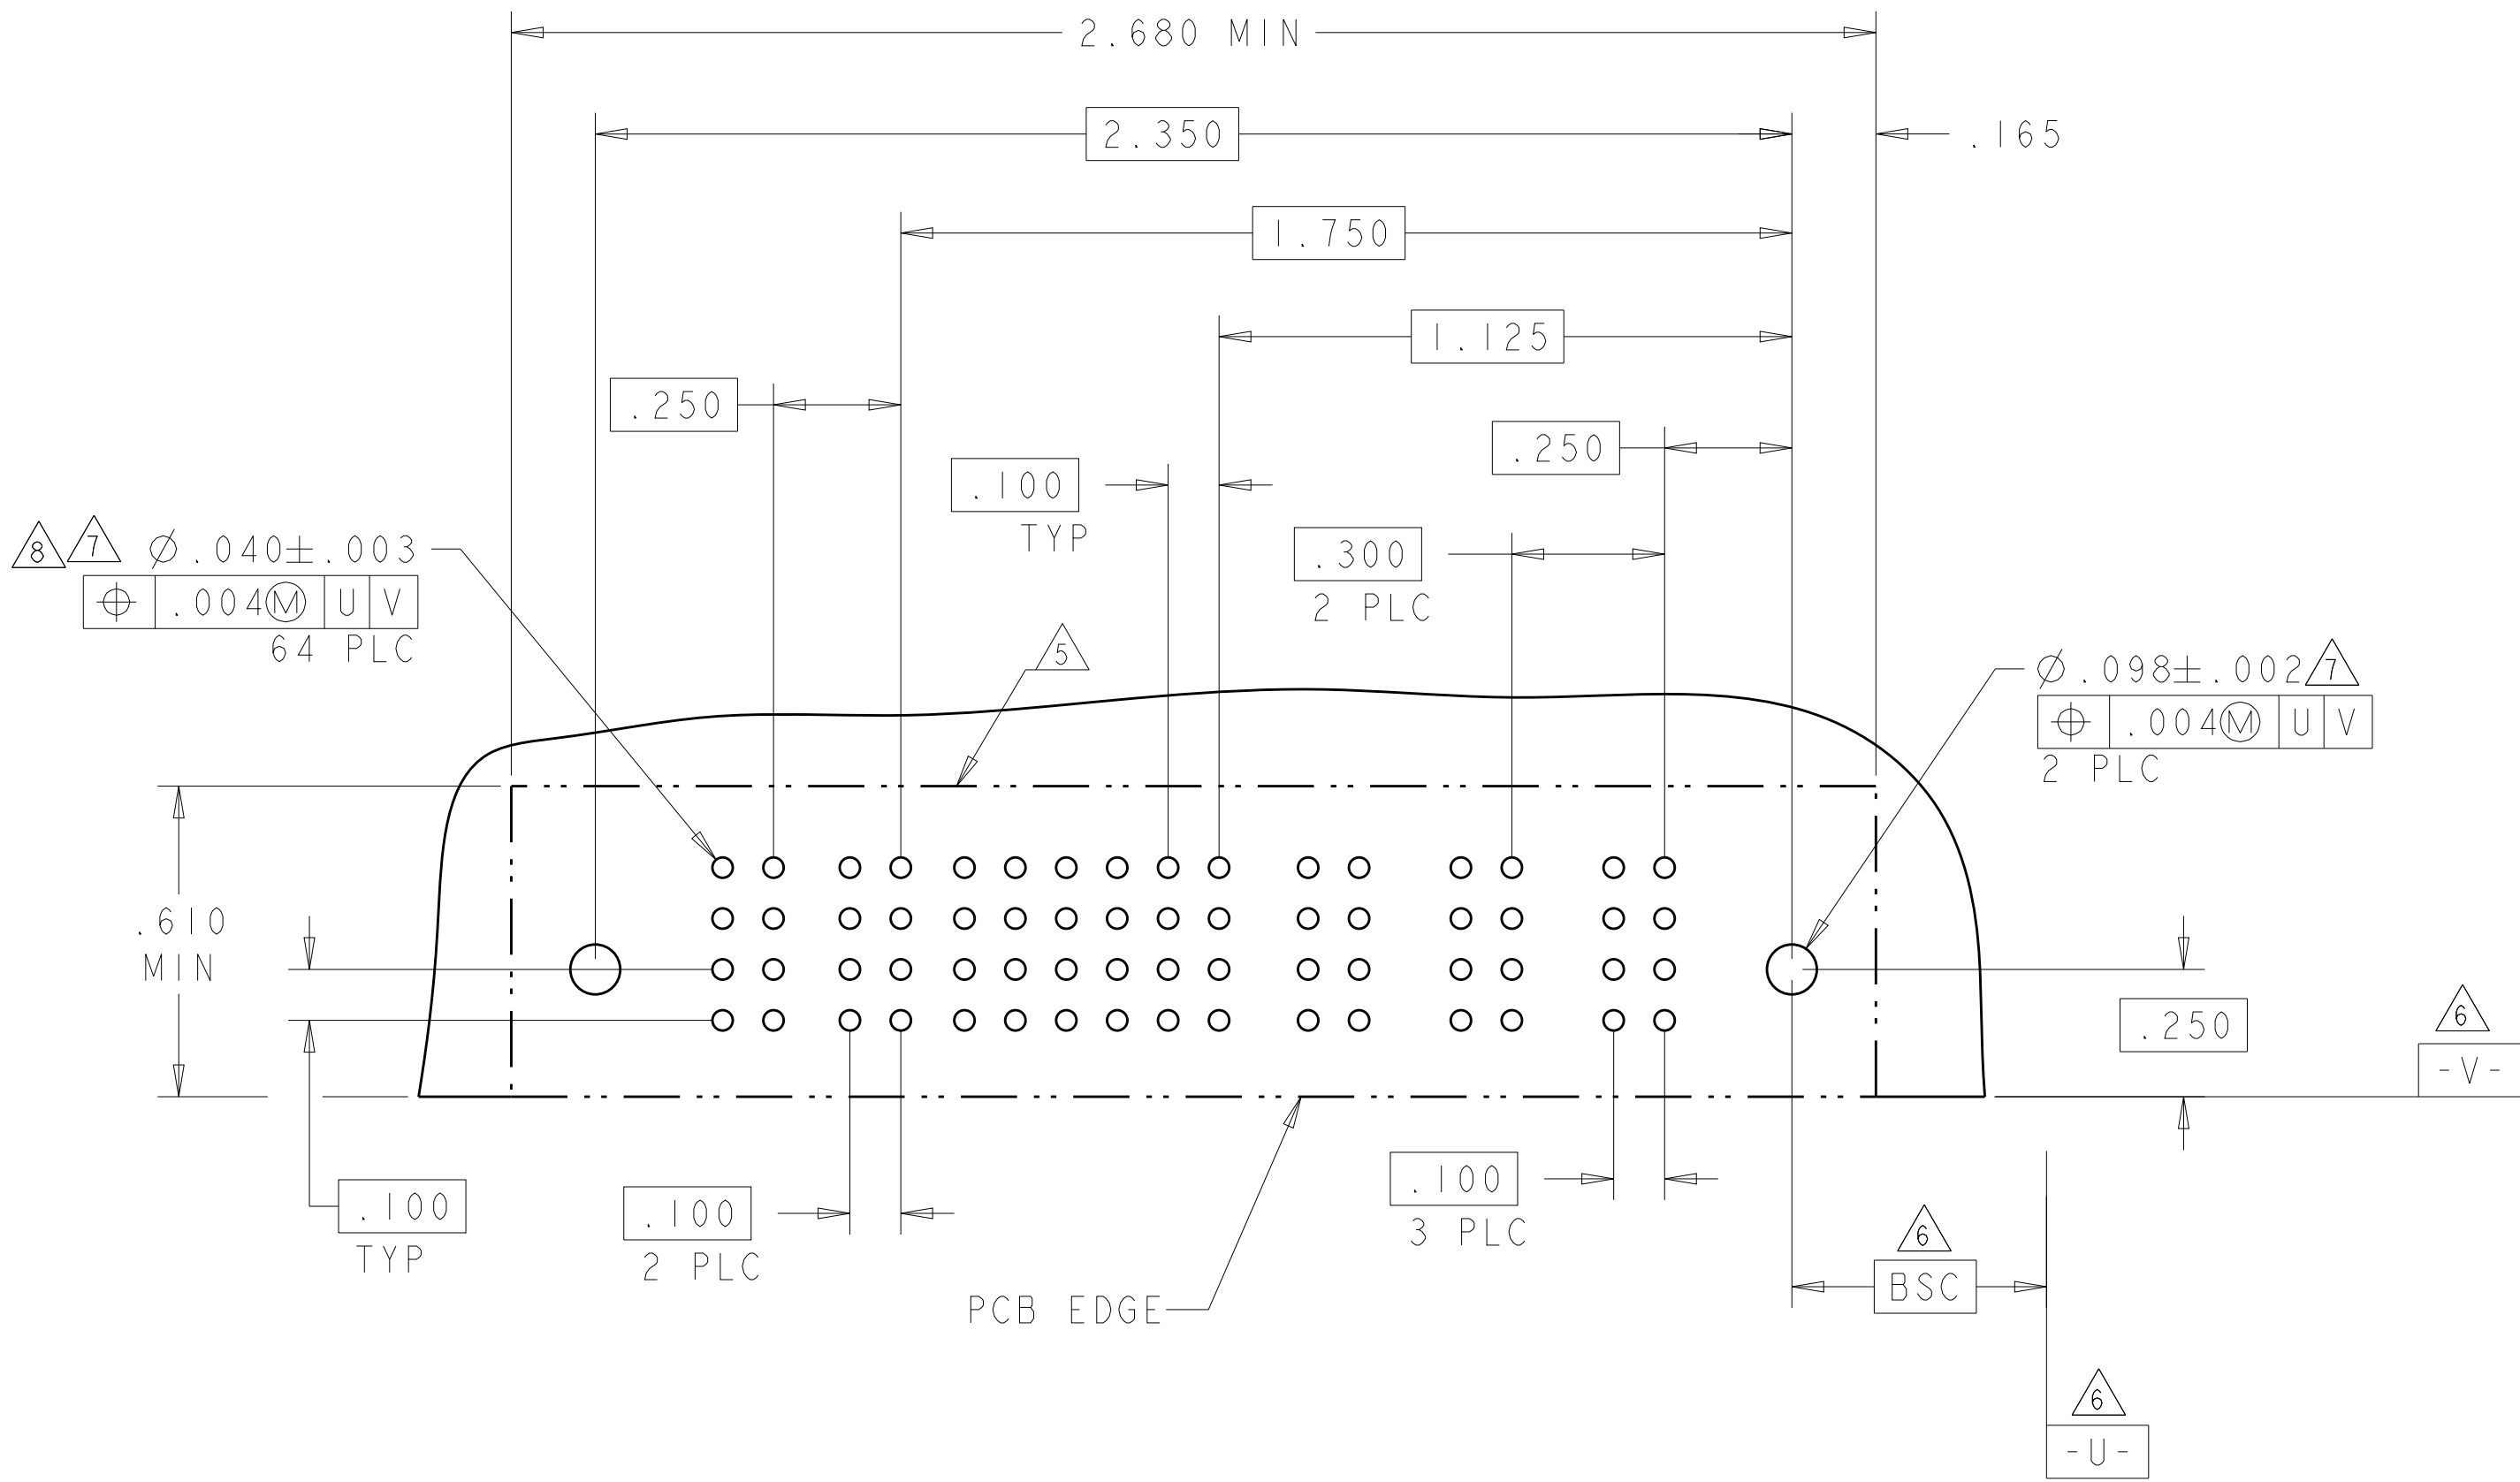
4805 (3/11)

PART NUMBER	ROWS		POWER			SIGNAL						POWER				
			P7	P6	P5	6	5	4	3	2	1	P4	P3	P2	P1	
I-6450170-8	D C B A		RM	RM	RA	H	H	H	H	H	H	RM	RM	RM	RM	
						G	G	G	G	G	G					
						F	F	F	F	F	F					
						E	E	E	E	E	E					
4P + 24S + 3ACP																

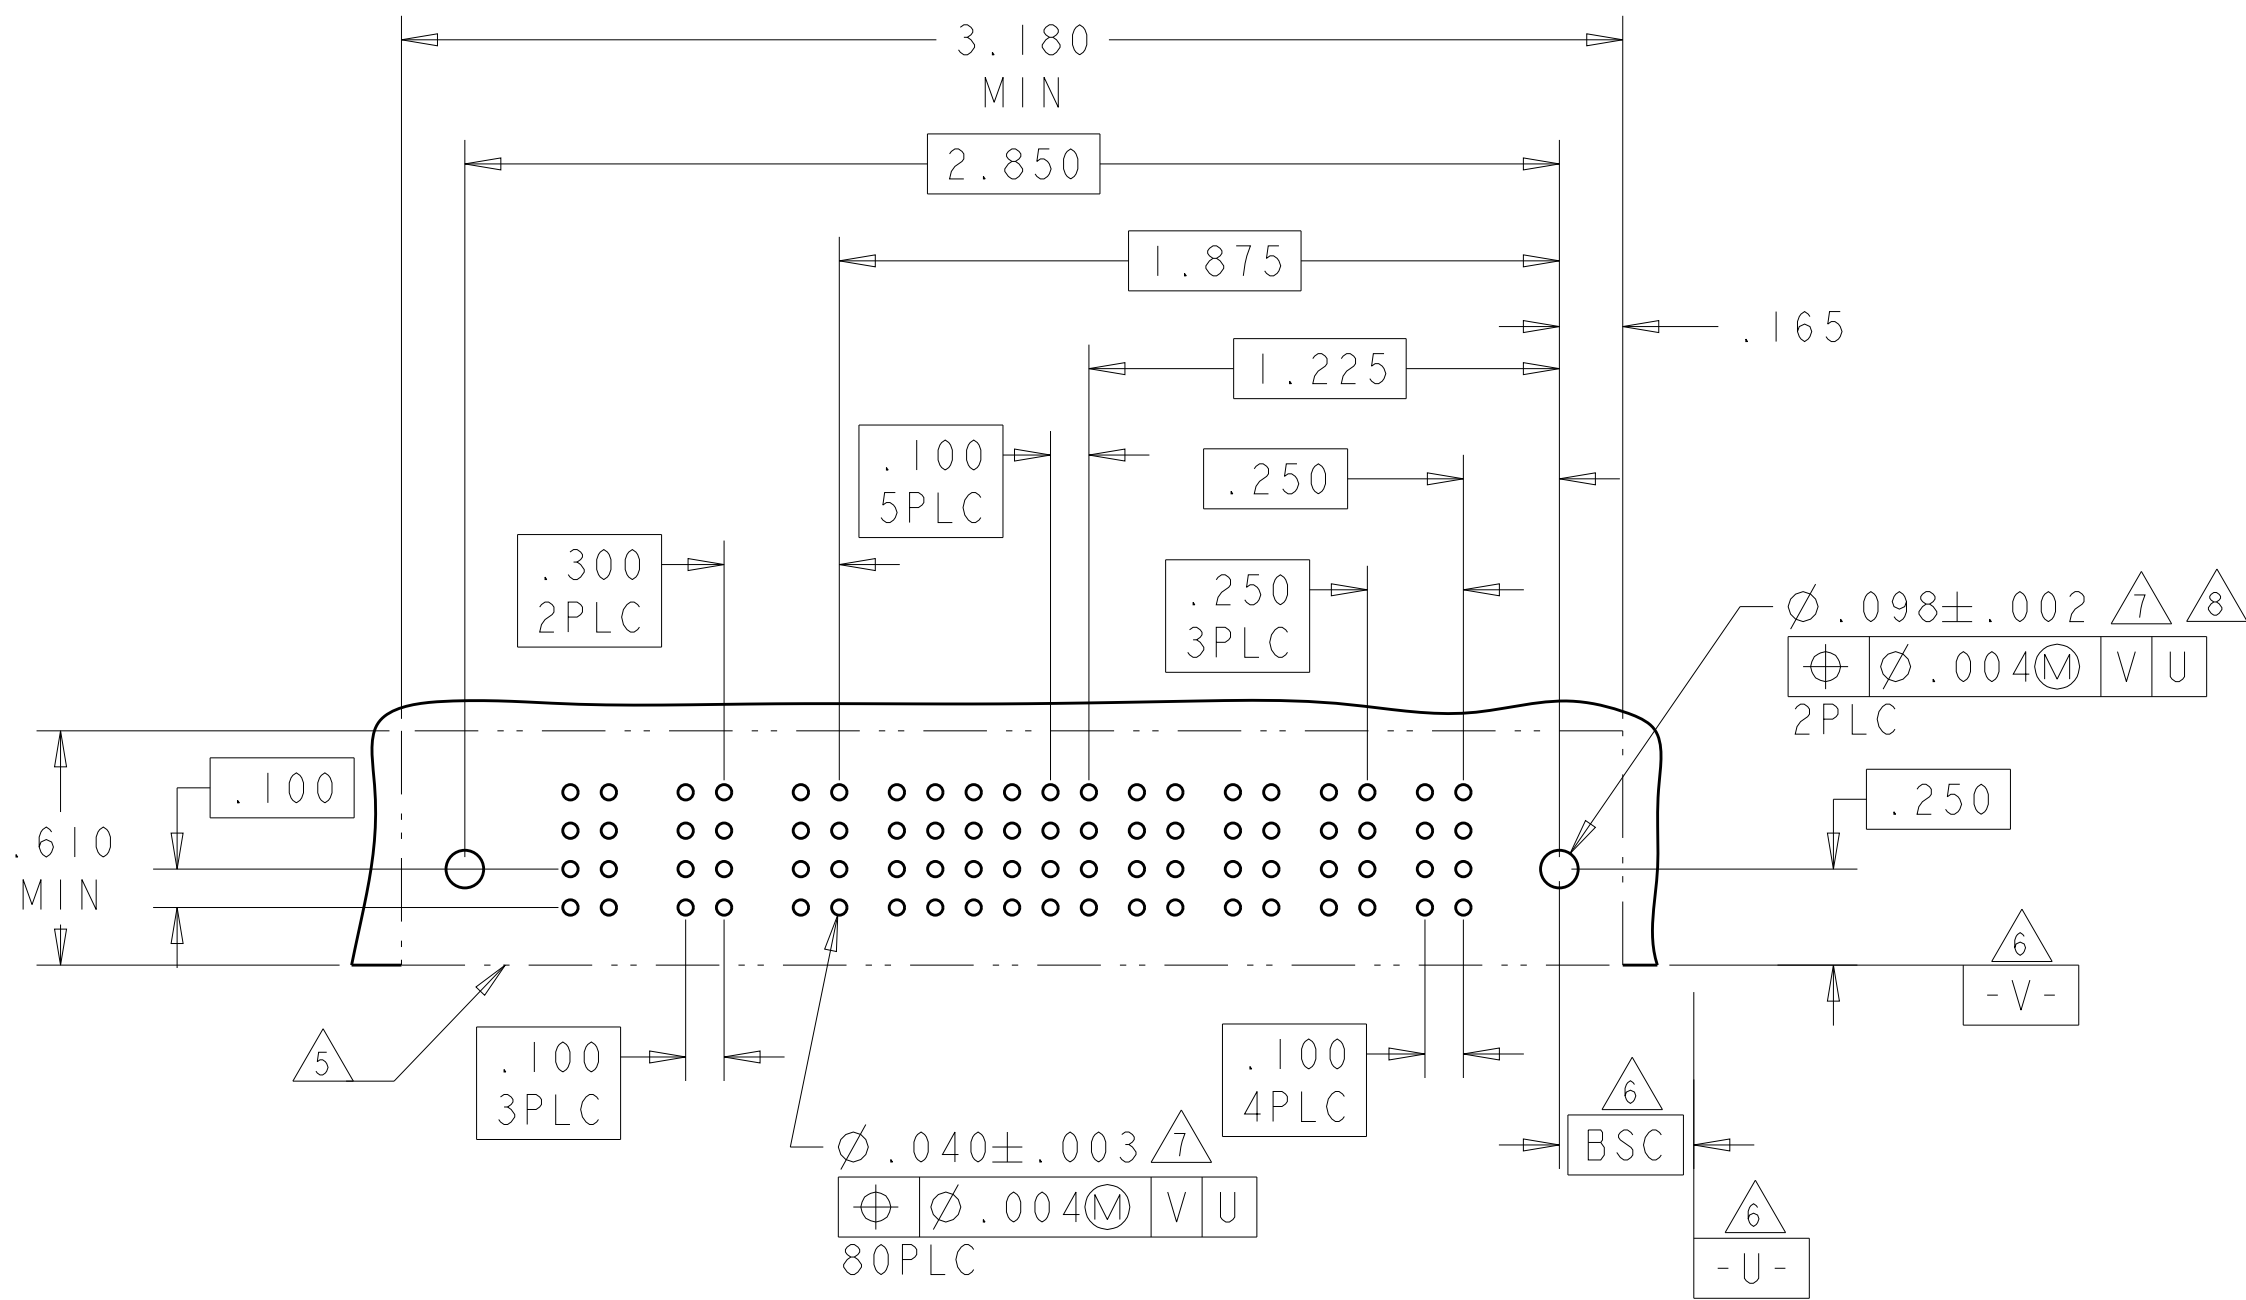4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER		SIGNAL			POWER						
			P6	P5	3	2	1	P4	P3	P2	P1			
3-6450170-3	D													
	C													
	B													
	A													
	4ACP + 12S + 2P													

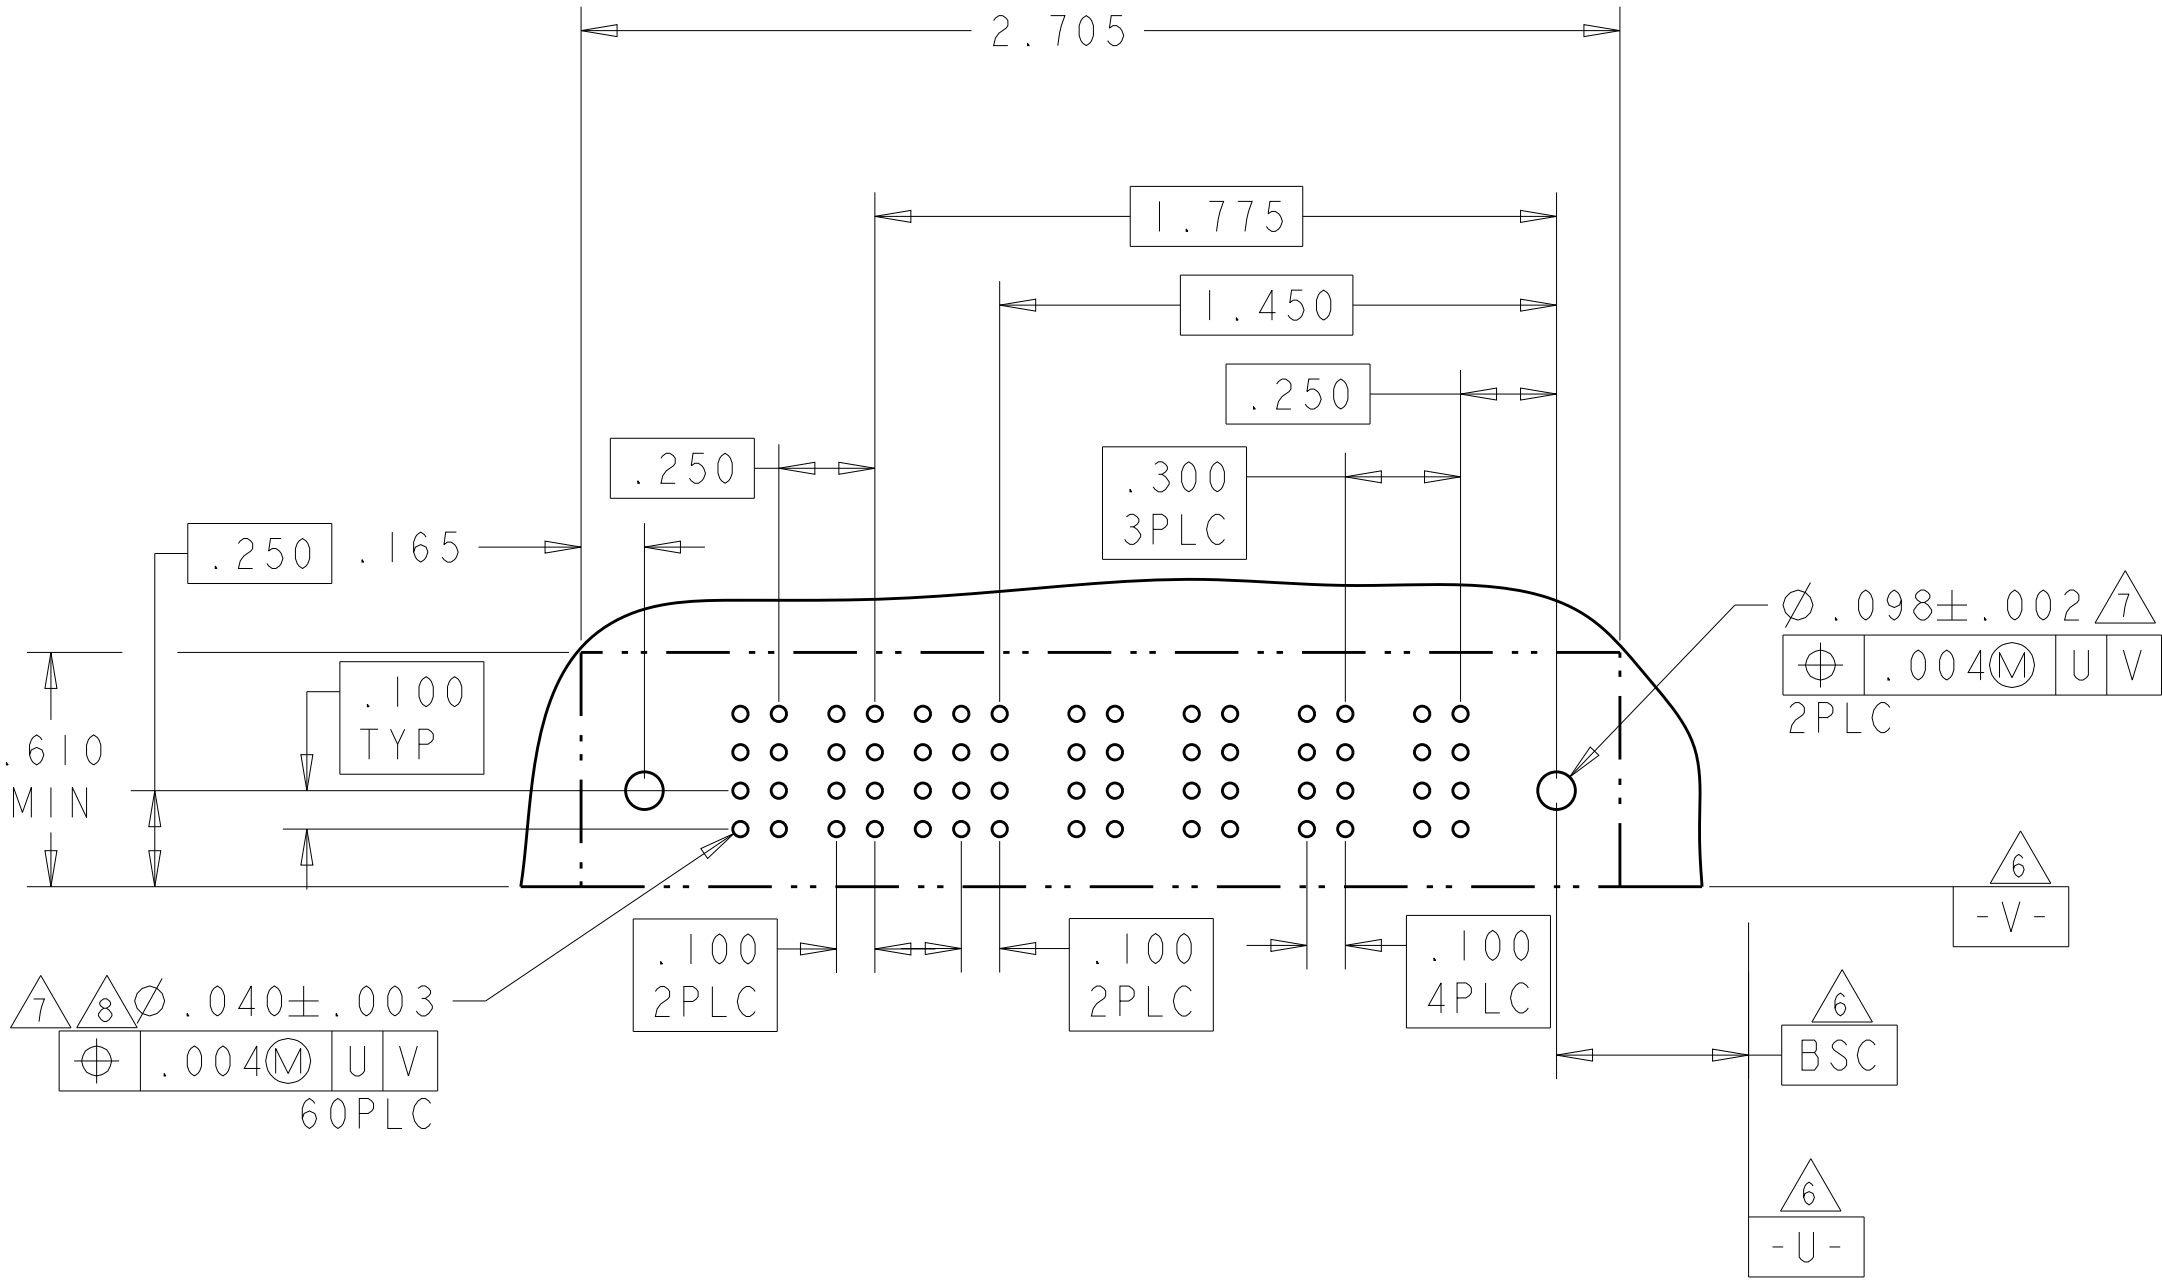

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

R.GRZYBOWSKI

21FEB05

CHK

M.PERCHERKE

21FEB05

APVD

M.PERCHERKE

-

TE Connectivity

RIGHT ANGLE RECEPTACLE ASSEMBLY
WITH GUIDES
MULTI-BEAM XL

DIMENSIONS:

INCHES

0 PLC

1 PLC

2 PLC

3 PLC

4 PLC

ANGLES

FINISH

±"

±.01

±.005

±.0020

#2°

-

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

PRODUCT SPEC

108-1973

APPLICATION SPEC

114-13038

WEIGHT

-

CUSTOMER DRAWING

NAME

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A100779

C=6450170

SCALE

4:1

SHEET

9

OF

13



REV

J5


LOC		DIST		REVISIONS				
ES	00	P	LTR	DESCRIPTION		DATE	DWN	APVD
		-		SEE SHEET 1		-	-	-

PART NUMBER	ROWS		POWER					SIGNAL			POWER		
			P7	P6	P5	P4	P3	3	2	1	P2	P1	
3-6450170-4	D		RM	RM	RM	RM	RM	H	H	H	RM	RM	
	C							G	G	G			
	B							F	F	F			
	A							E	E	E			
2P + 12S + 5P													


PART NUMBER	ROWS		POWER		SIGNAL		POWER		
			P 4	P 3	2	1	P 2	P 1	
3-6450170-5	D		RA	RA	H	H	RM	RM	
	C				G	G			
	B				F	F			
	A				E	E			
2P + 8S + 2P									

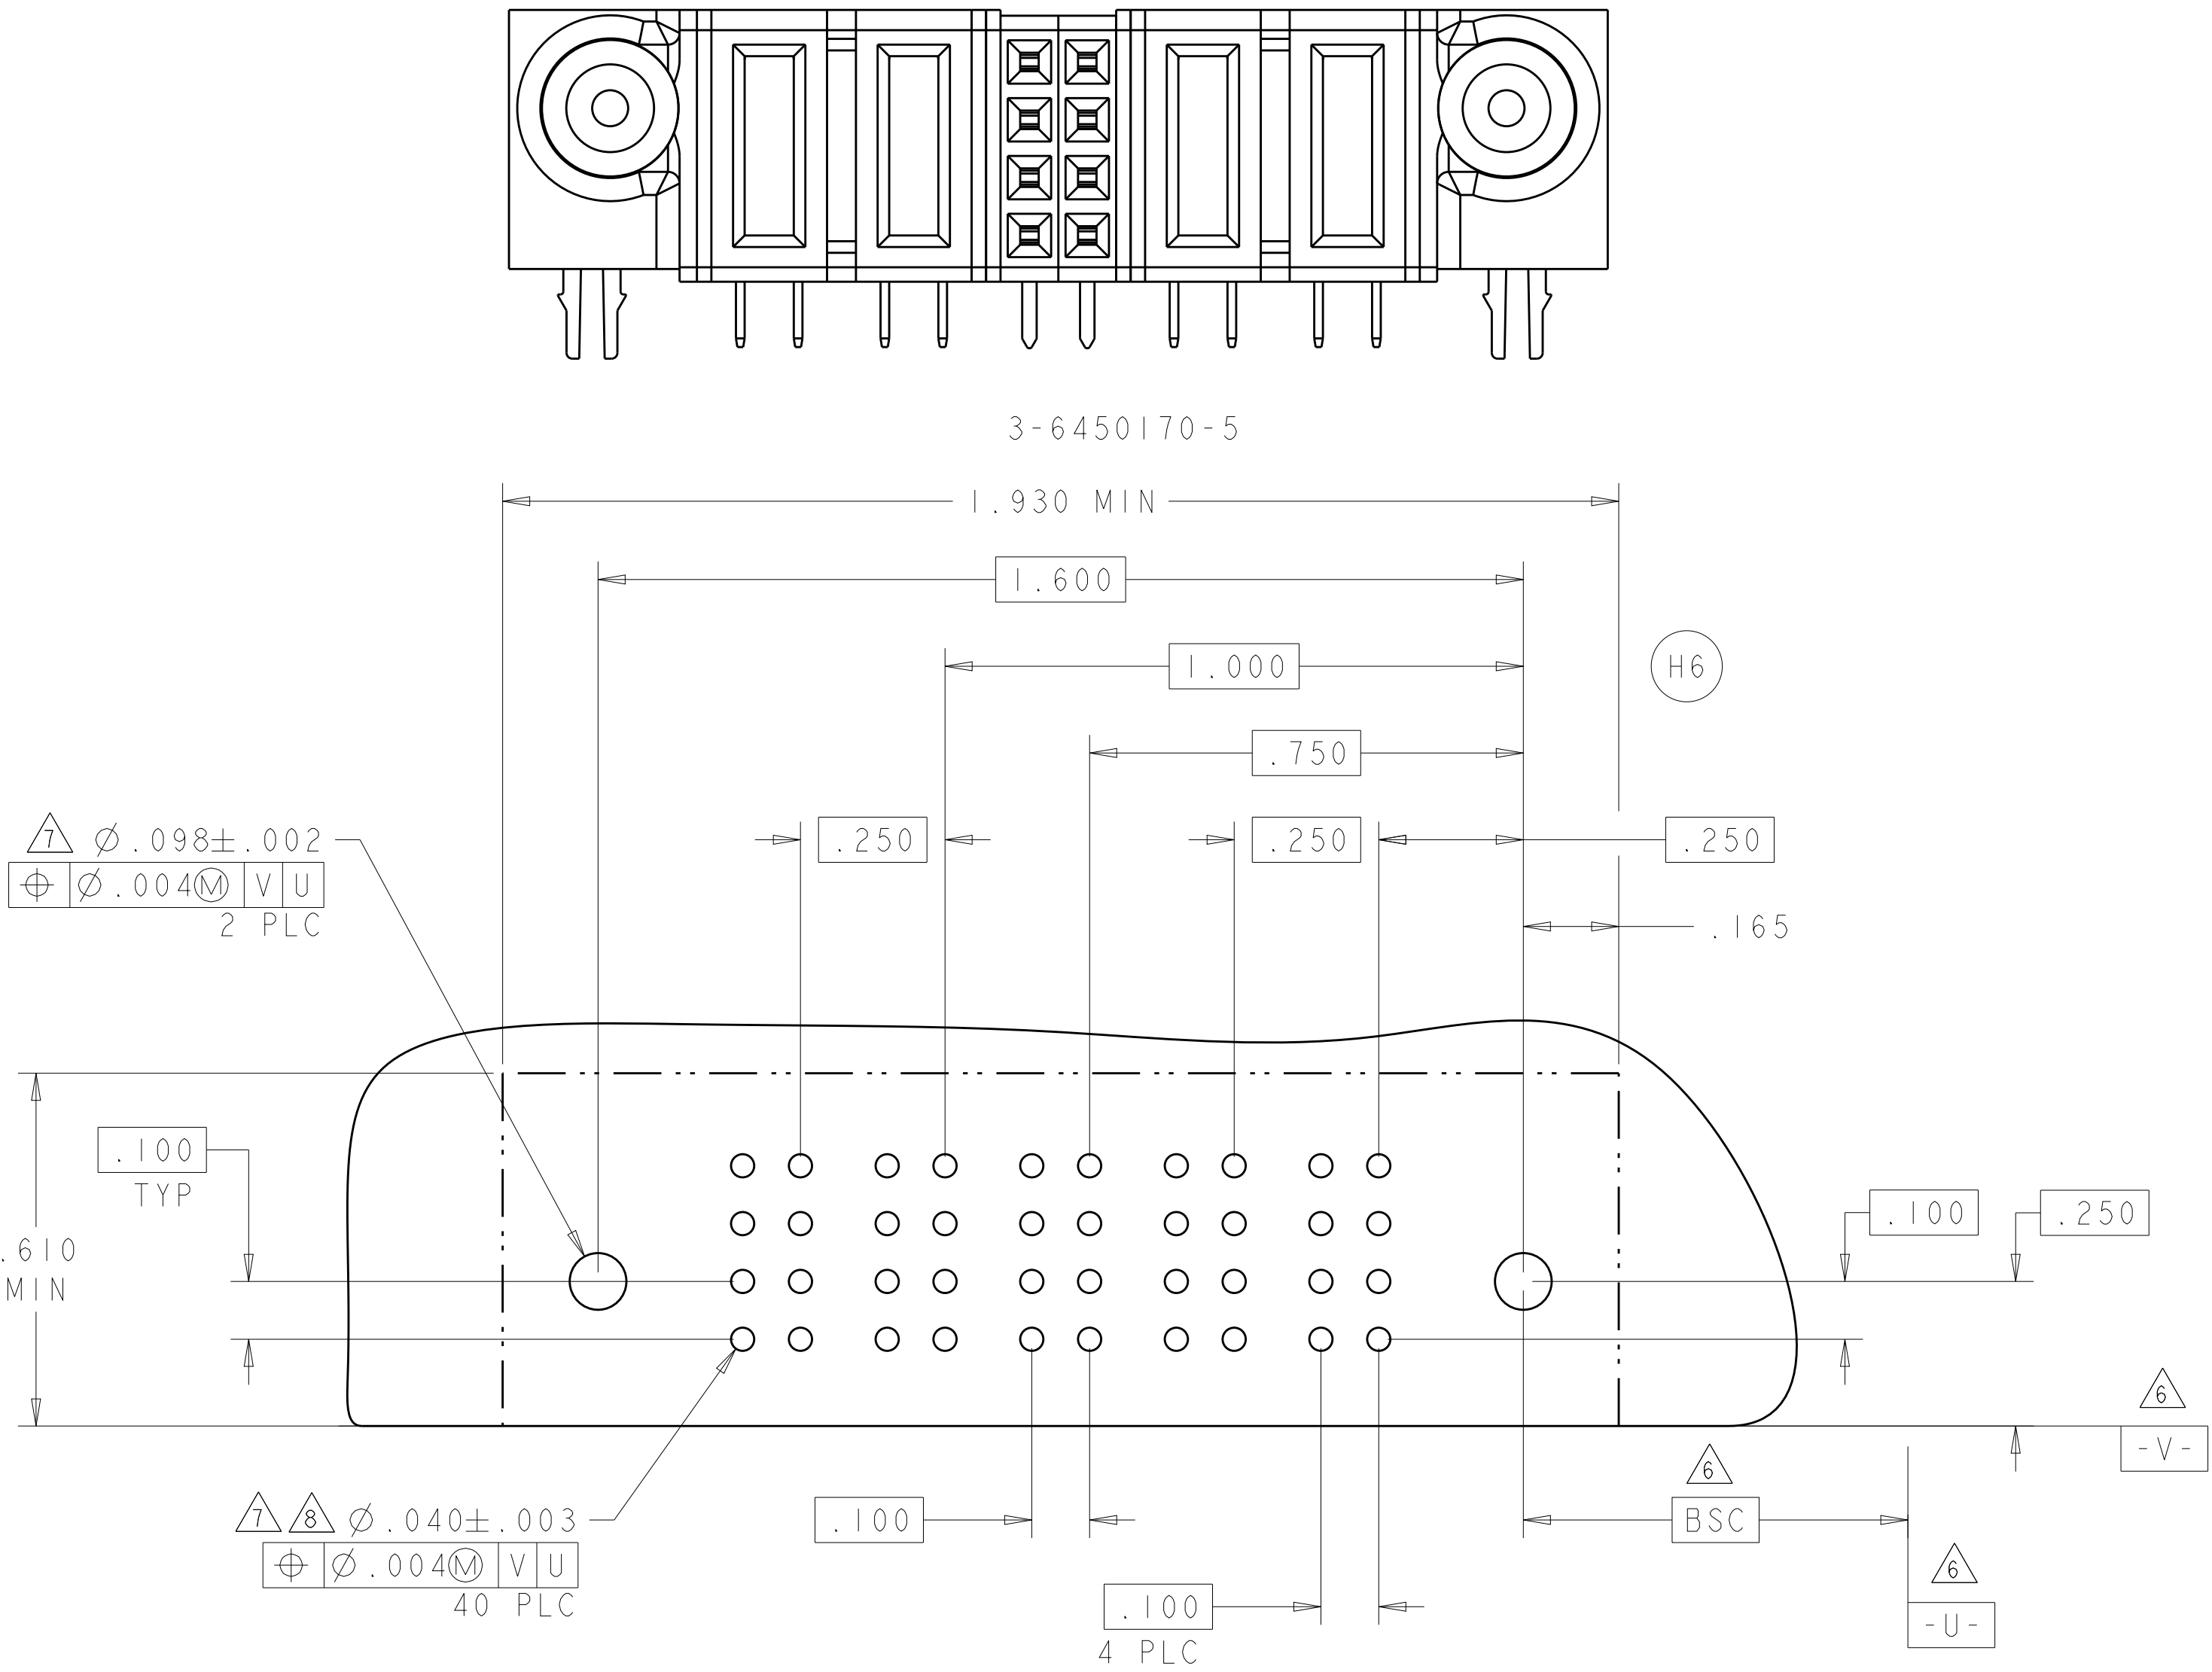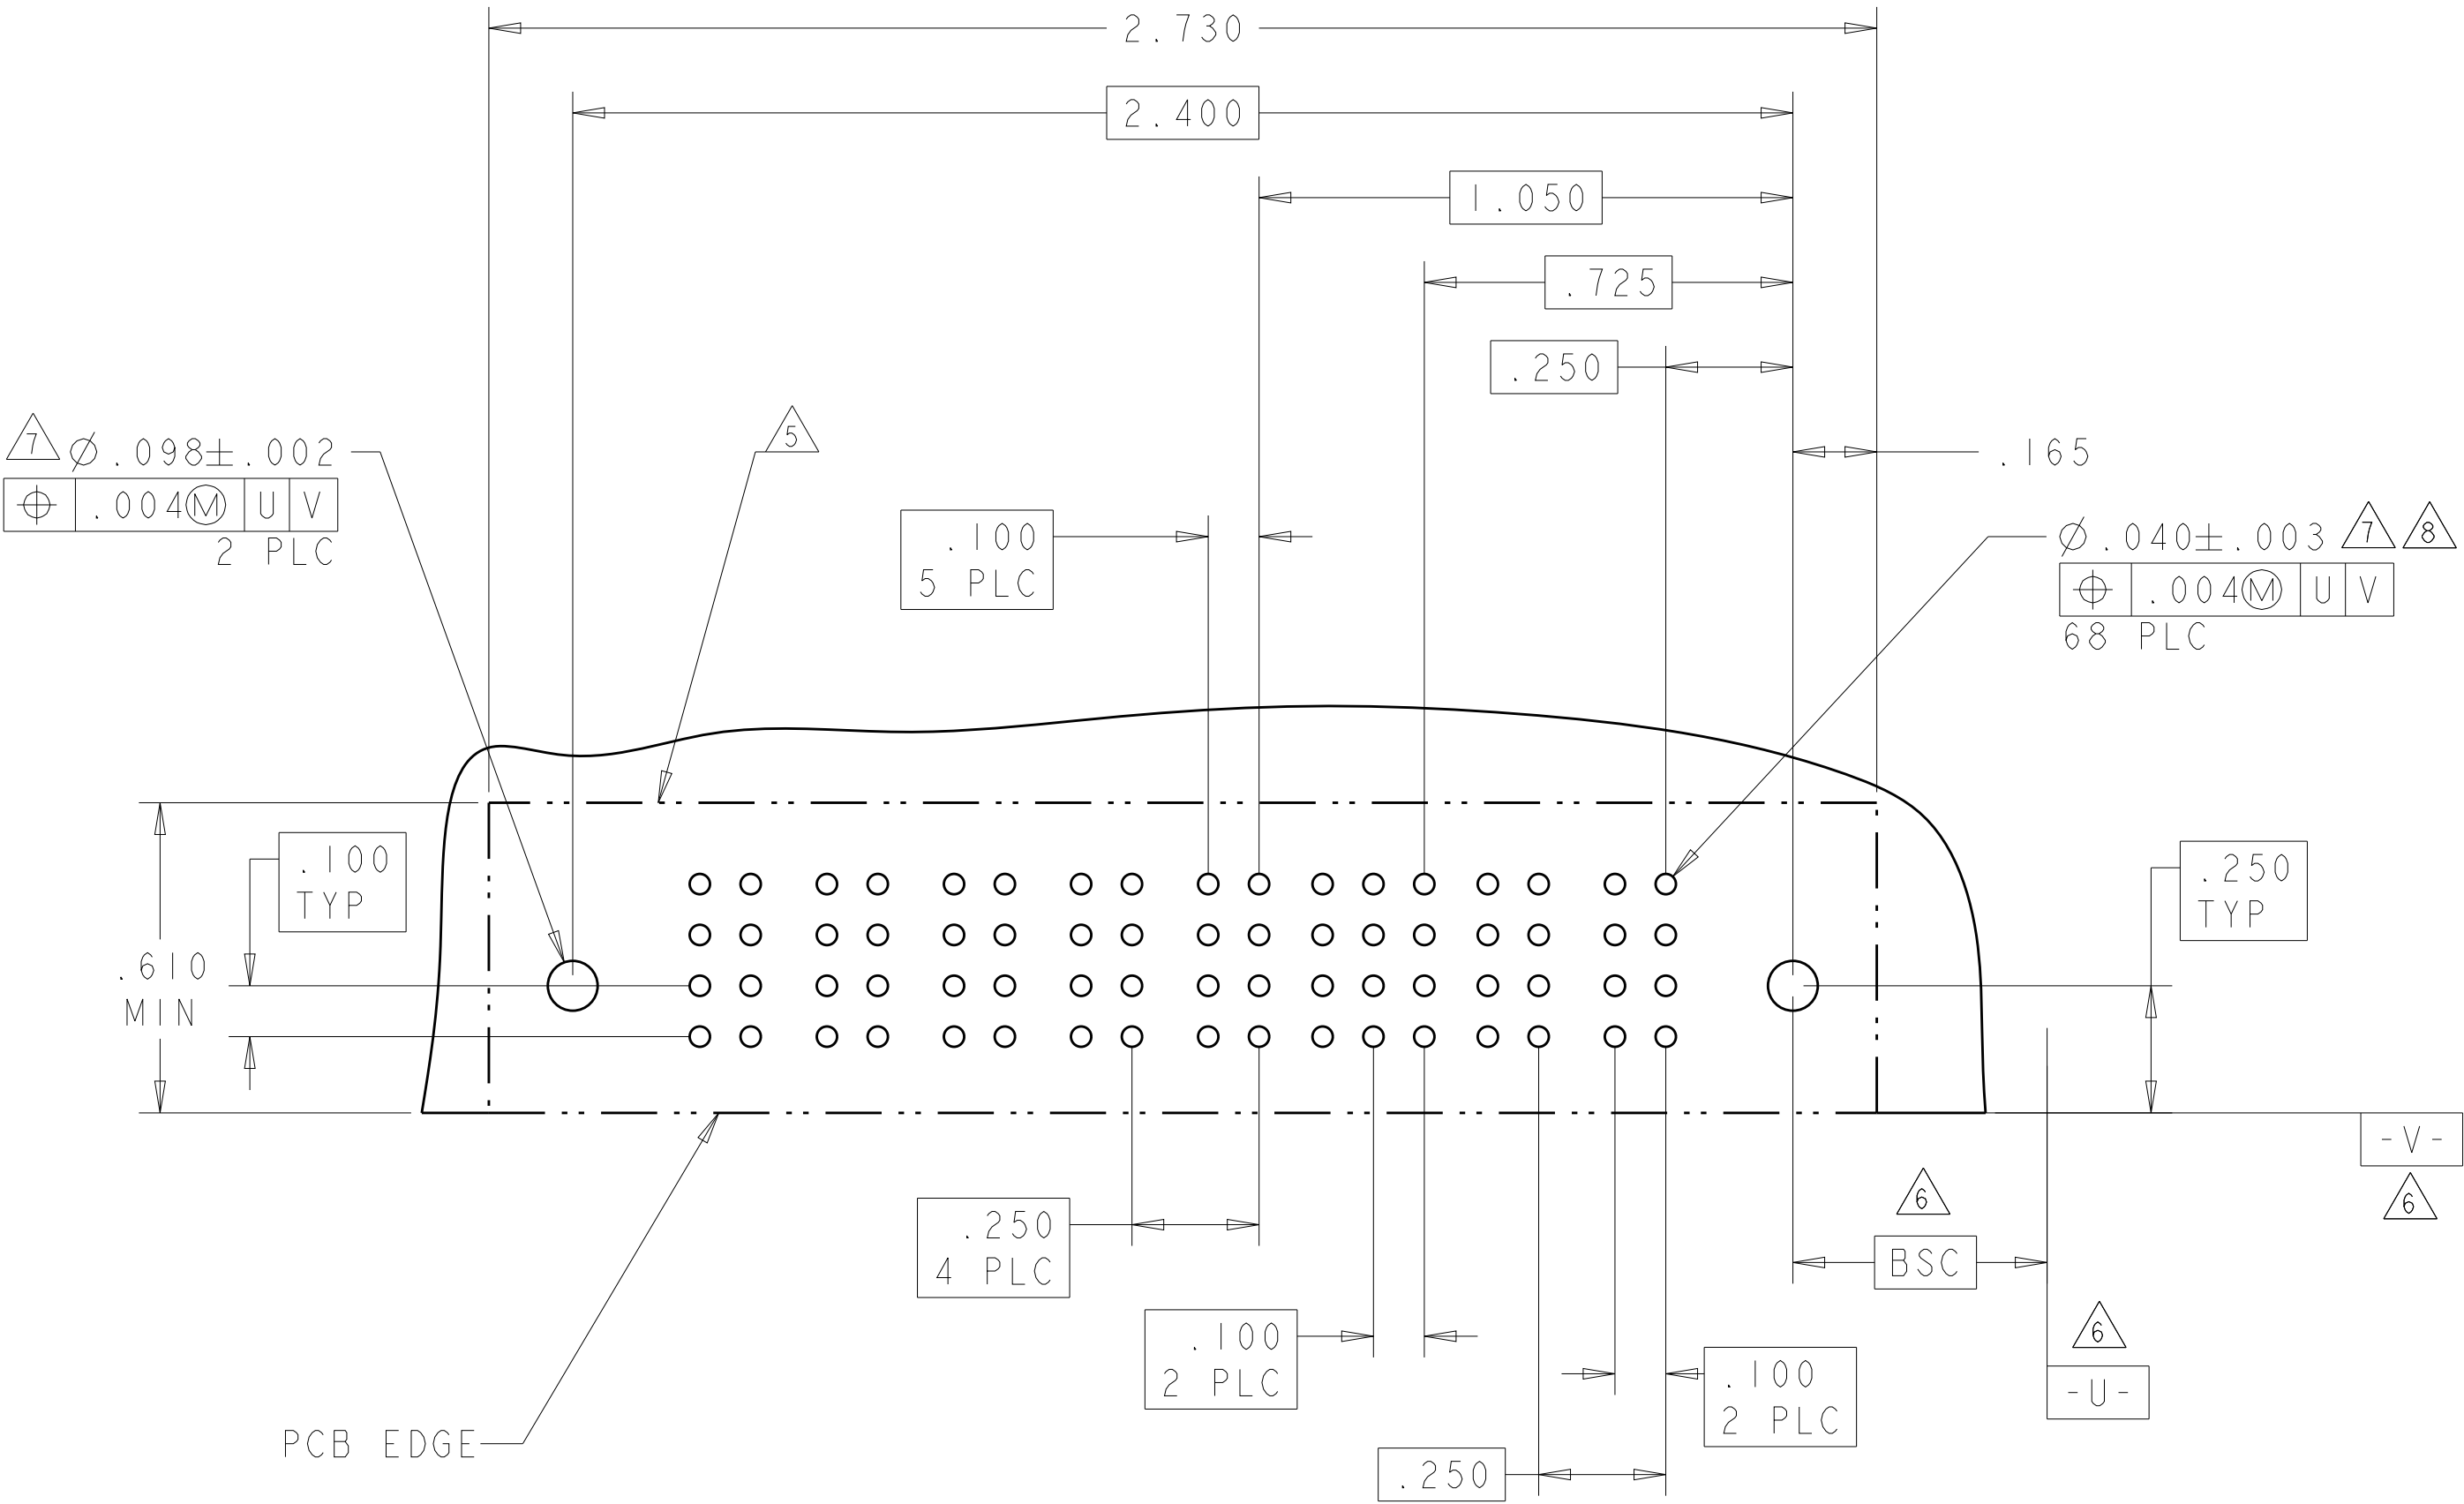

PART NUMBER	ROWS		POWER	SIGNAL								POWER	
			P2	8	7	6	5	4	3	2	1	P1	
3-6450170-7	D C B A			H	H	H	H	H	H	H	H		
				G	G	G	G	G	G	G	G		
				F	F	F	F	F	F	F	F		
				E	E	E	E	E	E	E	E		
IP + 32S + IP													

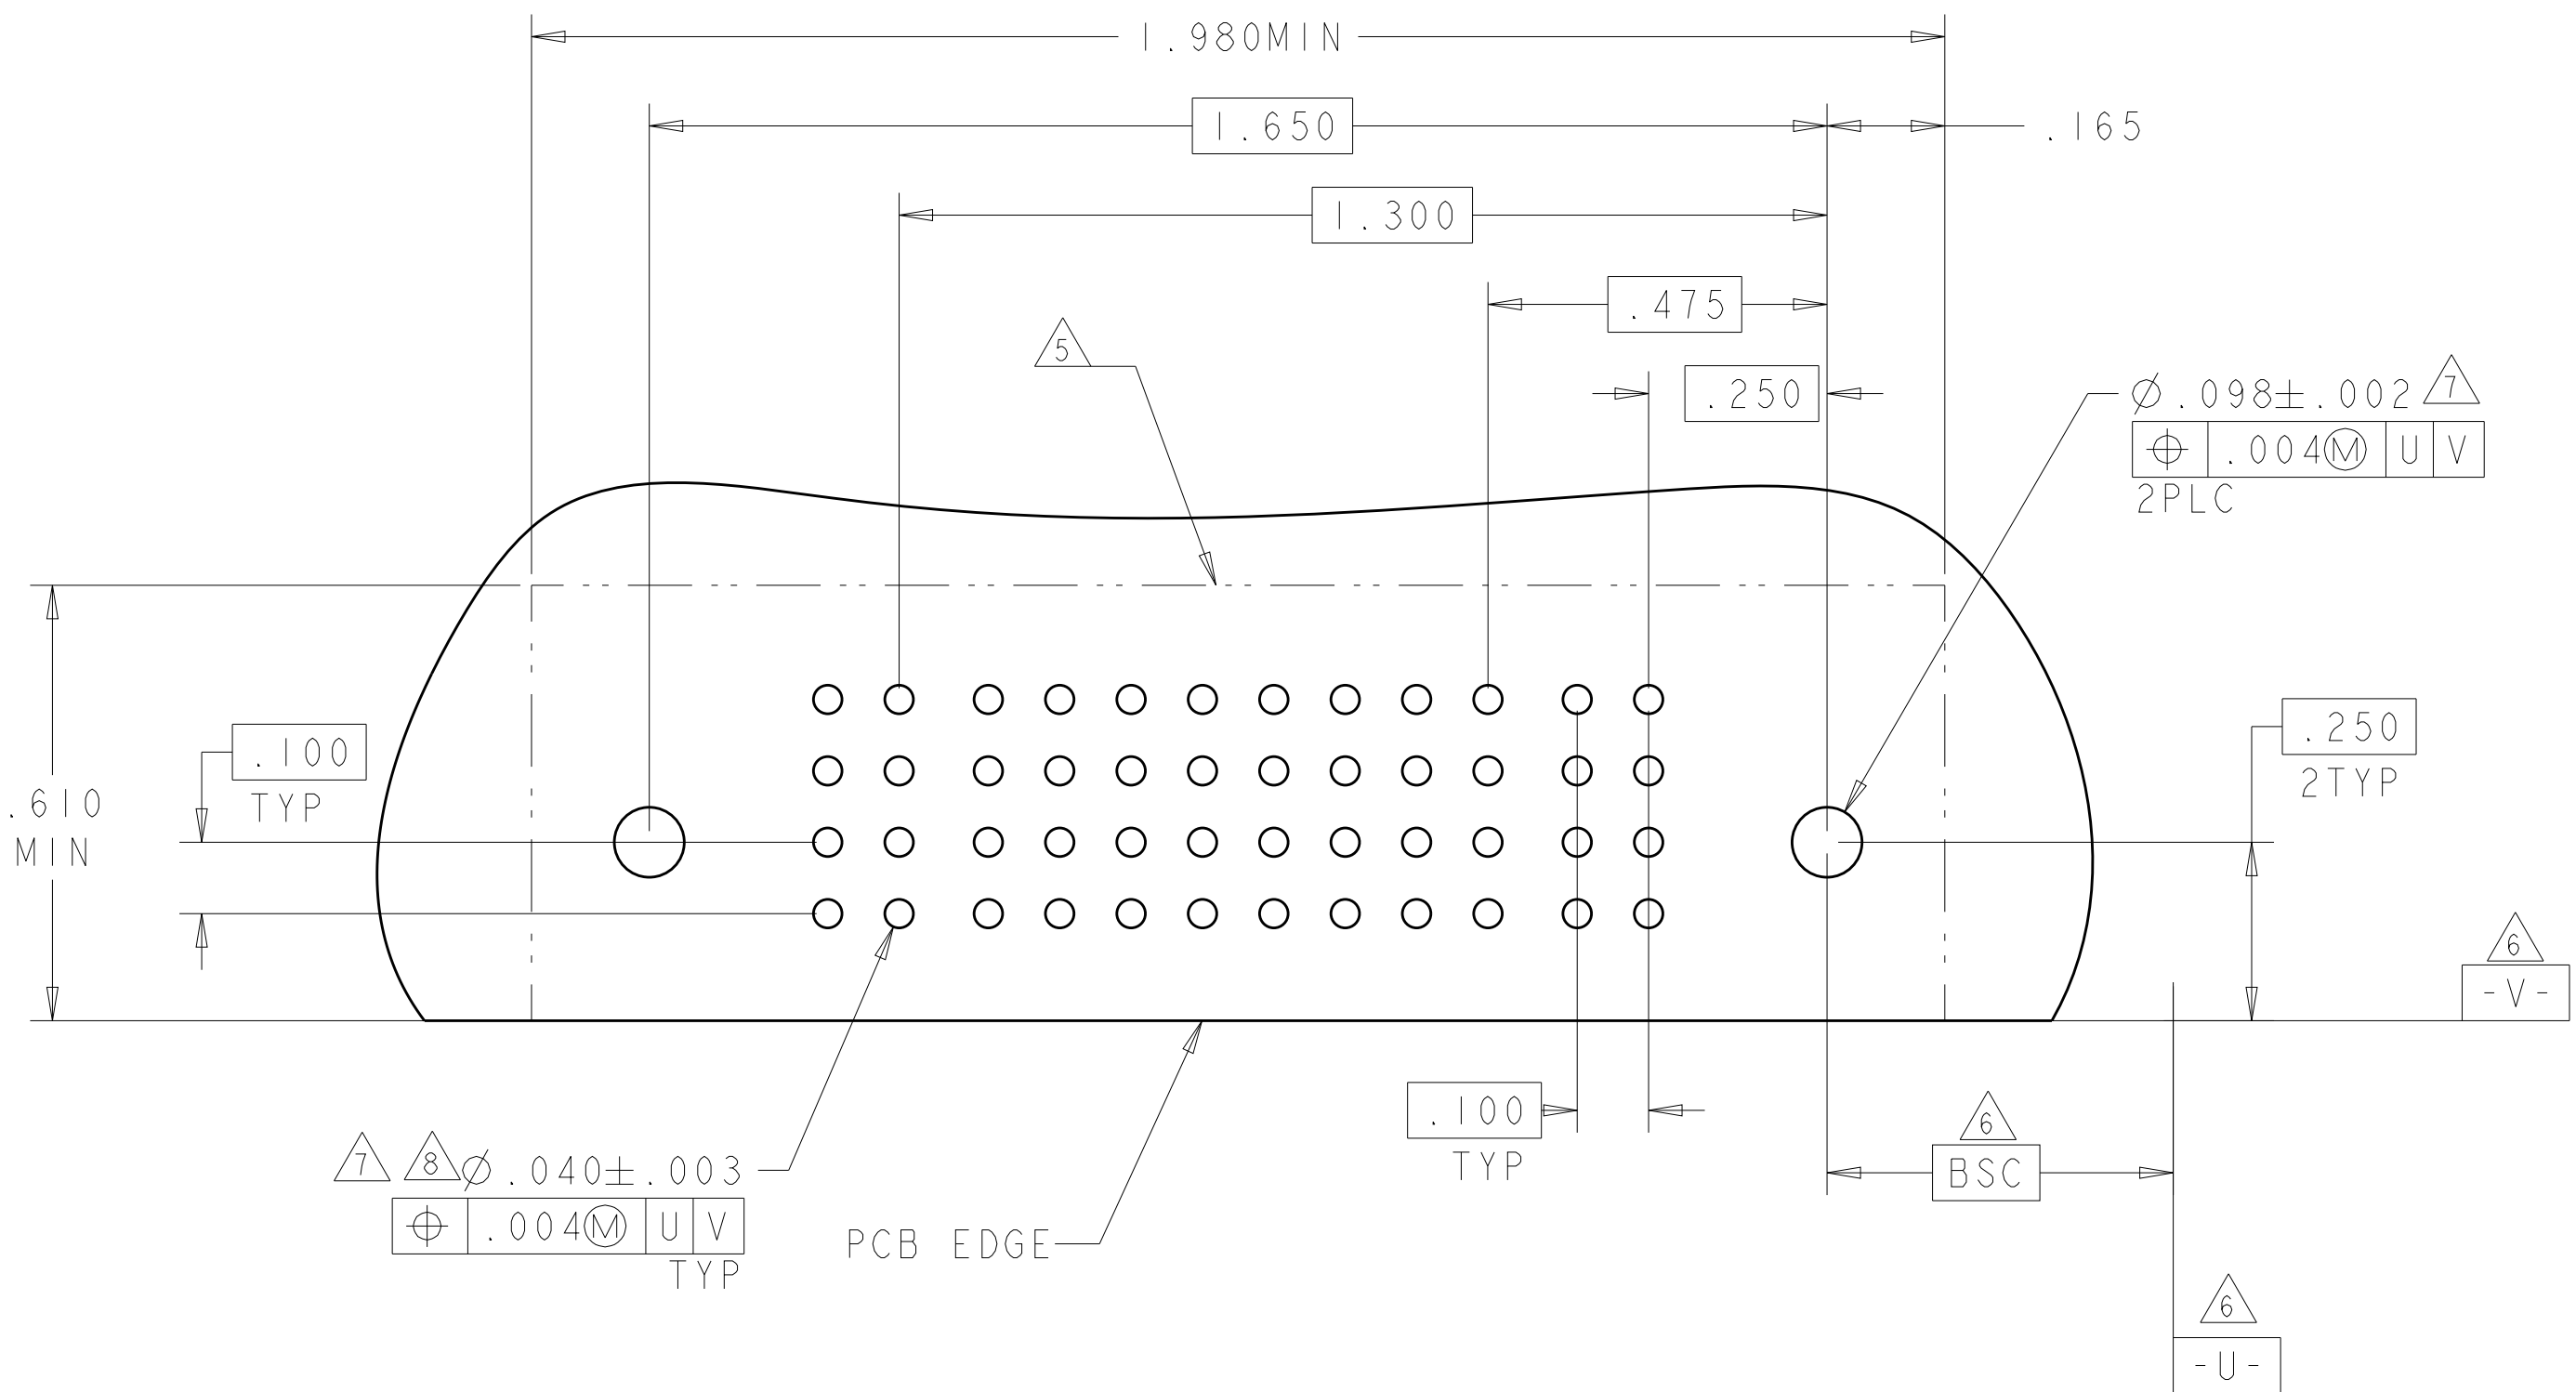4805 (3/11)

PART NUMBER	ROWS		POWER		SIGNAL		POWER			
			P5	P4	2	1	P3	P2	P1	
3-6450170-9	D C B A				H	H				
					G	G				
					F	F				
					E	E				
3ACP + 8S + 2P										

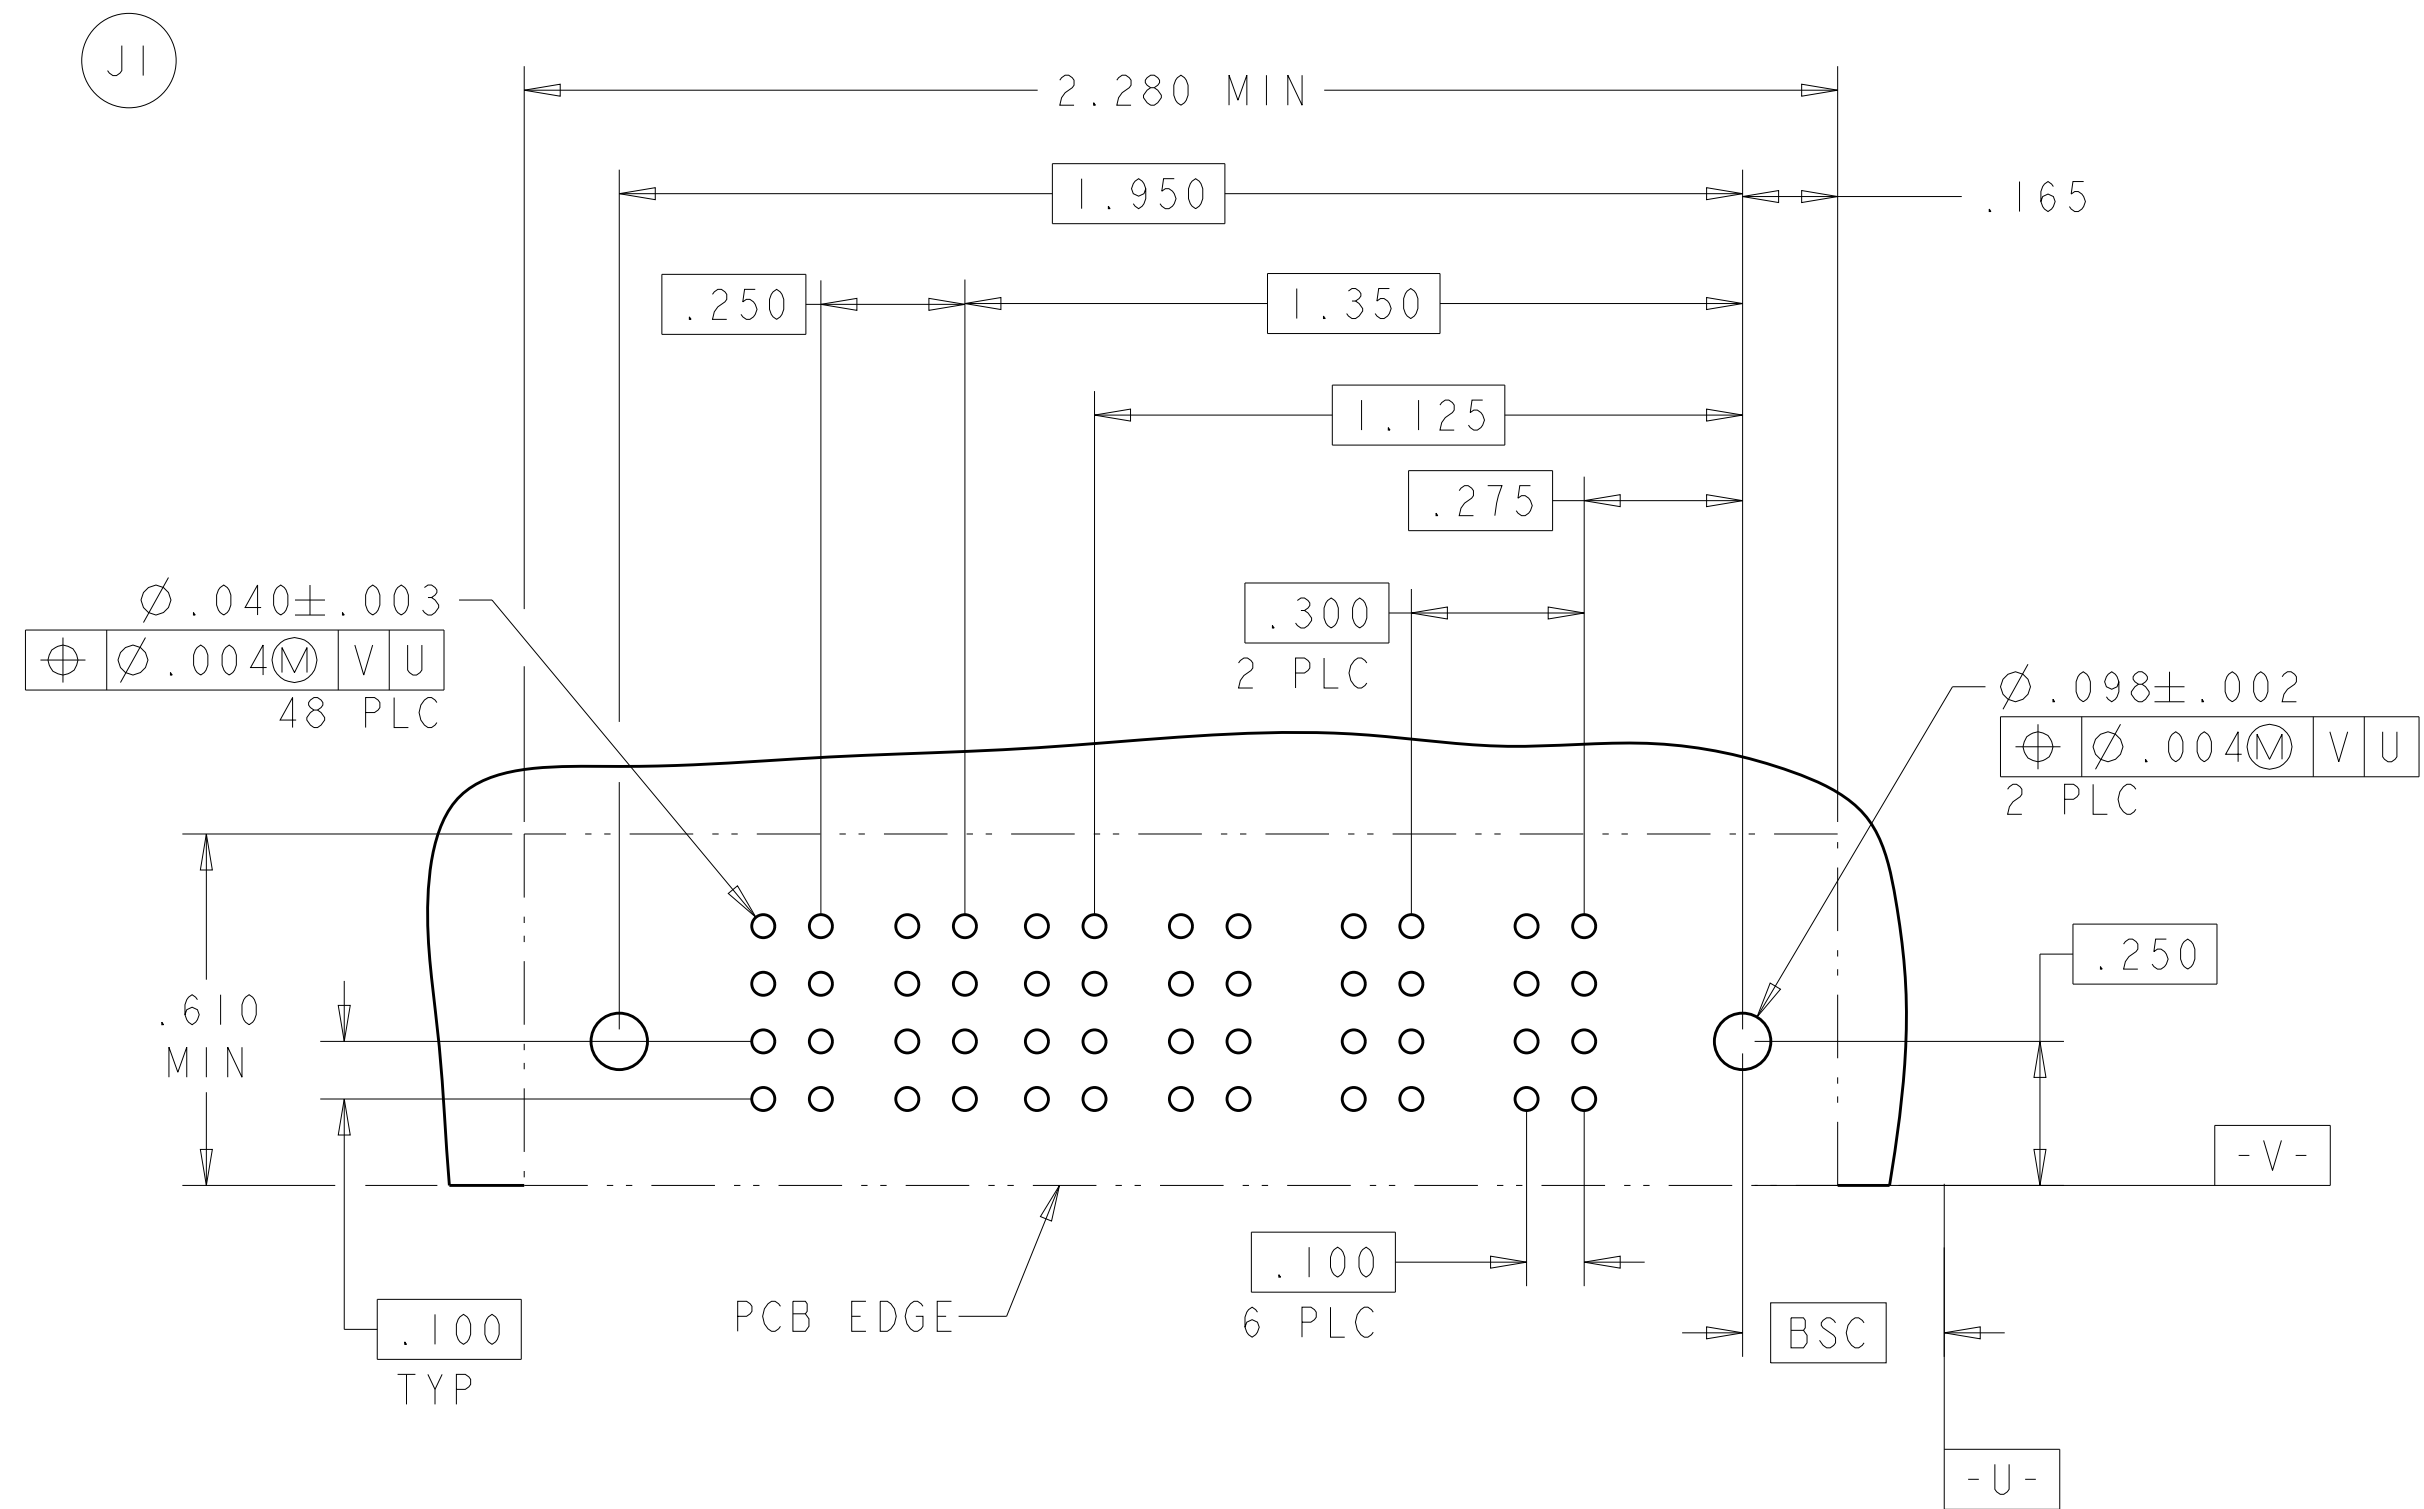

TE RECOMMENDED PCB LAYOUT

4805 (3/11)

PART NUMBER	ROWS		POWER							SIGNAL						POWER		
			P8	P7	P6	P5	P4	P3	6	5	4	3	2	1	P2	P1		
4-6450170-1	D		RM		RM		RA		H	H	H	H	H		RM	RM		
	G								G	G	G	G						
	F								F	F	F	F						
	E								E	E	E	E						
2P + 24S + 6P			HD														HD	

[illegible]4805 (3/11)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9