

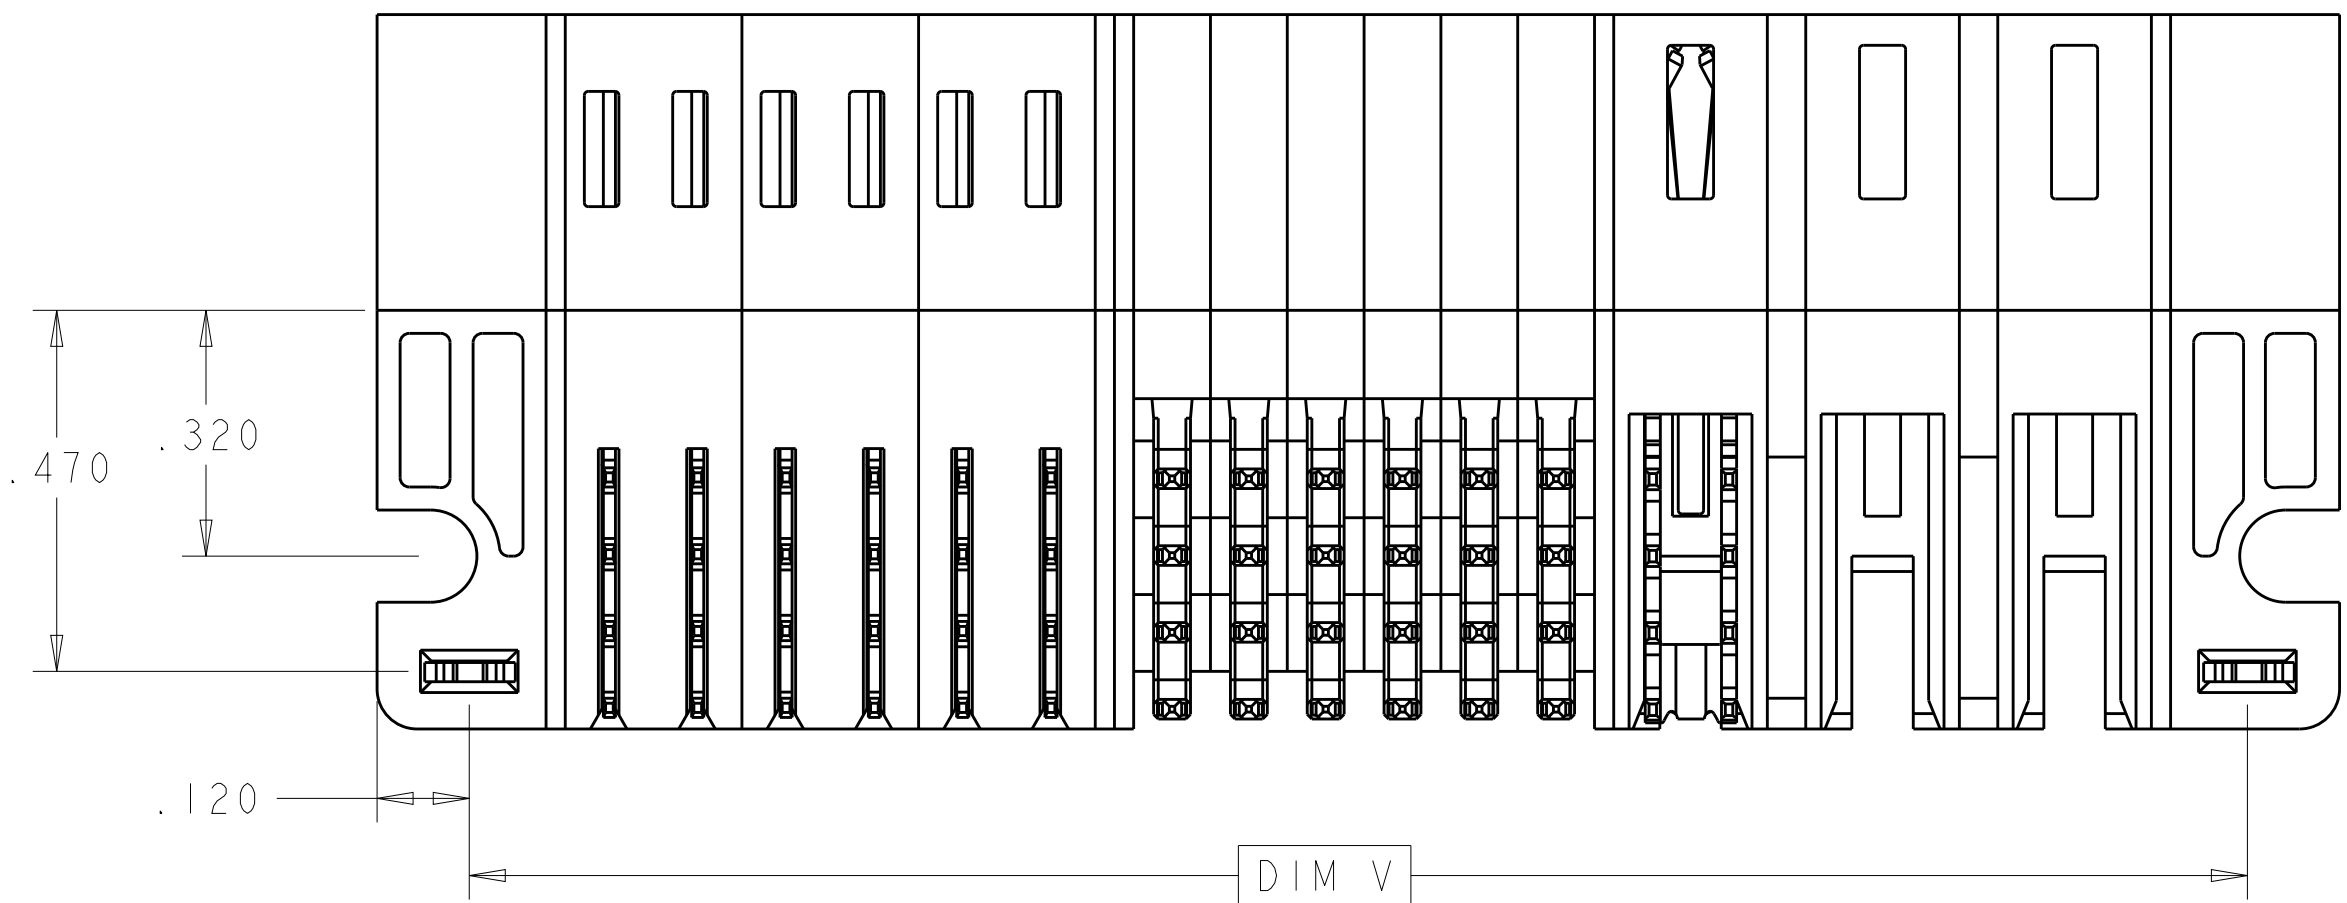
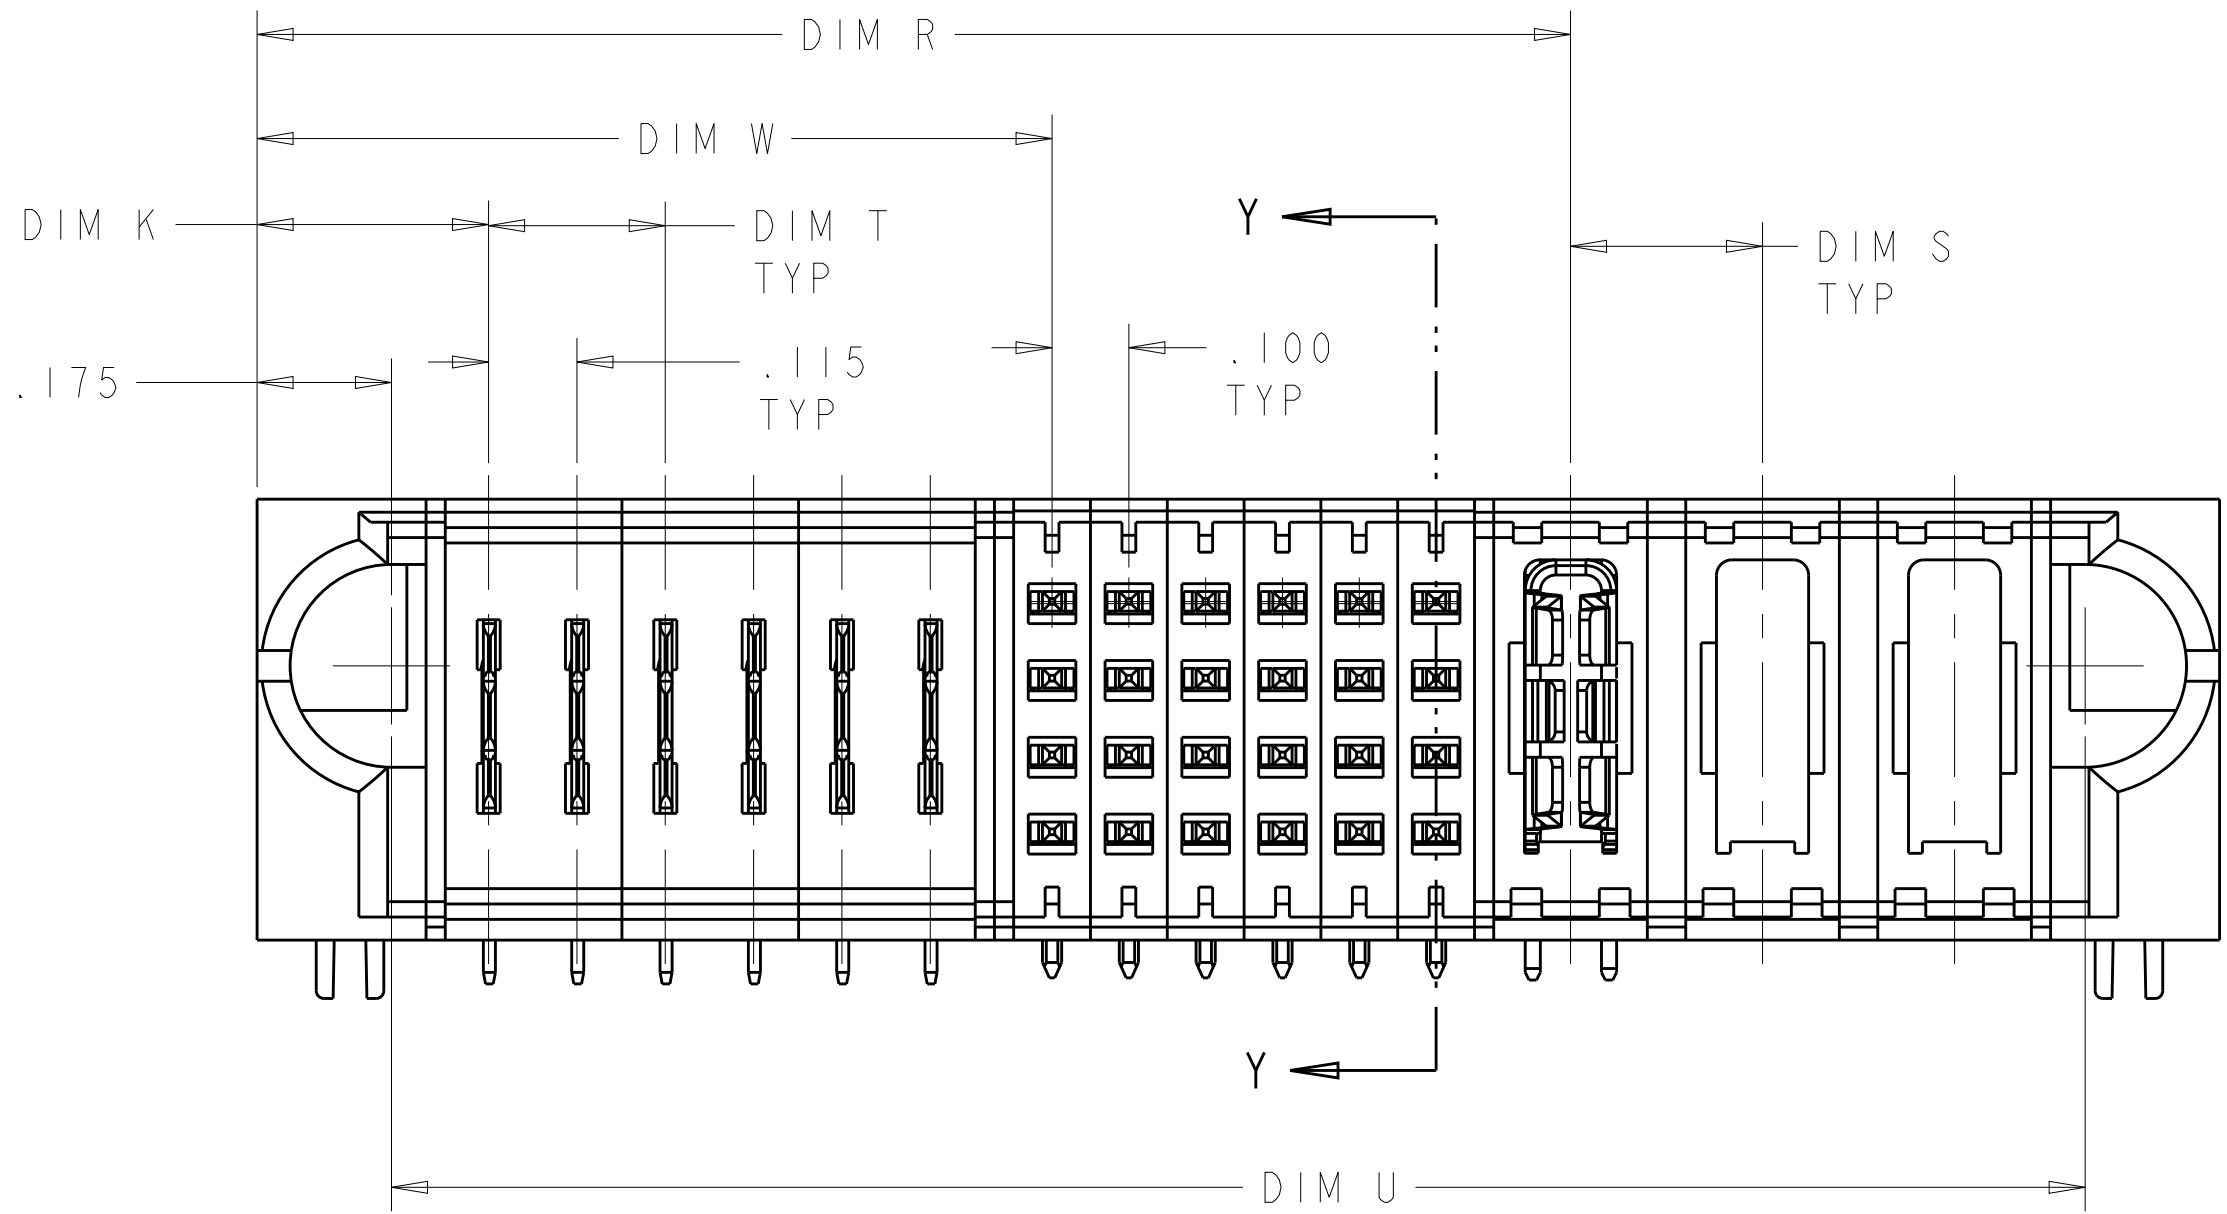
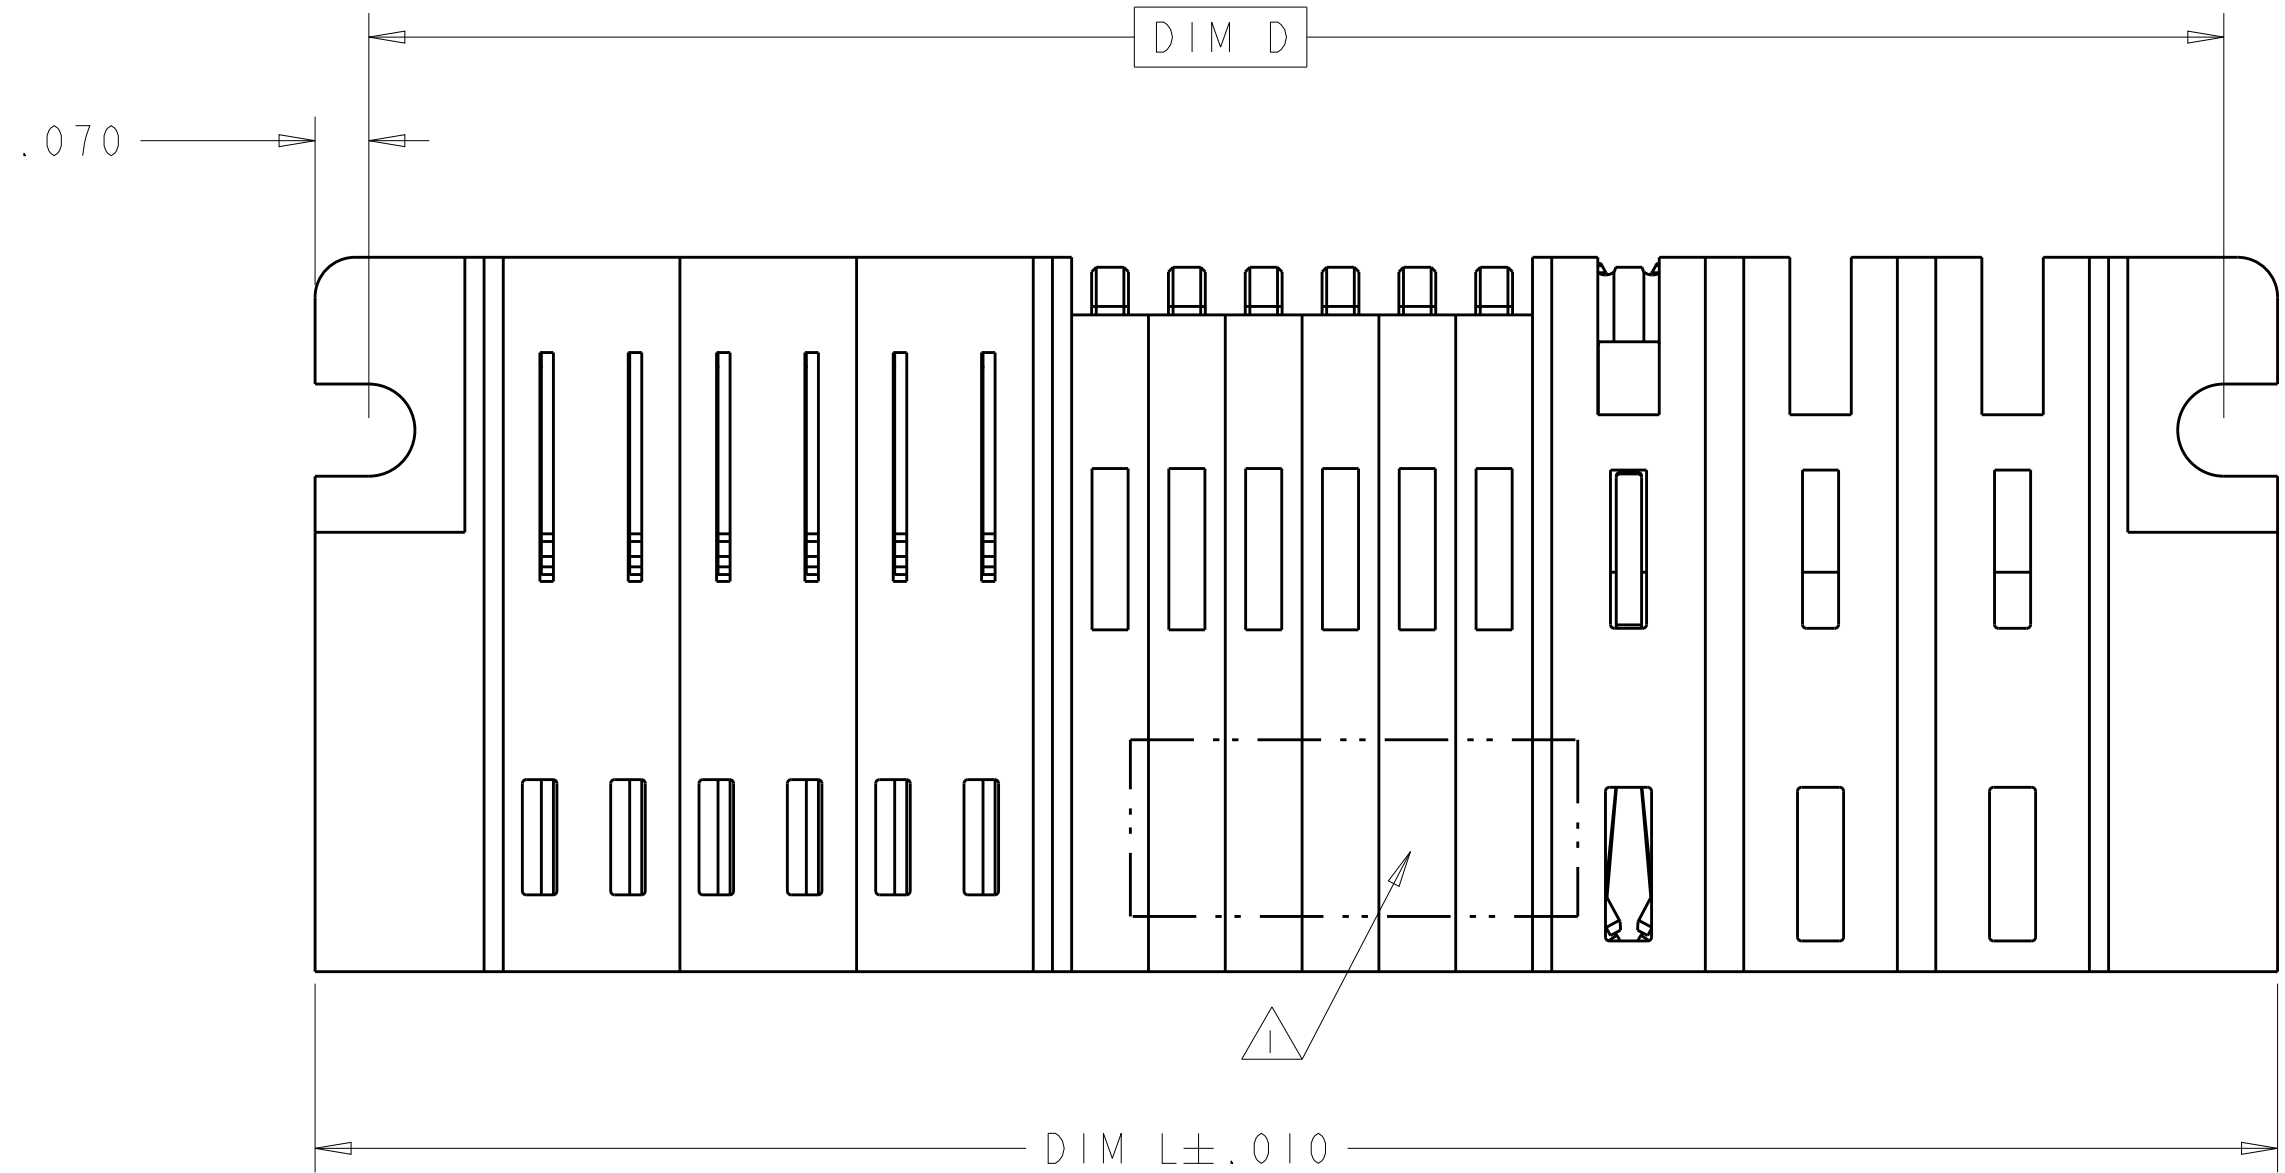


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			R9	REVISED 8-1	05NOV2014	CZ	SZ
			S	ADD NEW DASH NUMBER 8-2	07FEB2015	CZ	SZ
			S2	REVISED 8-2 CUSTOMER	09MAR2015	CZ	SZ

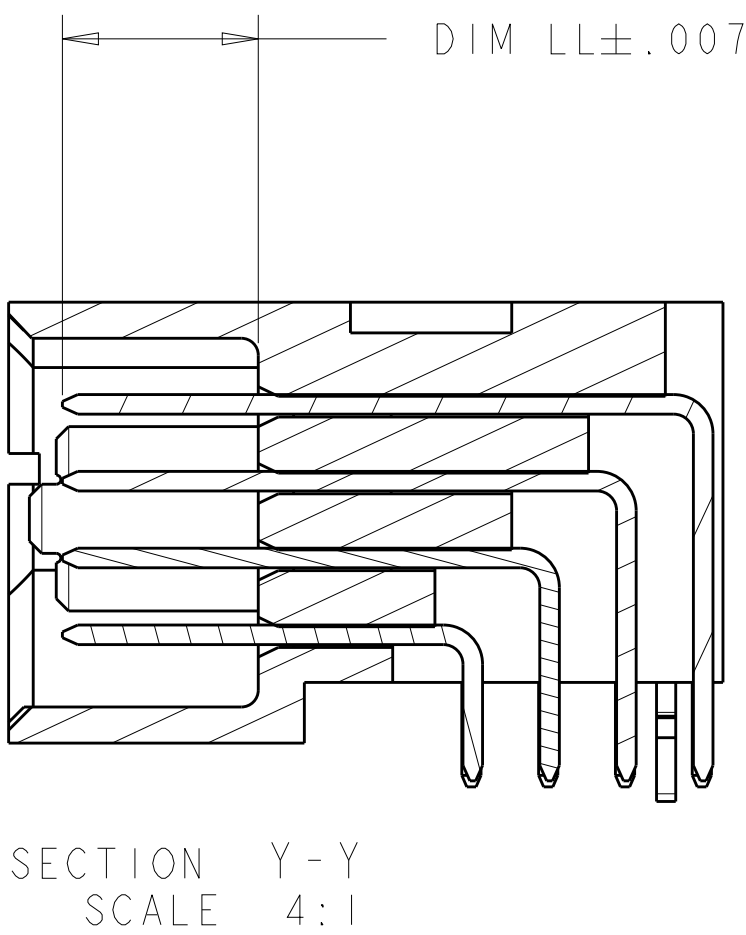

- 1 "AMP", PART NUMBER AND DATE CODE TO BE MARKED IN AREA SHOWN
PARTS UNDER 2.00 LONG MAY BE MARKED ON BOTH SIDES
- 2 MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, UL94 V-0
SIGNAL CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- 3 CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA
OF POWER AND SIGNAL CONTACTS
- 4 MECHANICAL CONNECTOR KEEP OUT ZONE
- 5 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 6 PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES
- 7 PCB - 0.0453 ±.0010 DRILLED HOLES PLATED WITH .0003 MIN Sn
OVER .001 TO .003 Cu PLATING TO ACHIEVE A .040 ±.030 HOLE
- 8 VARIABLE DIMENSIONS SHOW ON TABLE OR PART VIEW
- 9 REFER TO PAGE 10 FOR DETAIL DIMENTIONS.

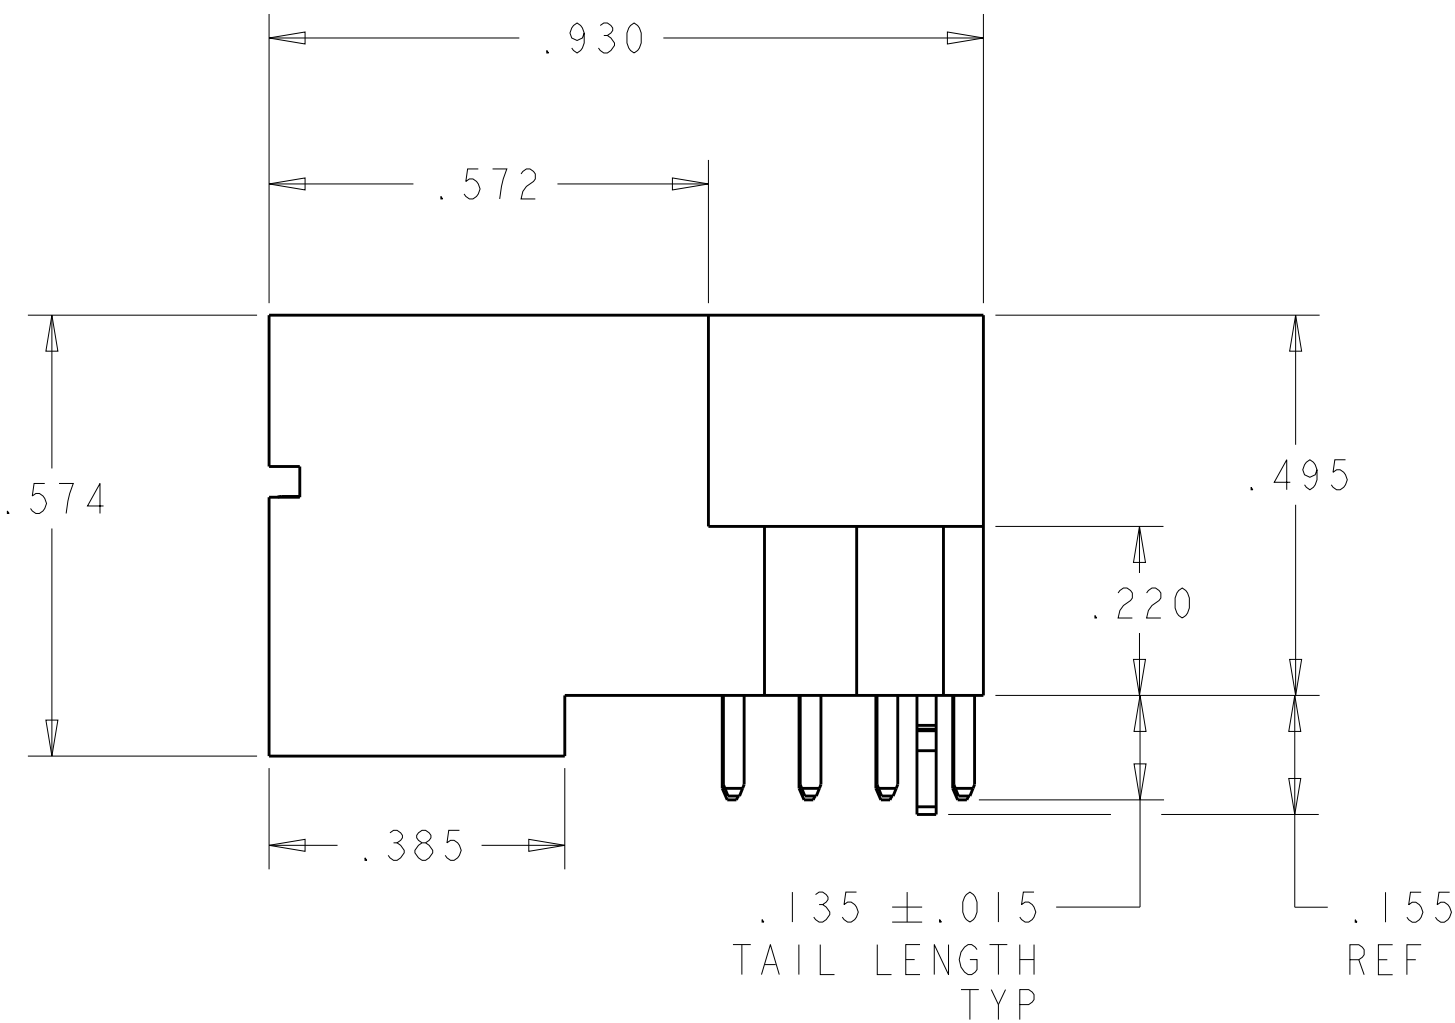

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.ZHAO	10APR2007	TE Connectivity	
		CHK S.ZHAO	10APR2007		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ±"		PRODUCT SPEC	
		1 PLC ±.01		108-2292	
		2 PLC ±.01		APPLICATION SPEC	
		3 PLC ±.005		114-13251	
		4 PLC ±.0020		WEIGHT	
MATERIAL		FINISH		CUSTOMER DRAWING	
: 2		: 3		SCALE 4:1 SHEET 1 OF 42 REV S2	


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

2.100	1.495	1.020	1.990	0.250	0.250	2.200	2.340	.3450	3P + 16S + 3P	7-6450830-3
1.000	.895	.570	.890	-	-	1.100	1.240	.345	1P + 8S + 1P	7-6450830-2
4.750	3.645	3.070	4.640	.250		4.850	4.990	.370	3ACP + 7P + 20S + 5P	7-6450830-1
3.850	3.4675	1.010	3.740	.230	.230	3.950	4.090	.2775	6LP + 96S + 4LP	7-6450830-0
3.850	3.4675	1.010	3.740	.230	.230	3.950	4.090	.2775	6LP + 96S + 4LP	6-6450830-9
2.420	2.0375	.780	2.310	.230	.230	2.520	2.660	.2775	4LP + 48S + 4LP	6-6450830-8
5.400	4.5575	1.700	5.290	.230	.230	5.500	5.640	.2775	12LP + 112S + 8LP	6-6450830-7
2.860	2.4775	1.820	2.750	.230	.300	2.960	3.100	.370	5ACP + 24S + 4LP	6-6450830-6
2.225	1.620	1.045	2.115	.250	.250	2.325	2.465	.345	3P + 20S + 3P	6-6450830-4
3.600	2.895	1.795	3.490	.300	.250	3.700	3.840	.345	6P + 40S + 3ACP	6-6450830-3
3.030		1.345 	2.920			3.130	3.270	.345 	5HDP + 24S + 1P + 7LP	6-6450830-2
1.135	.9825	.550	1.025	-	-	1.235	1.375	.2775	2LP + 16S + 2LP	6-6450830-0
3.200	3.120	2.370	3.090	-	.300	3.300	3.440	.320	7ACP + 24S + 1P	5-6450830-8
2.800	1.945	1.270	2.690	.250	.250	2.900	3.040	.345	4P + 24S + 4P	5-6450830-7
2.700	1.595	1.120	2.590	.250	.300	2.800	2.940	.345	3ACP + 16S + 5P	5-6450830-6
2.655	2.5025	2.145	2.545	.115		2.755	2.895	.345	3ACP+3P+12S+2LP	5-6450830-5
1.350	1.020	.745	1.240	.250	.250	1.450	1.590	.320	2P + 8S + 2P	5-6450830-4
2.450	1.595	1.120	2.340	.250	.300	2.550	2.690	.345	3ACP + 16S + 4P	5-6450830-3
2.350	1.670	1.095	2.240	.200	.200	2.450	2.590	.320	4HDP + 20S + 4HDP	5-6450830-2
1.300	1.145	.520	1.190	-	-	1.400	1.540	.345	1P + 24S + 1P	5-6450830-1
1.025	.7575	.550	.915	-	-	1.125	1.265	.2775	2LP + 8S + 3LP	5-6450830-0
2.300	1.6950	1.020	2.190	.250	.250	2.400	2.540	.3450	3P + 24S + 3P	4-6450830-9
2.995	2.190	1.415	2.885	.350	.280	3.095	3.235	.3025	8LP + 24S + 3P	4-6450830-8
1.280	.875	.575	1.170	.250	-	1.380	1.520	.3015	2LP + 8S + 2P	4-6450830-7
1.750	1.345	.845	1.640	.250	.250	1.850	1.990	.395	2P + 16S + 2P	4-6450830-6
2.300	1.6950	1.020	2.190	.250	.250	2.400	2.540	.3450	3P + 24S + 3P	4-6450830-5
1.600	1.245	.770	1.490	.250	.250	1.700	1.840	.3450	2P + 16S + 2P	4-6450830-4
6.100	2.195	1.845	5.990	.250	.375	6.200	6.340	.395	4P + 12S + 16P	4-6450830-3
2.500	1.645	1.270	2.390	.250	.250	2.600	2.740	.3450	4P + 12S + 4P	4-6450830-2
3.675	2.445	2.045	3.565	.375	.375	3.775	3.915	.3450	5ACP + 12S + 4ACP	3-6450830-8
1.190	-	1.060	1.080	-	.230	1.290	1.430	.3775	6LP + 8S	3-6450830-7
1.920	1.0775	.870	1.810	-	.300	2.020	2.160	.320	2ACP + 8S + 4LP	3-6450830-6
2.195	1.465	.865	2.085		.215	2.295	2.435	.2775	3LP + 20S + 4HDP	3-6450830-5
4.400	3.220	2.695	4.290		.300	4.500	4.640	.3700	8ACP + 16S + 4ACP	3-6450830-4
3.075	2.395	1.920	2.965		.300	3.175	3.3150	.3700	4ACP + 12S + 3P	3-6450830-3
3.075	2.395	1.920	2.965		.300	3.175	3.3150	.3700	4ACP + 12S + 3P	3-6450830-2
.935	.7825	.550	.825	-	-	1.035	1.175	.2775	2LP + 8S + 2LP	3-6450830-1
3.075	2.395	1.920	2.965		.300	3.175	3.3150	.3700	4ACP + 12S + 3P	3-6450830-0
2.160	1.7775	1.145	2.050	-	.300	2.260	2.400	.3450	3ACP + 24S+ 4LP	2-6450830-9
1.600	1.295	.720	1.490	.200	.200	1.700	1.840	.3450	2P + 20S + 2P	2-6450830-8
1.500	1.195	.720	1.390	.200	.200	1.600	1.740	.3450	2P + 16S + 2P	2-6450830-7
1.475	1.320	.595	1.365	-	-	1.575	1.715	.3700	1P + 24S + 1P	2-6450830-6
2.100	1.795	.720	1.990	.200	.200	2.200	2.340	.3450	2P + 40S + 2P	2-6450830-4
2.750	2.0450	1.270	2.640	.300	.250	2.850	2.990	.3450	4P + 28S + 3ACP	1-6450830-9
2.460	1.8575	.625	2.350	-	-	2.560	2.700	.1700	1P+2LP+48S+2LP+1P	1-6450830-7
-	-	-	-	-	-	-	-	-	4P+16S+24S+2HDP	1-6450830-8
2.750	2.0450	1.270	2.640	.300	.250	2.850	2.990	.3450	4P + 28S + 3ACP	1-6450830-5
1.800	1.4450	.770	1.690	.250	.250	1.900	2.040	.3450	2P + 24S + 2P	1-6450830-4
2.375	1.520	.845	2.265	.250	.300	2.475	2.615	.3450	2ACP + 24S + 4P	1-6450830-3
3.000	2.5025	1.945	2.890	.230		3.000	3.240	.3200	8HDP + 20S + 5LP	1-6450830-2
3.615	1.6850	1.010	3.505		.230	3.715	3.855	.2775	6LP + 24S + 10P	1-6450830-0
2.300	1.6950	1.020	2.190	.250	.250	2.400	2.540	.3450	3P + 24S + 3P	6450830-9
2.480	2.3275	1.520	2.370	-	.250	2.580	2.720	.3450	5P + 32S + 2LP	6450830-8
3.400	2.2950	1.570	3.290	.250	.250	3.500	3.640	.3450	5P + 24S + 5P	6450830-7
1.800	1.4450	.770	1.690	.250	.250	1.900	2.040	.3450	2P + 24S + 2P	6450830-5
1.780	1.6025	.770	1.670	-	.250	1.880	2.020	.3450	2P + 32S + 2LP	6450830-4
2.310	1.6725	1.240	2.200	.230	.230	2.410	2.550	.3025	8LP + 16S + 6LP	6450830-3
2.315	1.7100	1.035	2.205	.250	.230	2.415	2.555	.3025	6LP + 24S + 3P	6450830-2
.935	.7825	.550	.825	-	-	1.035	1.175	.2775	2LP + 8S + 2LP	6450830-1
DIM V	DIM R	DIM W	DIM U	DIM S	DIM T	DIM D	DIM L	DIM K	DESCRIPTION	PART NUMBER

4.350	2.405	1.380	4.240			4.450	4.590	.2775	9LP + 36S + 1P + 16LP	8-6450830-2
4.500	2.170	.795	4.390			4.600	4.740	.345	2P + 48S + 10P	8-6450830-1
2.250	1.645	1.170	2.140	.250	.300	2.300	2.490	.370	3ACP + 16S + 3P	8-6450830-0
4.300	2.695	2.020	4.190	.250	.250	4.400	4.540	.345	7P + 24S + 7P	7-6450830-9
4.180	3.325	1.700	4.070	.250	.230	4.280	4.420	.2775	12LP + 60S + 4P	7-6450830-8
2.650	2.545	1.270	2.540	-	.250	2.750	2.890	.345	4P + 48S + 1P	7-6450830-7
1.750	1.3675	1.060	1.755	.230	.230	1.850	1.990	.2775	3LP + 12S + 4LP	7-6450830-6
DIM V	DIM R	DIM W	DIM U	DIM S	DIM T	DIM D	DIM L	DIM K	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES



MATERIAL
-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC
1 PLC
2 PLC
3 PLC
4 PLC
ANGLES
FINISH

±
±.01
±.005
±.0020
#P

DWN
CHK
S. ZHAO

S. ZHAO

10APR2007

10APR2007

APVD
S. ZHAO

PRODUCT SPEC
108-2292

APPLICATION SPEC
114-13251

WEIGHT
-

CUSTOMER DRAWING

NAME
S. ZHAO

RIGHT ANGLE WITH SHORT GUIDES
AND LP CONTACTS ASSEMBLY
MULTI-BEAM XLE

SIZE
A1

CAGE CODE
100779

DRAWING NO
6450830

RESTRICTED TO
-

SCALE
4:1


SHEET
2

OF
42


REV
S2

4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

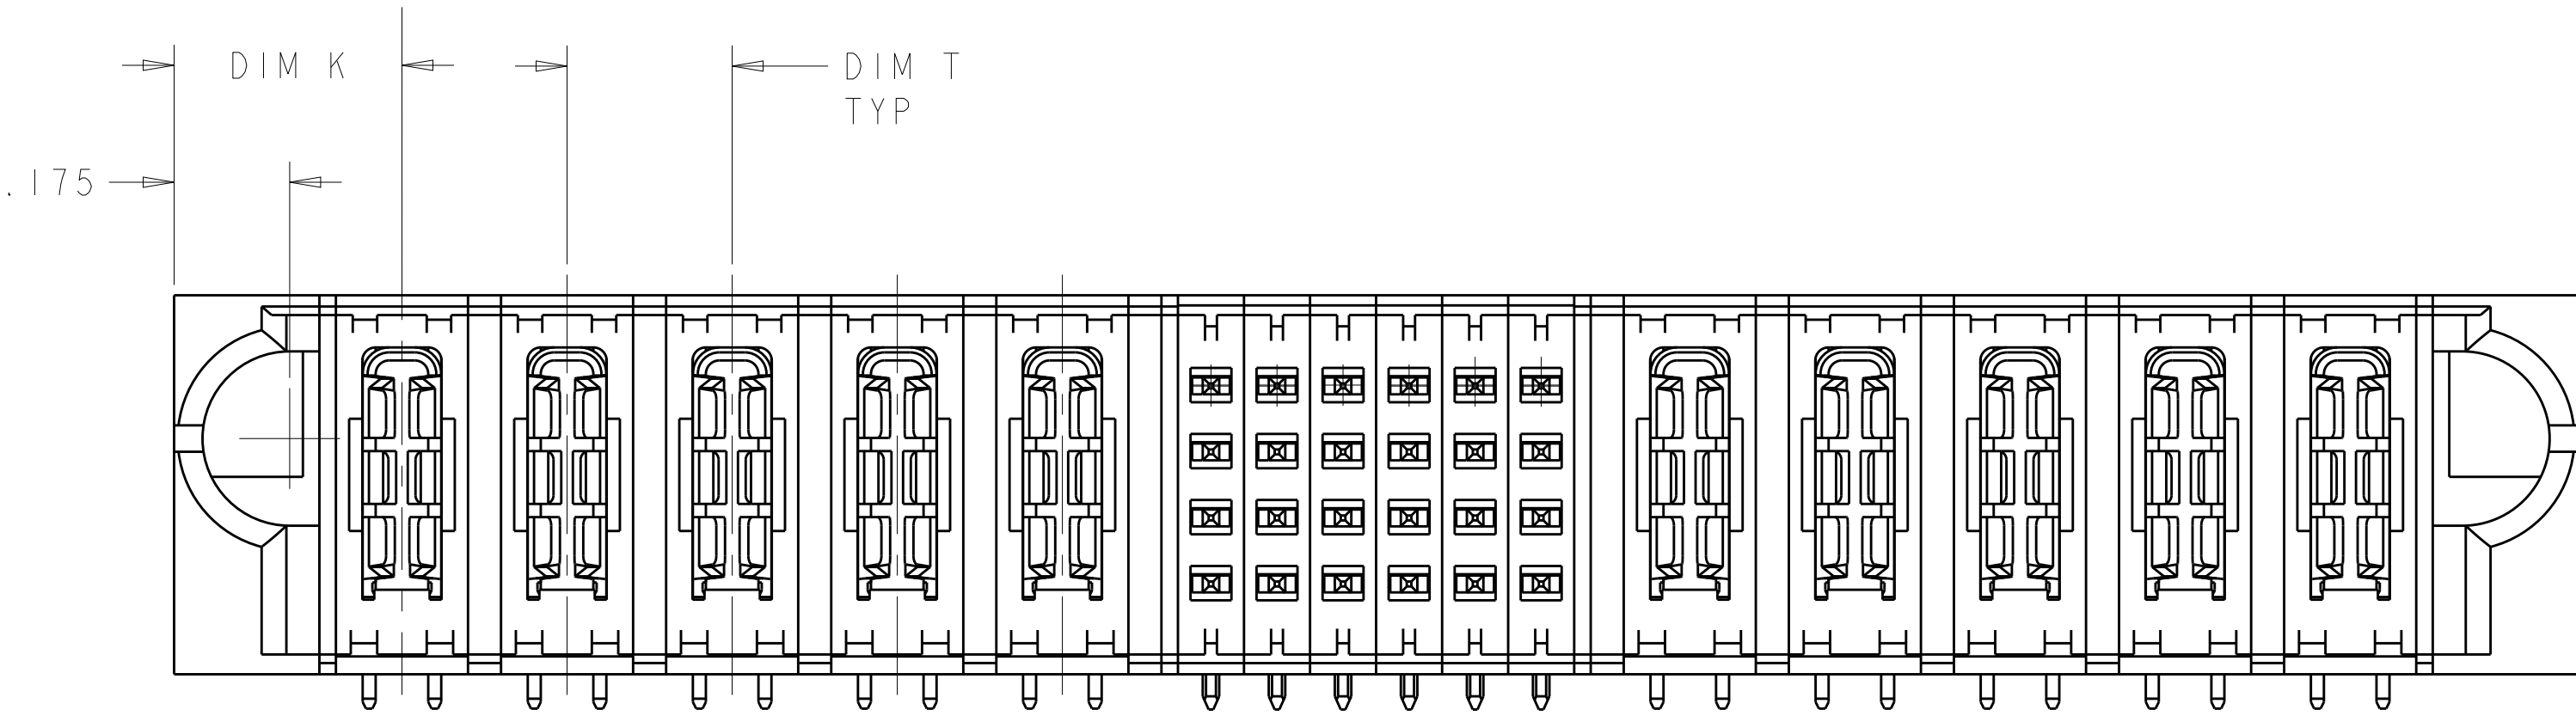

FOR "P+S+P"CONFIGURATION
UNSPECIFY DIMENSIONS PLEASE REFER TO PAGE 1

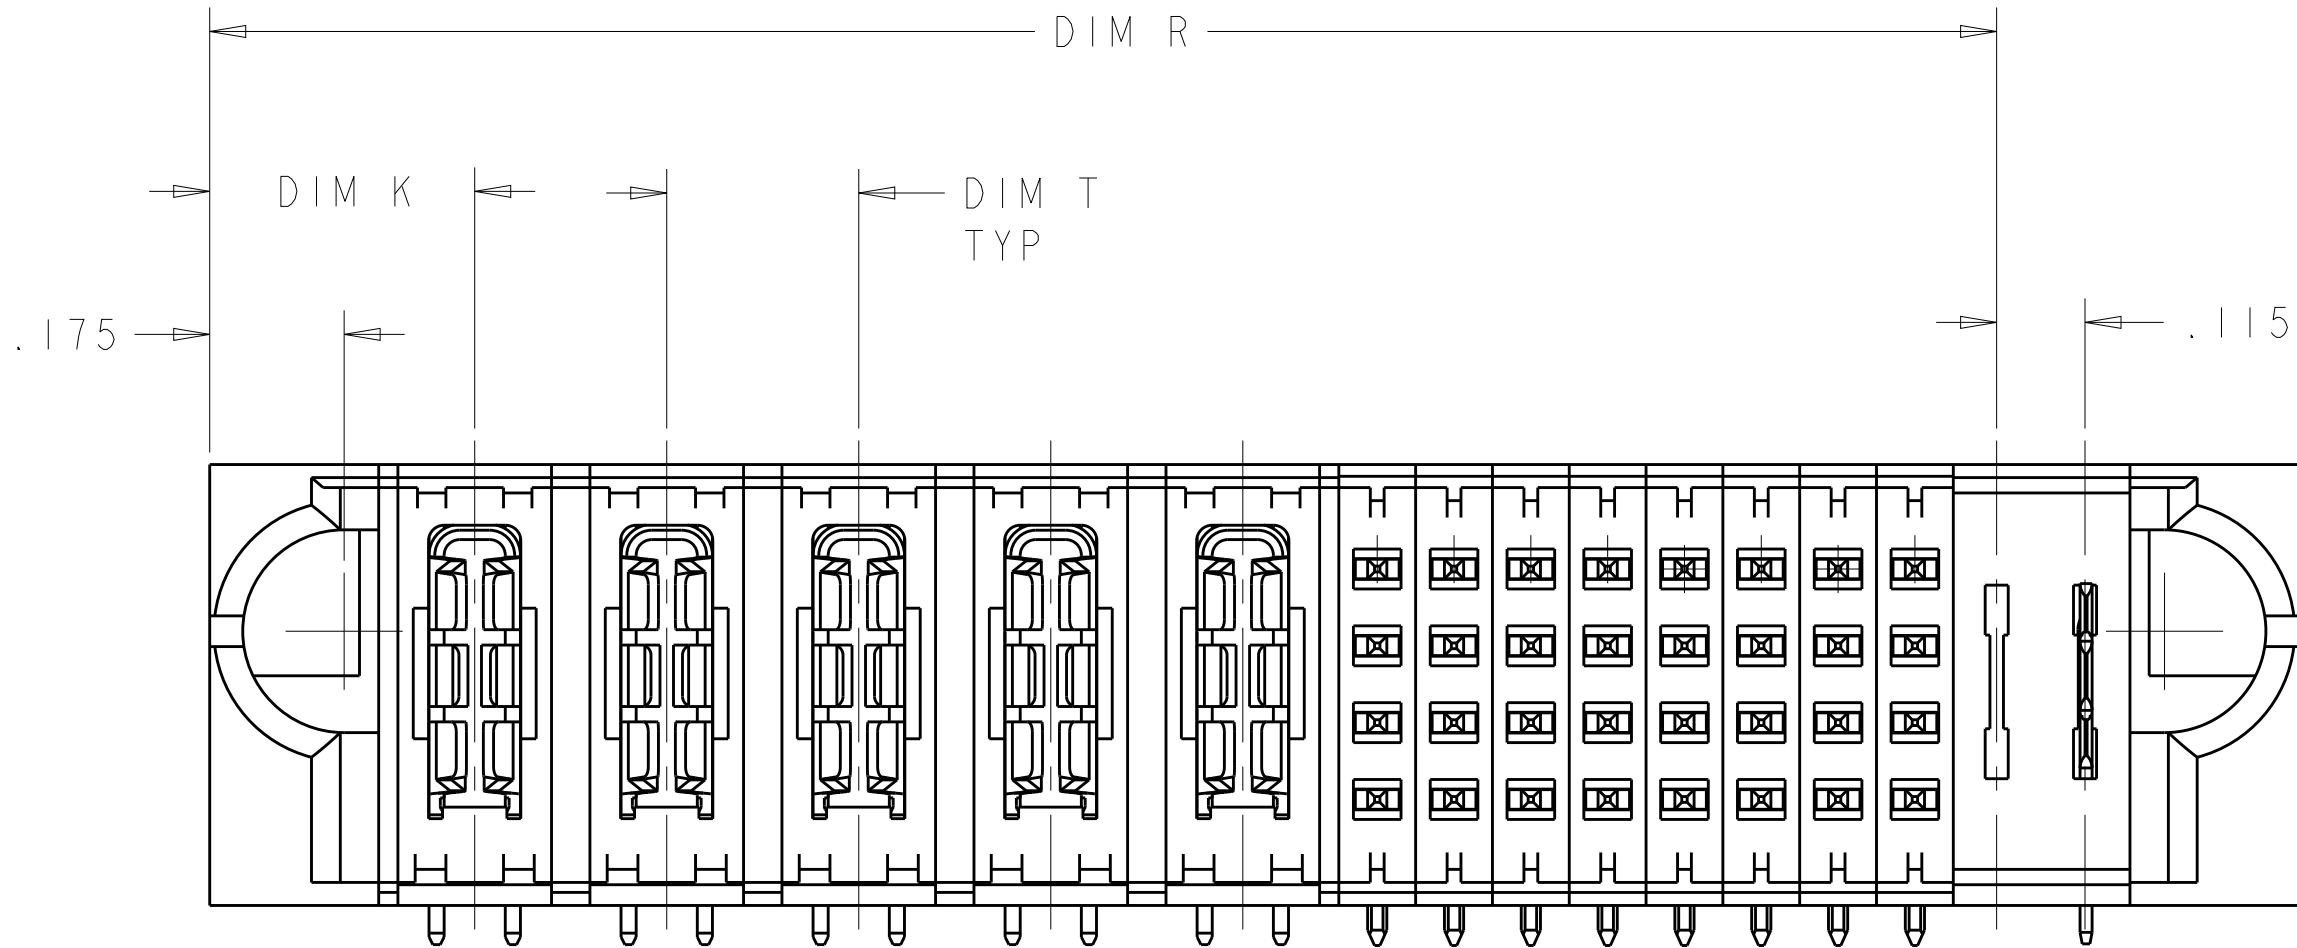

FOR "P+S+LP"CONFIGURATION
UNSPECIFY DIMENSIONS PLEASE REFER TO PAGE 1

HOLD DOWN	HD
.135 SIGNAL CON, ROW D,MFBL LL=.304	FJ
.135 SIGNAL CON, ROW C,MFBL LL=.304	FK
.135 SIGNAL CON, ROW B,MFBL LL=.304	FN
.135 SIGNAL CON, ROW A,MFBL LL=.304	FS
.135 SIGNAL CON, ROW D,MLBF LL=.204	E
.135 SIGNAL CON, ROW C,MLBF LL=.204	F
.135 SIGNAL CON, ROW B,MLBF LL=.204	G
.135 SIGNAL CON, ROW A,MLBF LL=.204	H
.135 SIGNAL CON, ROW D,STANDARD LL=.254	J
.135 SIGNAL CON, ROW C,STANDARD LL=.254	K
.135 SIGNAL CON, ROW B,STANDARD LL=.254	N
.135 SIGNAL CON, ROW A,STANDARD LL=.254	S
.135 STANDARD POWER CON,3 BEAMS	TM
.135 SOLDER LOWER POWER,MFBL	LMF
.135 SOLDER LOWER POWER,STD	LM
.135 SOLDER LOWER POWER,MLBF	LML
DESCRIPTION	IDENTIFIER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

S.ZHAO

10APR2007

CHK

S.ZHAO

10APR2007

APVD

S.ZHAO

-

DIMENSIONS:

INCHES

0 PLC

±"

1 PLC

±.01

2 PLC

±.01

3 PLC

±.005

4 PLC

±.0020

ANGLES

±2°

FINISH

-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

PRODUCT SPEC

108-2292

APPLICATION SPEC

114-13251

WEIGHT

-

MATERIAL

-

CUSTOMER DRAWING

TE

TE Connectivity

NAME

RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A1

00779

6450830

-

SCALE

4:1

SHEET

3


OF

42

REV

S2



PART NUMBER	ROWS		POWER						SIGNAL						POWER			
			LP1	LP2	LP3	LP4	LP5	LP6	1	2	3	4	5	6	P1	P2	P3	
6450830-2	D C B A		LM	LM	LM	LM	LM	LM	J	J	J	J	J	J	TM	TM	TM	
									K	K	K	K	K	K				
									N	N	G	N	N	N				
									S	S	S	S	S	S				
6LP + 24S + 3P																		

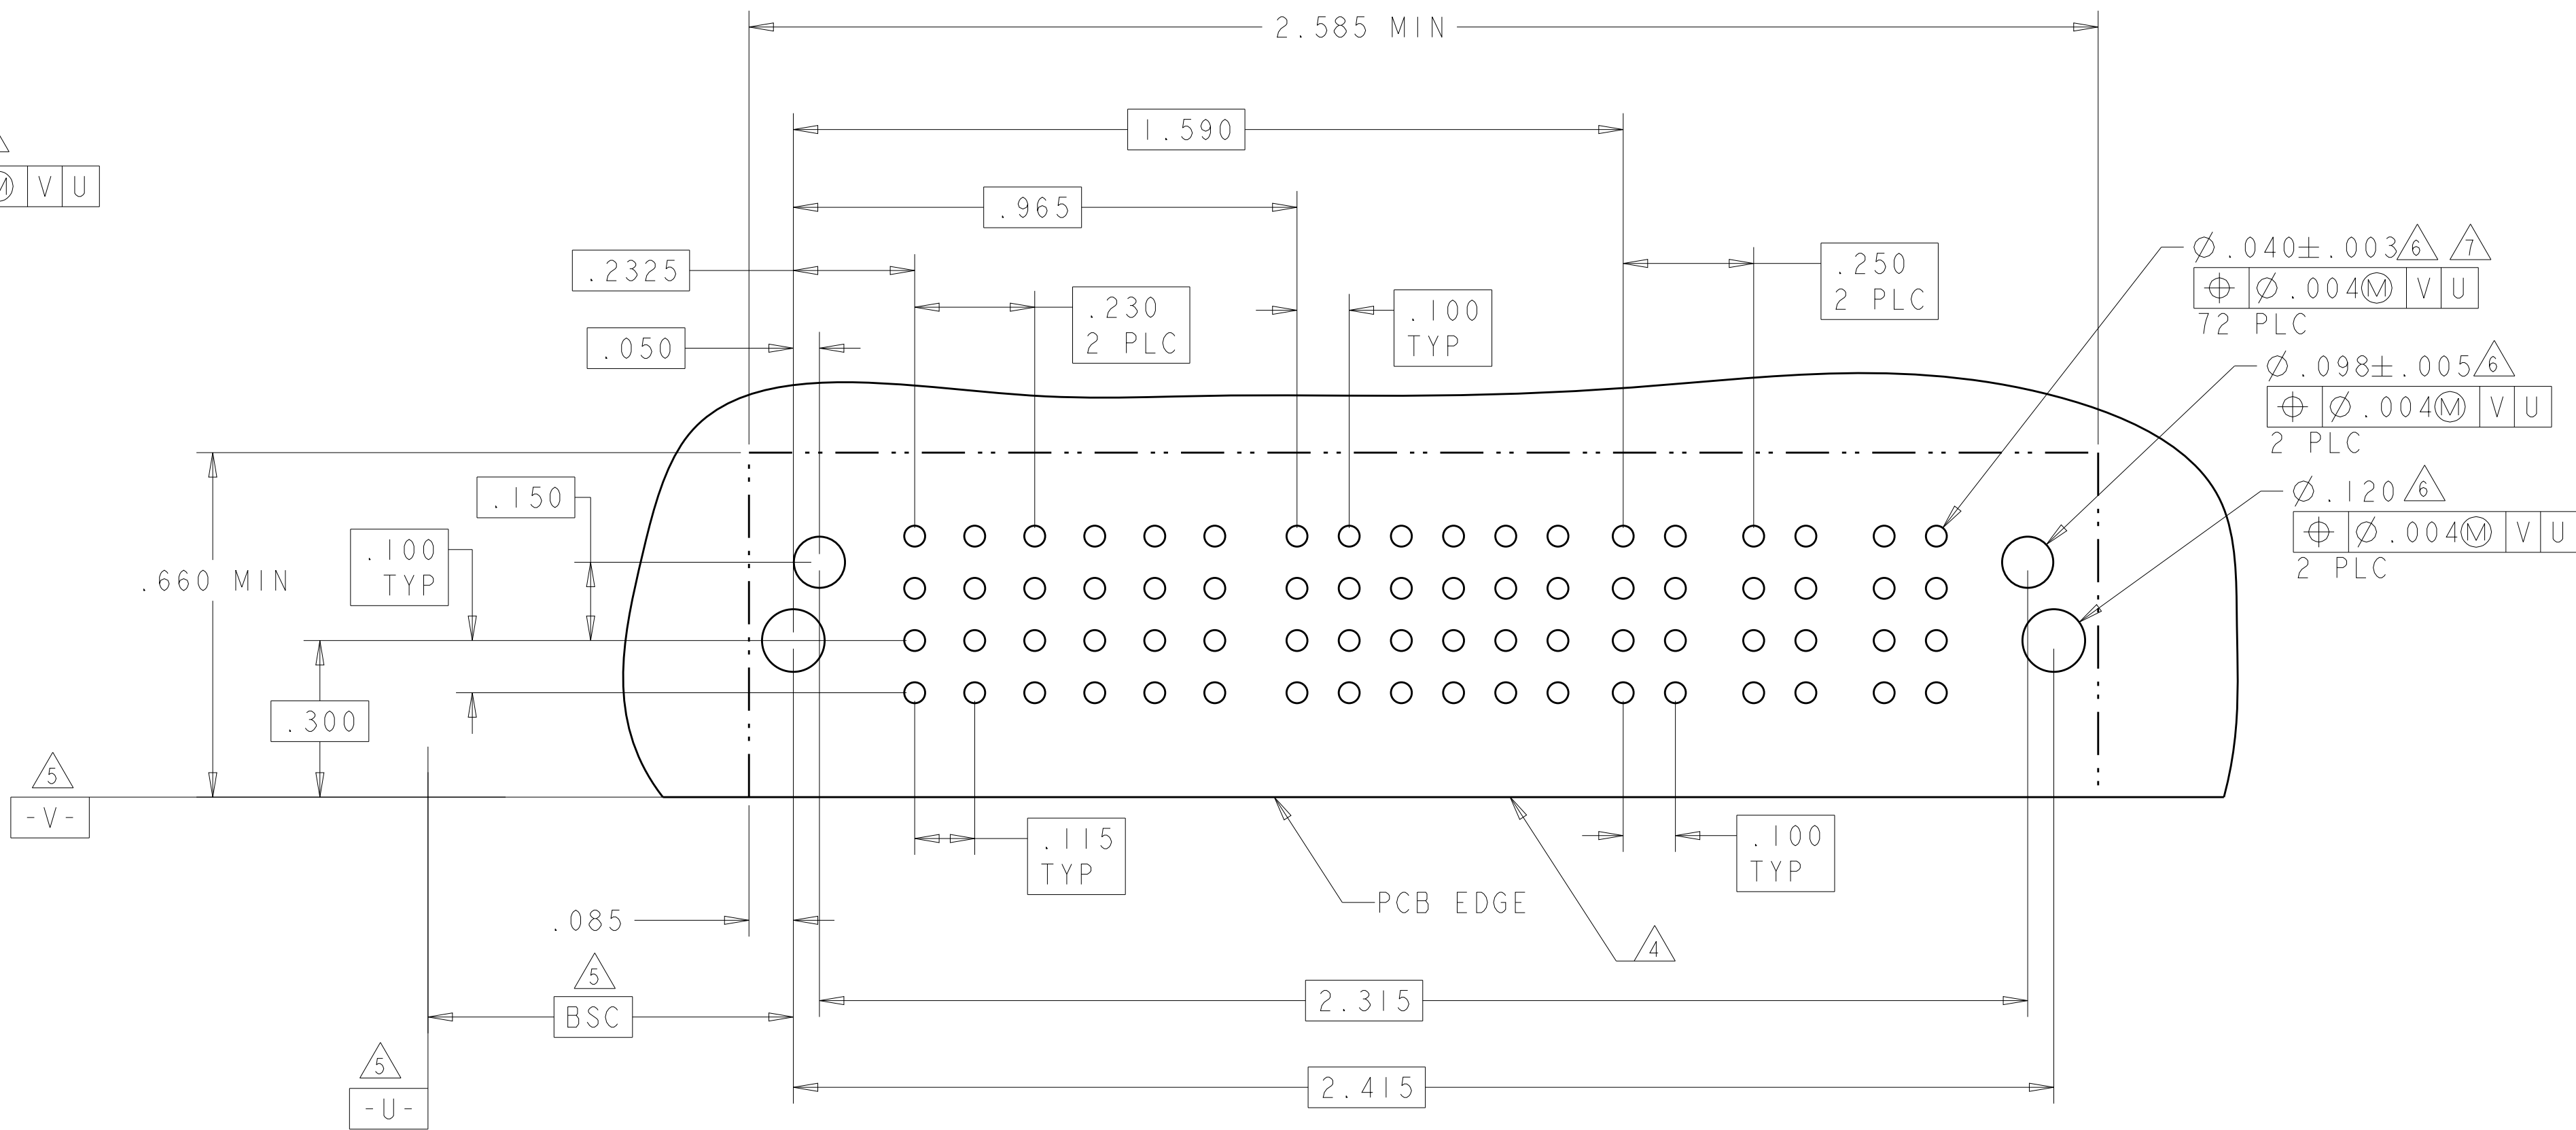
4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-




PART NUMBER	ROWS		POWER		SIGNAL						POWER		
			P1	P2	1	2	3	4	5	6	P3	P4	
6450830-5	D C B A	 HD	 TM	 TM	J	J	J	J	J	J	 TM	 TM	 HD
					K	K	K	K	K	K			
					N	N	N	N	N	N			
					S	S	S	S	S	S			
2P + 24S + 2P													

PART NUMBER	ROWS		POWER					SIGNAL						POWER					
			P1	P2	P3	P4	P5	1	2	3	4	5	6	P6	P7	P8	P9	P10	
6450830-7	D C B A		TM	TM	TM	TM	TM	J	J	J	J	J	J	TM	TM	TM	TM	TM	
								K	K	K	K	K	K						
								N	N	N	N	N	N						
								S	S	S	S	S	S						
5P + 24S + 5P																			

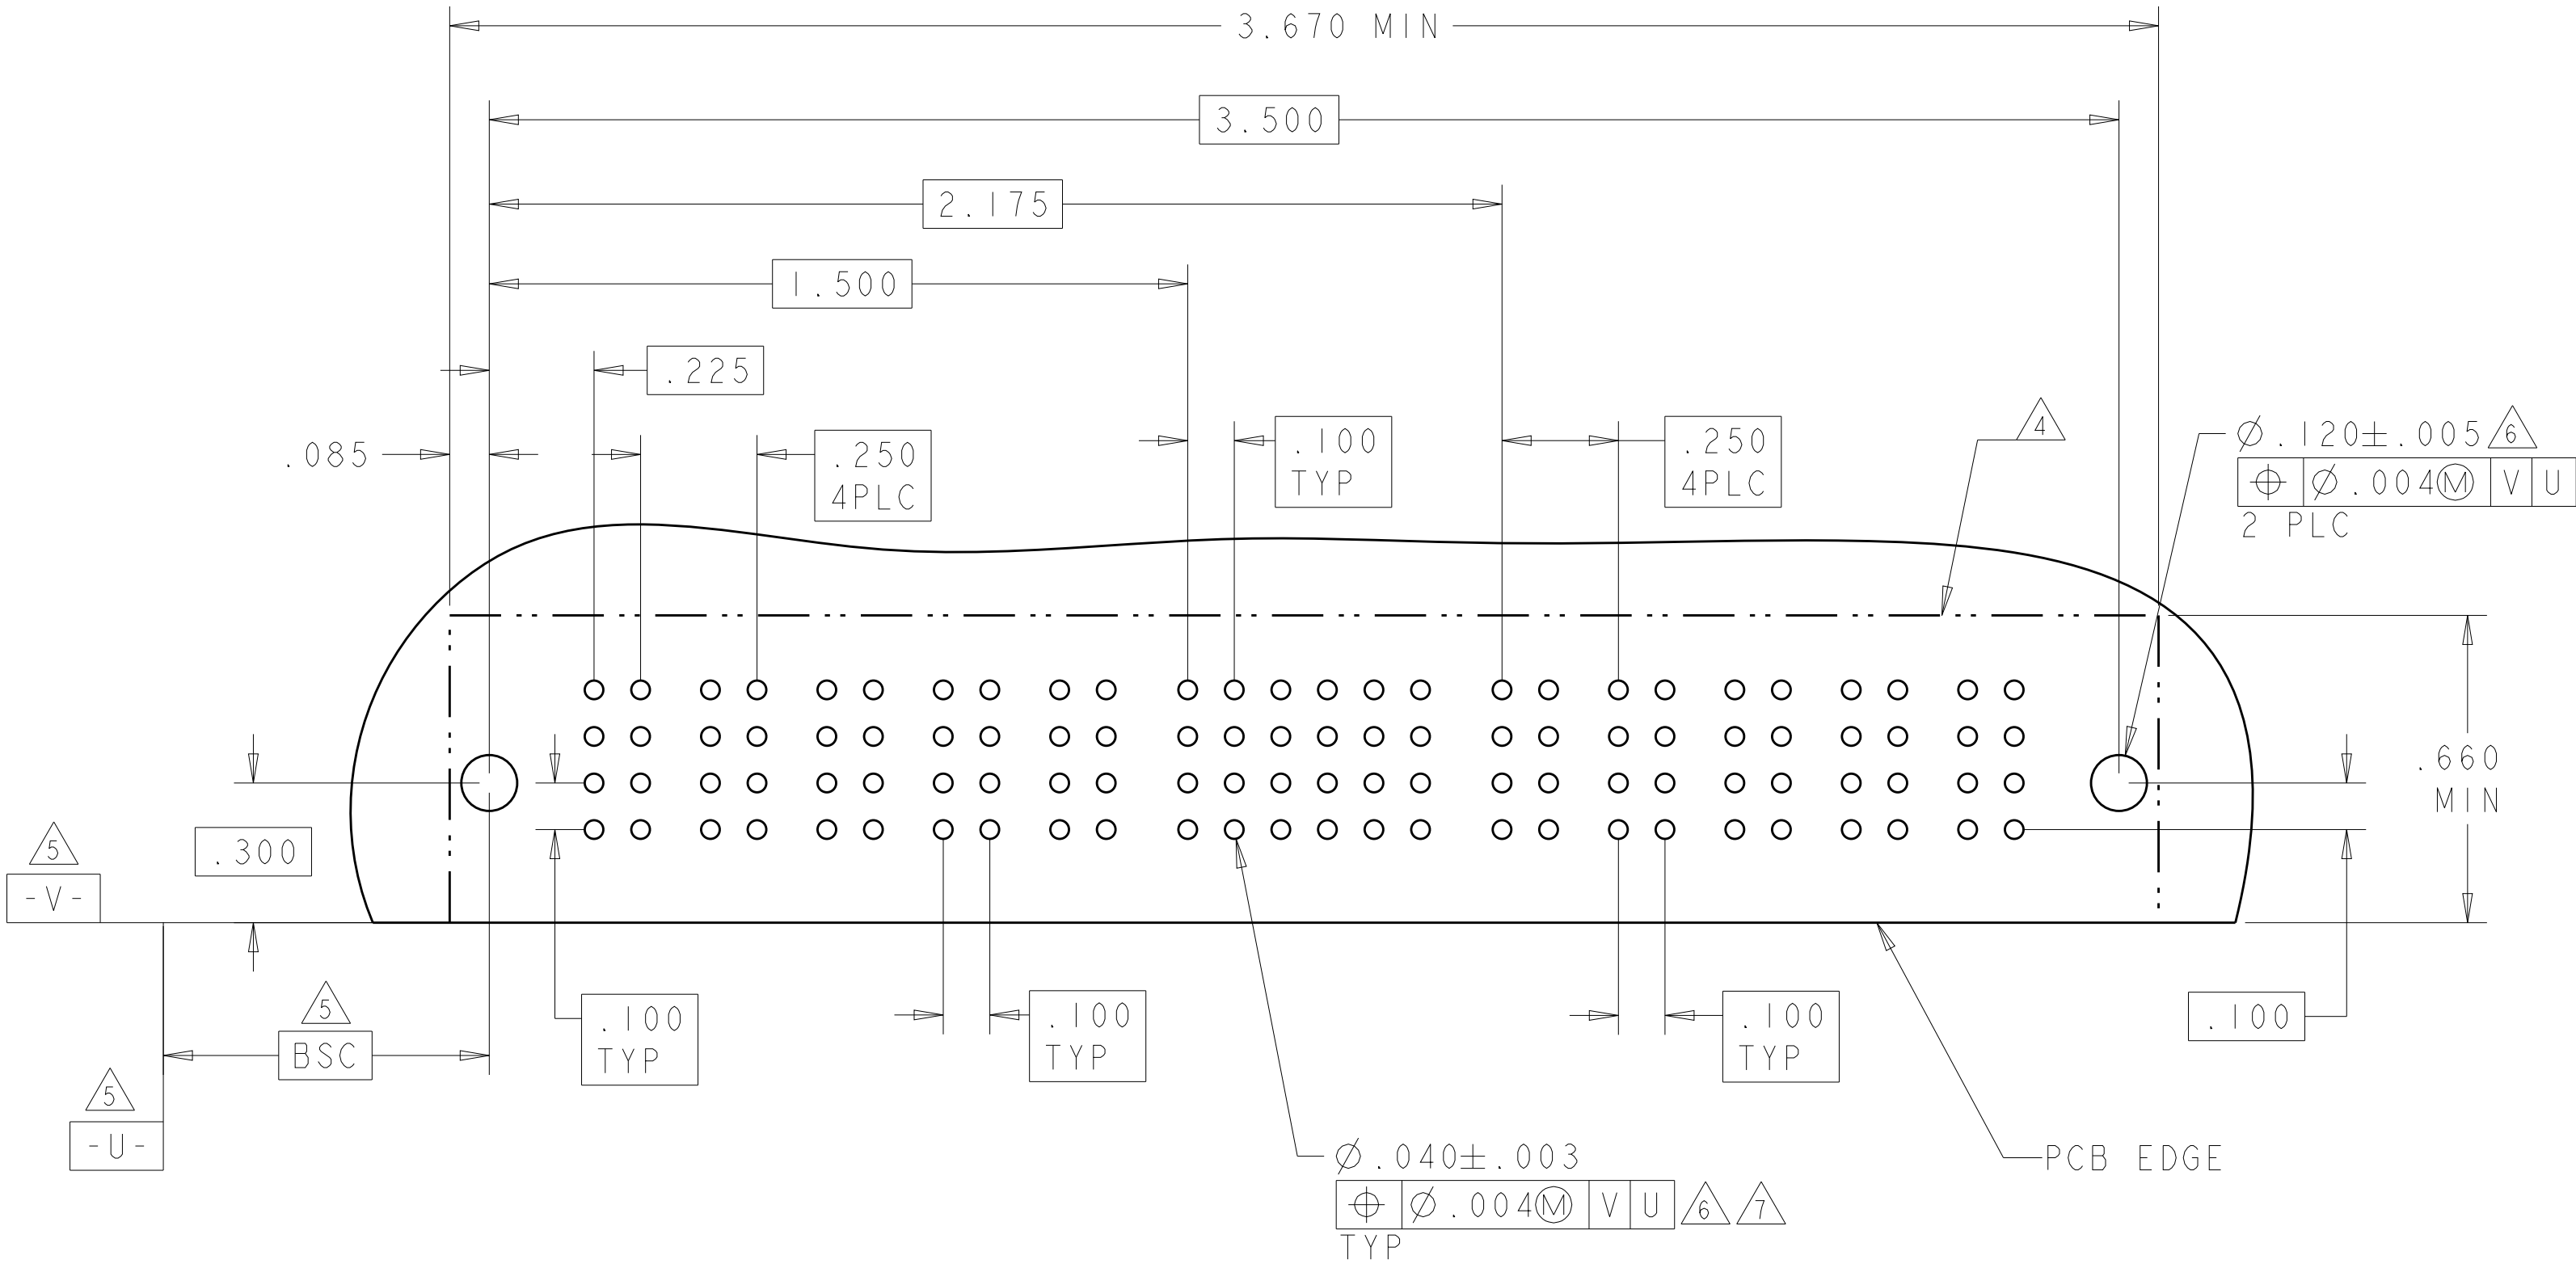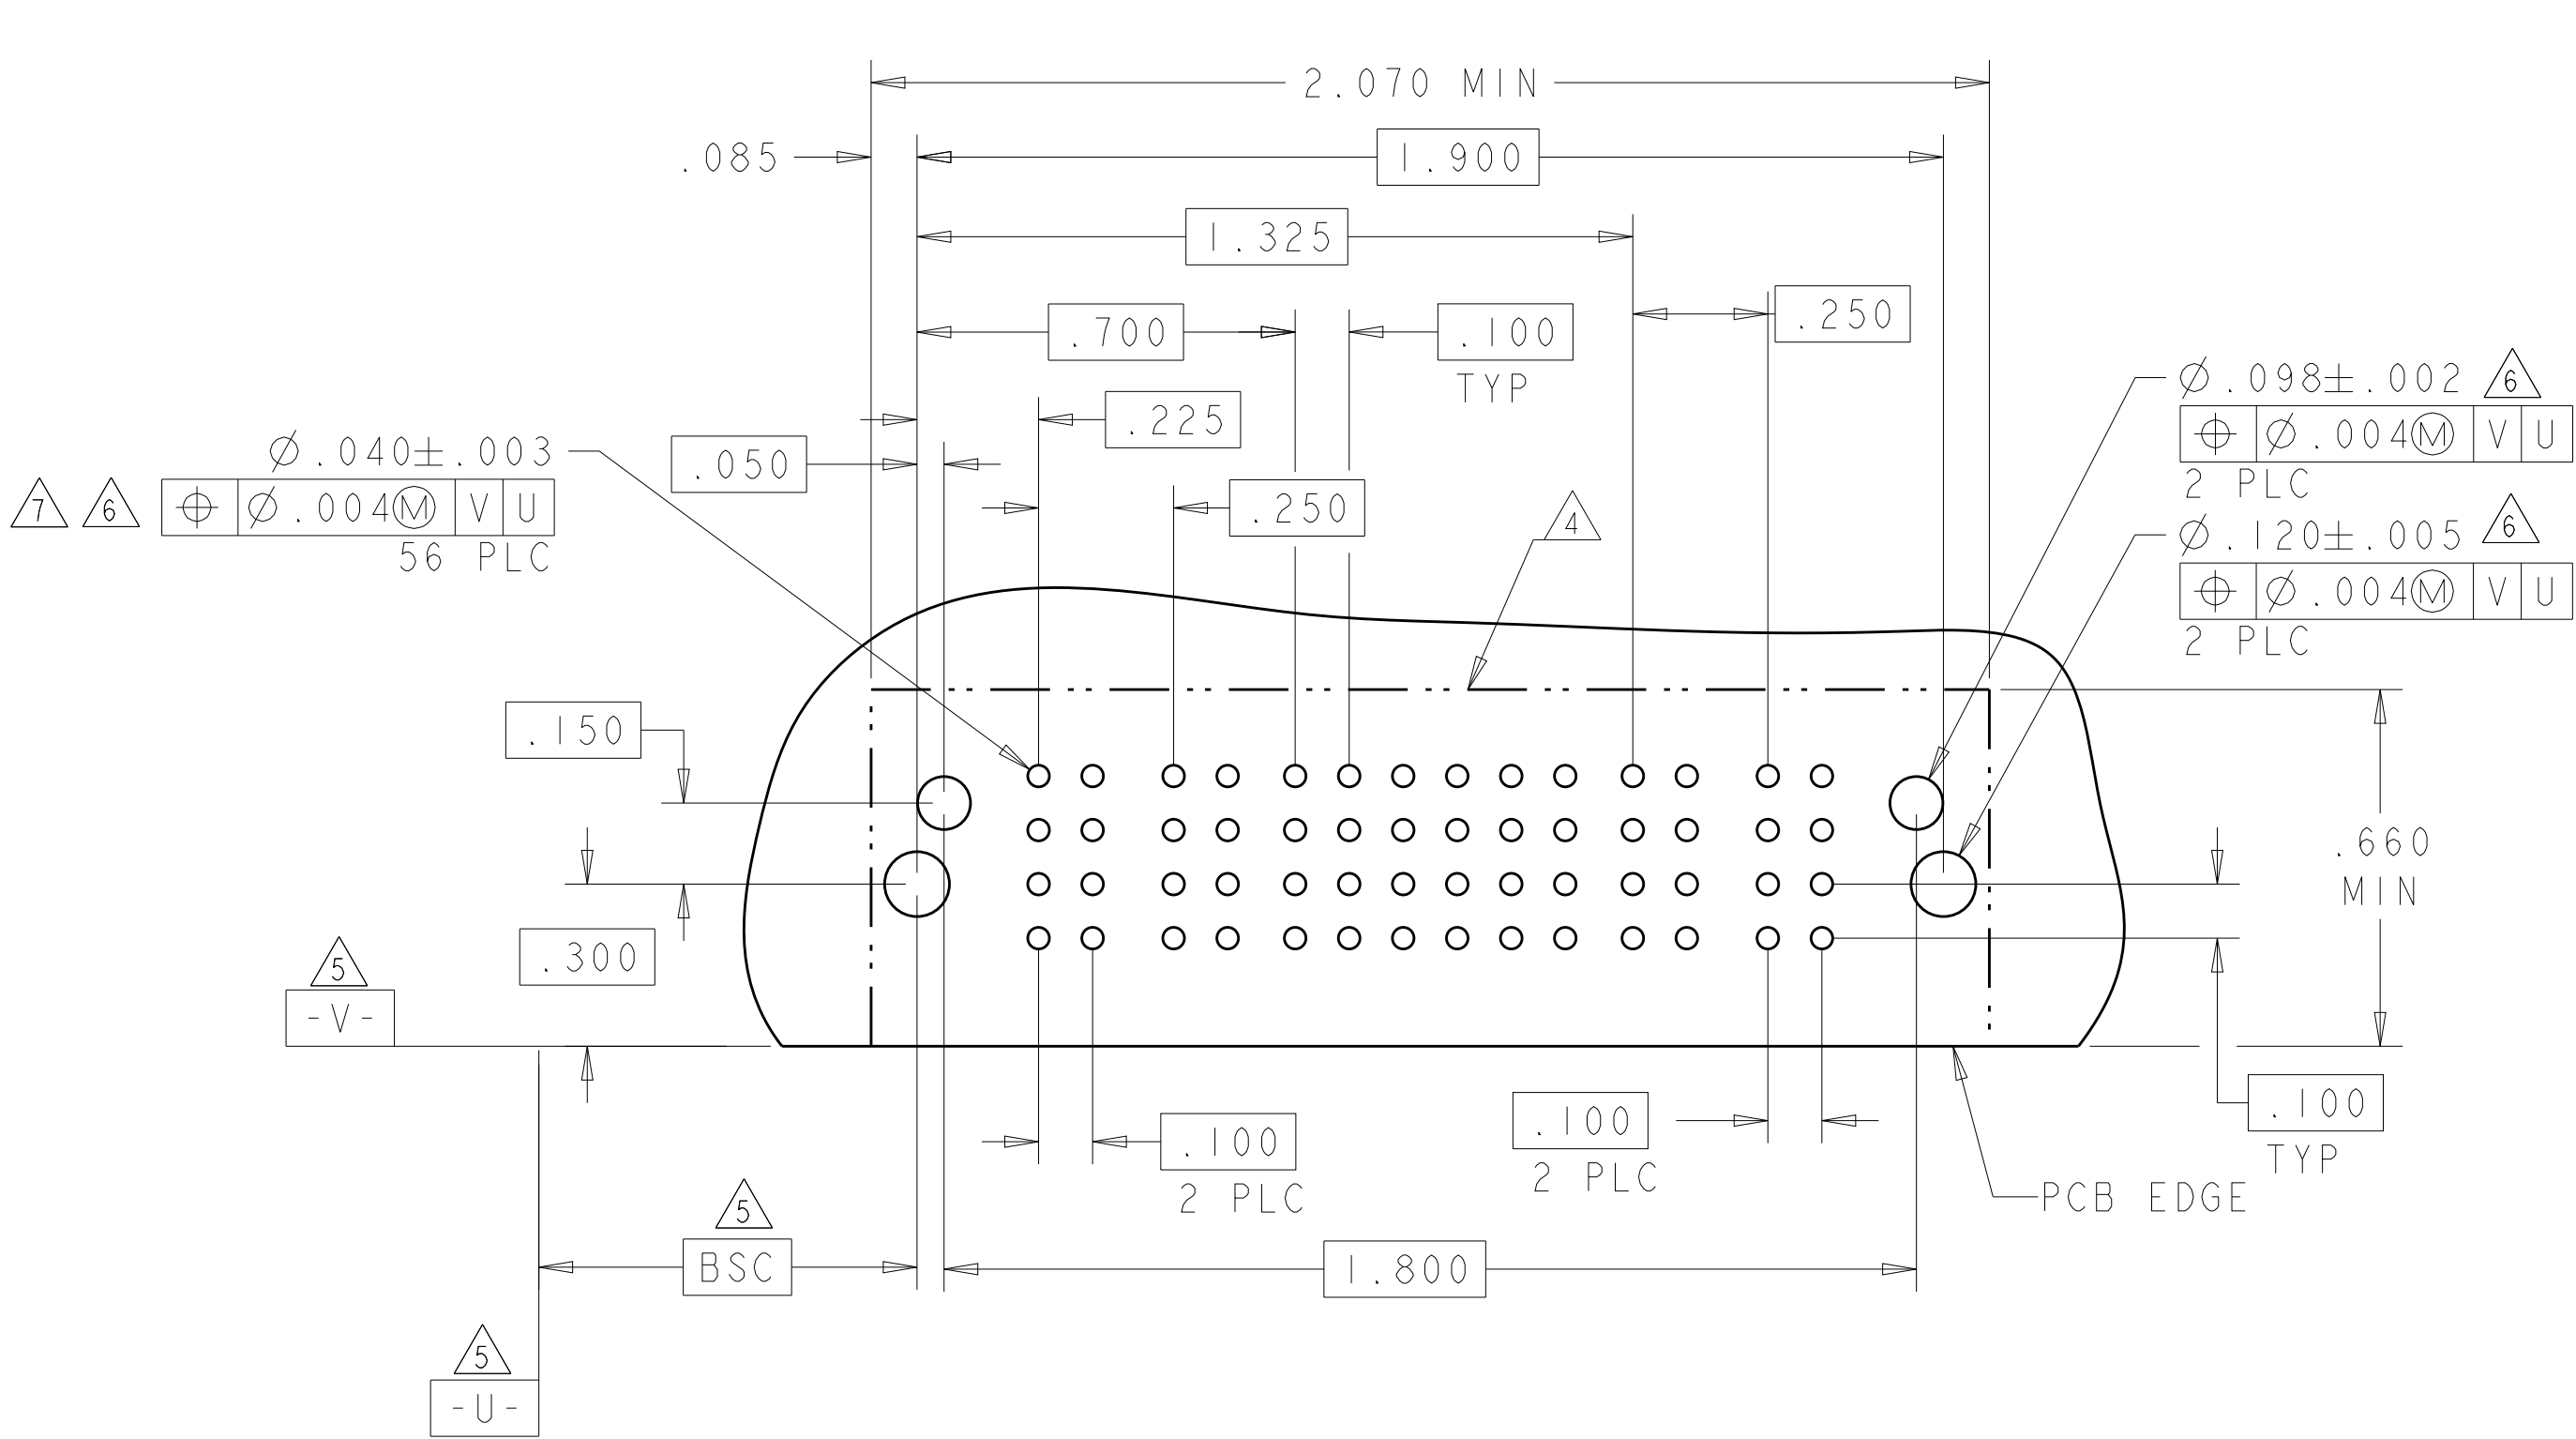


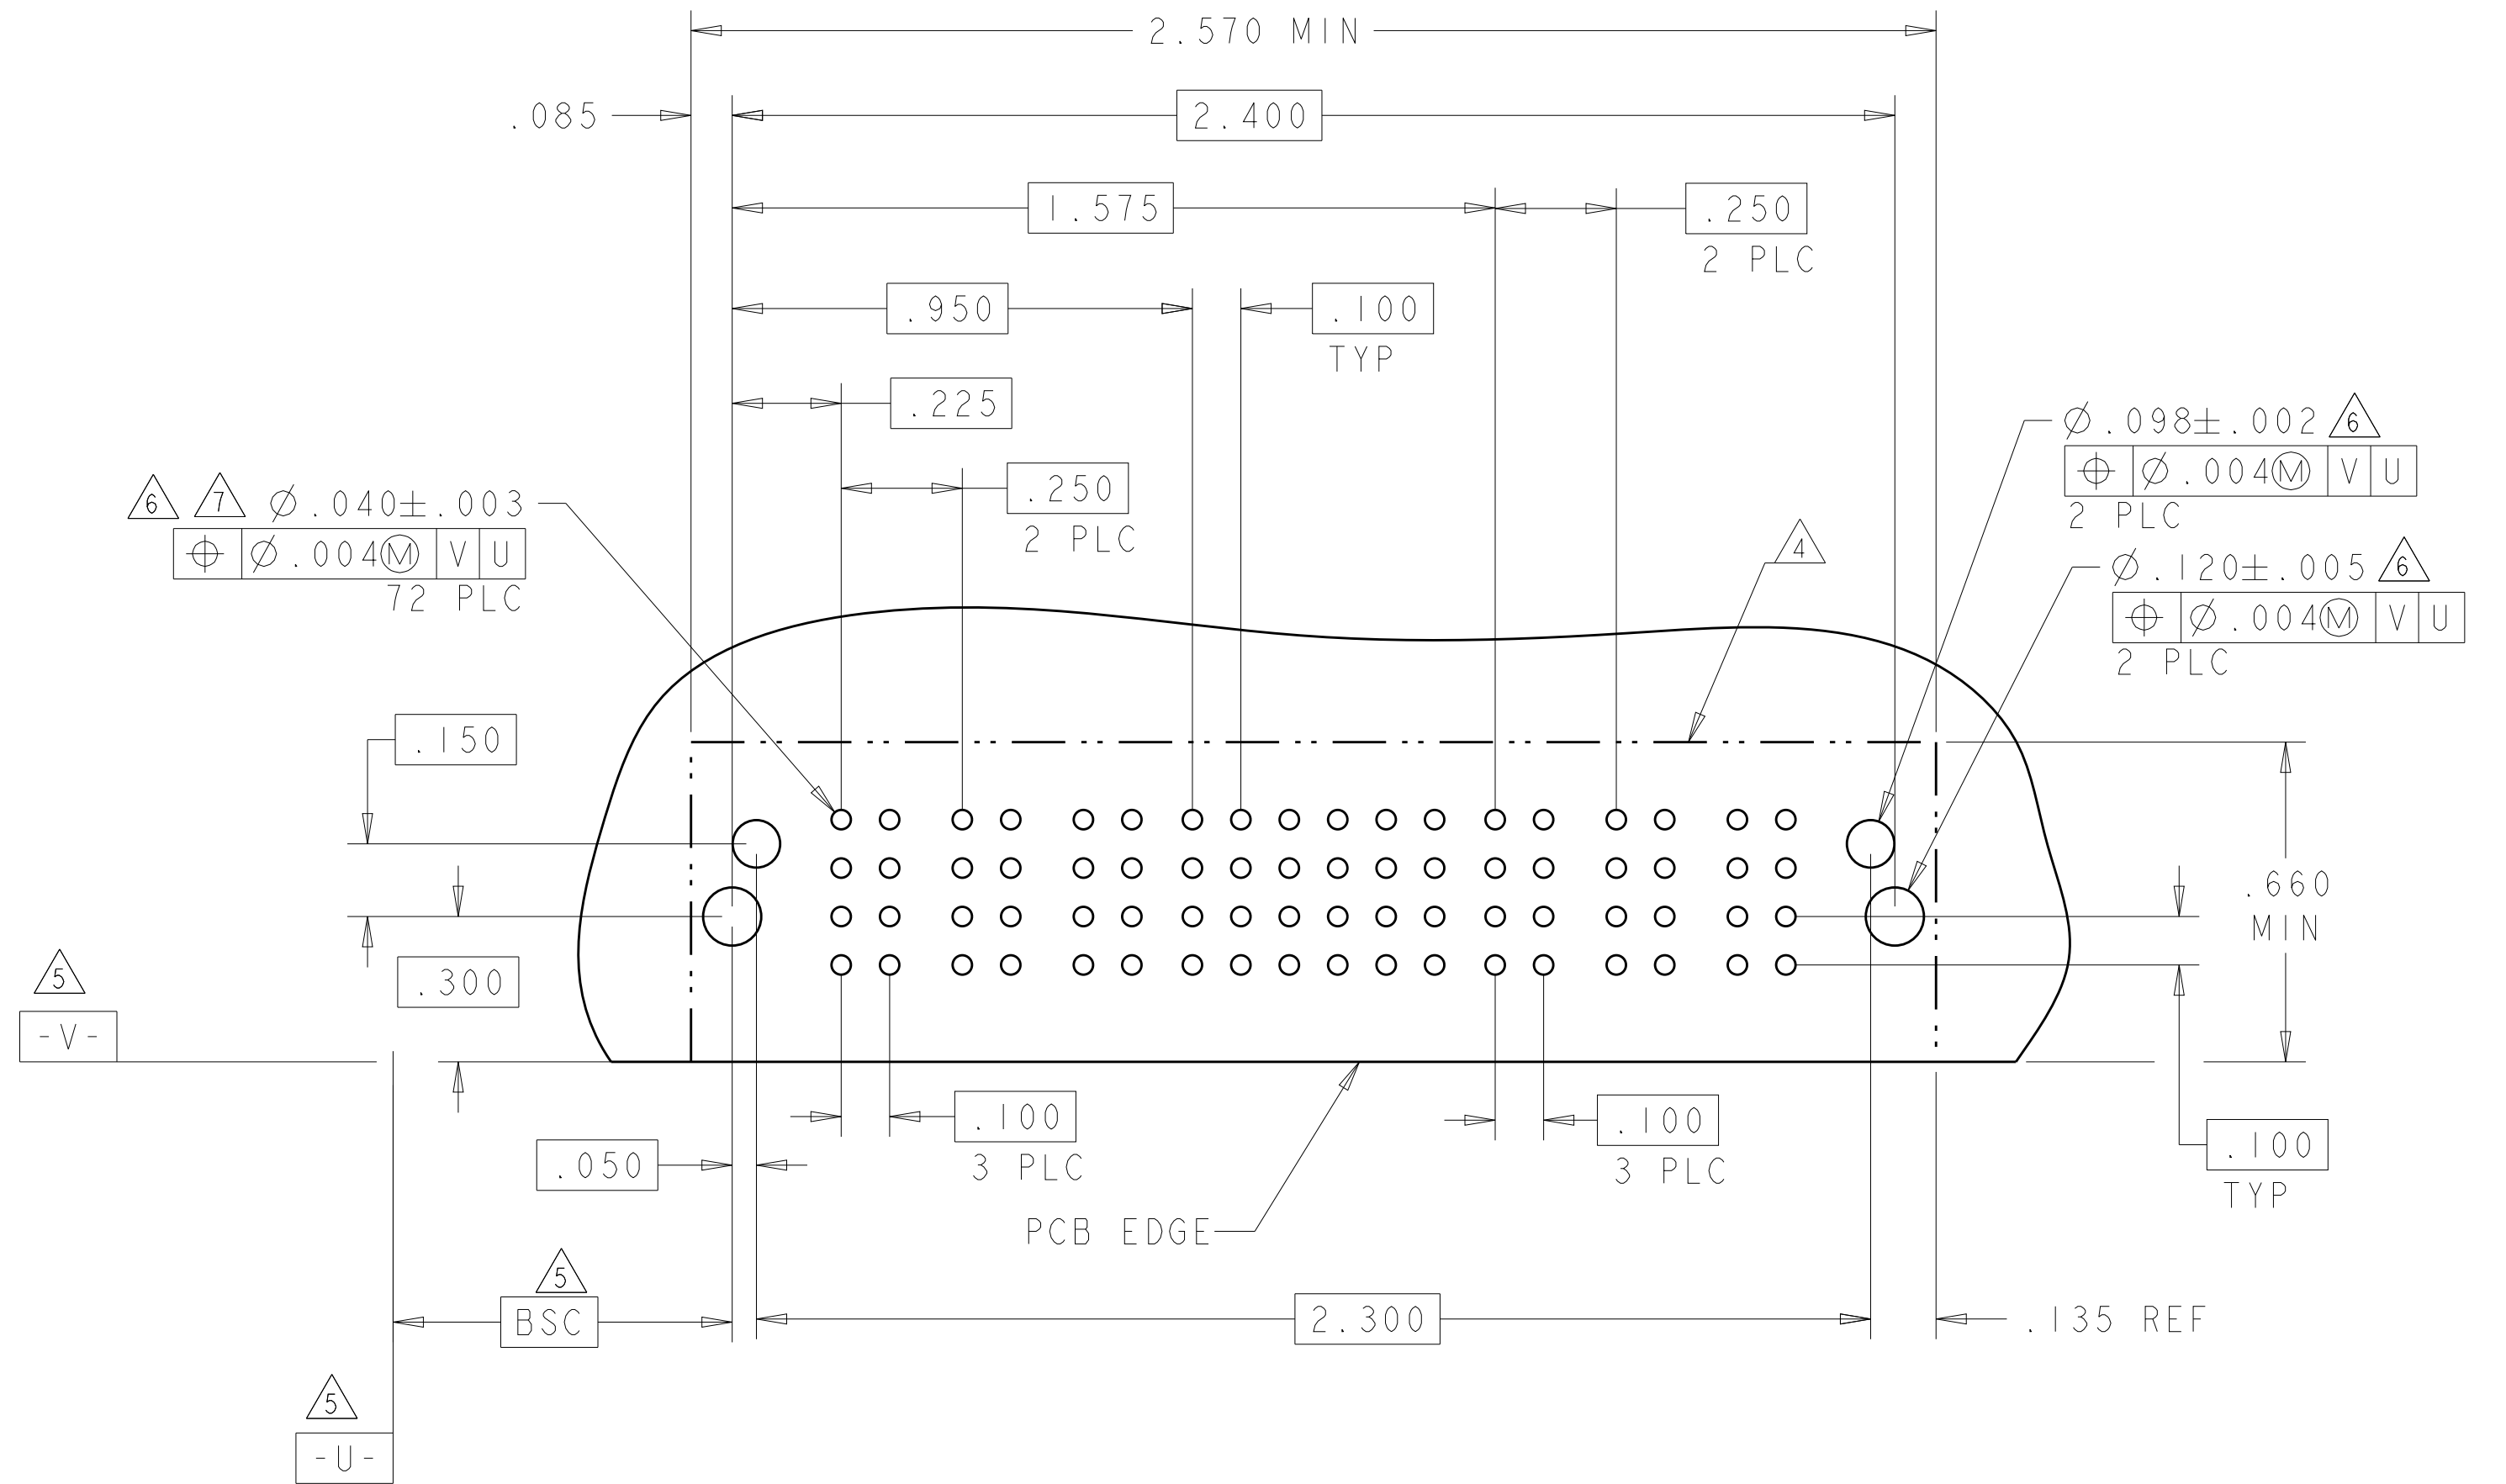[illegible]
$$3P + 24S + 3P$$


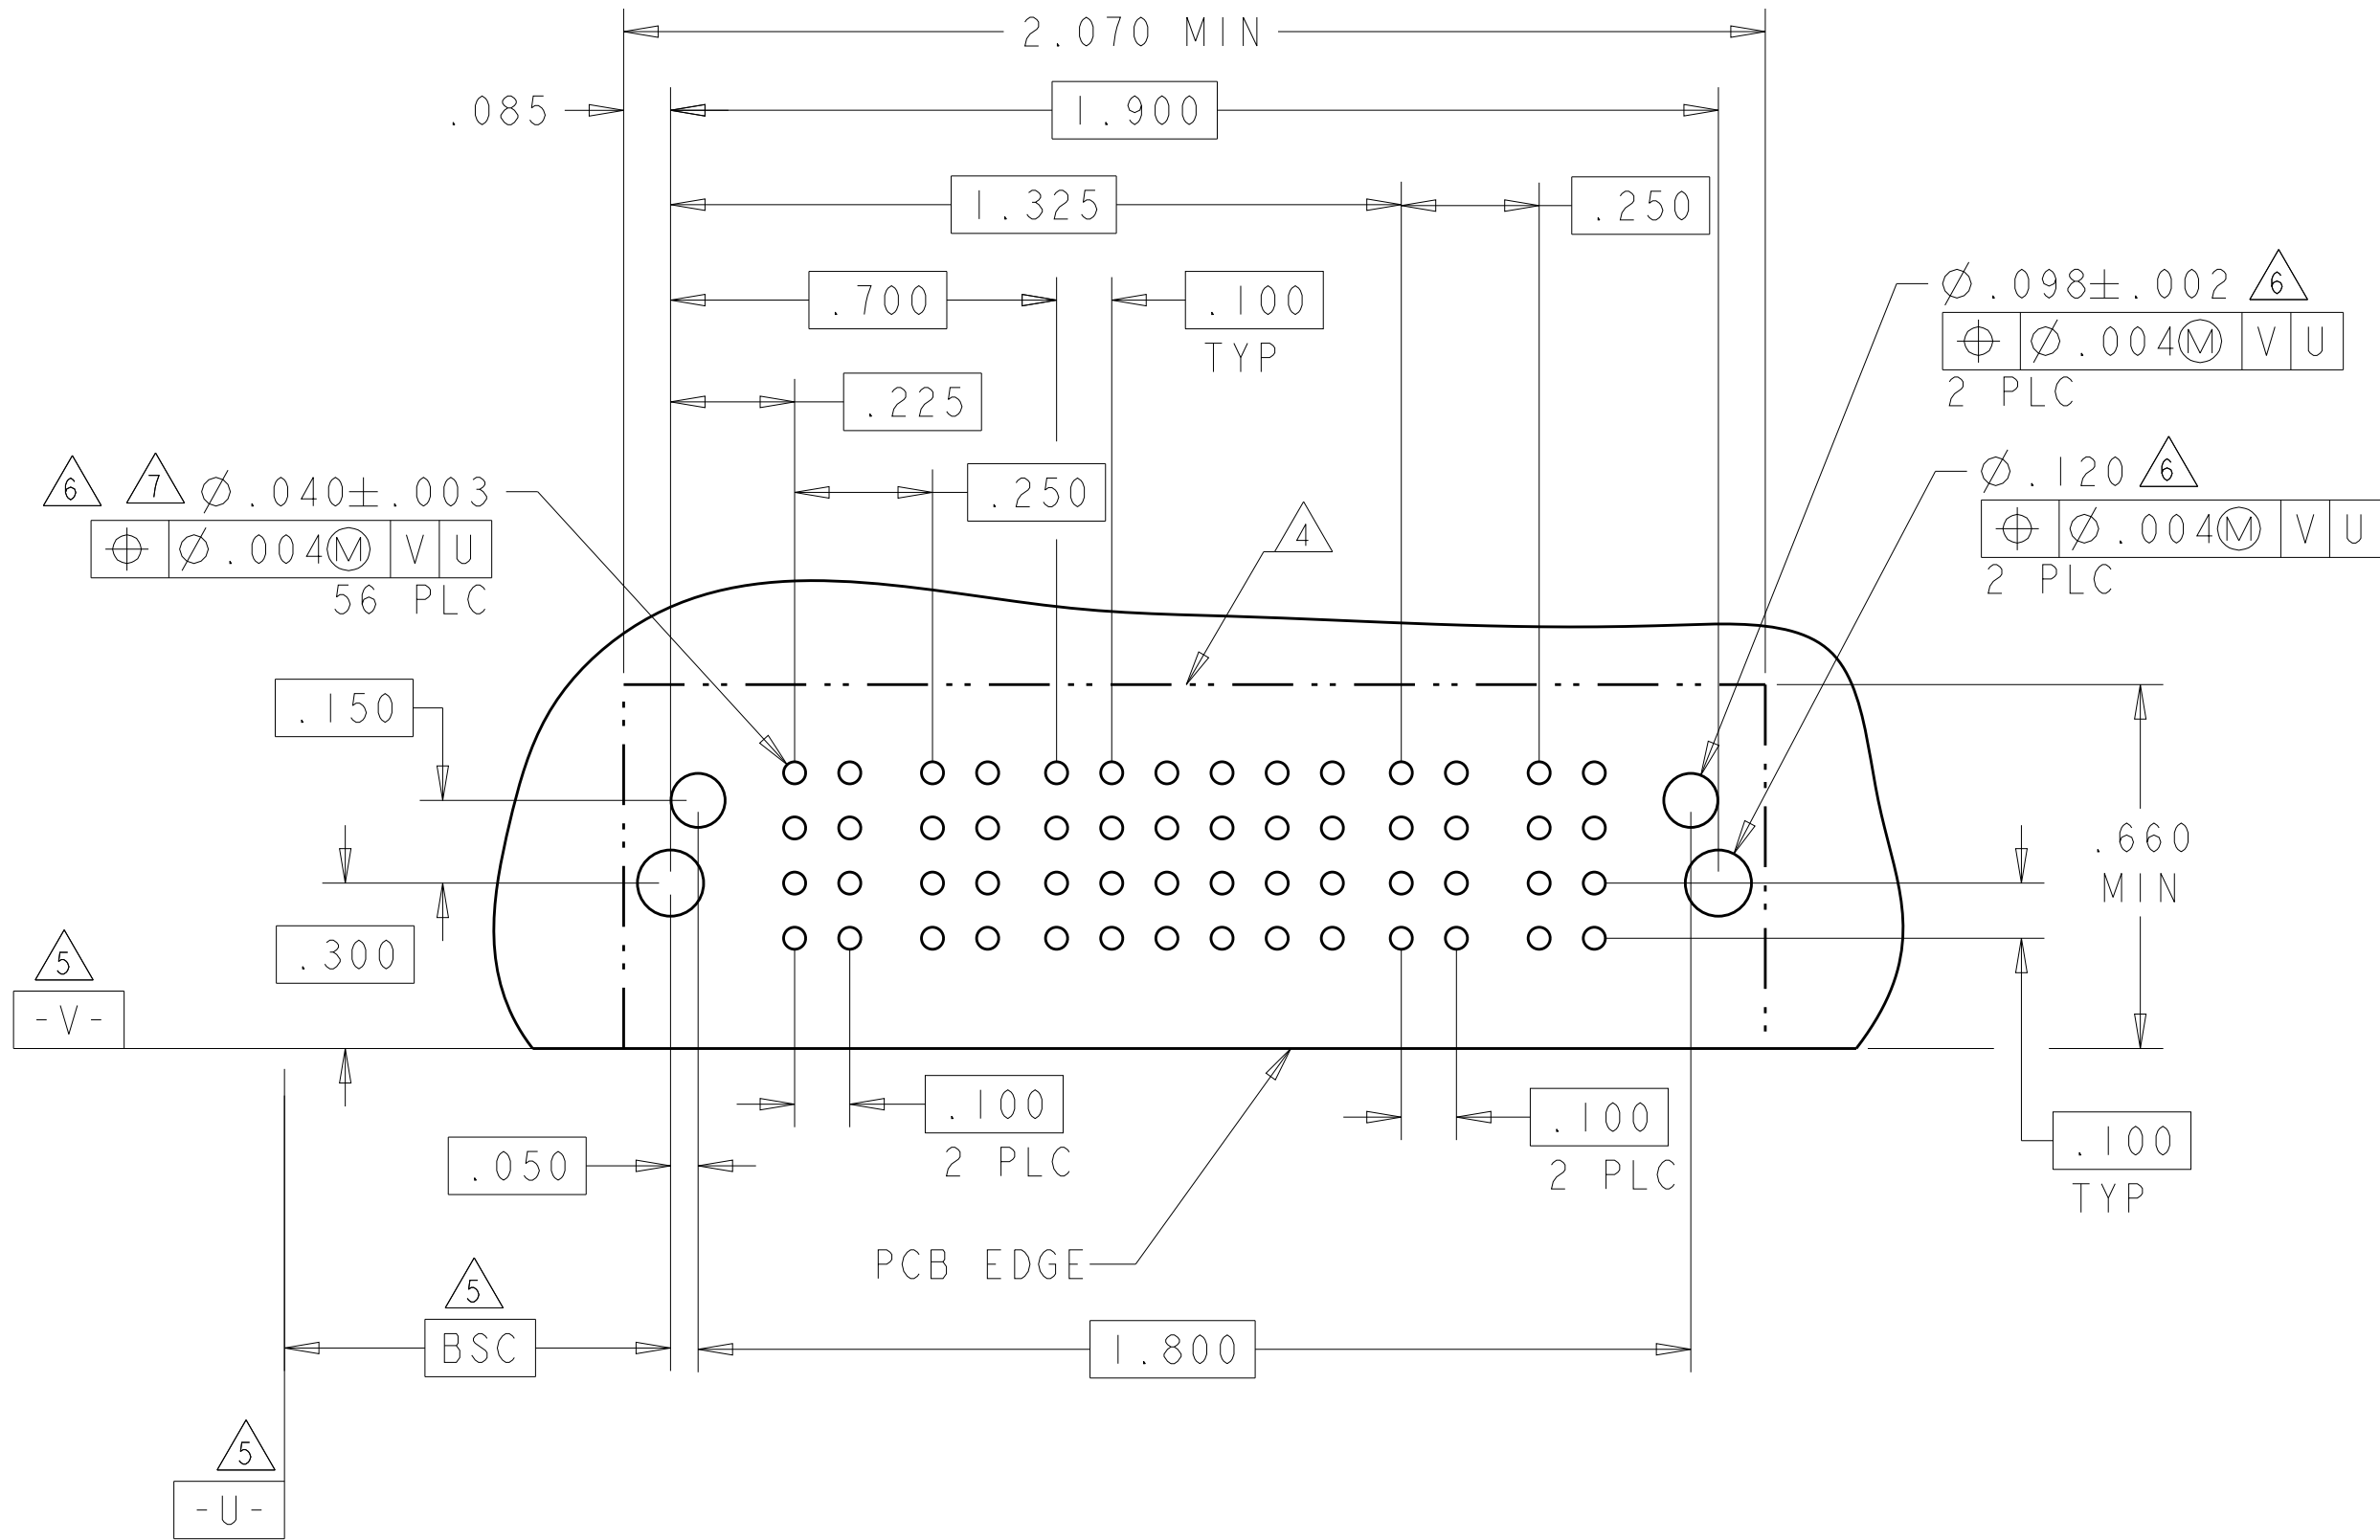
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. ZHAO		10APR2007		 TE Connectivity	
		CHK S. ZHAO		10APR2007			
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE	
INCHES				APVD S. ZHAO			
		0 PLC ± 1 PLC ± 2 PLC ±.01 3 PLC ±.005 4 PLC ±.002		PRODUCT SPEC			
		ANGLES ±°		108-2292 APPLICATION SPEC 114-13251			
MATERIAL		FINISH		WEIGHT		SIZE CAGE CODE DRAWING NO RESTRICTED TO A 100779 G 6450830 -	
				CUSTOMER DRAWING		SCALE 4:1 SHEET 7 OF 42 REV S2	

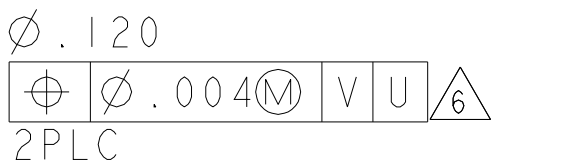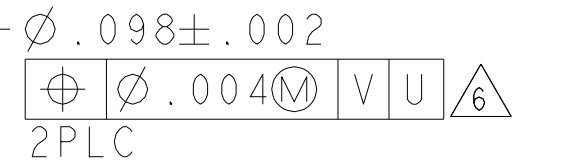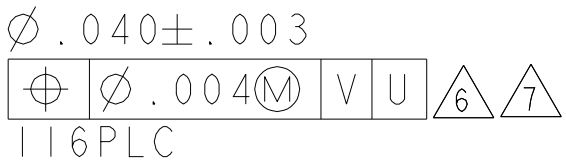NO CONTACTS LOADED

PART NUMBER	ROWS		POWER		SIGNAL						POWER				
			P1	P2	1	2	3	4	5	6	P3	P4	P5	P6	
I-6450830-3	D C B A		TM	TM		J	J	J	J	J	TM	TM	TM	TM	
						K	K	K	K	K					
						N	N	N	N	N					
						S	S	S	S	S					
2ACP + 24S + 4P															

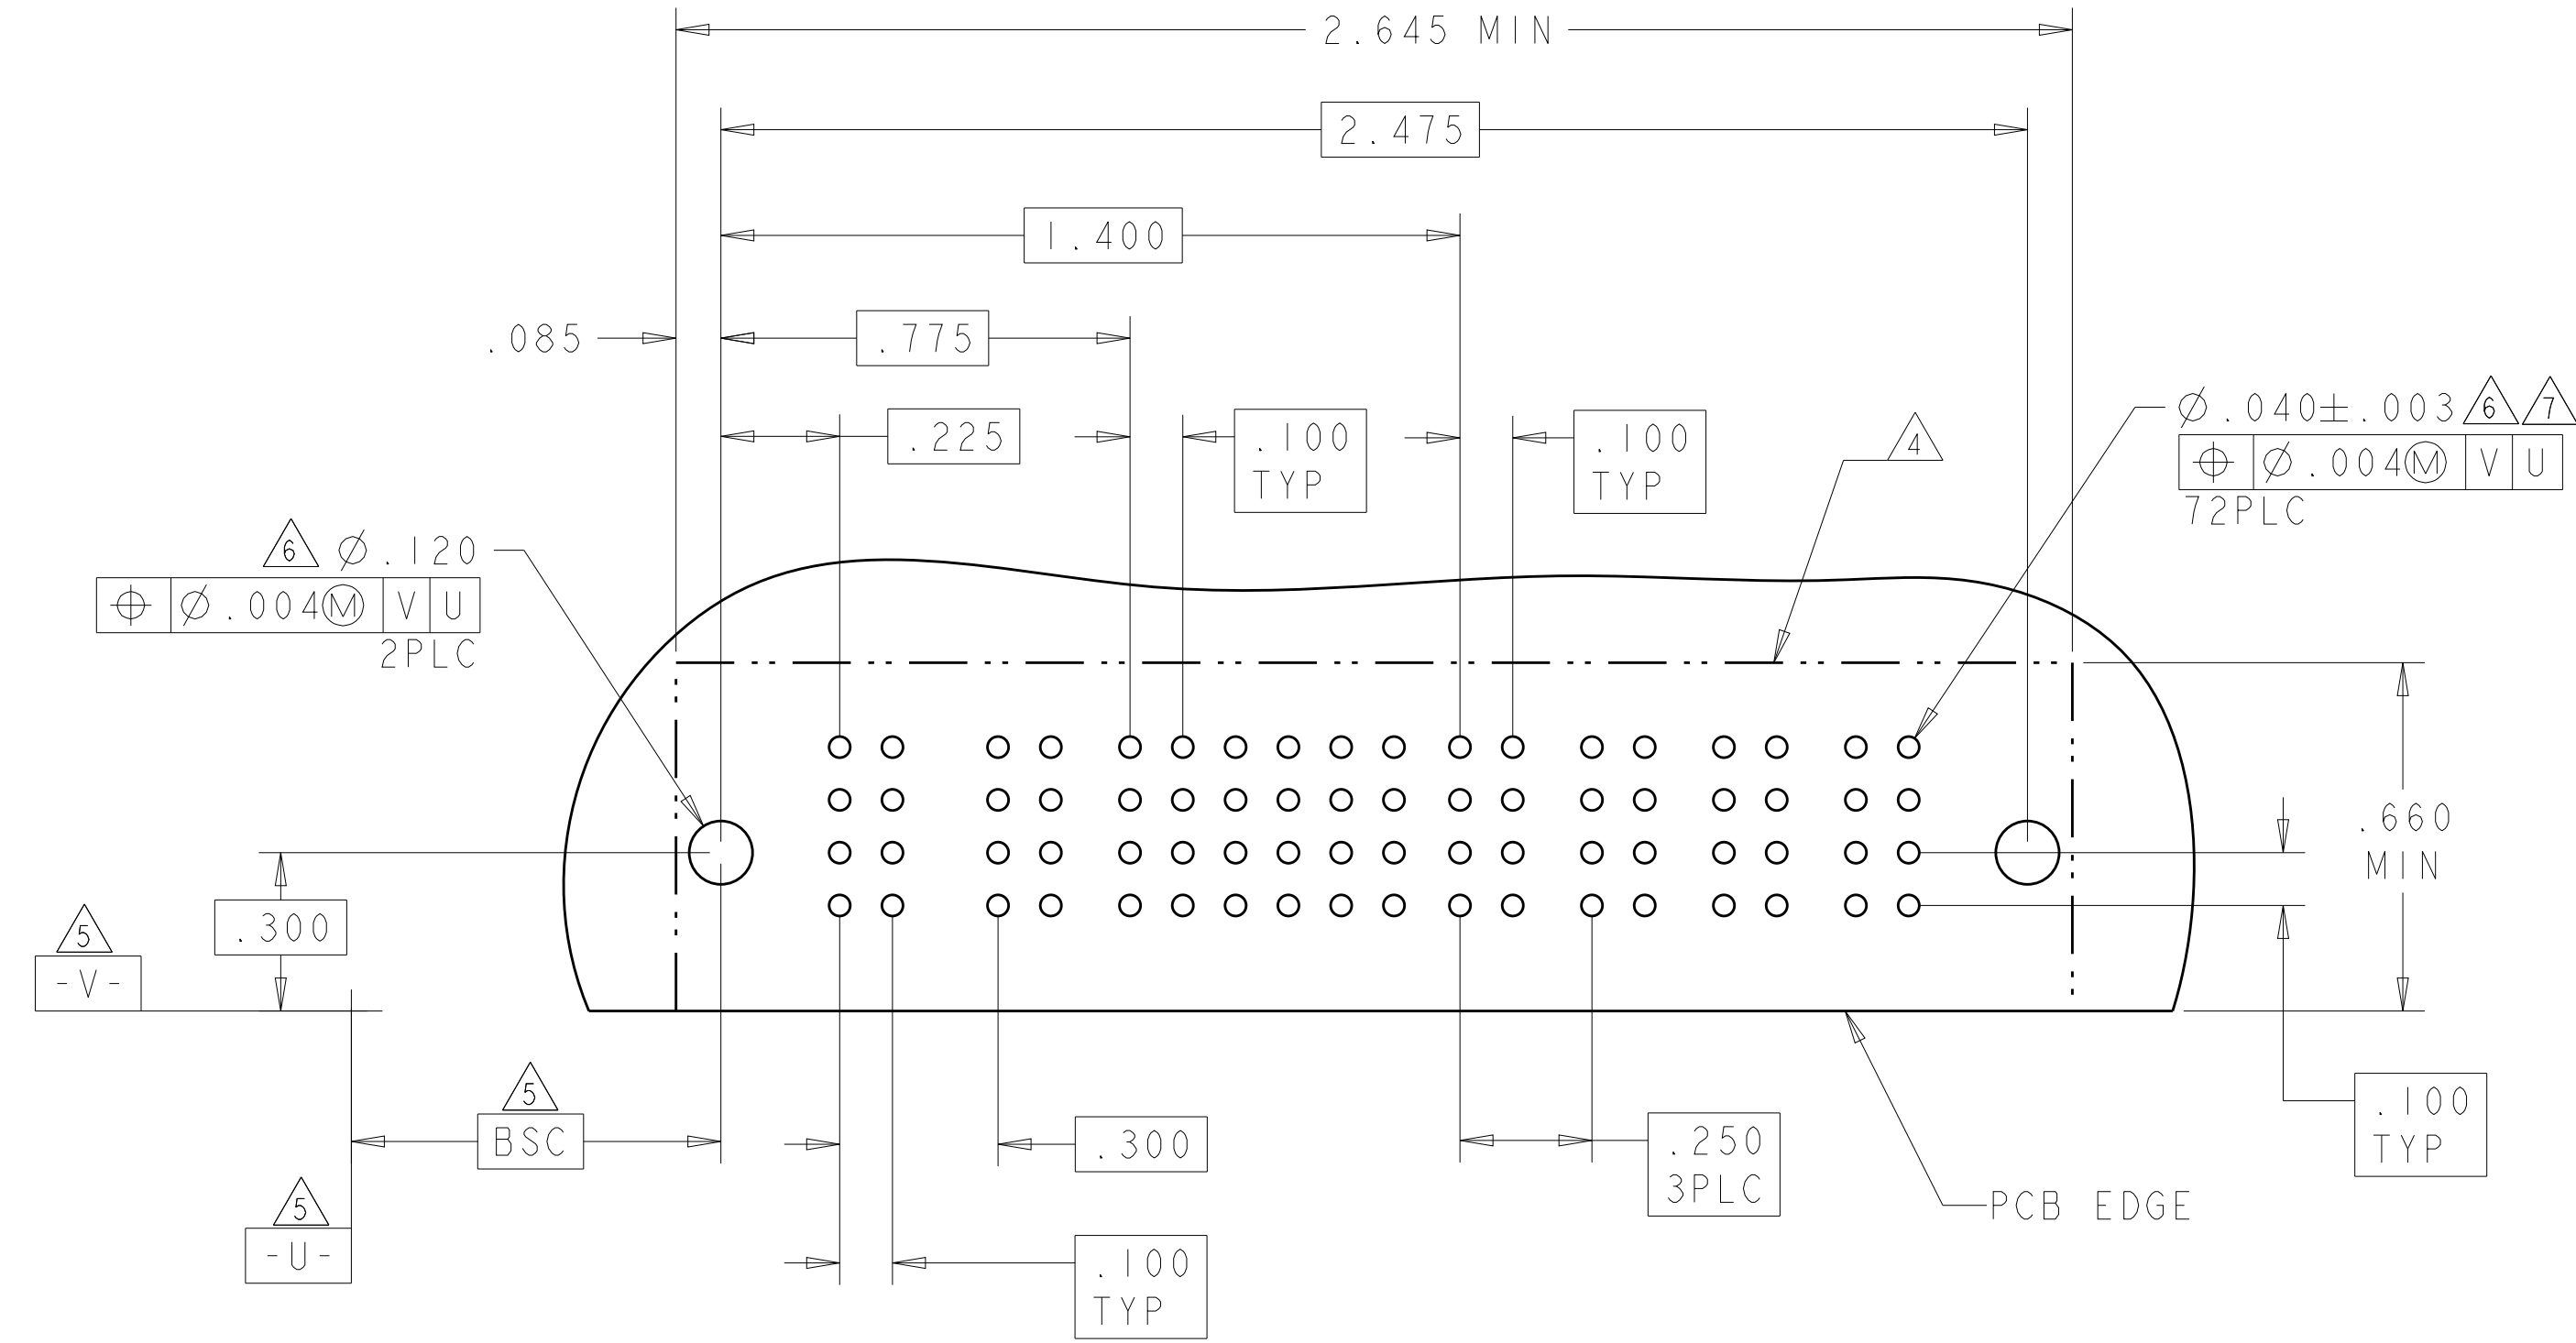

PART NUMBER	ROWS		POWER		SIGNAL						POWER		
			P1	P2	1	2	3	4	5	6	P3	P4	
I-6450830-4	D C B A		TM	TM	J	J	J	J	J	J	TM	TM	
					K	K	K	K	K	K			
					N	N	G	N	N	N			
					S	S	S	S	S	S			
2P + 24S + 2P													



LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			-	SEE SHEET 1	-	-	-

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
S.ZHAO
CHK
S.ZHAO
APVD
S.ZHAO

10APR2007
10APR2007
-

DIMENSIONS:
INCHES

MATERIAL
-

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±.
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH

PRODUCT SPEC
108-2292
APPLICATION SPEC
114-13251
WEIGHT
-

NAME
RIGHT ANGLE WITH SHORT GUIDES
AND LP CONTACTS ASSEMBLY
MULTI-BEAM XLE

SIZE
A1

CAGE CODE
00779

DRAWING NO
6450830

RESTRICTED TO
-

CUSTOMER DRAWING

SCALE
4:1

SHEET
9

OF
42

REV
S2

TE Connectivity


TE Connectivity

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS		POWER								SIGNAL					POWER					
			P1	P2	P3	P4	P5	P6	P7	P8	1	2	3	4	5	LP1	LP2	LP3	LP4	LP5	
I-6450830-2	D C B A		TM	TM	TM	TM	TM	TM	TM	J	J	J	J	J	LMF		LM		LM		
										K	K	K	K	K							
										N	N	N	N	N							
8HDP + 20S + 5LP											S	S	S	S	S						HD


.250
6 PLC

.200
6 PLC

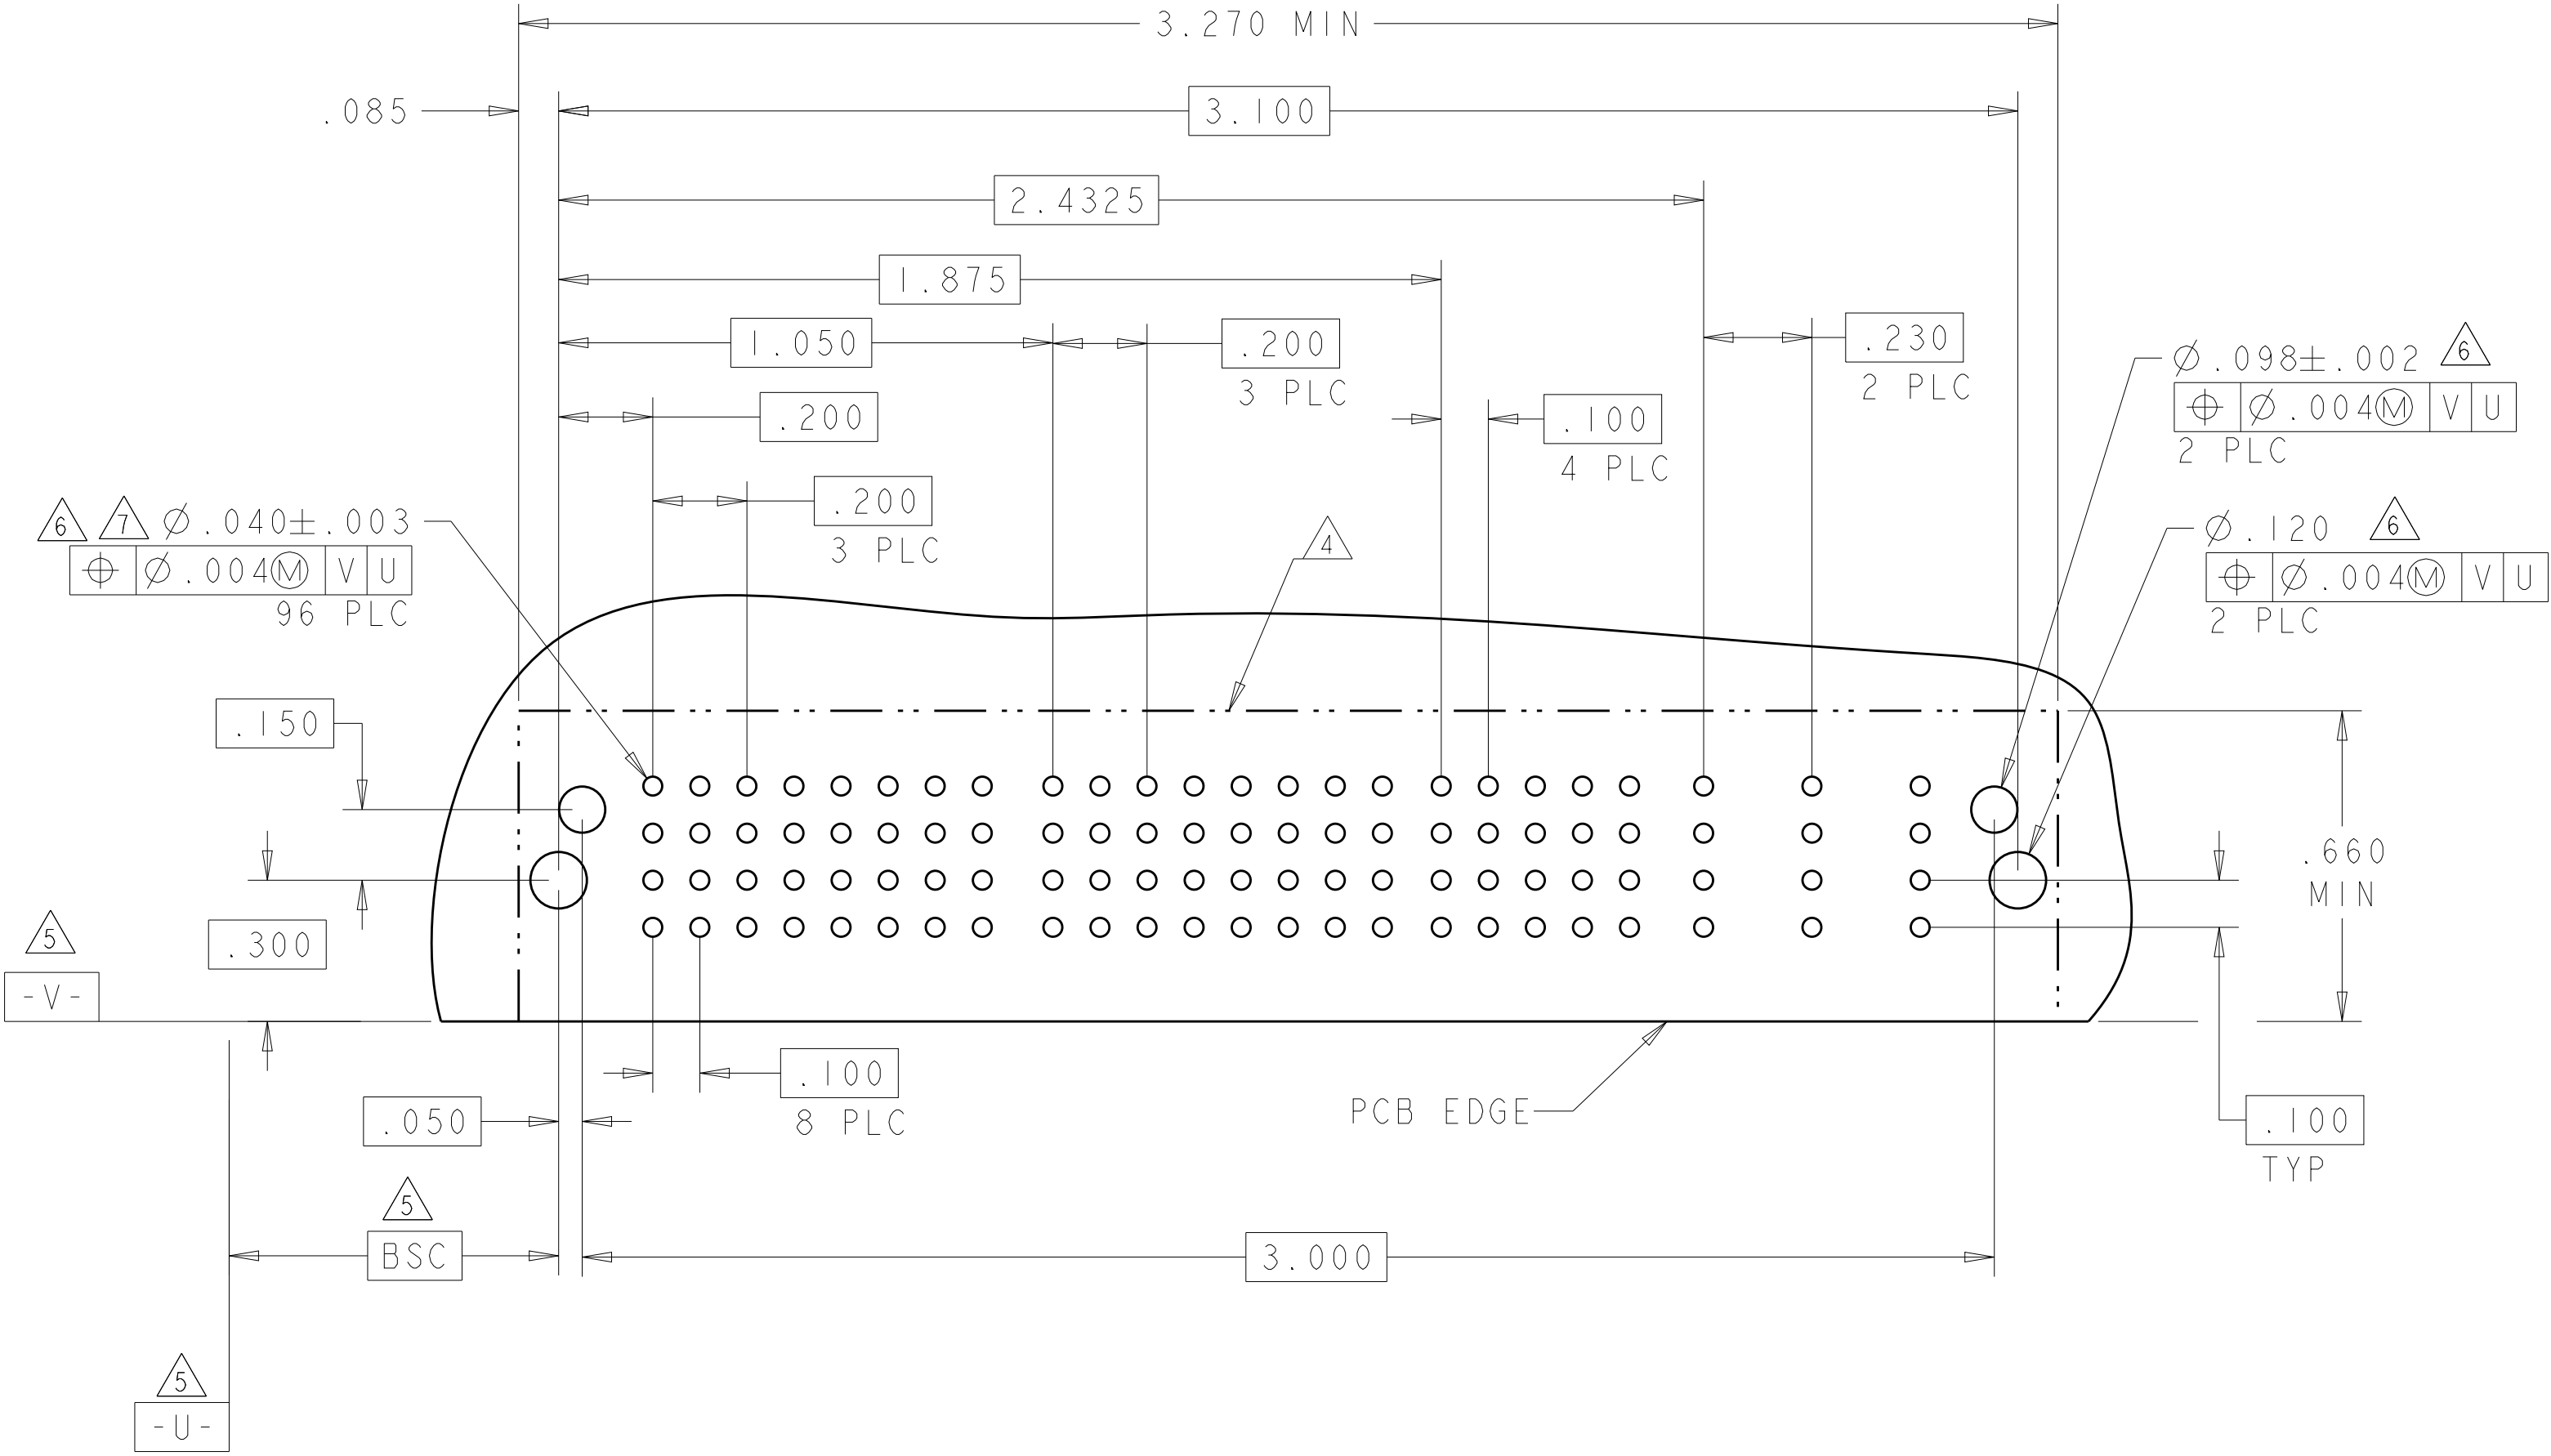

PART NUMBER	ROWS		POWER				SIGNAL							POWER			
			P1	P2	P3	P4	1	2	3	4	5	6	7	P5	P6	P7	
I-6450830-5	D C B A	 HD	TM	TM	TM	TM	J	J	J	J	J			TM	TM	 HD	
							K	K	K	K	K						
							N	N	N	N	N						
							S	S	S	S	S						
4P + 28S + 3ACP																	

NO CONTACTS LOADED

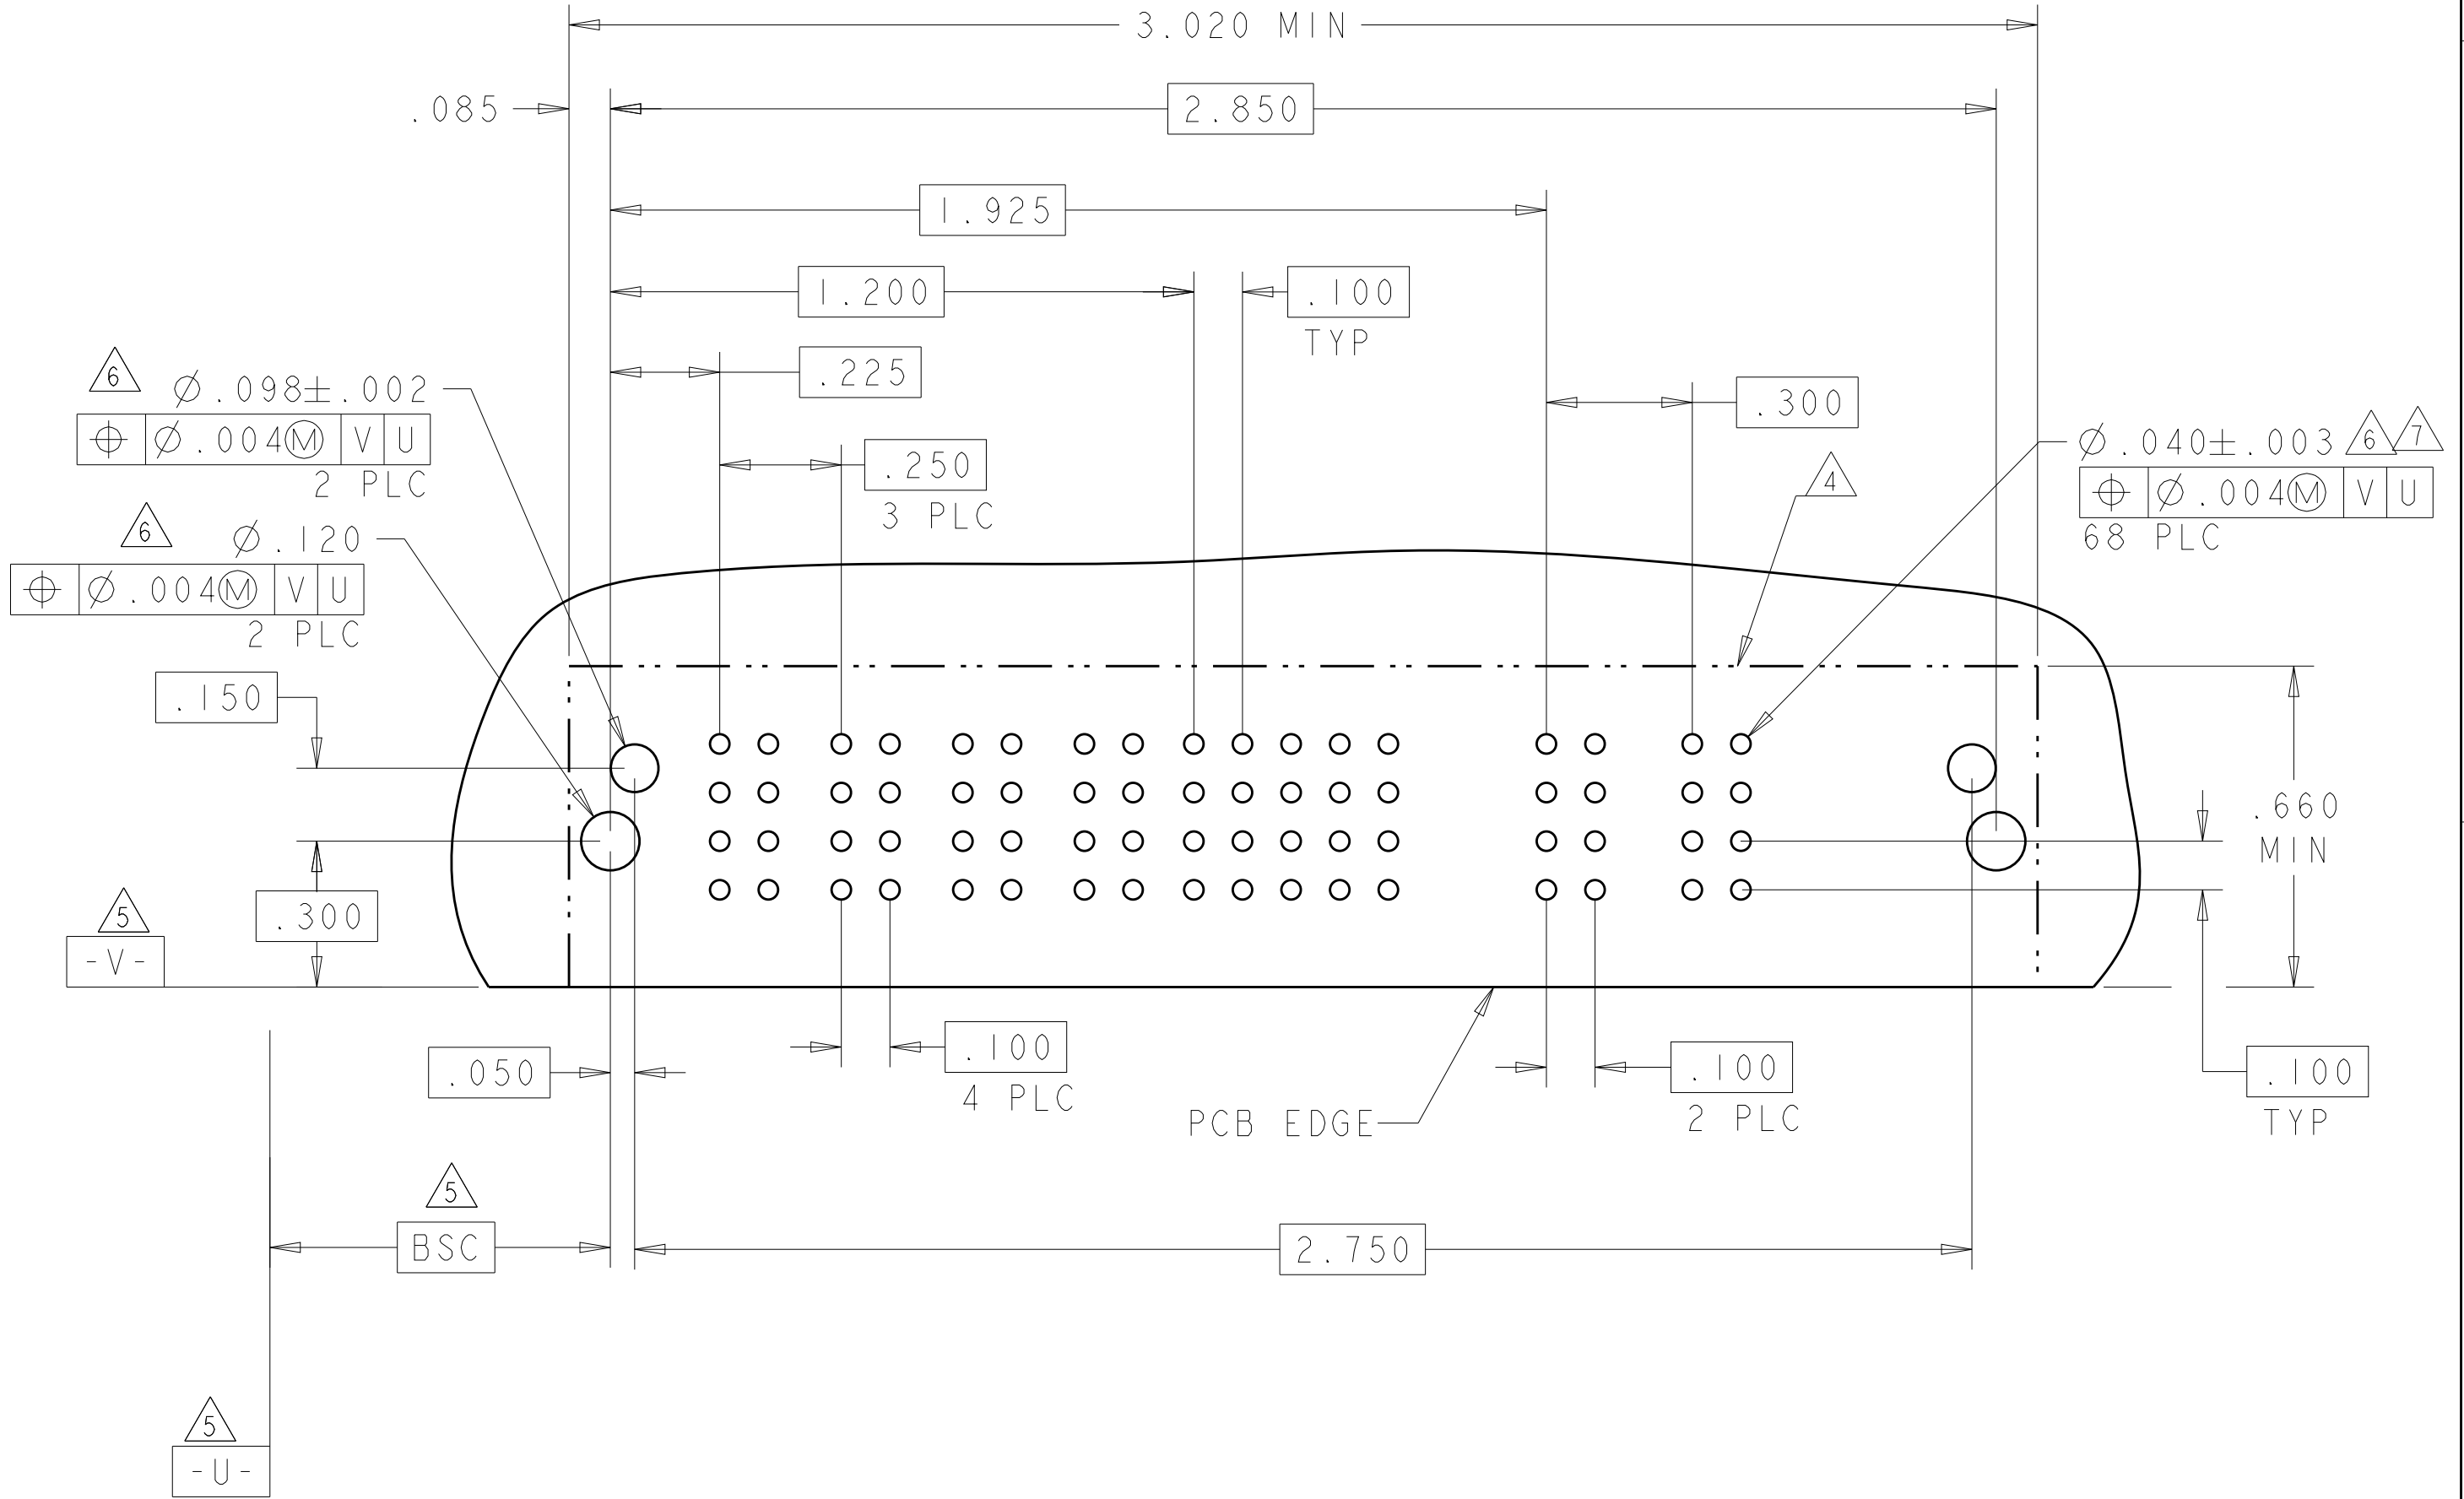

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN S.ZHAO 10APR2007
CHK S.ZHAO 10APR2007
APVD S.ZHAO -

DIMENSIONS:
INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH

MATERIAL

-

PRODUCT SPEC

108-2292

APPLICATION SPEC

114-13251

WEIGHT

-

CUSTOMER DRAWING

SCALE 4:1 SHEET 10 OF 42 REV S2

NAME

RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE

SIZE

A100779


CAGE CODE

6450830

RESTRICTED TO


-

TE Connectivity


[illegible]4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER			SIGNAL															
			P1	LP1	LP2	1	2	3	4	5	6	7	8	9	10	11	12	LP3	LP4	P2	
1-6450830-7	D		TM	LML	LML	E	E	E	E	E	E	E	E	E	E	E	LML	LMF	TM		
	F					F	F	F	F	F	F	F	F	F	F	F					
	G					G	G	G	G	G	G	G	G	G	G	G					G
	H					H	H	H	H	H	H	H	H	H	H	H					H
IP + 2LP + 48S + 2LP + IP																					

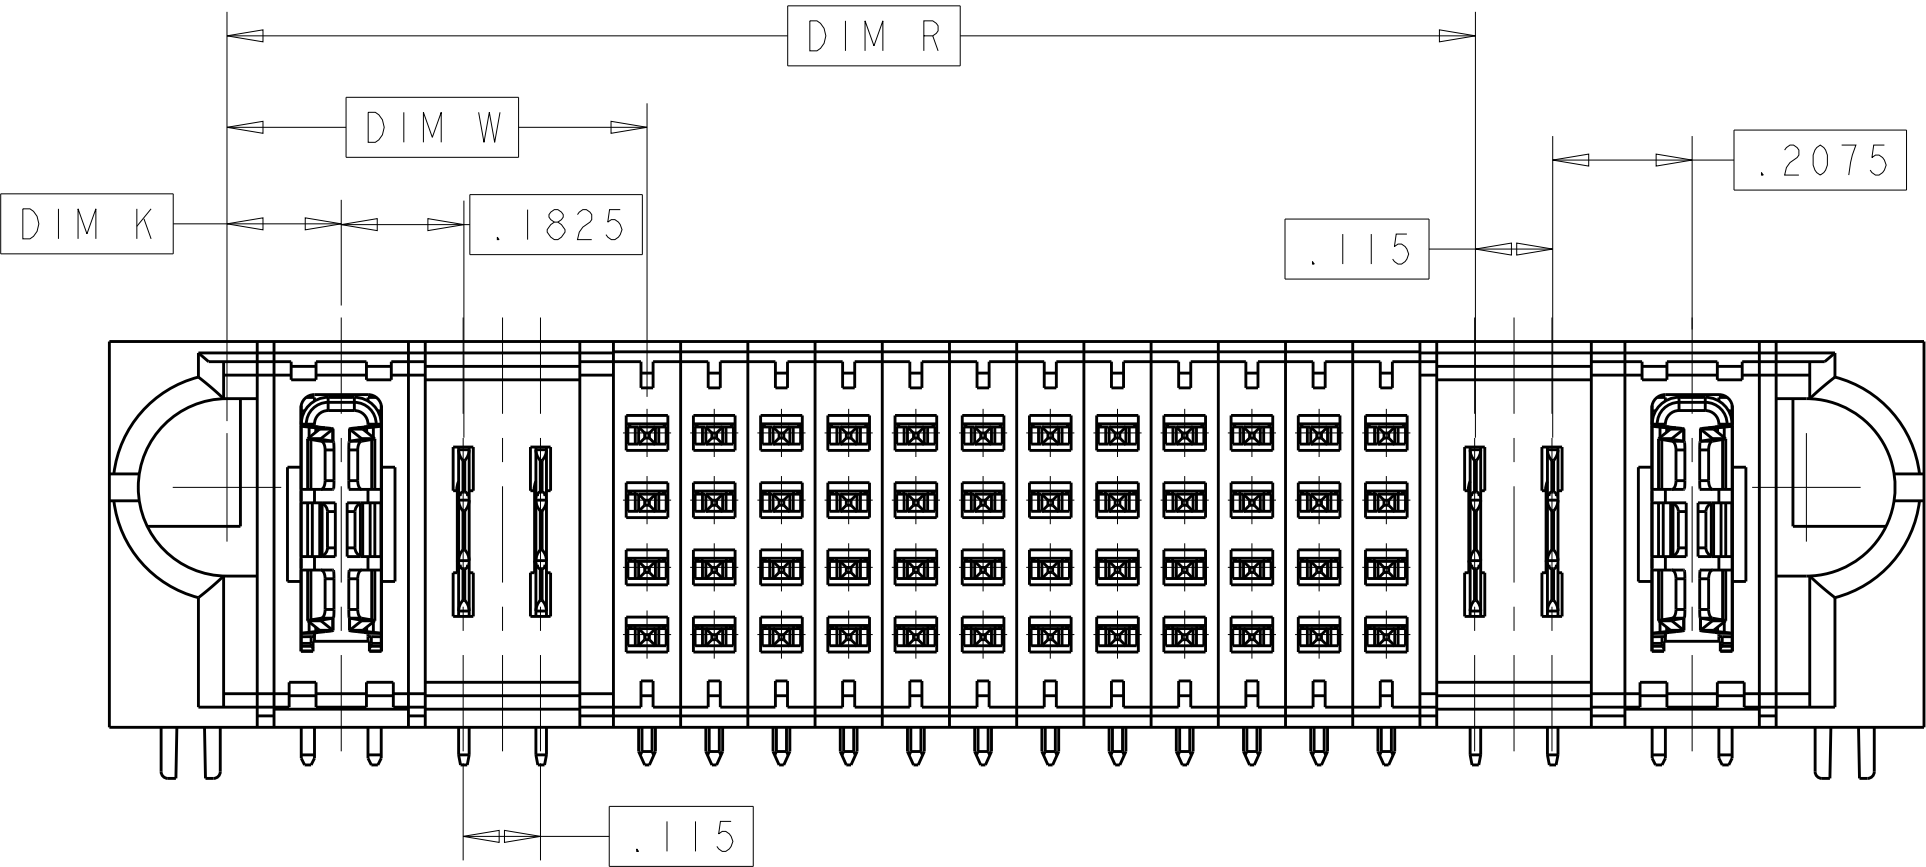

P/N:1-6450830-7 CONFIGURATION
UNSPECIFIED DIMENSION REFER TO SHEET 1

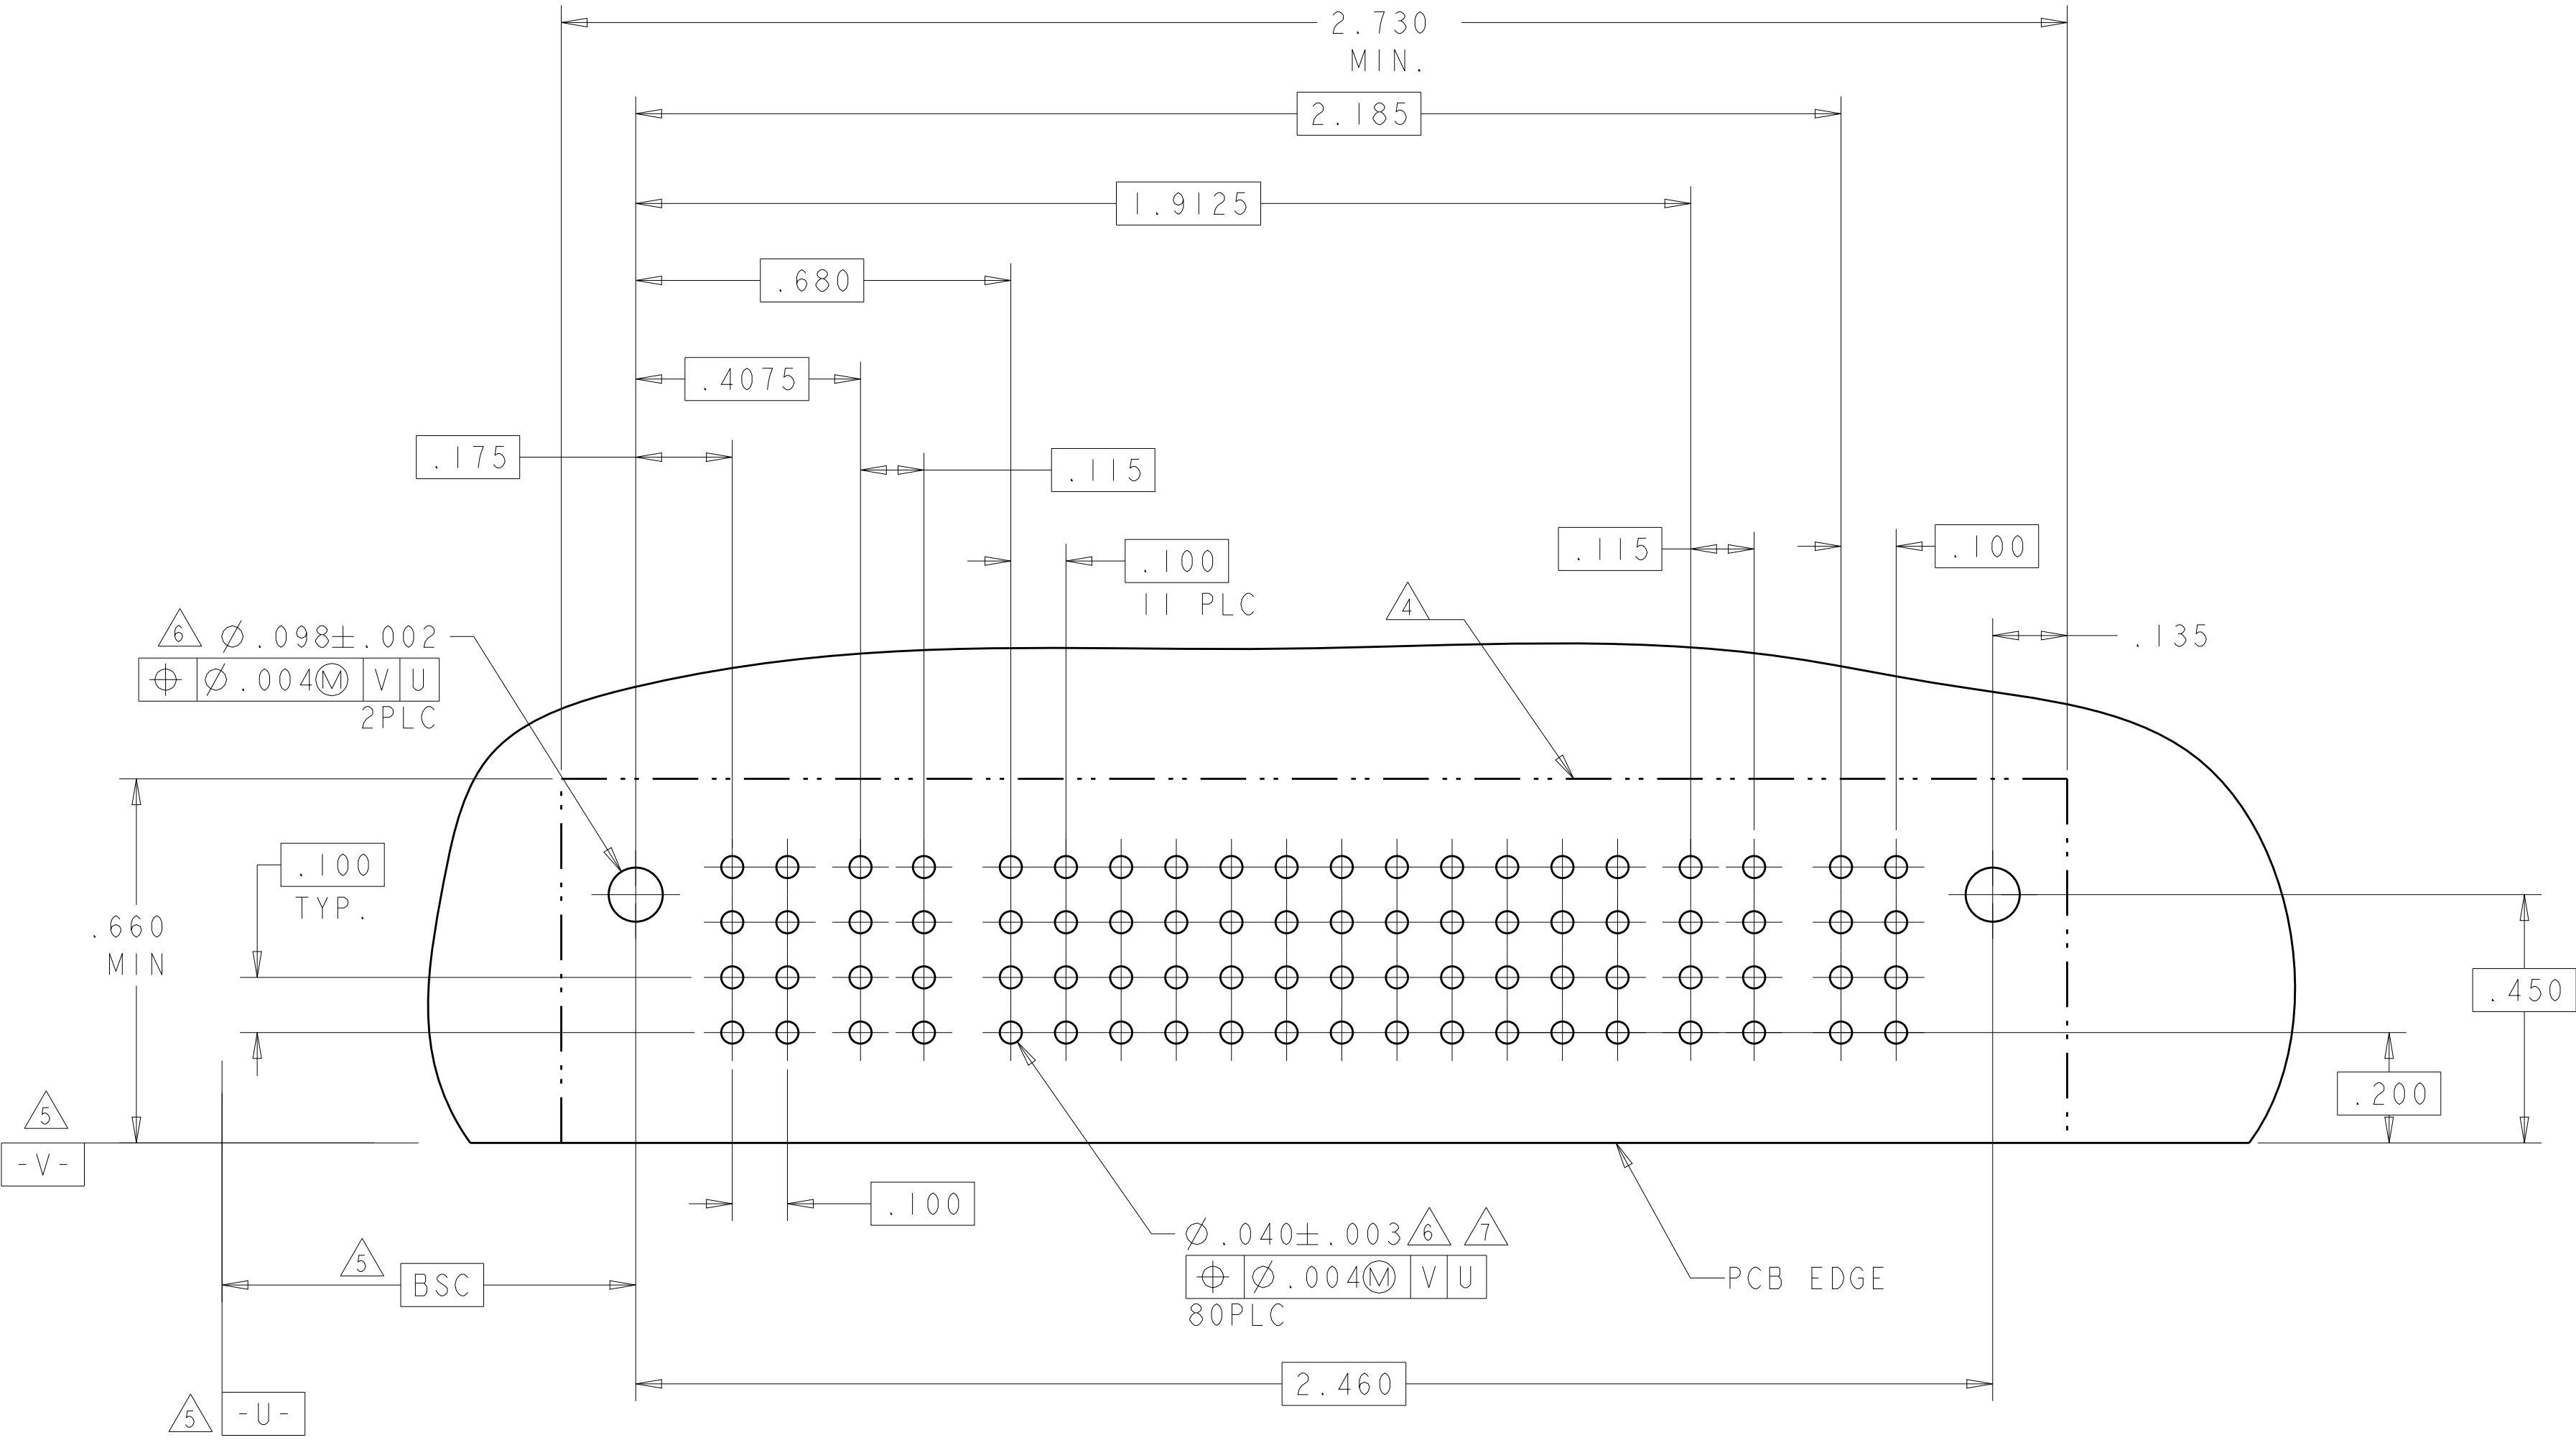

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

S. ZHAO

10APR2007

CHK

S. ZHAO

10APR2007

APVD

S. ZHAO

-

DIMENSIONS:

INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±"

1 PLC ±.01

2 PLC ±.01

3 PLC ±.005

4 PLC ±.0020

ANGLES ±2°

FINISH

-

MATERIAL

-

PRODUCT SPEC

108-2292

APPLICATION SPEC

114-13251

WEIGHT

-

CUSTOMER DRAWING

NAME

RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE

SIZE

A1

CAGE CODE

00779

DRAWING NO

6450830

RESTRICTED TO

-

SCALE

4:1

SHEET

12

OF





42

REV


S2

TE Connectivity

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-


PART NUMBER	ROWS		POWER				SIGNAL							POWER			
			P1	P2	P3	P4	1	2	3	4	5	6	7	P5	P6	P7	
I-6450830-9	D C B A	 HD	 TM	 TM	 TM	 TM	J	J	J	J	J			 TM	 TM	 TM	 HD
							K	K	K	K	K						
							N	N	N	N	N						
							S	S	S	S	S						
4P + 28S + 3ACP																	

NO CONTACTS LOADED

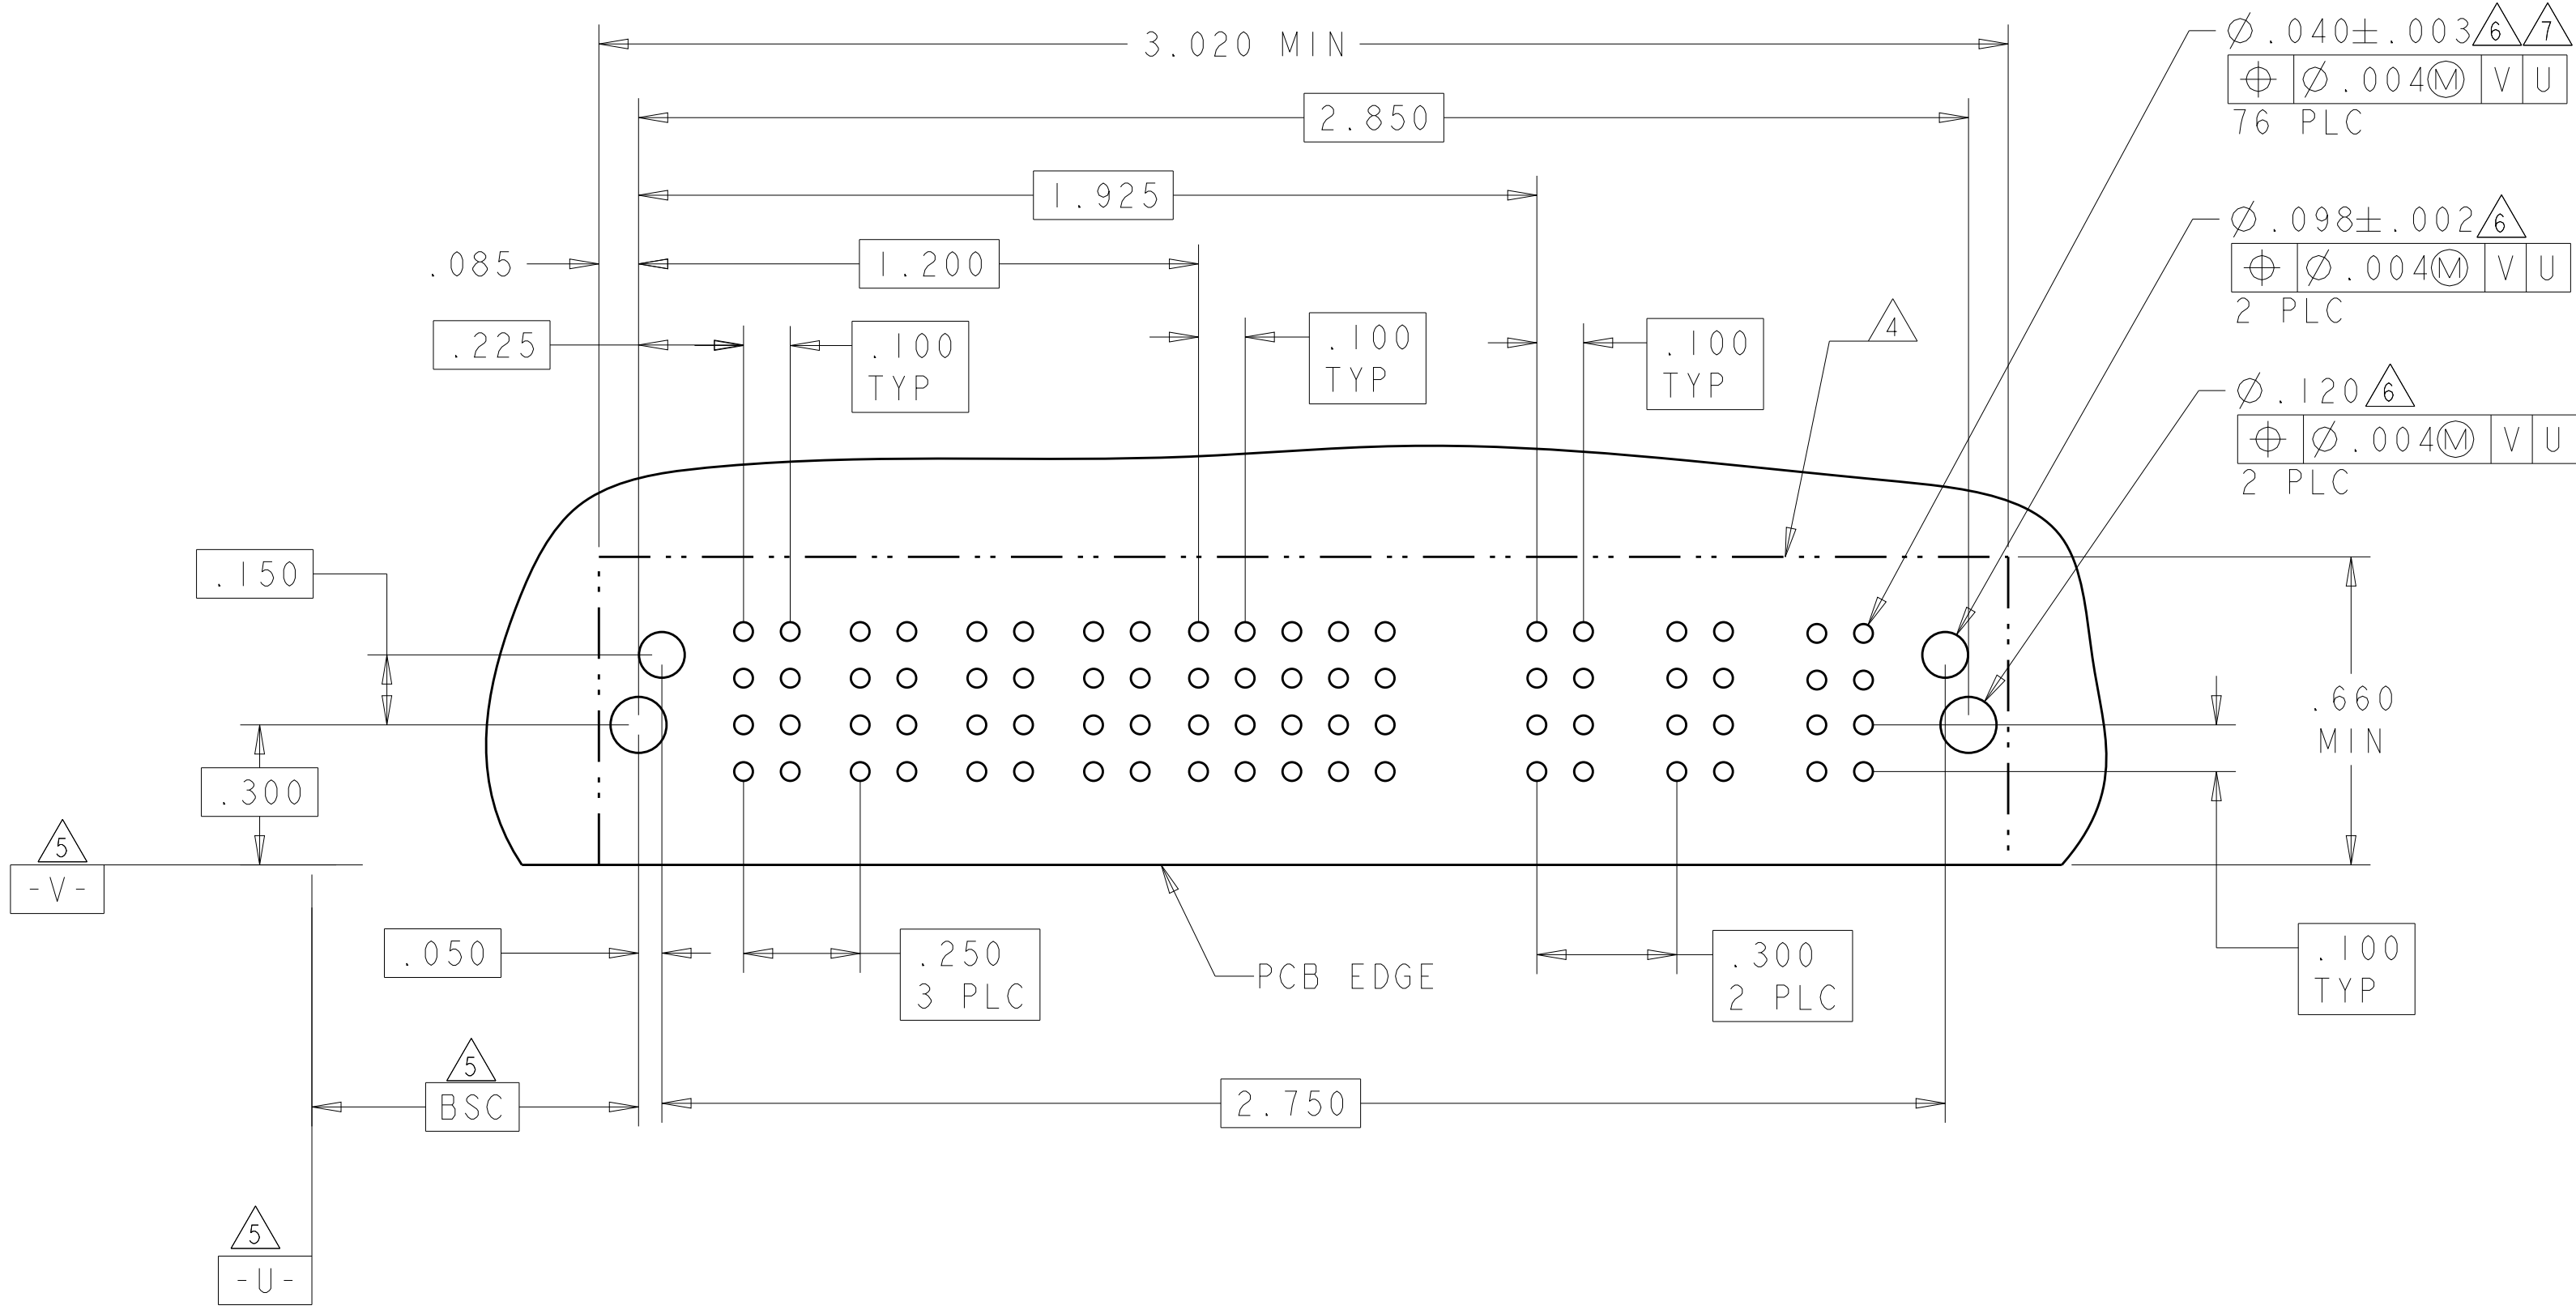


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. ZHAO	10APR2007		
		CHK S. ZHAO	10APR2007		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ±.01		PRODUCT SPEC	
		1 PLC ±.01		108-2292	
		2 PLC ±.01		APPLICATION SPEC	
		3 PLC ±.005		114-13251	
		4 PLC ±.0020		WEIGHT	
		ANGLES ±.0020		CUSTOMER DRAWING	
		FINISH		SCALE 4:1	
MATERIAL		SHEET 13 OF 42		REV S2	



PART NUMBER	ROWS		POWER	SIGNAL						POWER	
			P1	1	2	3	4	5	6	P2	
2-6450830-6	D		TM	J	J	J	J	J	J	TM	
	K			K	K	K	K	K			
	N			N	N	N	N	N			
	H			S	S	S	S	S			
		HD									
IP + 24S + IP											

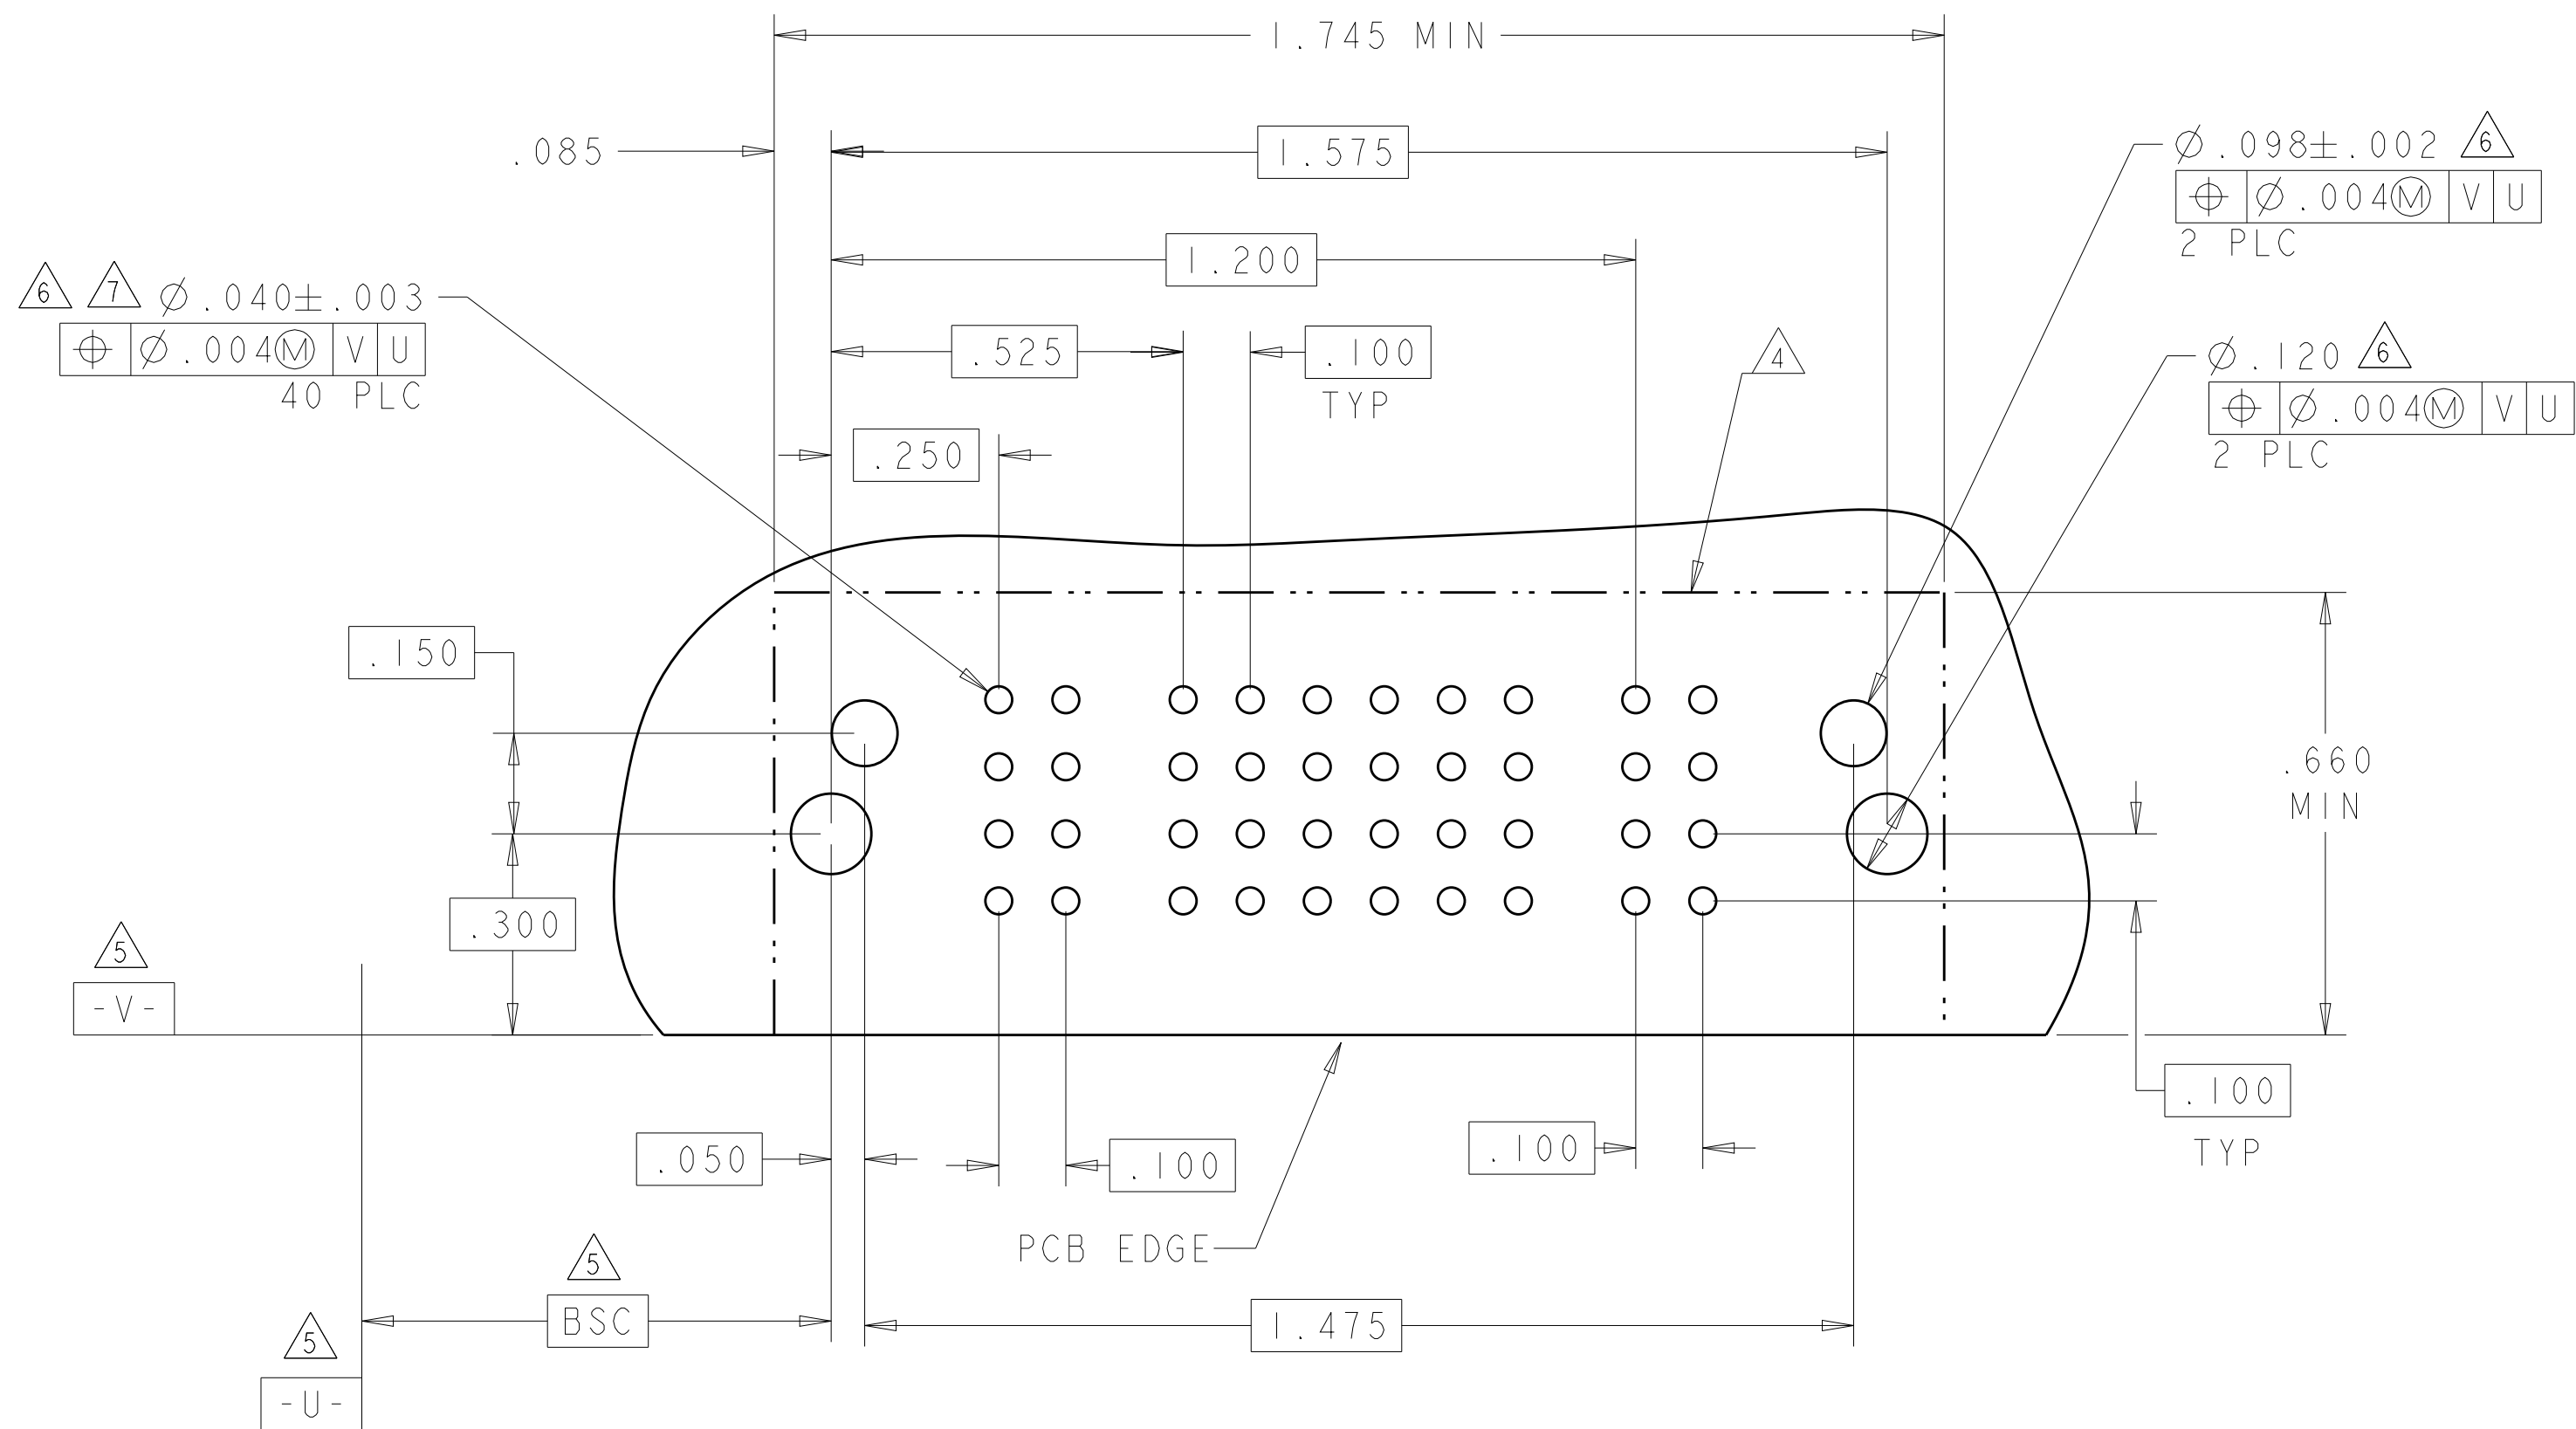4805 (3/11)

PART NUMBER	ROWS		POWER		SIGNAL					POWER		
			P1	P2	1	2	3	4	5	P3	P4	
2-6450830-8	D		TM	TM	J	J	J	J	J	TM	TM	
	K				K	K	K	K				
	N				N	N	N	N				
	S				S	S	S	S				
	A	HD										HD
2P + 20S + 2P												

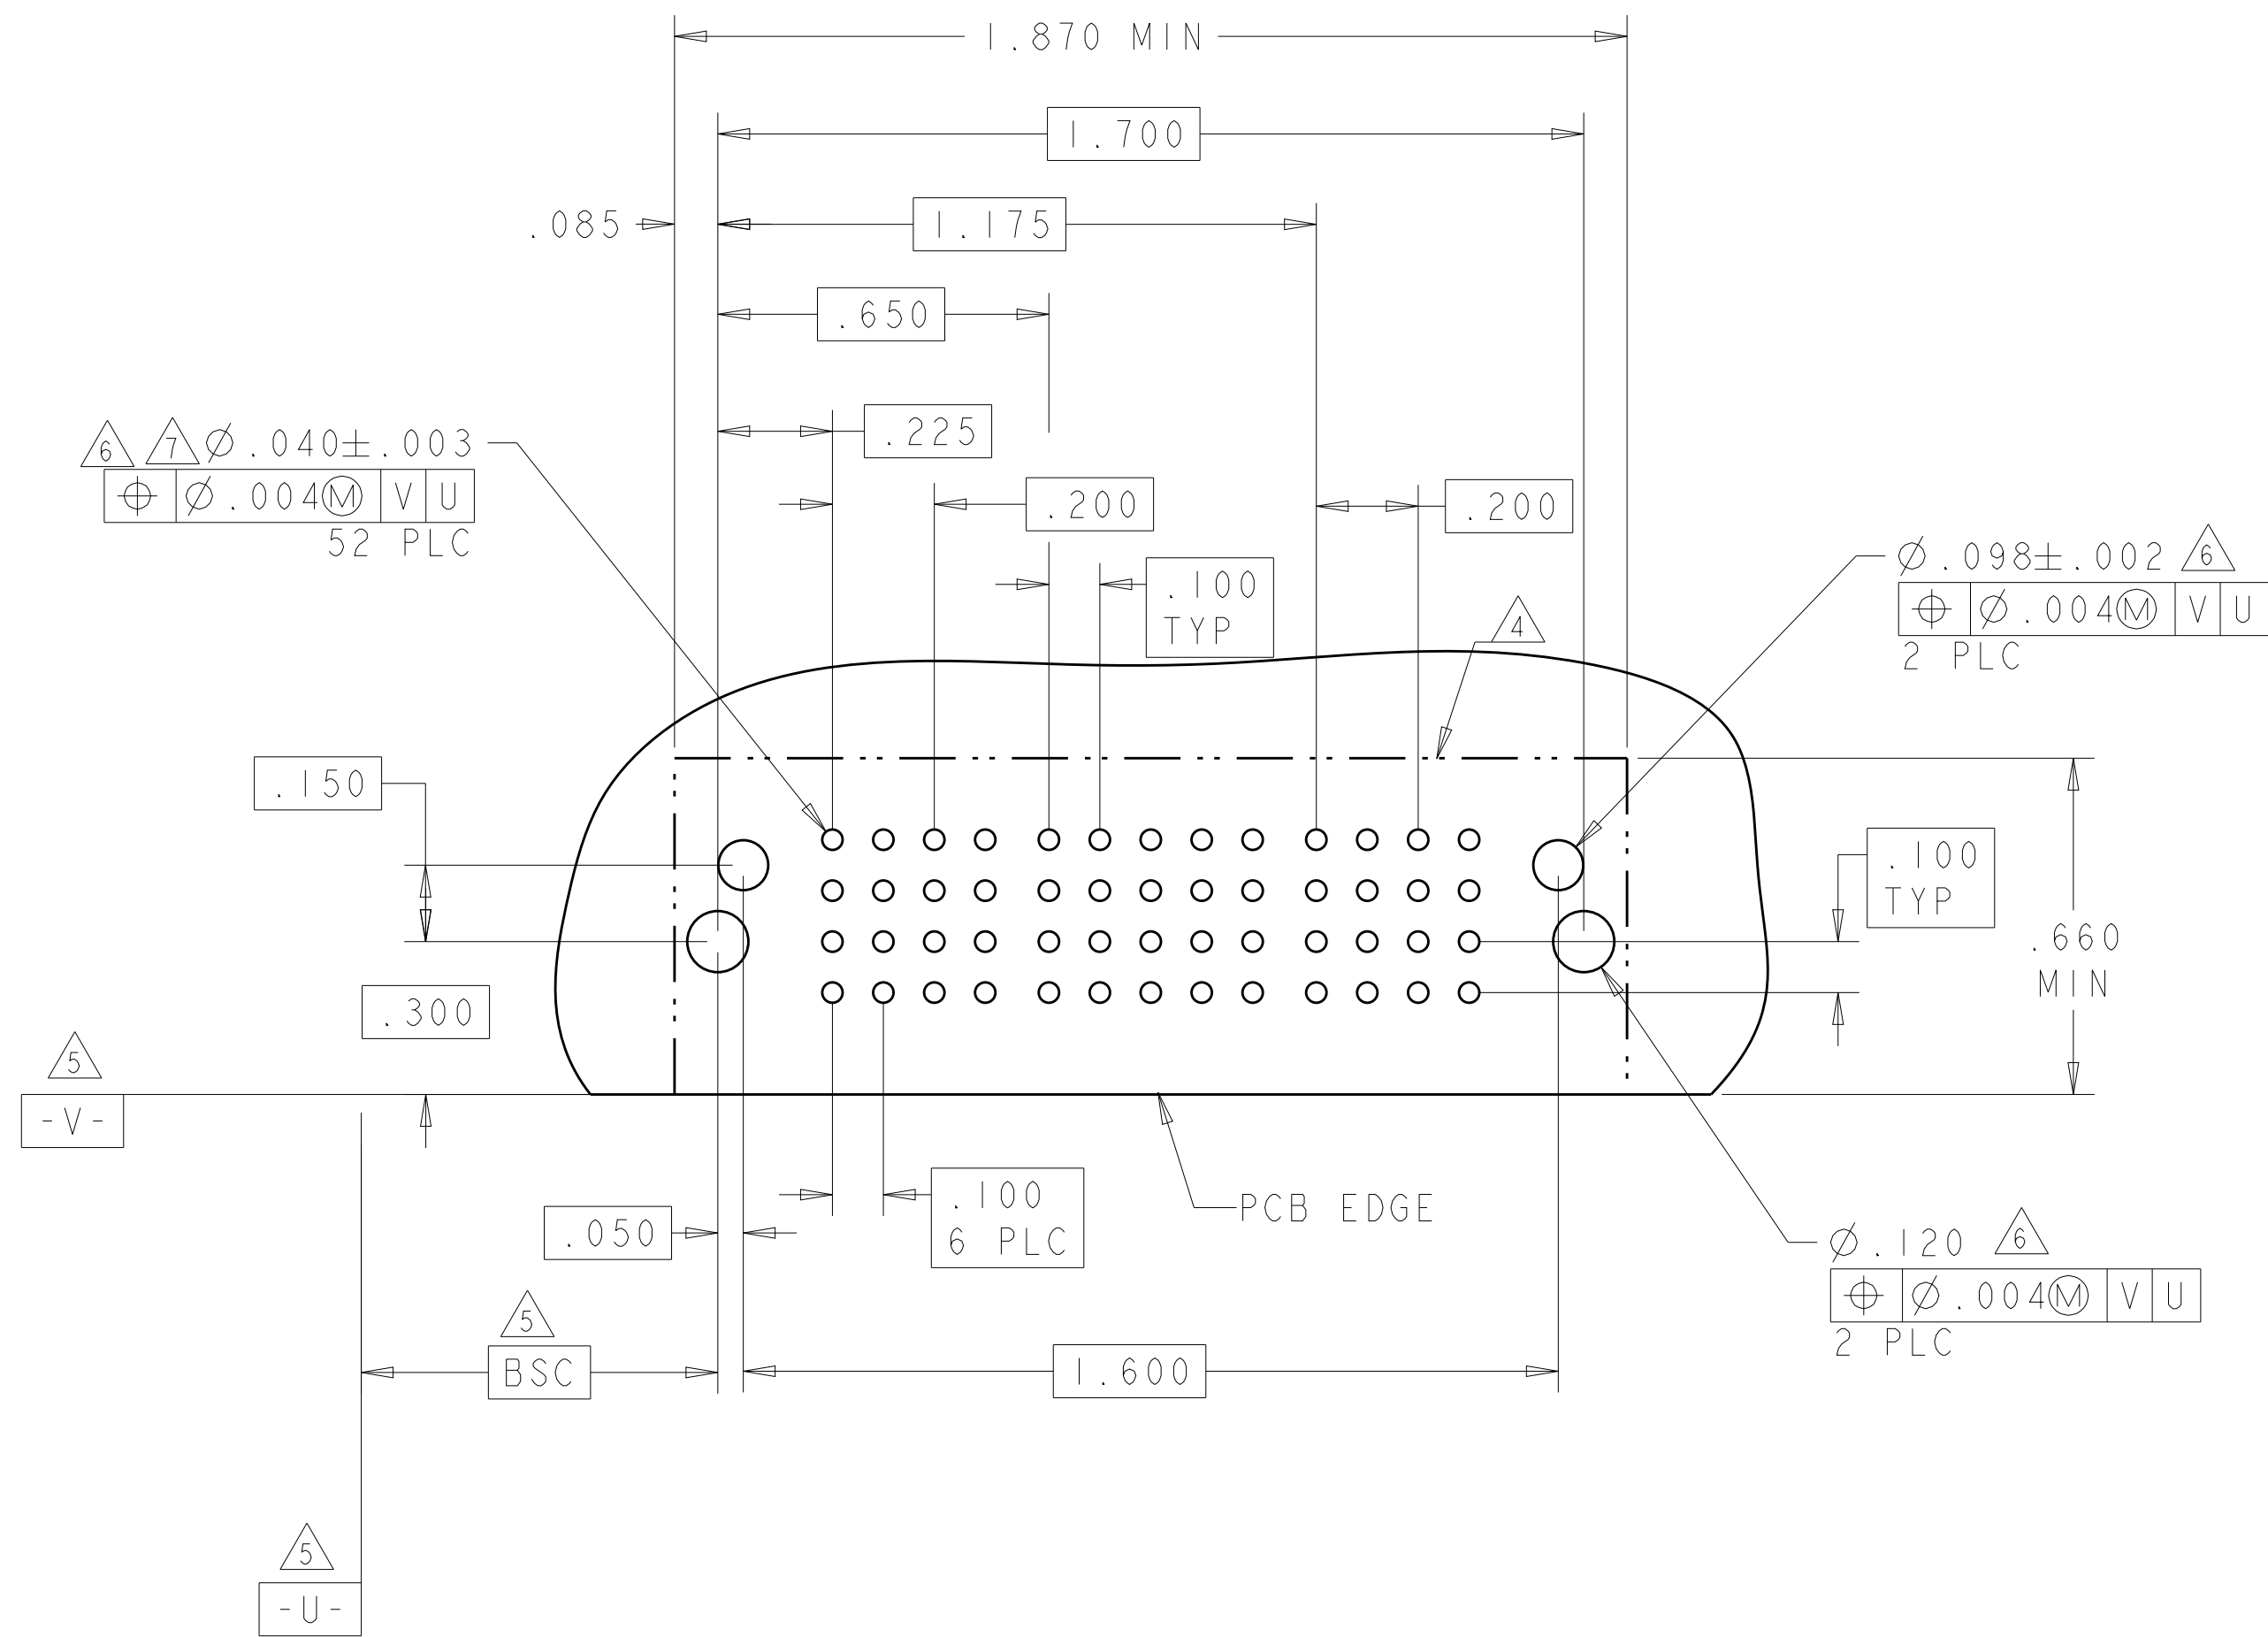
4805 (3/11)


PART NUMBER	ROWS		POWER		SIGNAL		POWER				
			P1	P2	1	2	LP1	LP2	LP3	LP4	
3-6450830-6	D		TM	TM	J	J	LM	LM	LM	LM	
	K				K						
	N				N						
	S				S						
HD											
2ACP + 8S + 4LP											

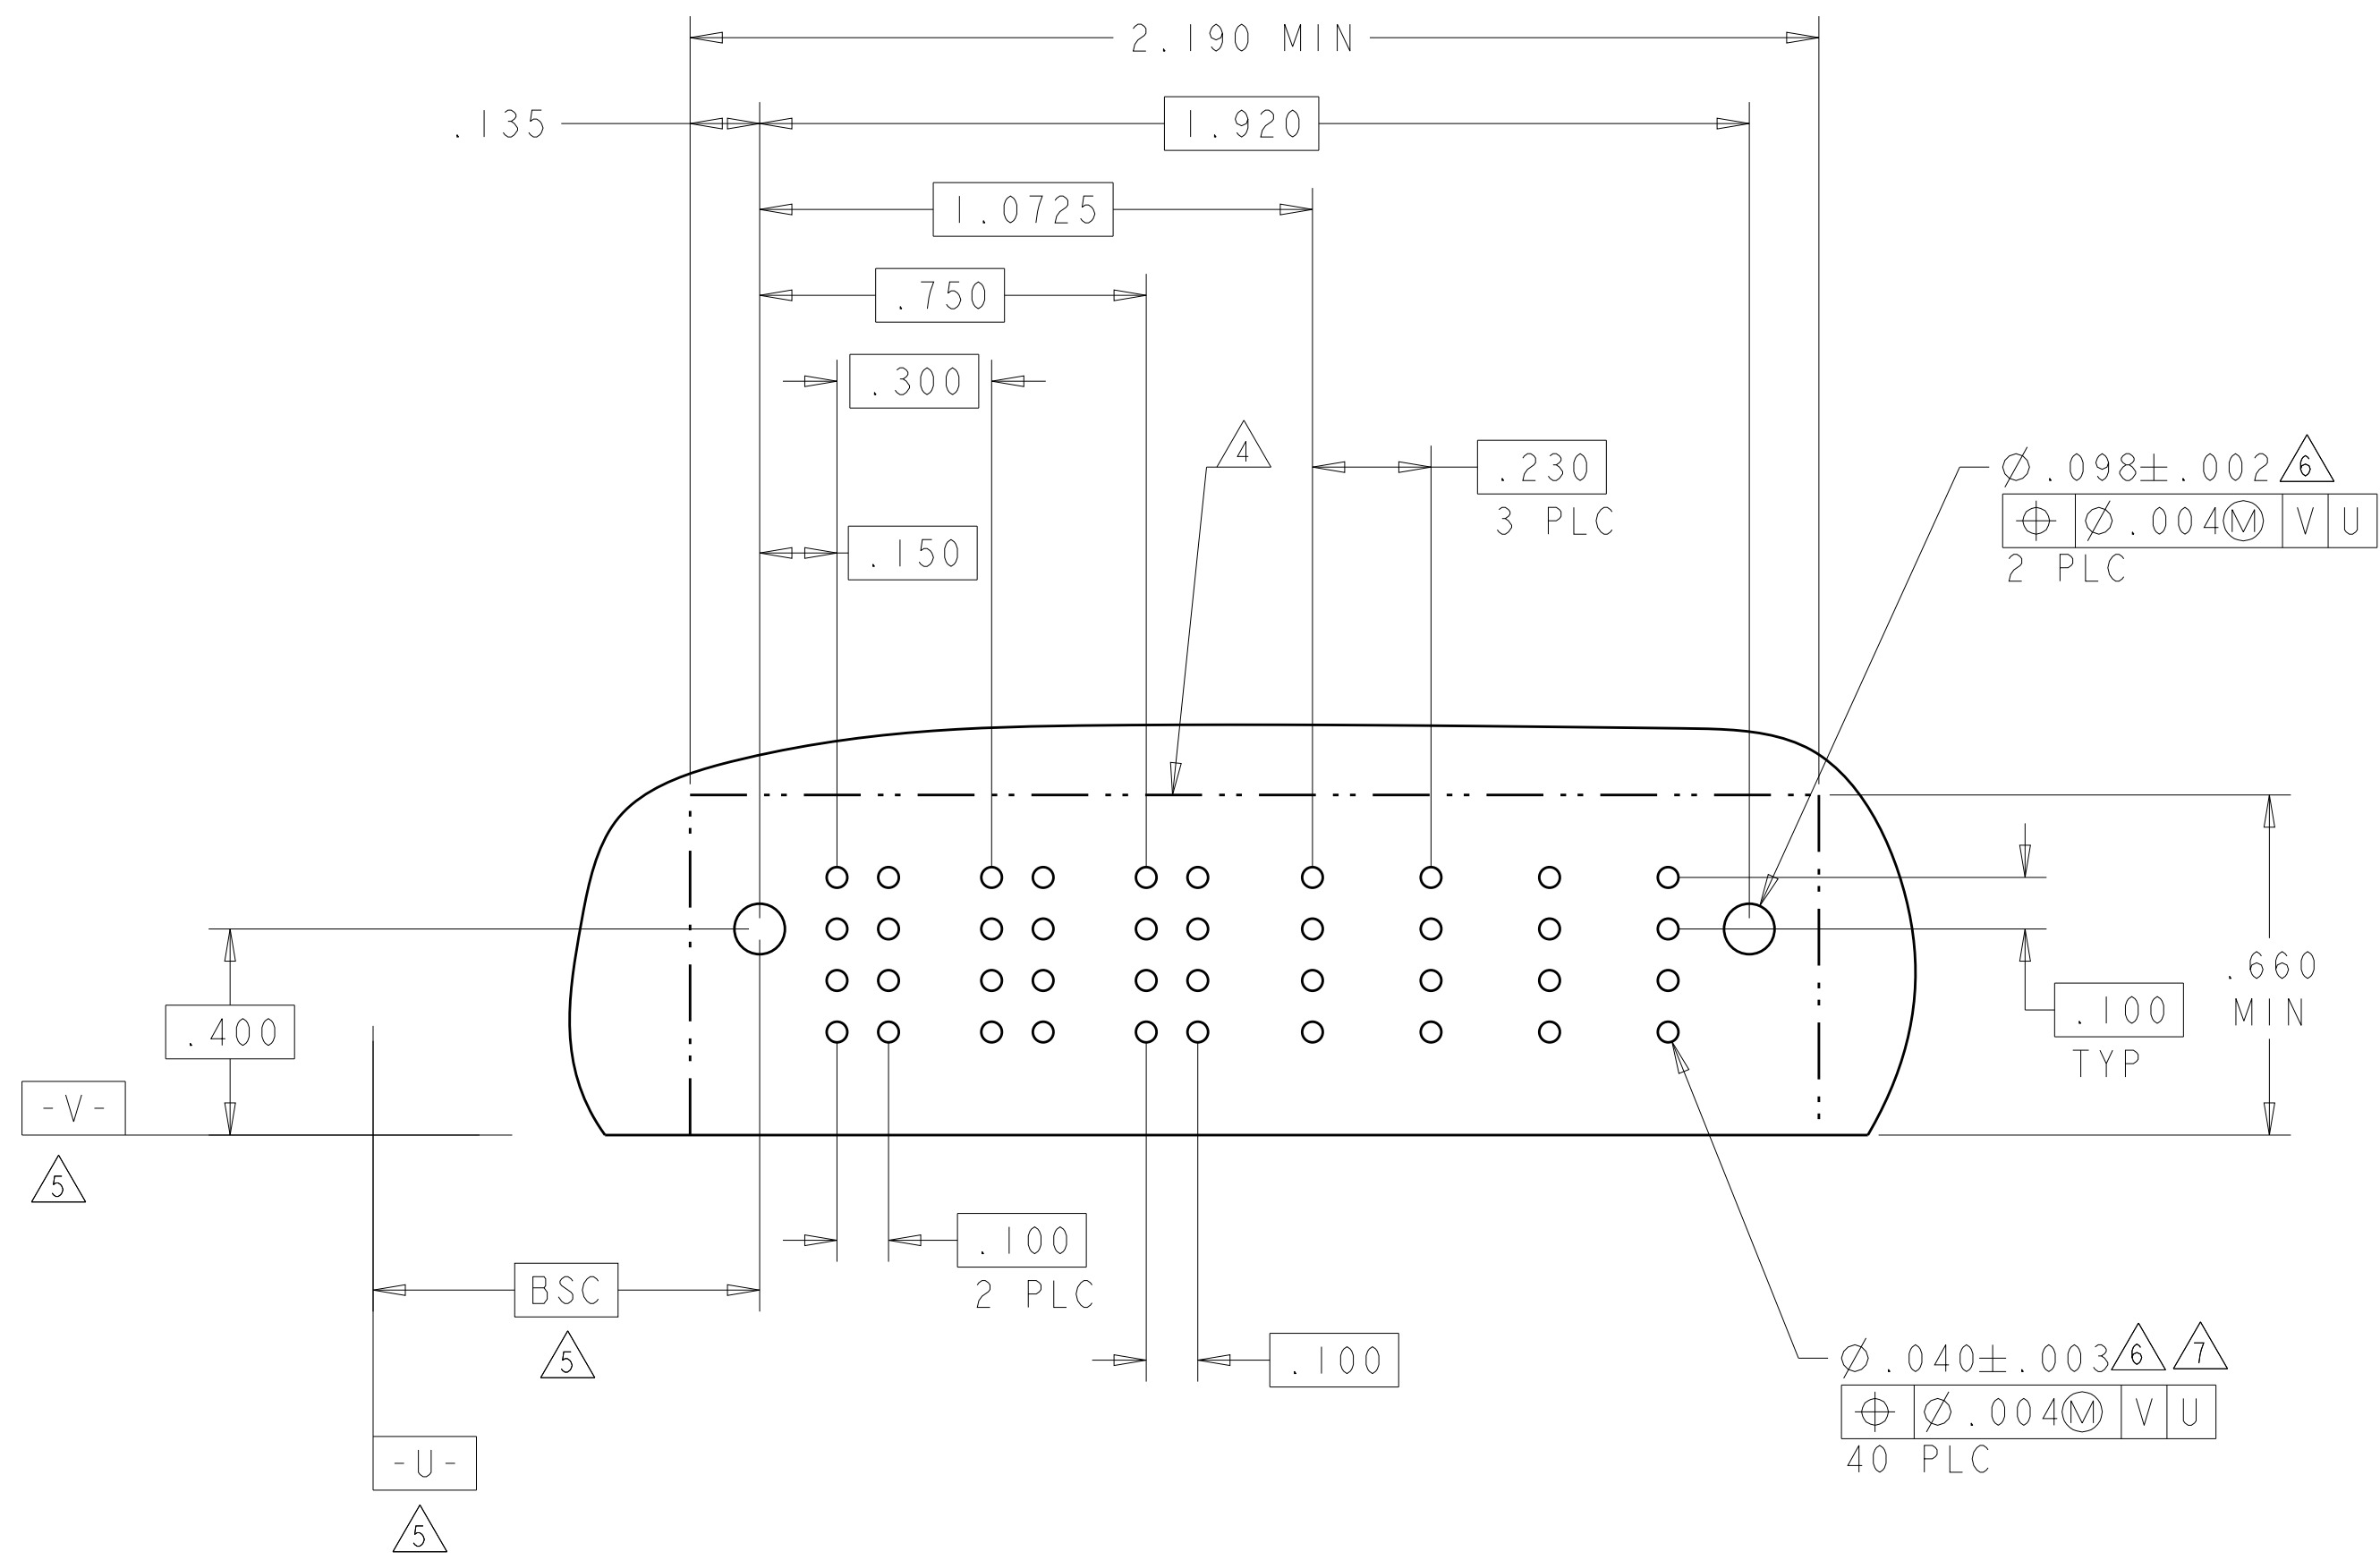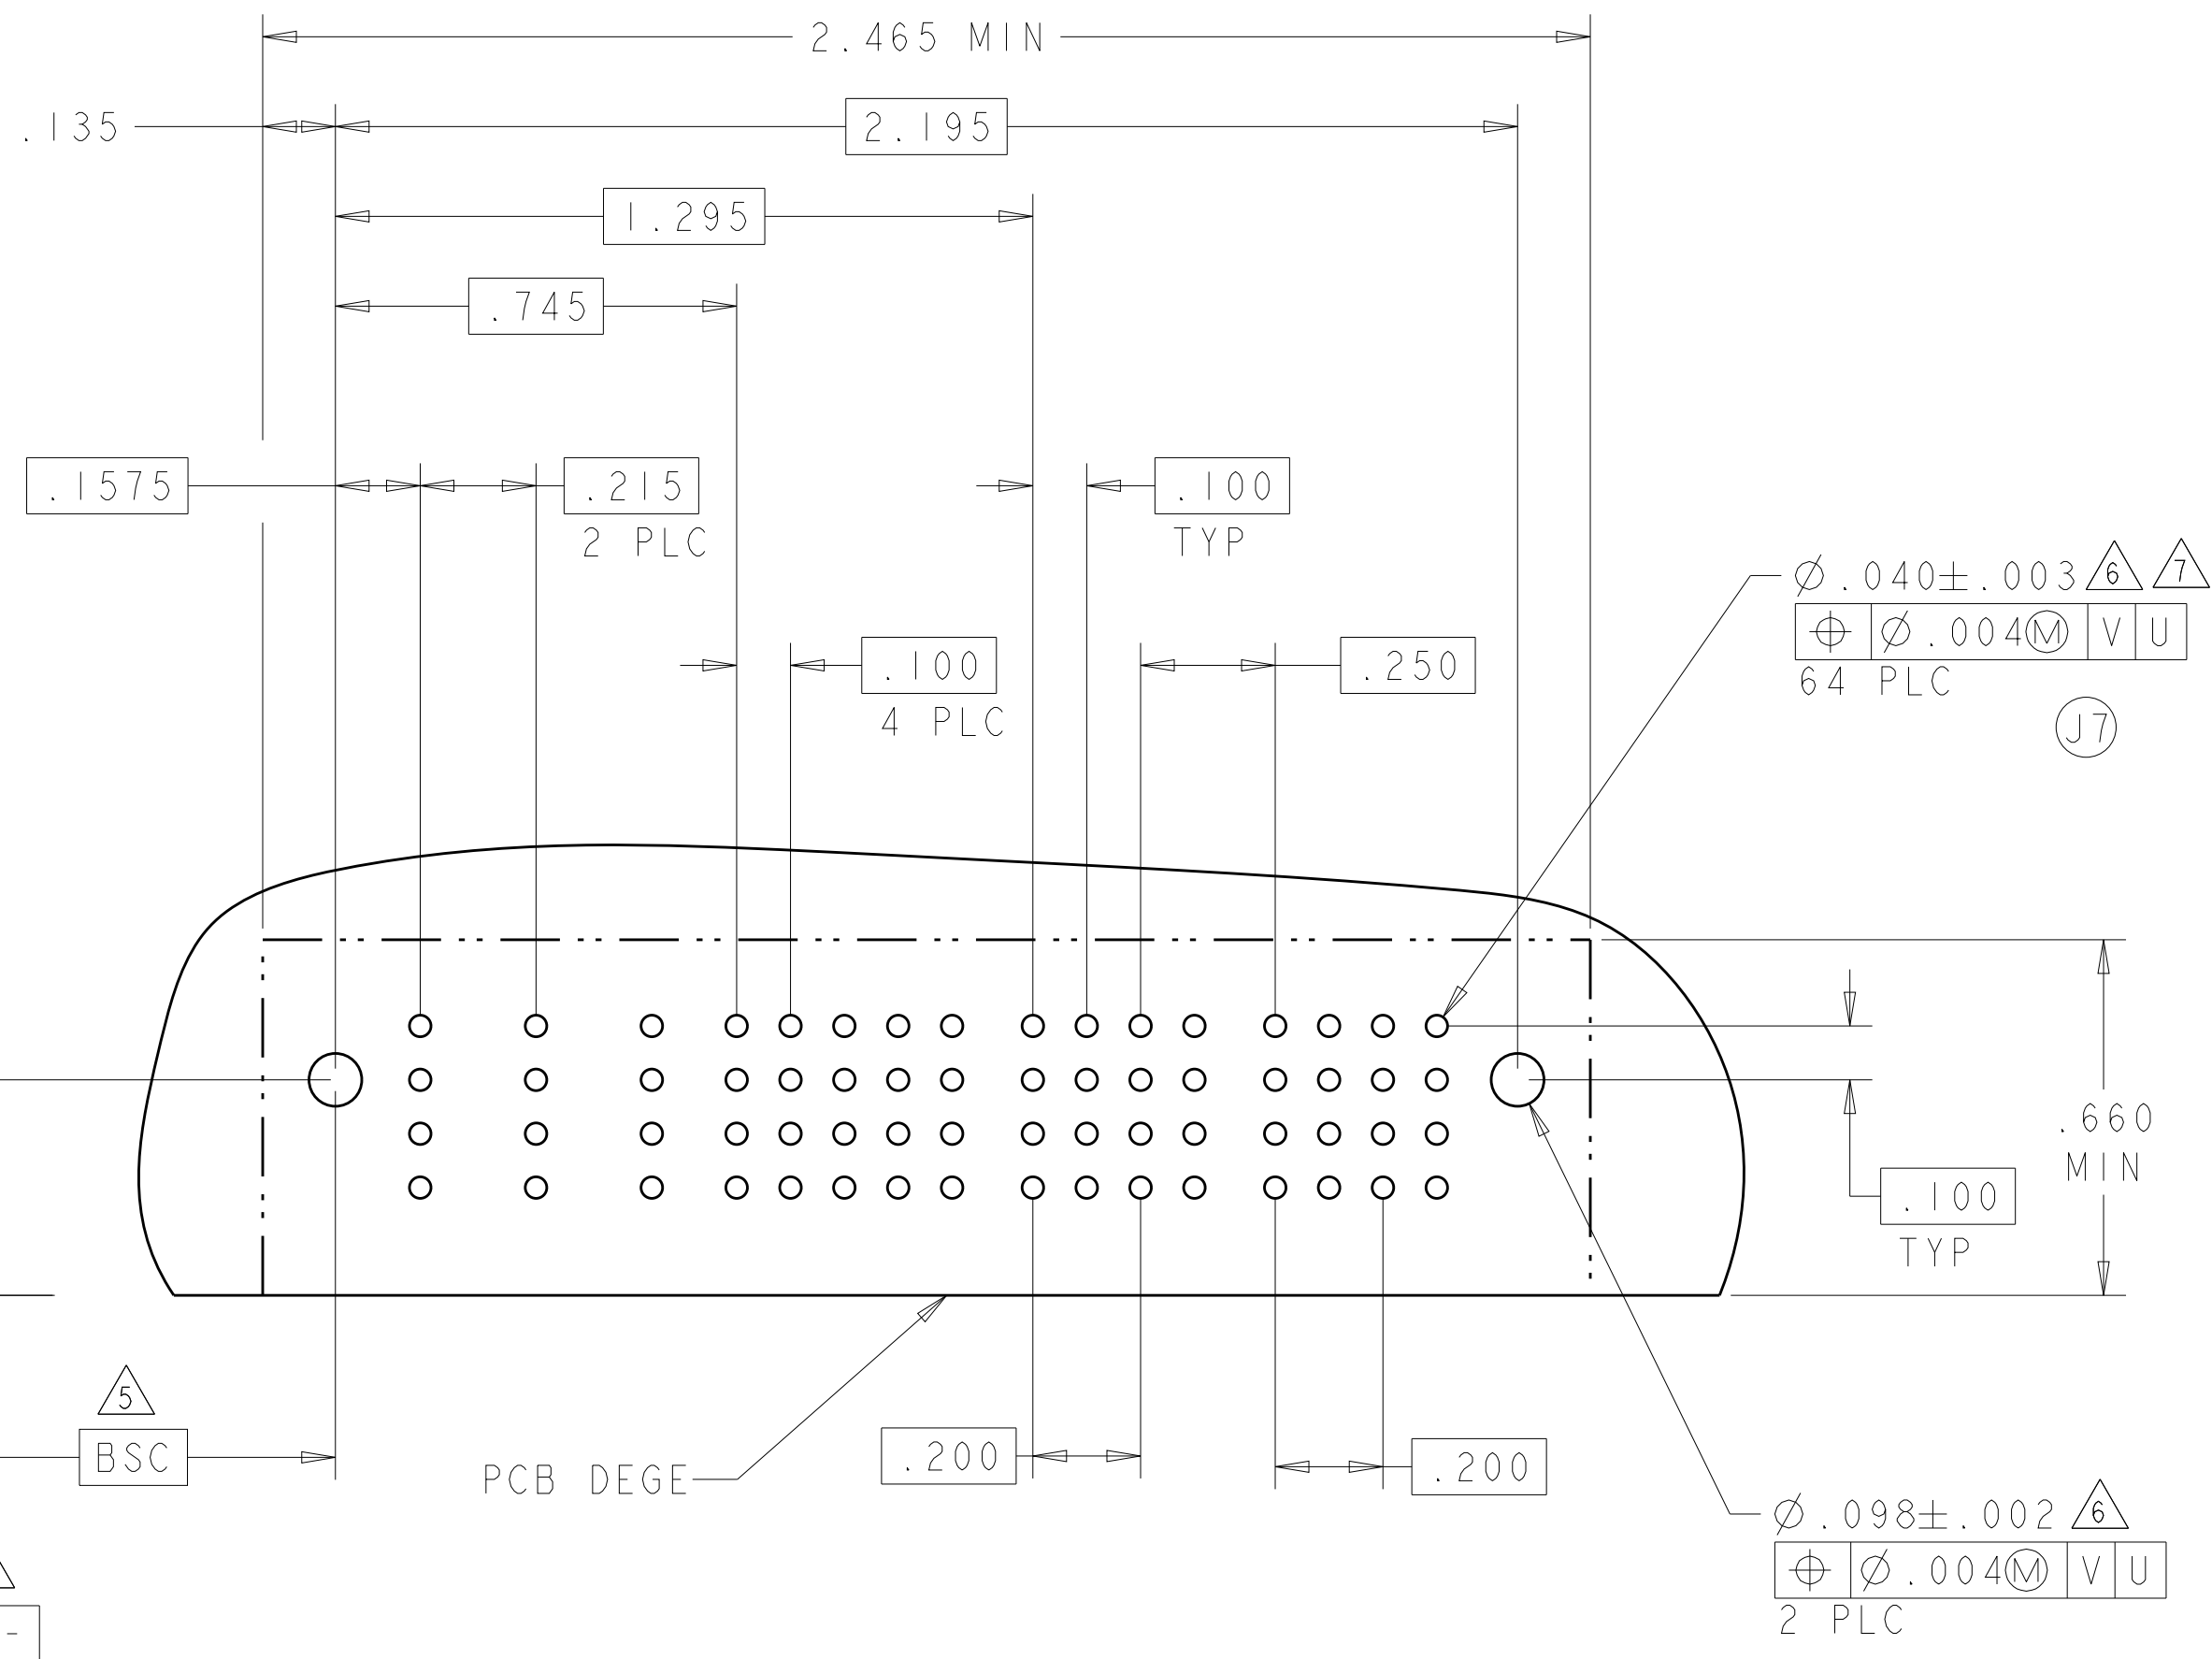4805 (3/11)


PART NUMBER	ROWS		LOW POWER		SIGNAL				LOW POWER		
			LP1	LP2	I	2	3	4	LP3	LP4	
6-6450830-0	D		LM	LM	J	J	J	E	LM	LM	
	C				K	K	K	K			
	B				N	N	N	N			
	A				S	S	S	S			

2LP + 16S + 2LP

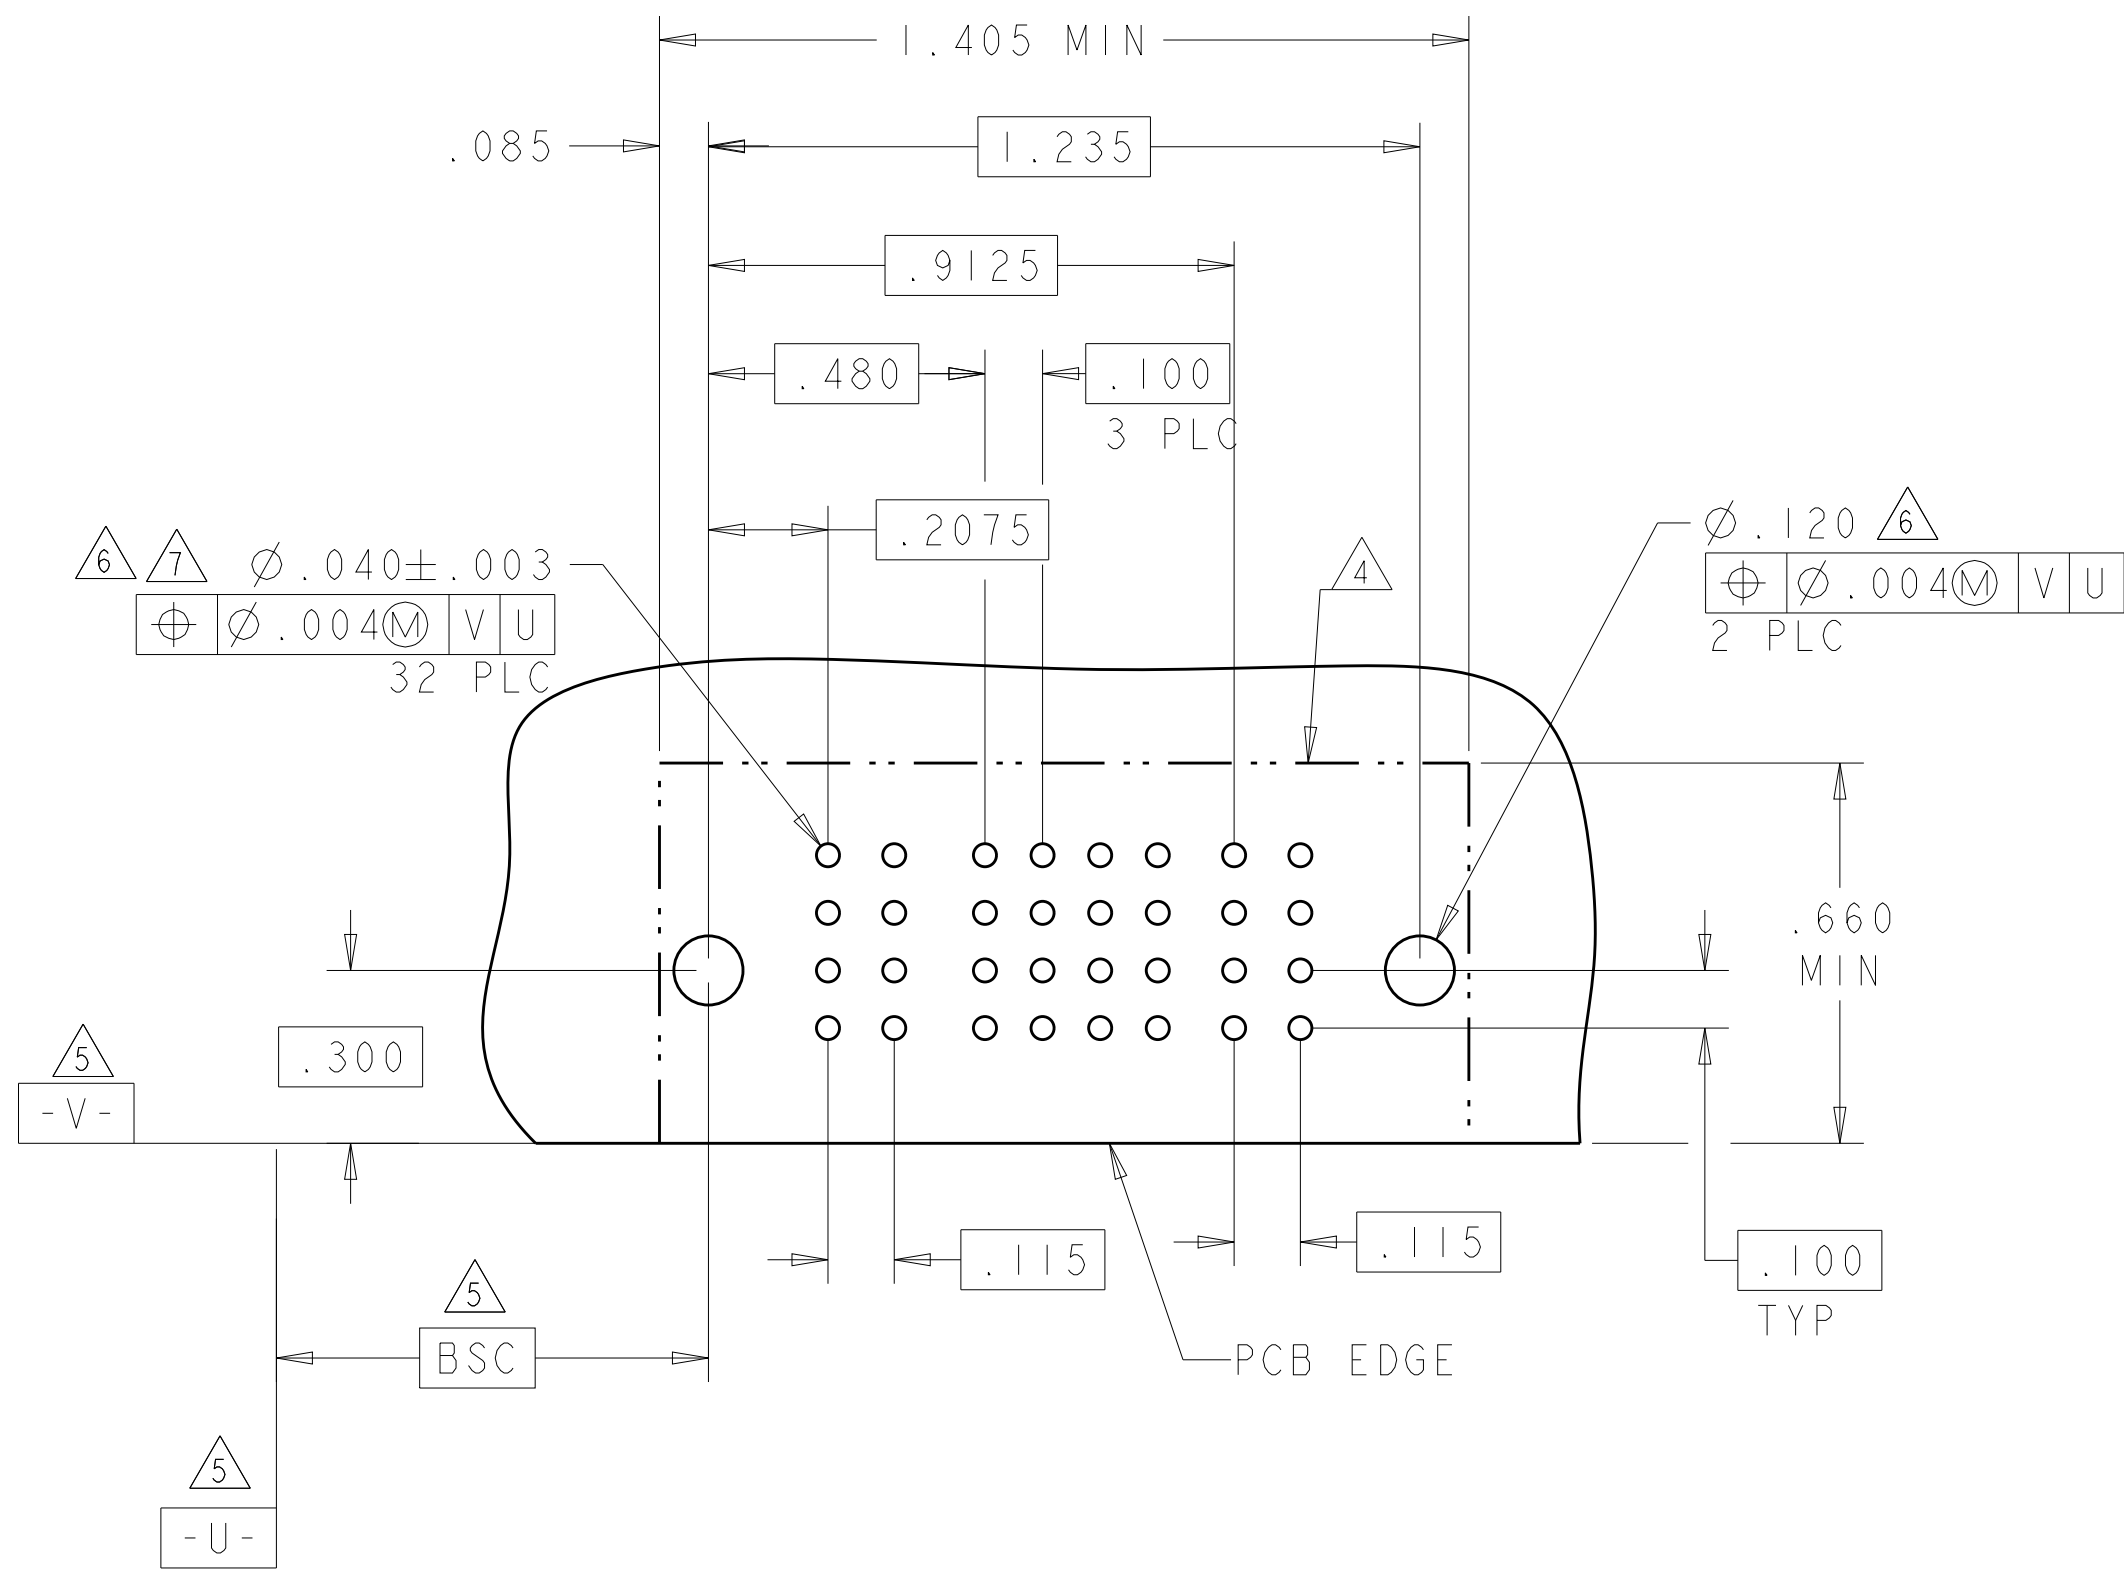4805 (3/11)

4805 (3/11)



PART NUMBER	ROWS		POWER			SIGNAL						POWER			
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	
4-6450830-5	D		TM		TM			J	J	J		TM	TM	TM	
	C							K	K	K					
	B							G	G	G					
	A					HD			S	S	S				
3P + 24S + 3P															

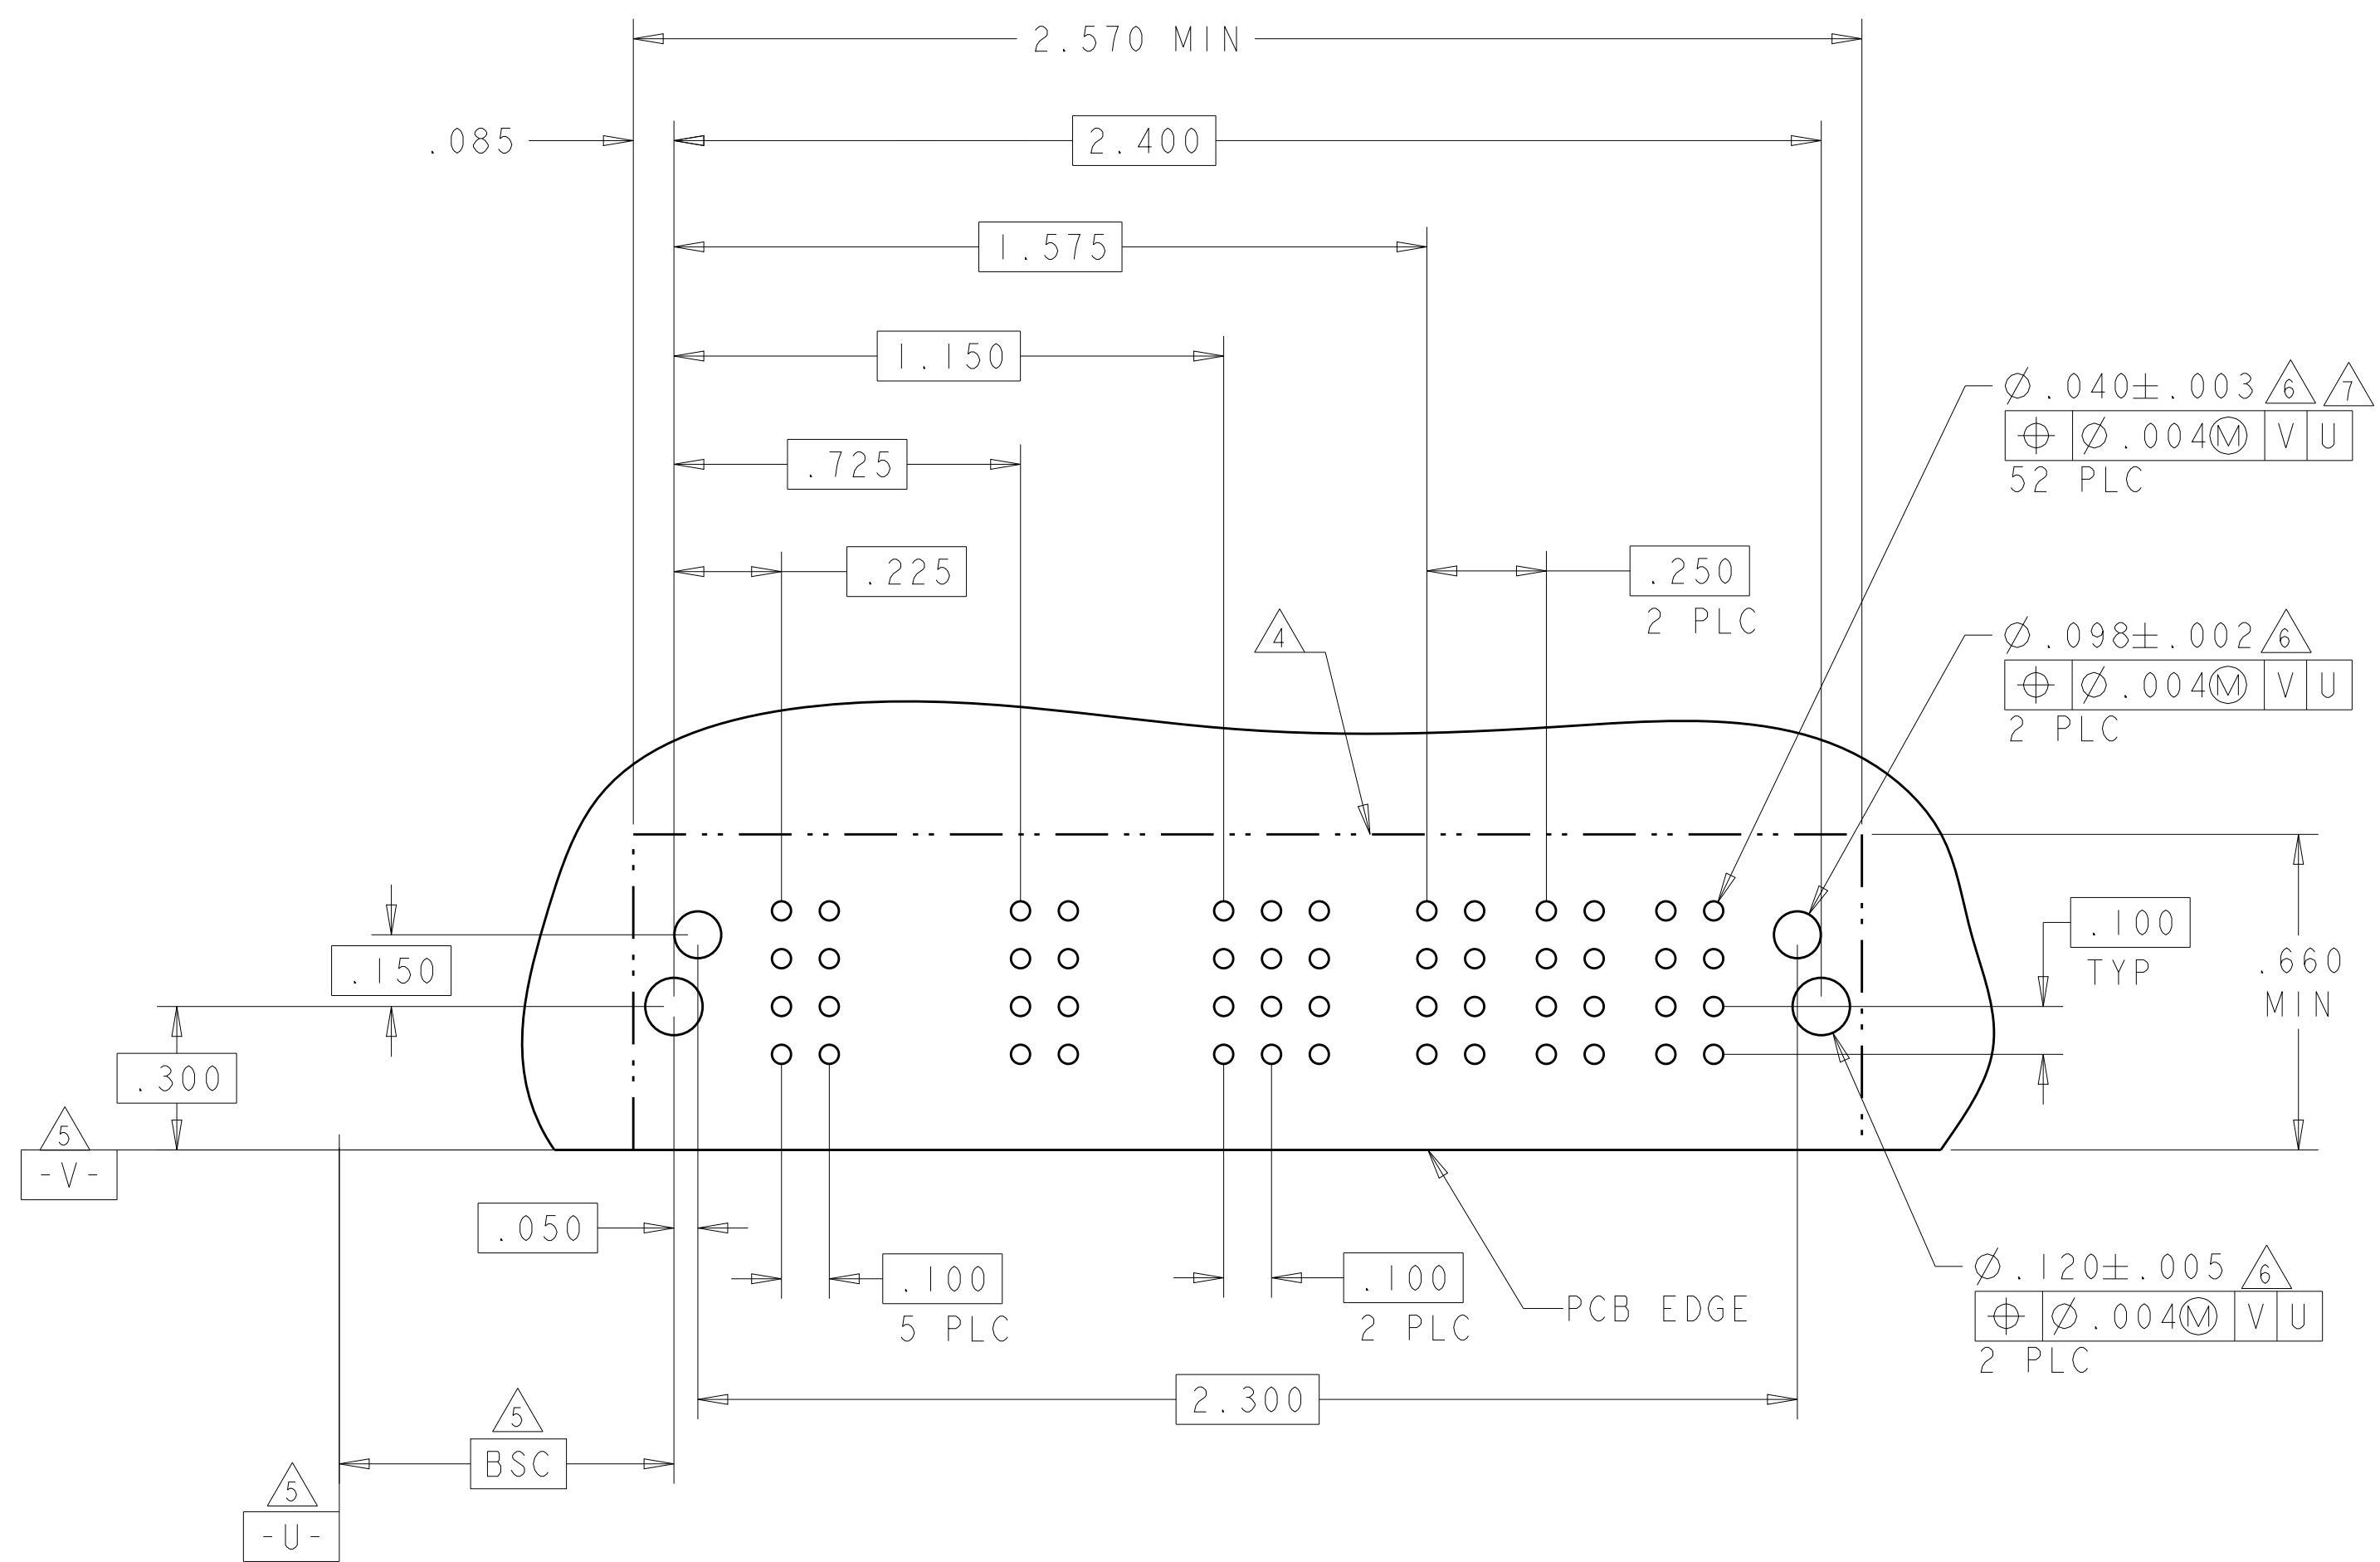4805 (3/11)


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS		POWER		SIGNAL				POWER		
			P1	P2	1	2	3	4	P3	P4	
4-6450830-6	D C B A				J	J	J	J			
					FK	FK	FK	FK			
					G	G	G	G			
					S	S	S	S			
2P + 16S + 2P											

PART NUMBER	ROWS		POWER		SIGNAL		POWER		
			P1	P2	1	2	P3	P4	
4-6450830-7	D C B A		LM	LM	F	J	TM	TM	
					K	E			
					N	N			
					S	S			
2LP + 8S + 2P			HD				HD		

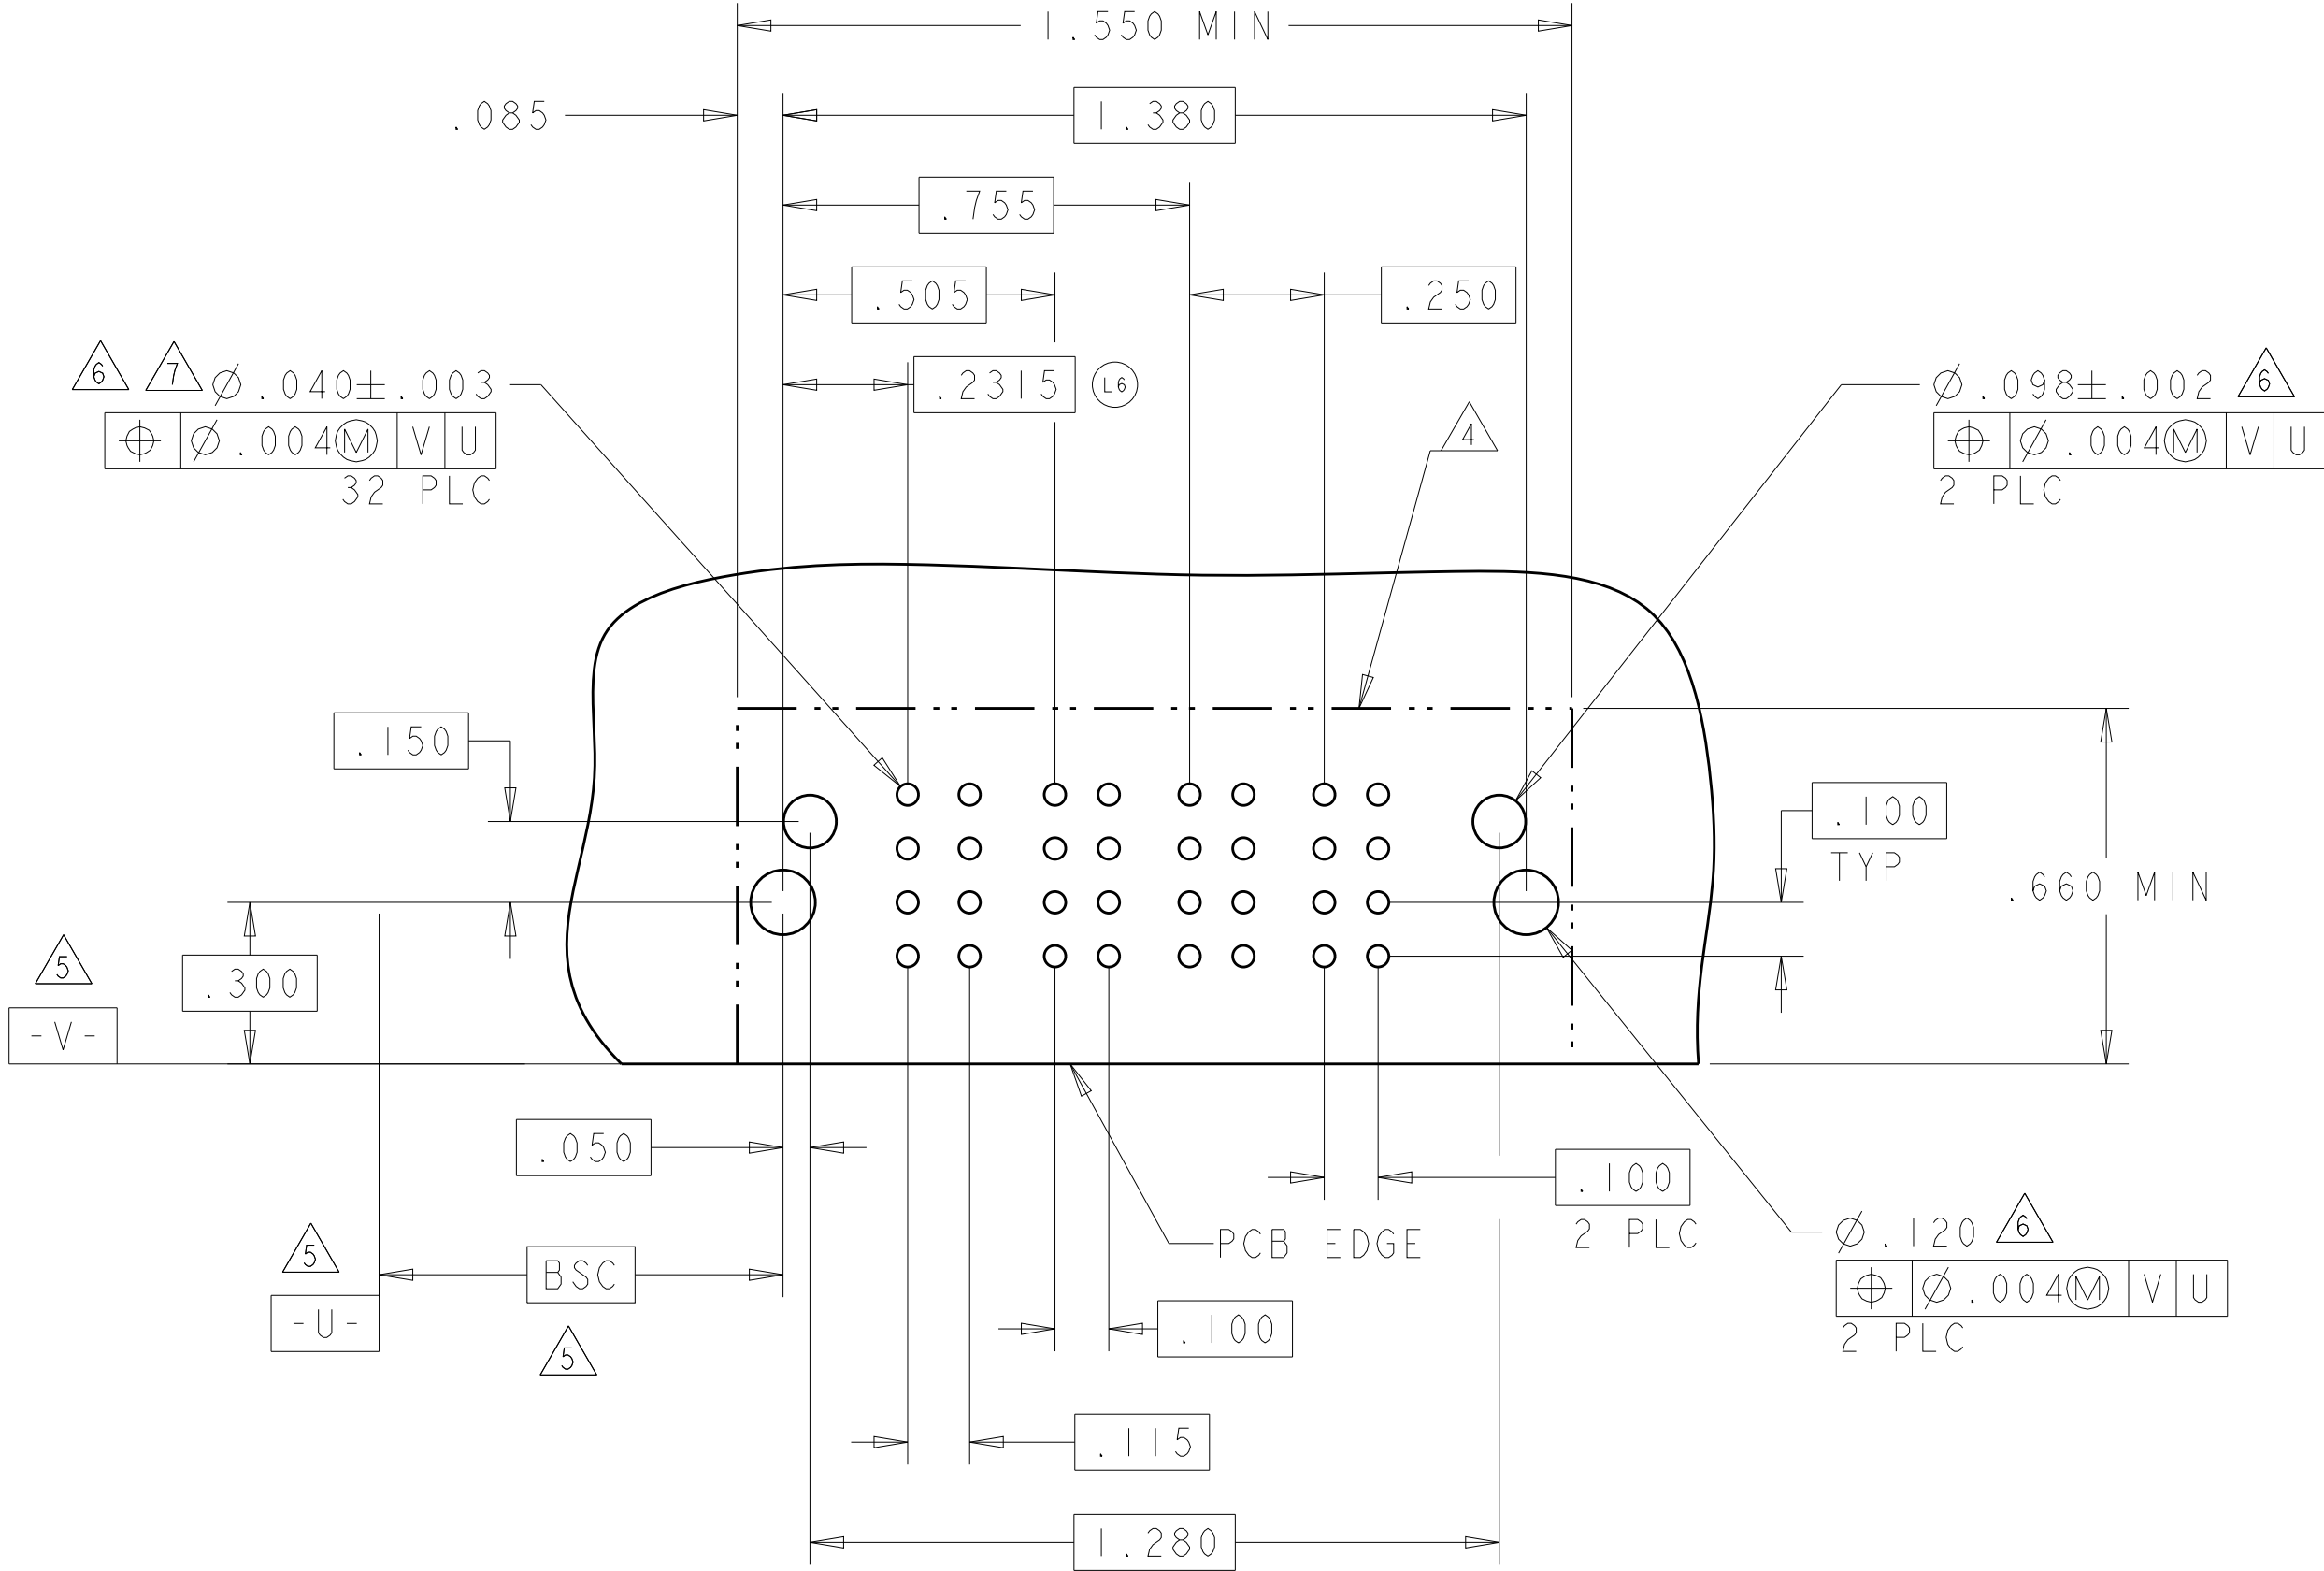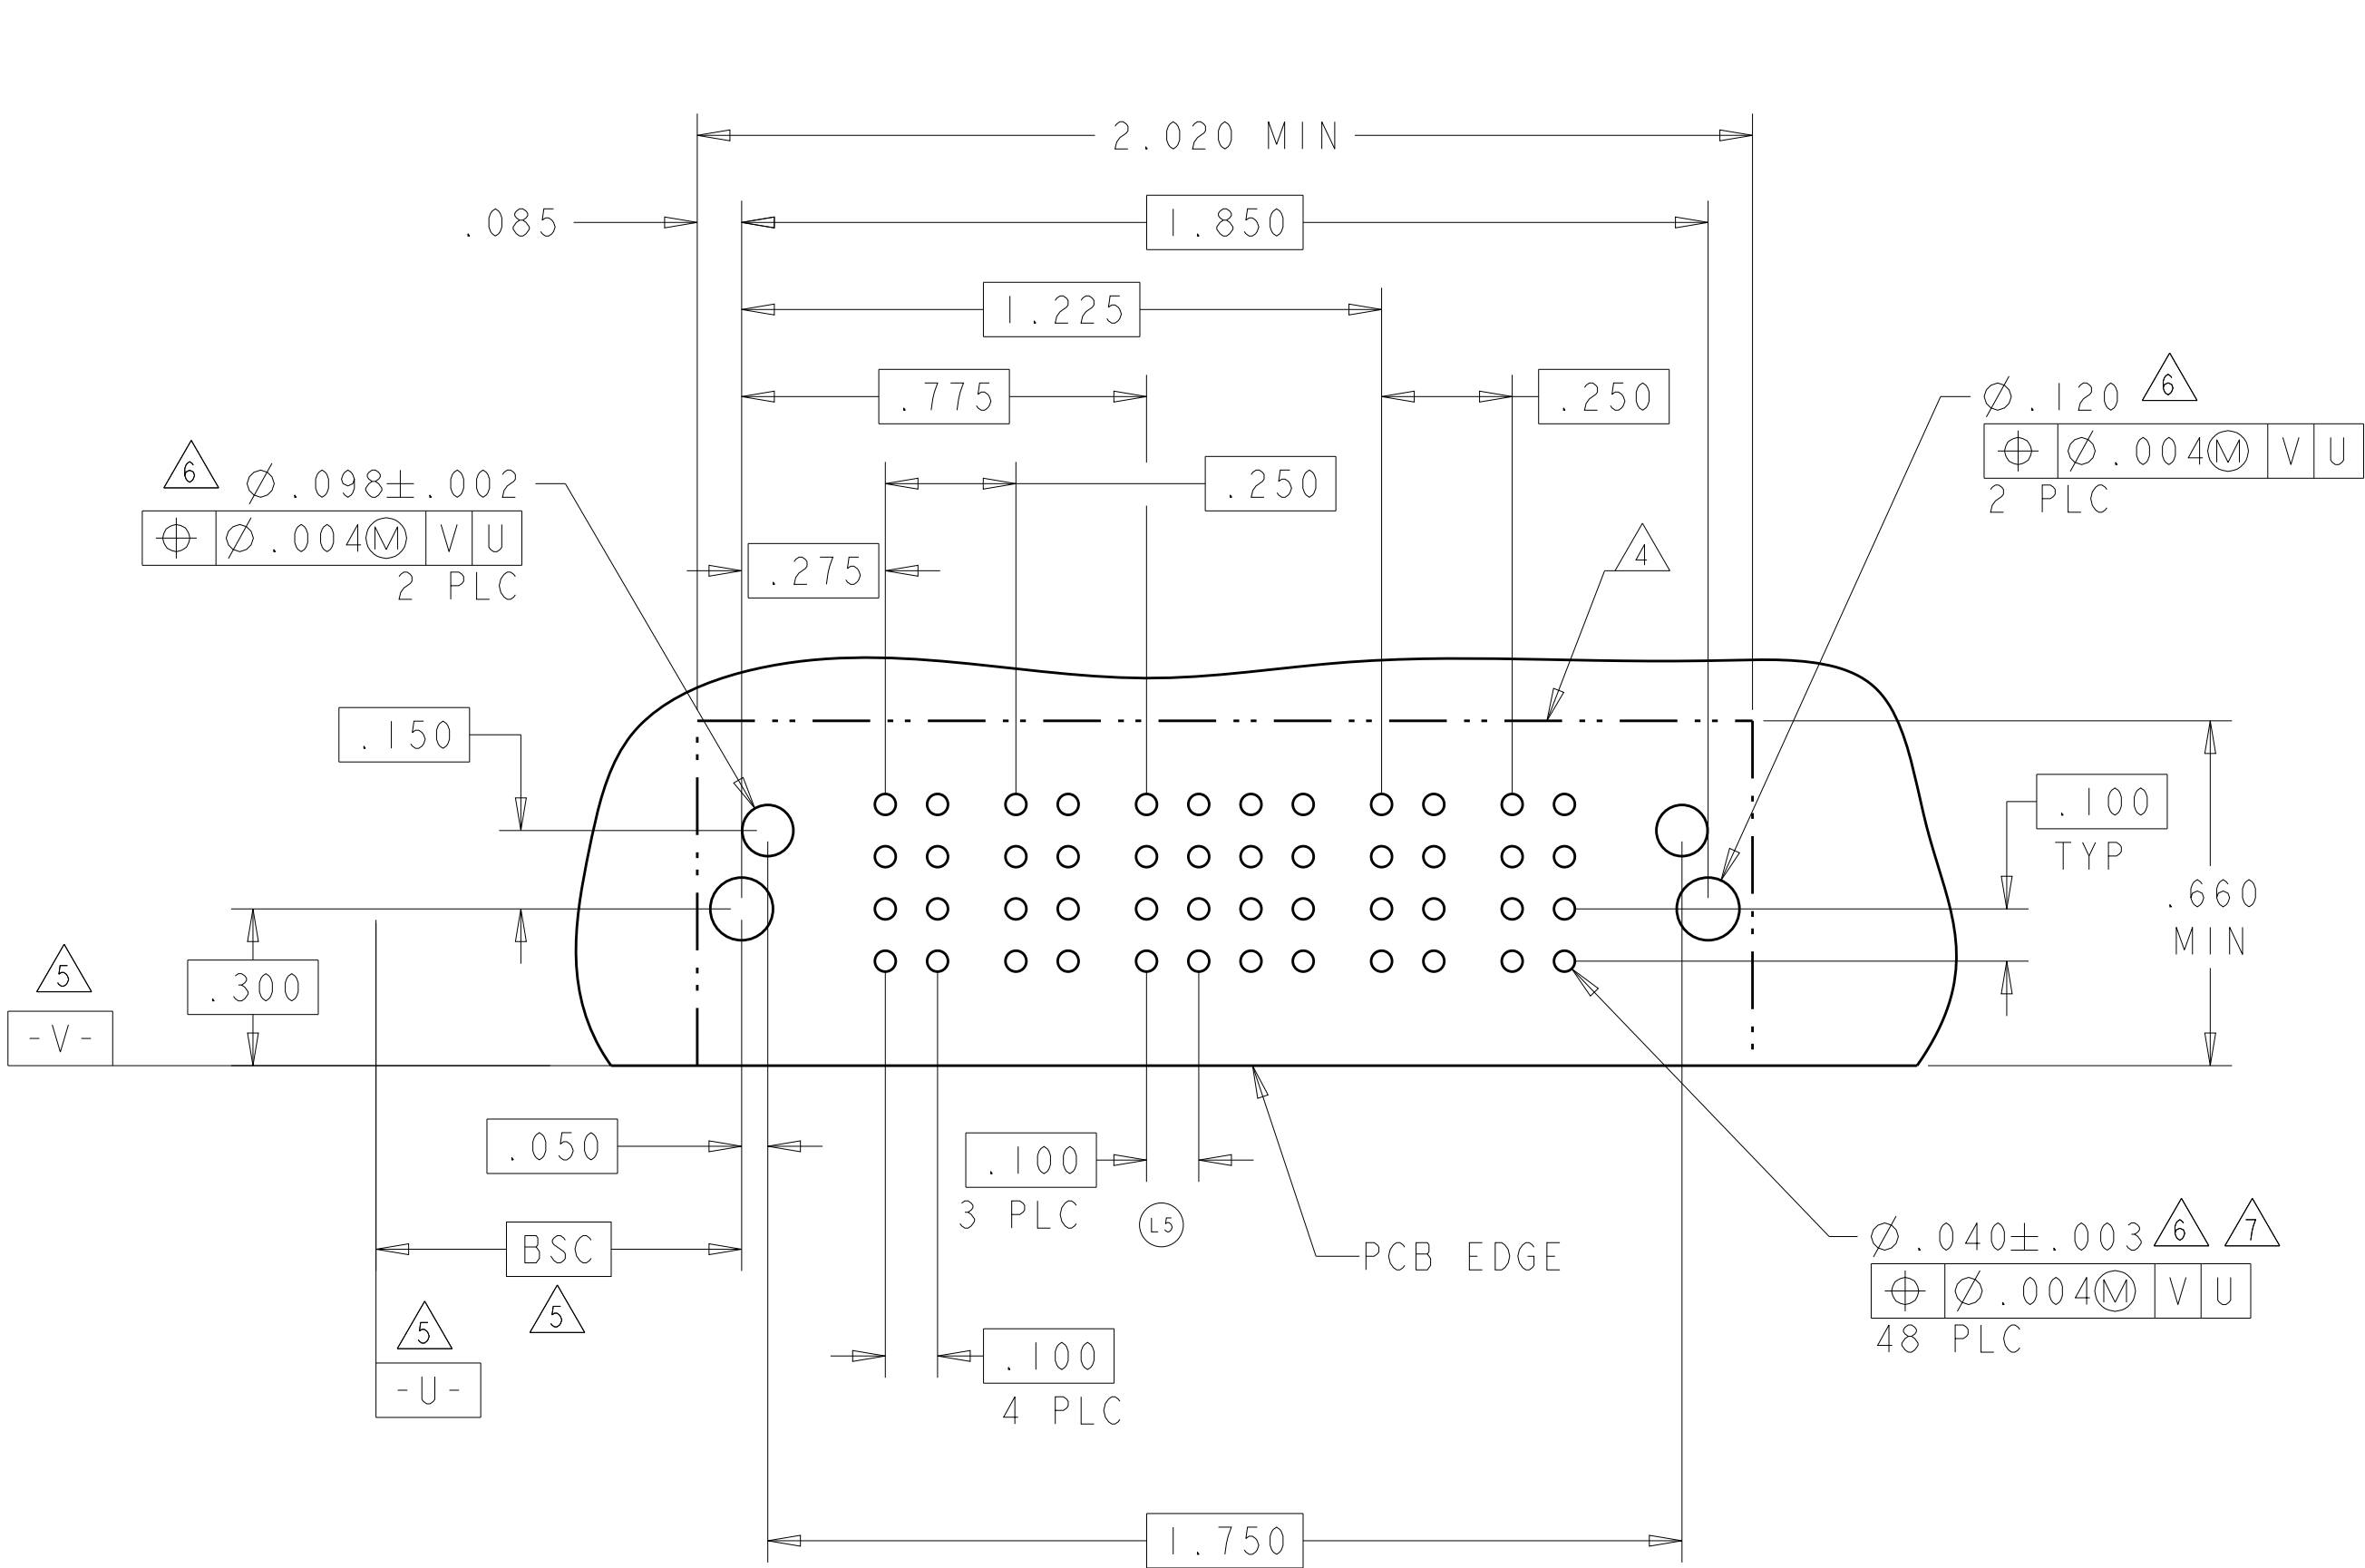

—NO CONTACT LOADED

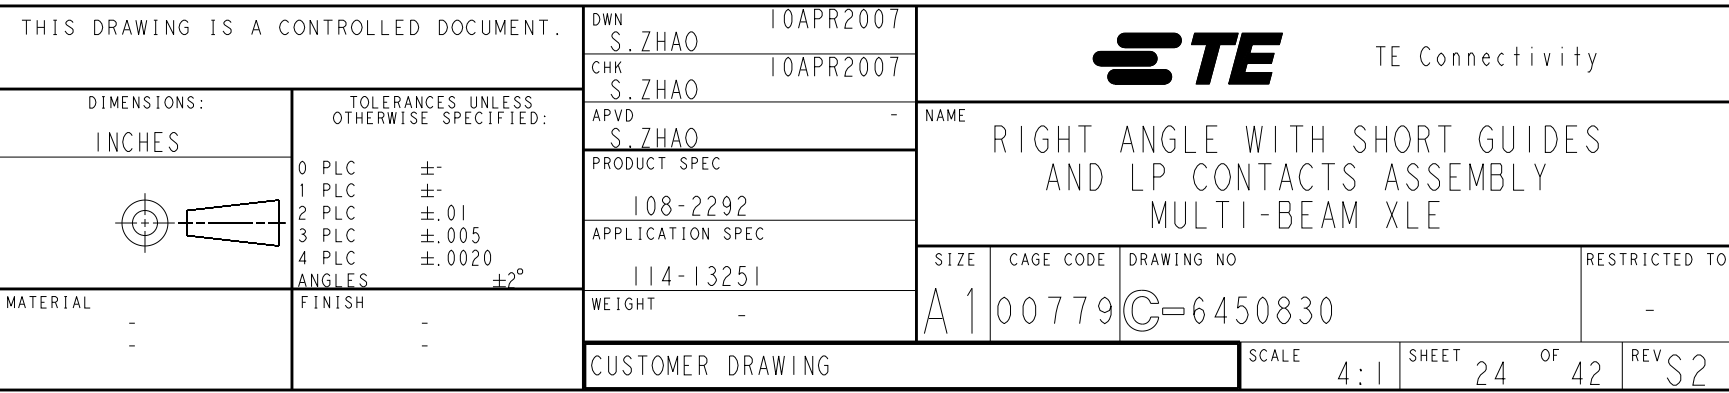

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-



L 8

PART NUMBER	ROWS		POWER			SIGNAL						POWER			
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	
4-6450830-9	D		TM	TM					J	J		TM	TM	TM	
	C								K	K					
	B								G	G					
	A								S	S					
3P + 24S + 3P															


NO CONTACT LOADED


M

PART NUMBER	ROWS		POWER		SIGNAL		POWER			
			P1	P2	1	2	P3	P4	P5	
5-6450830-0	D		LM	LM	J	J	LMF	LMF	LMF	
	C				K	K				
	B				N	N				
	A				S	S				
2LP + 8S + 3LP										

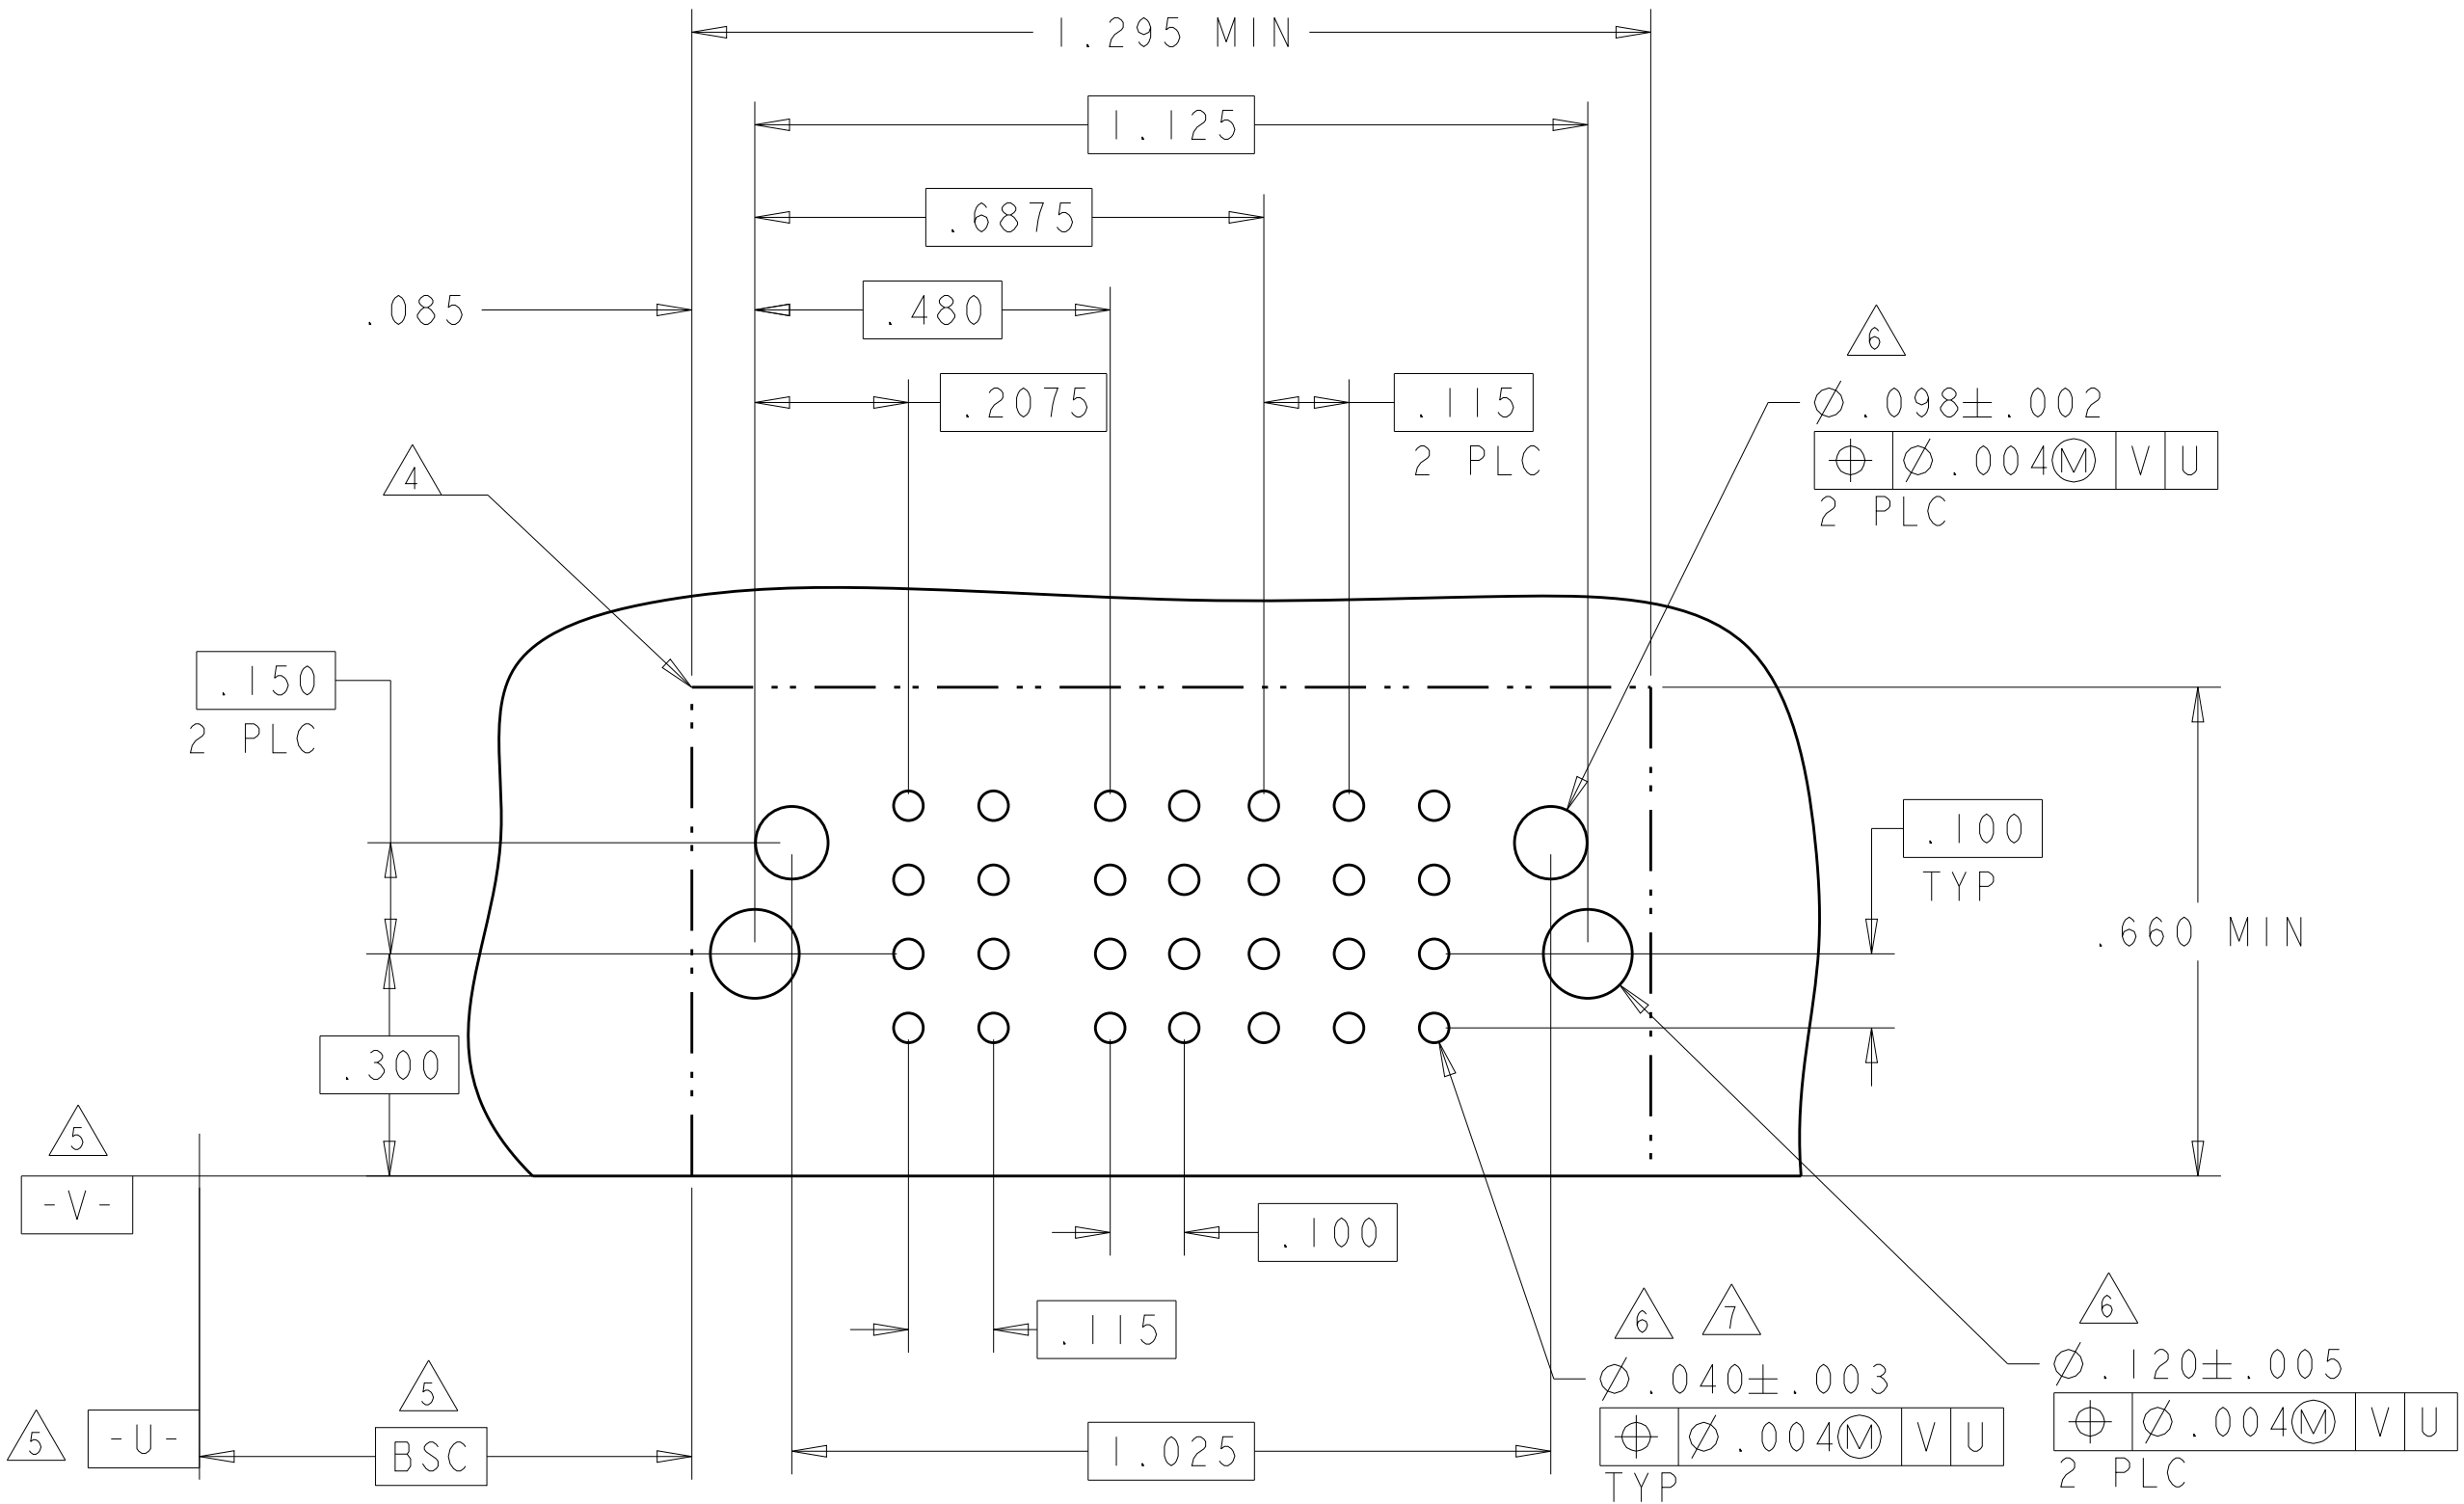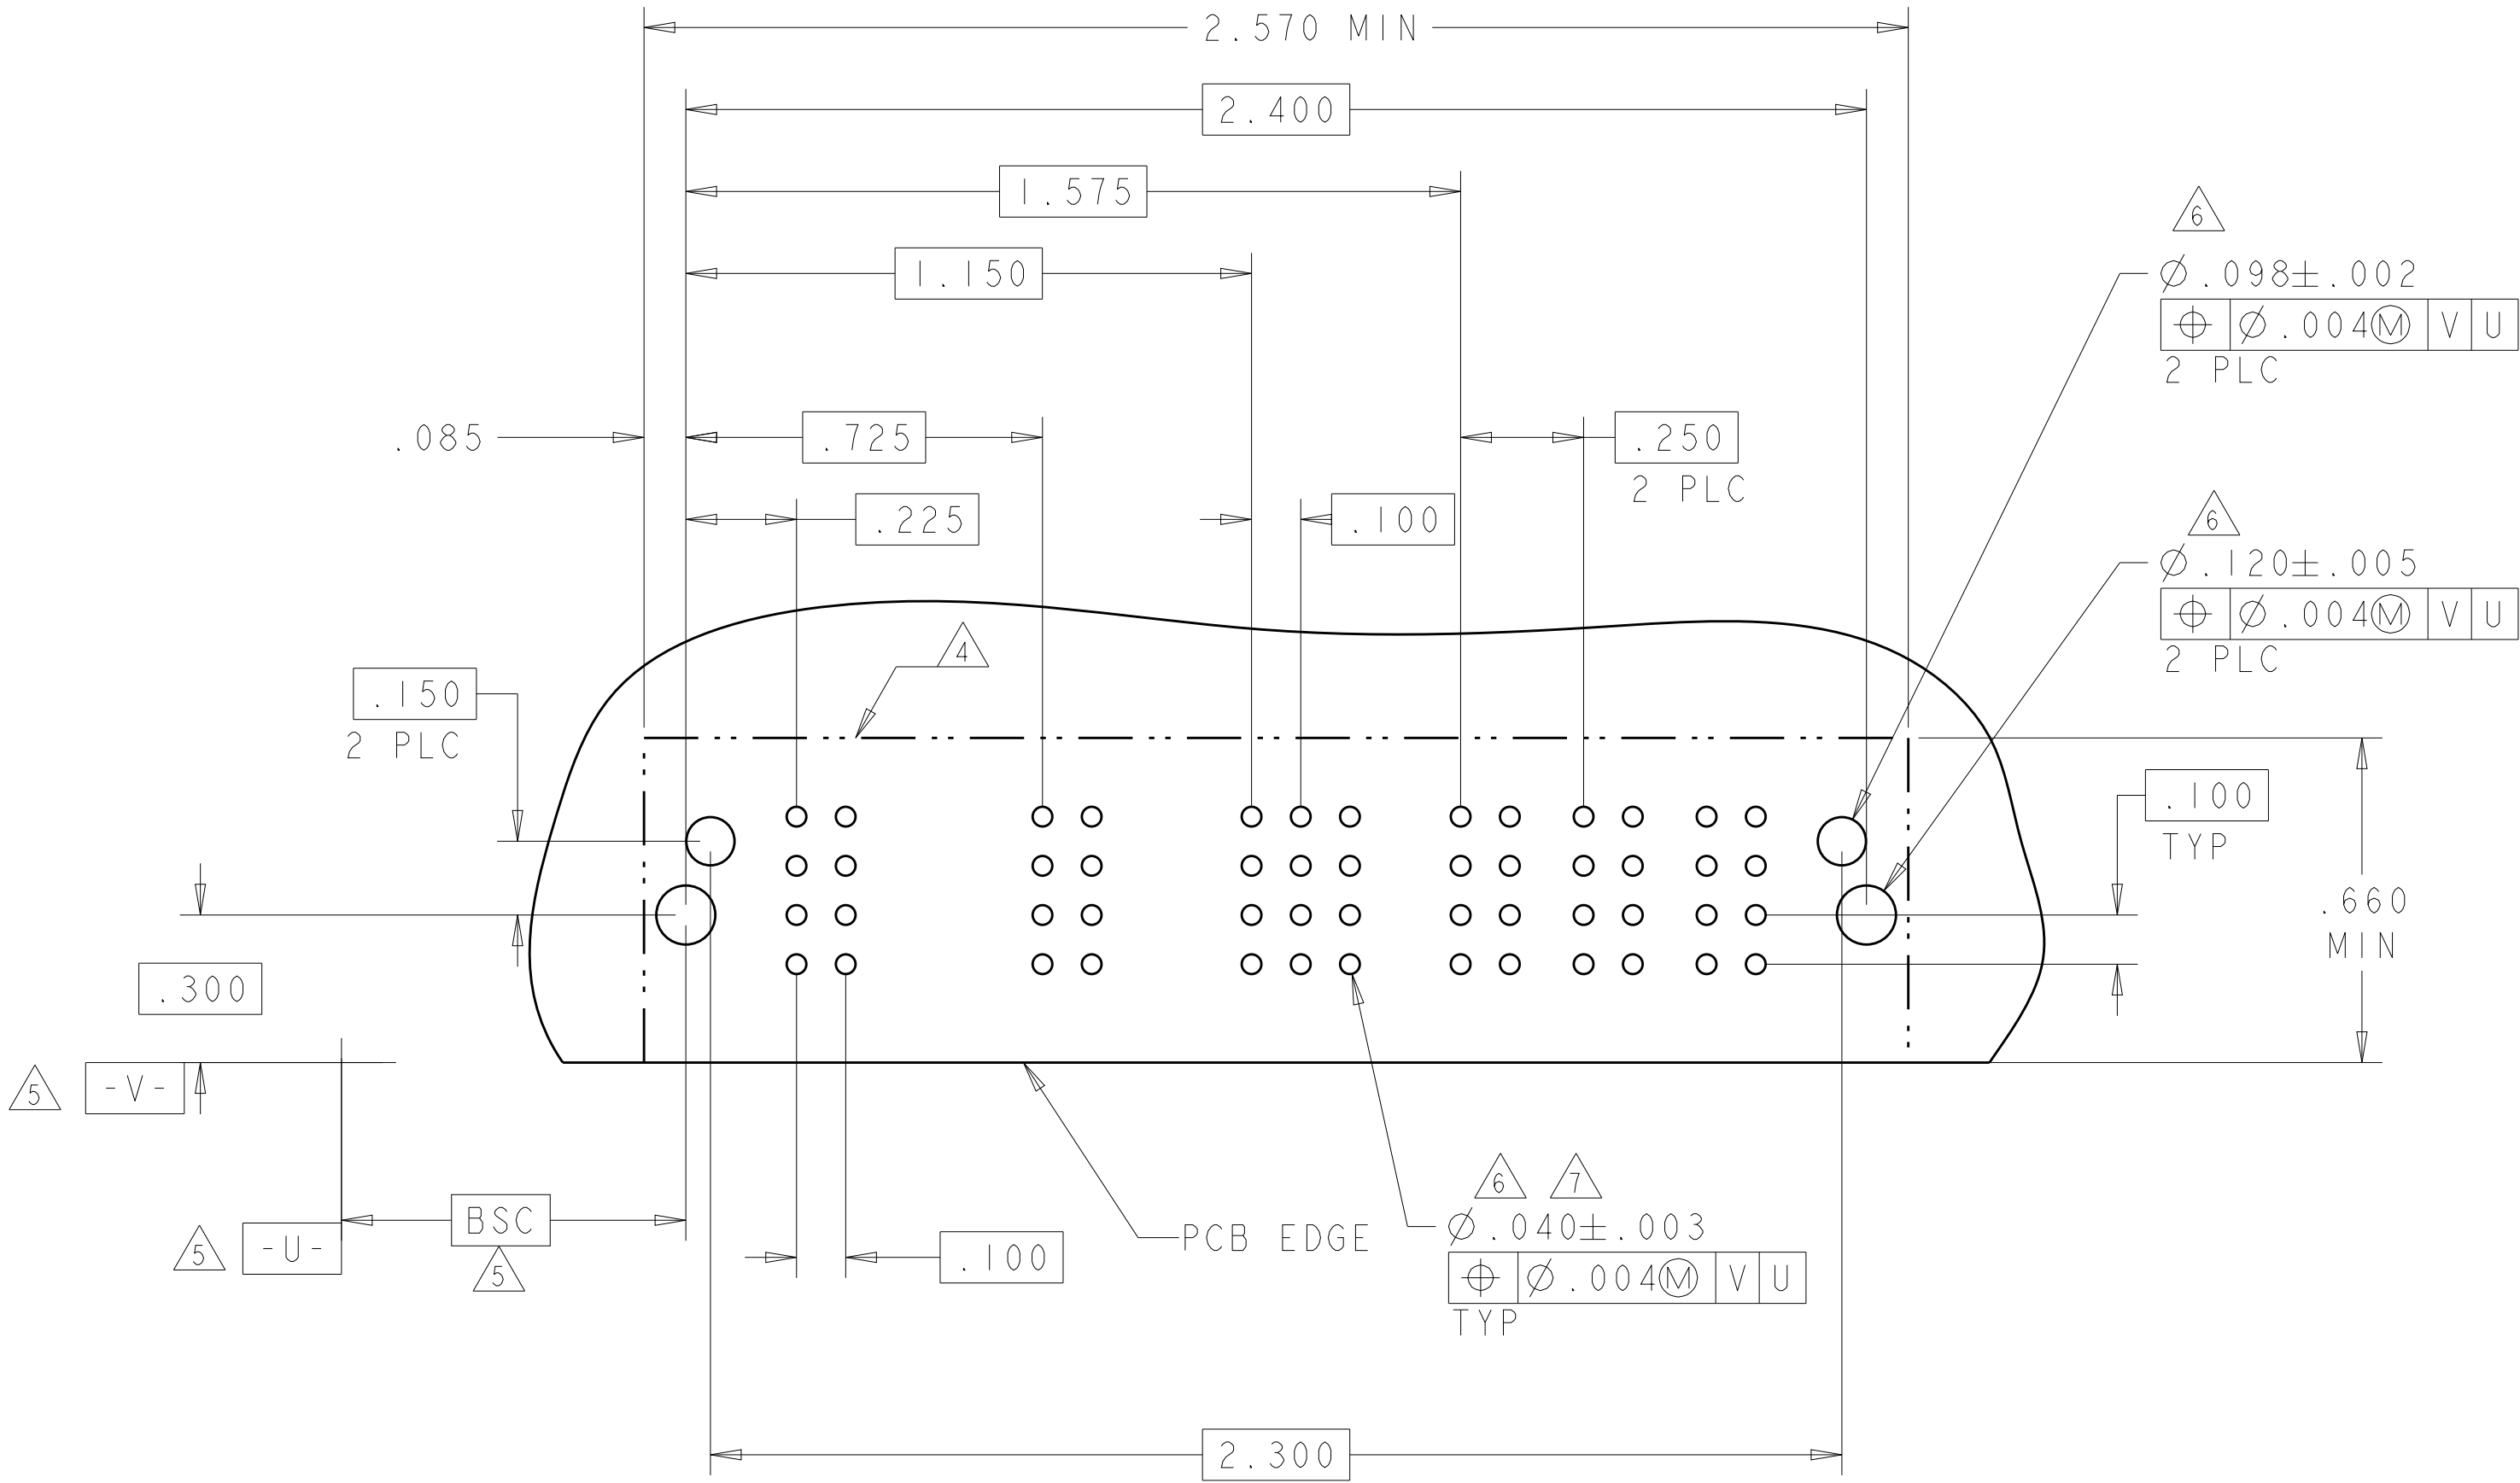


PART NUMBER	ROWS		POWER				SIGNAL					POWER				
			P1	P2	P3	P4	1	2	3	4	5	P5	P6	P7	P8	
5-6450830-2	D		TM	TM	TM	TM	J	J	J	J	J	TM	TM	TM	TM	
	K						K	K	K	K						
	N						N	N	N	N						
	A	HD					H	S	S	S	S					
4P + 20S + 4P																

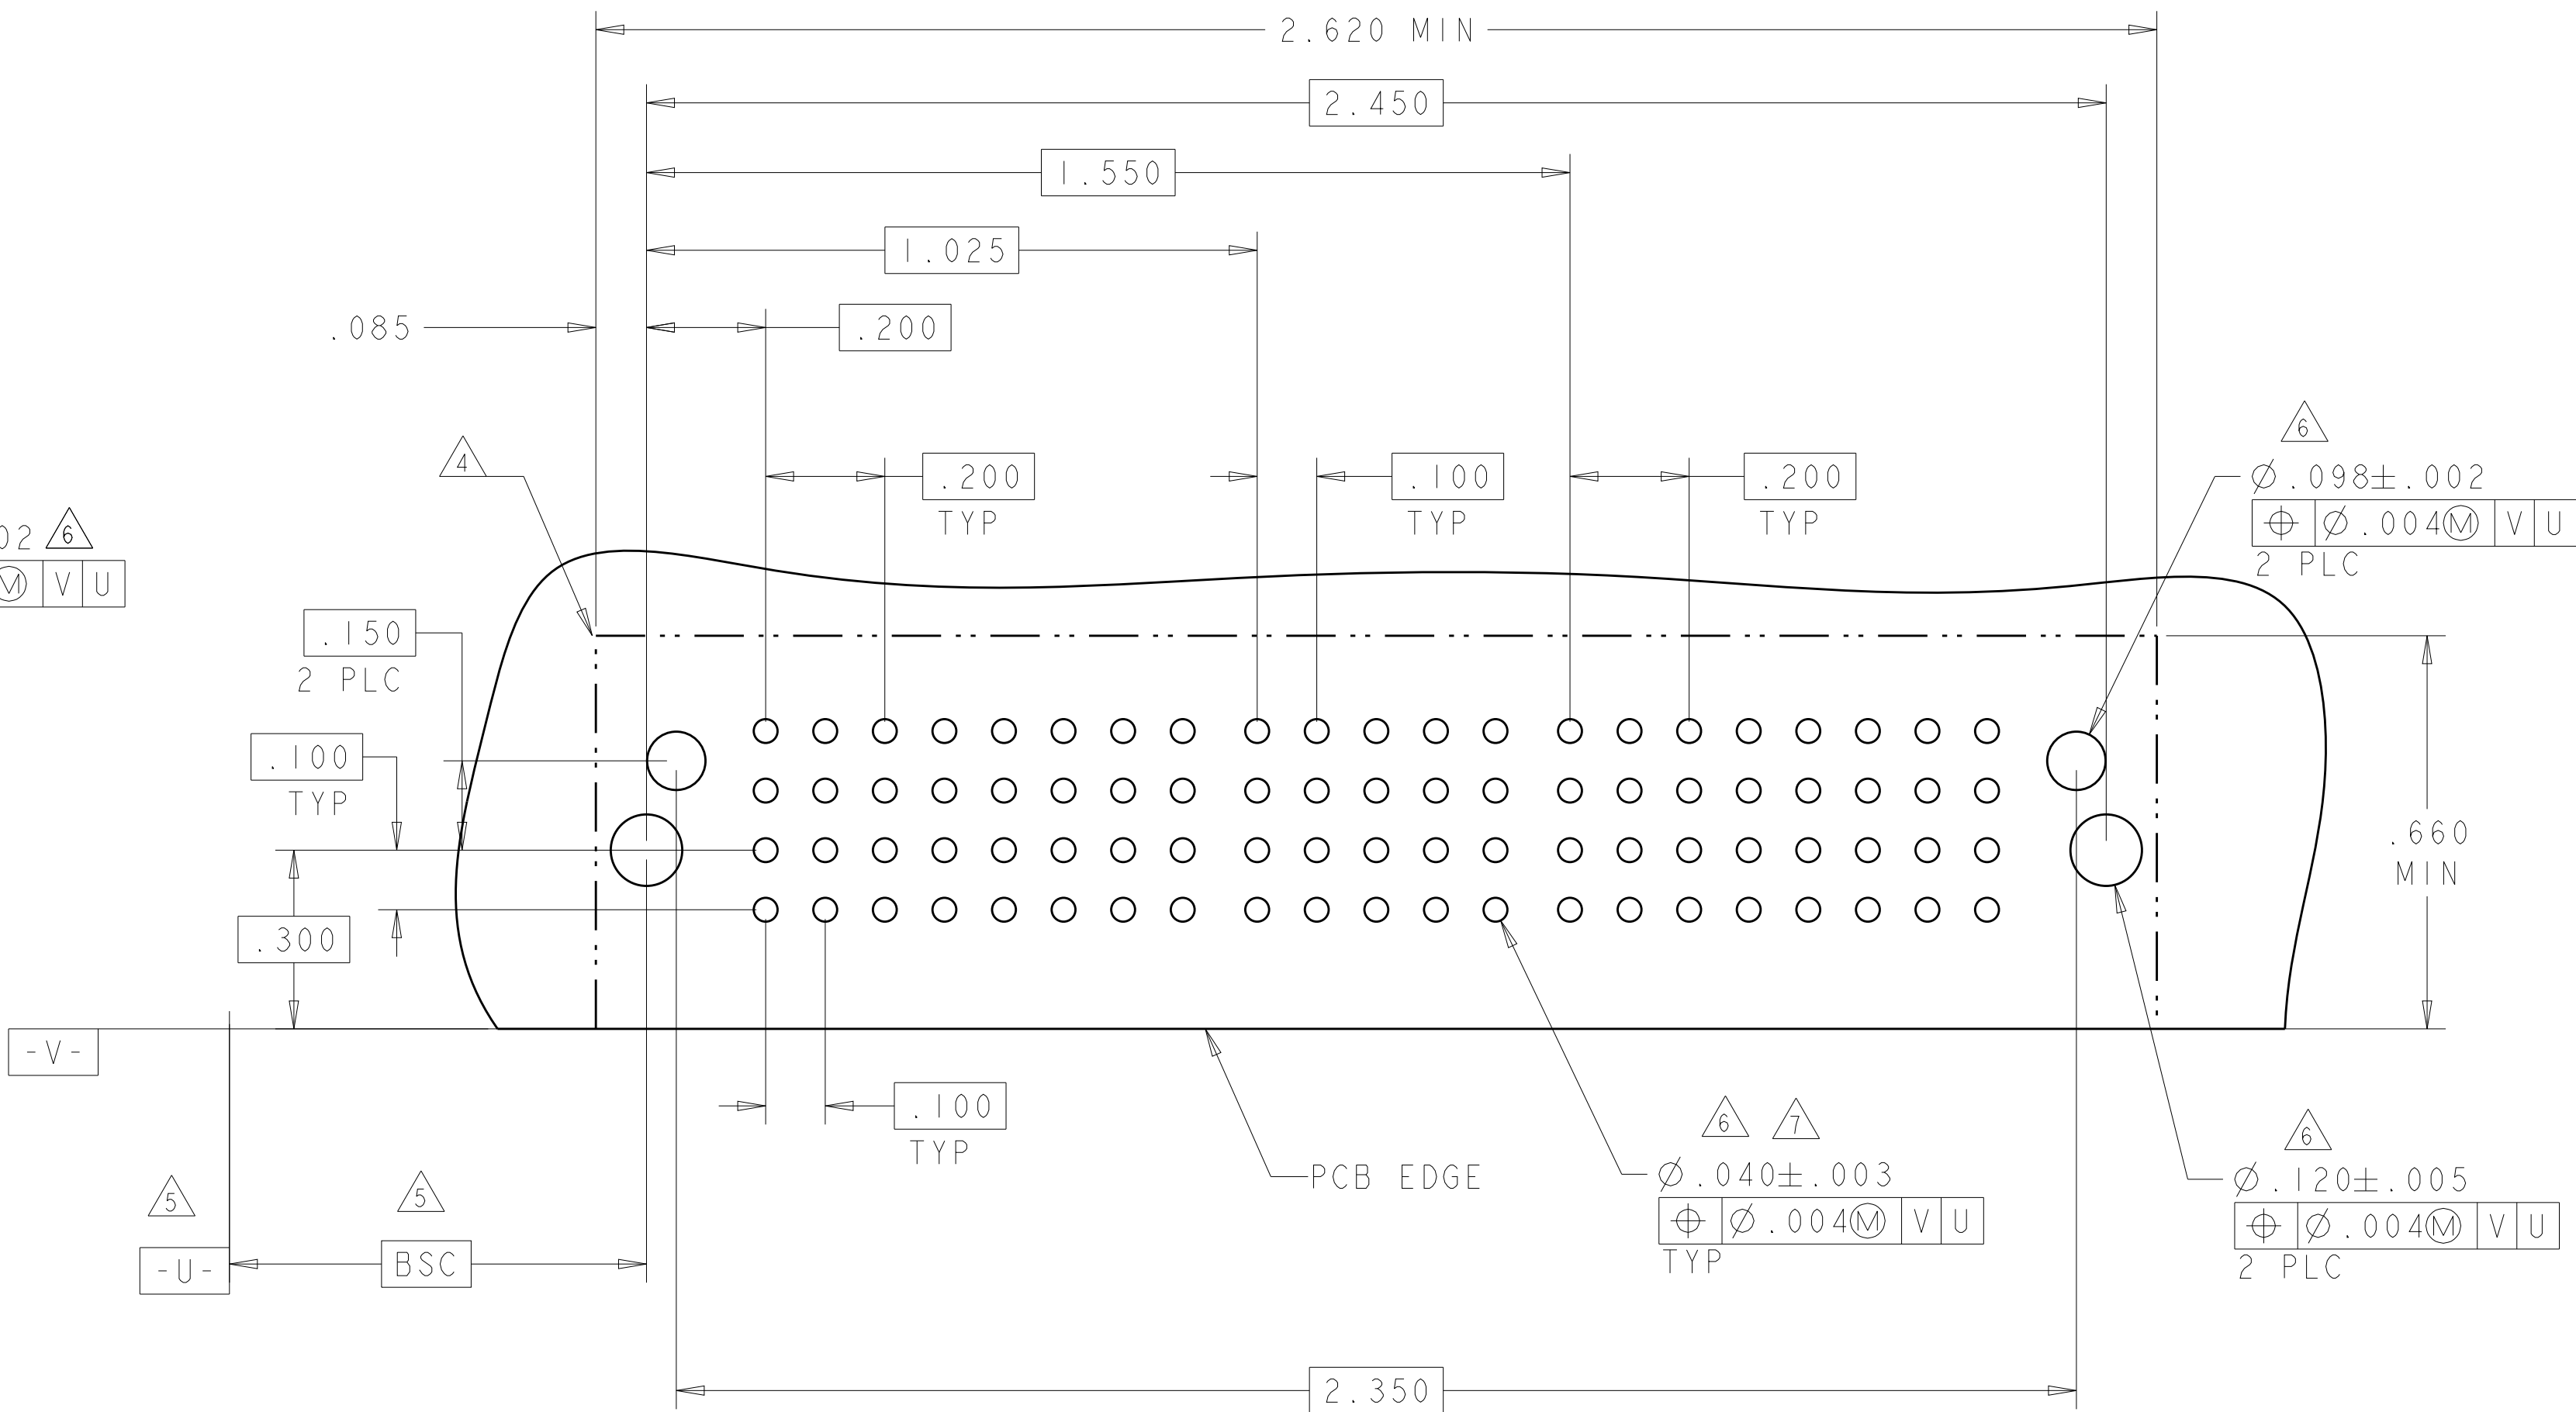4805 (3/11)

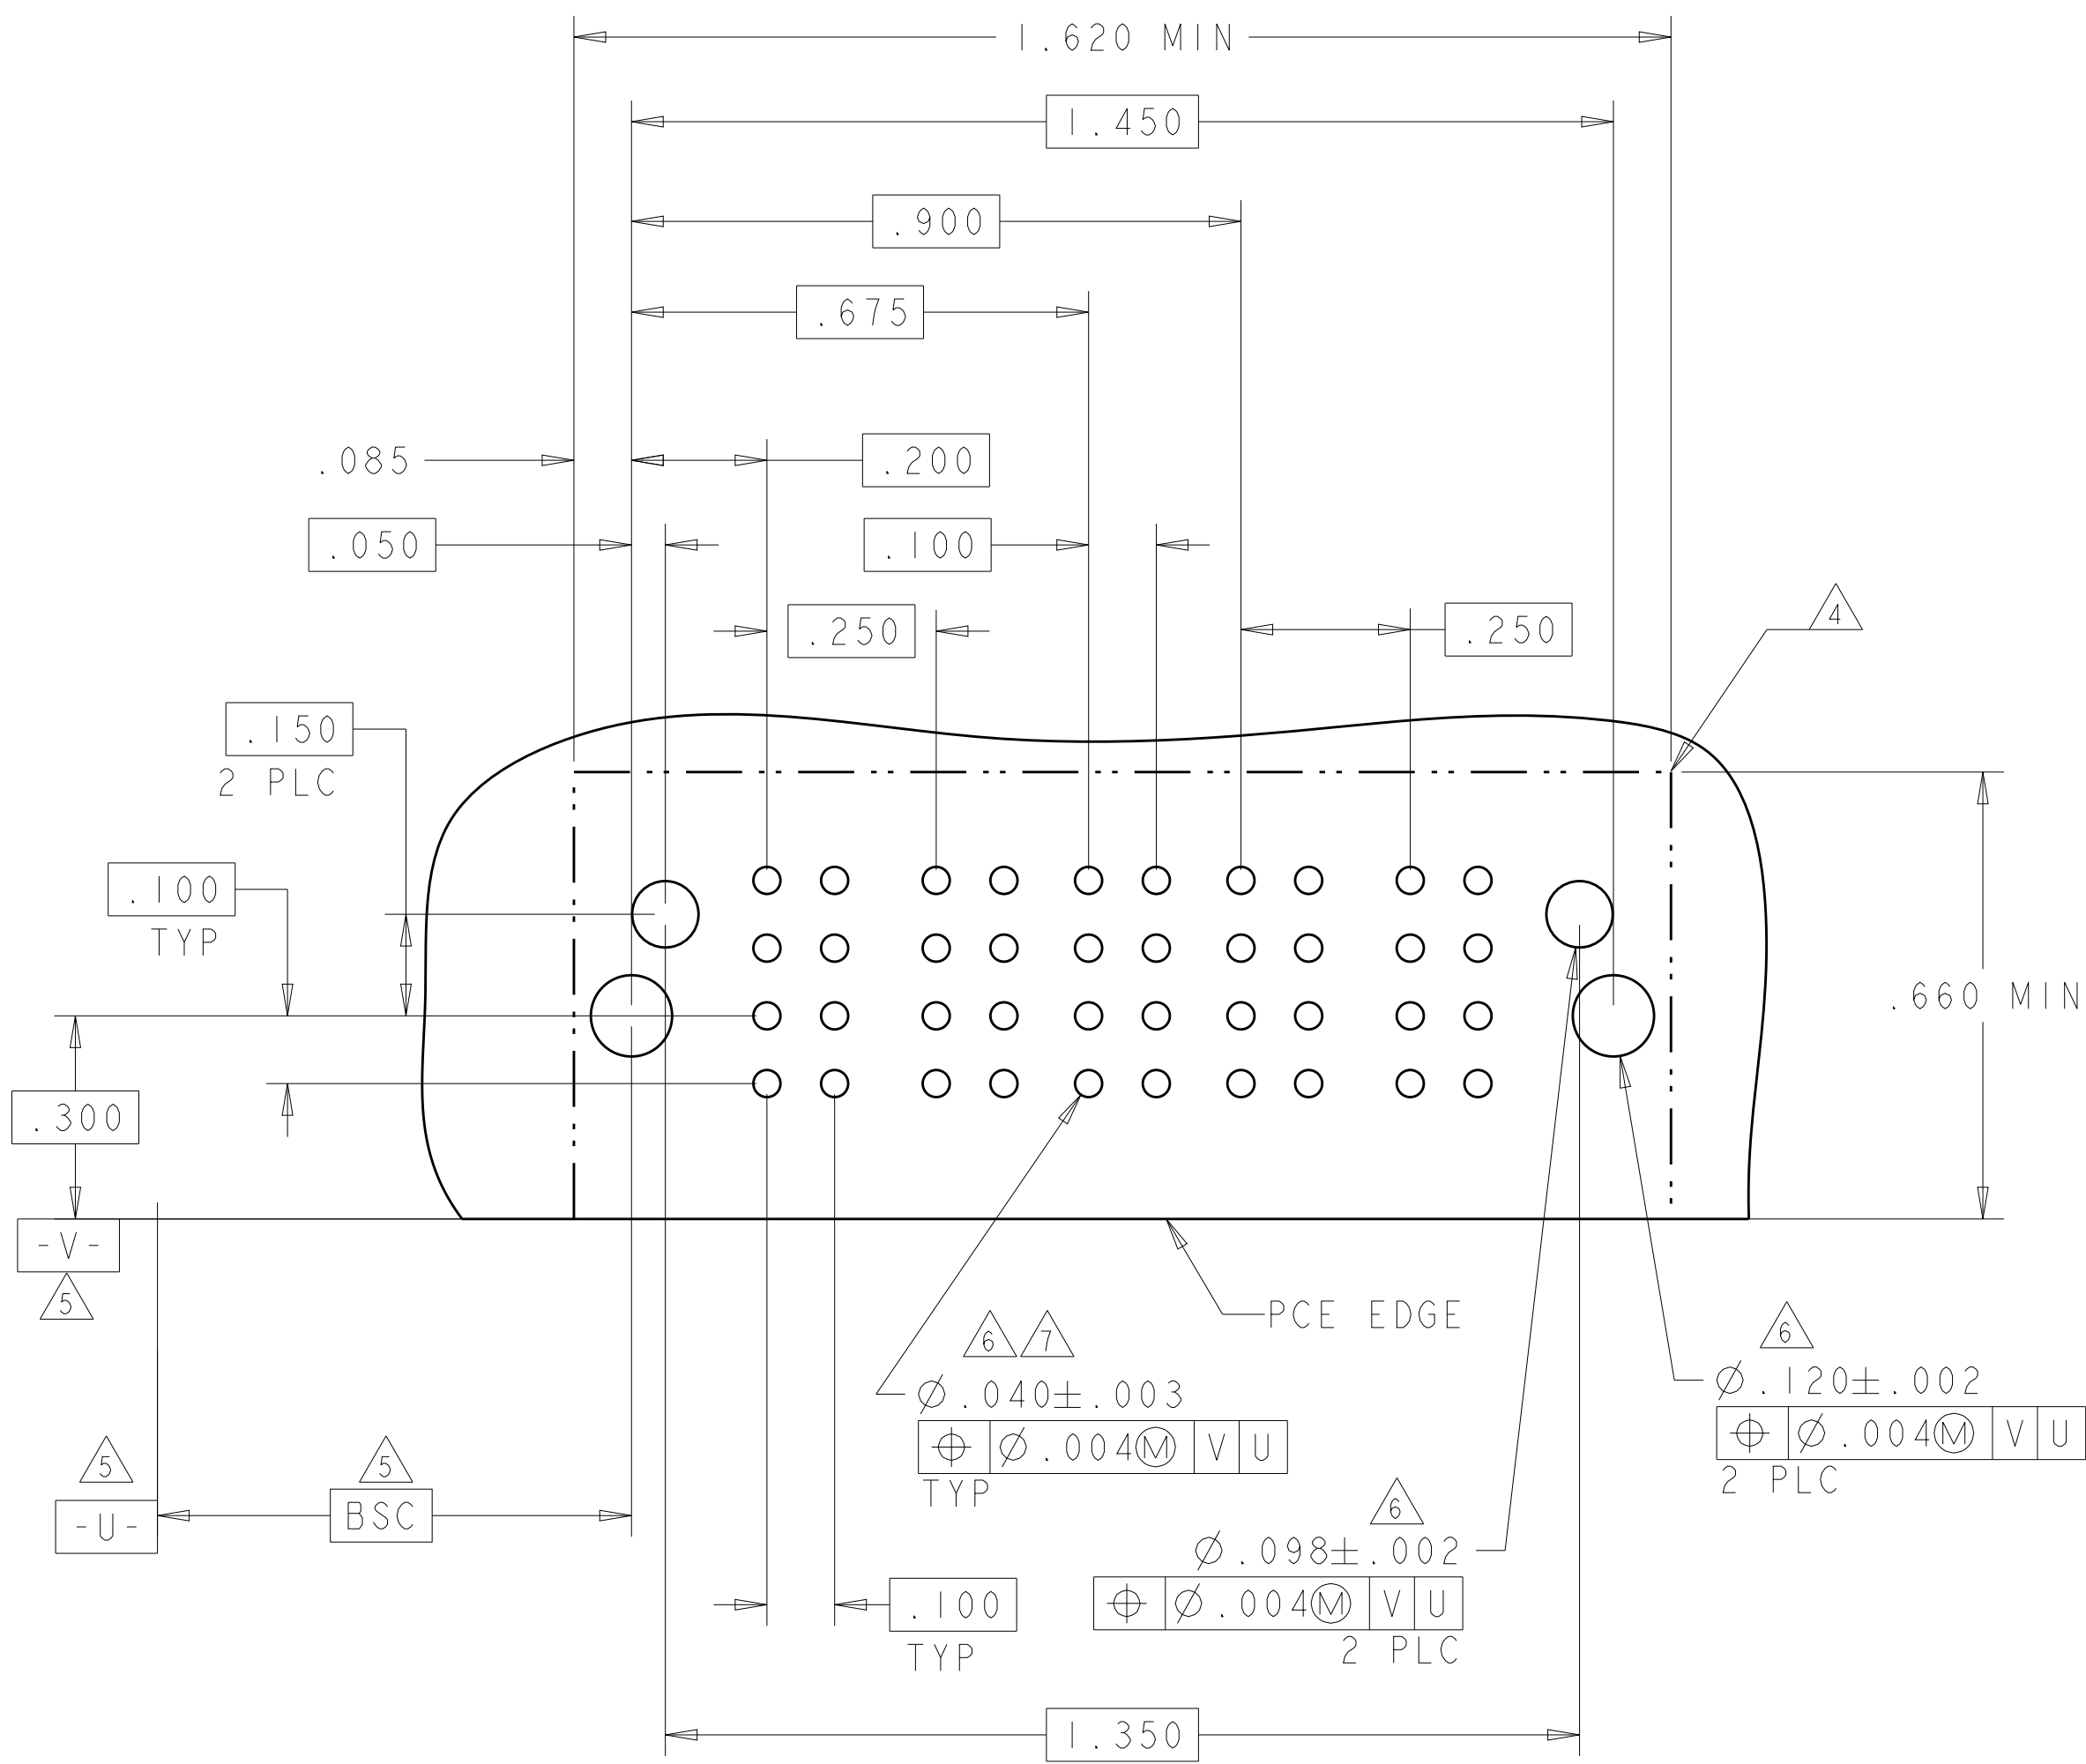
[illegible]4805 (3/11)

PART NUMBER	ROWS	POWER			SIGNAL				POWER						
		P1	P2	P3	1	2	3	4	P4	P5	P6	P7	P8		
5-6450830-6	C		TM	TM	TM	J	J	J	J	TM	TM	TM	TM	TM	
	K					K	K	K							
	N					N	N	N							
	S					S	S	S							
	A	HD													HD
3ACP + 16S + 5P															

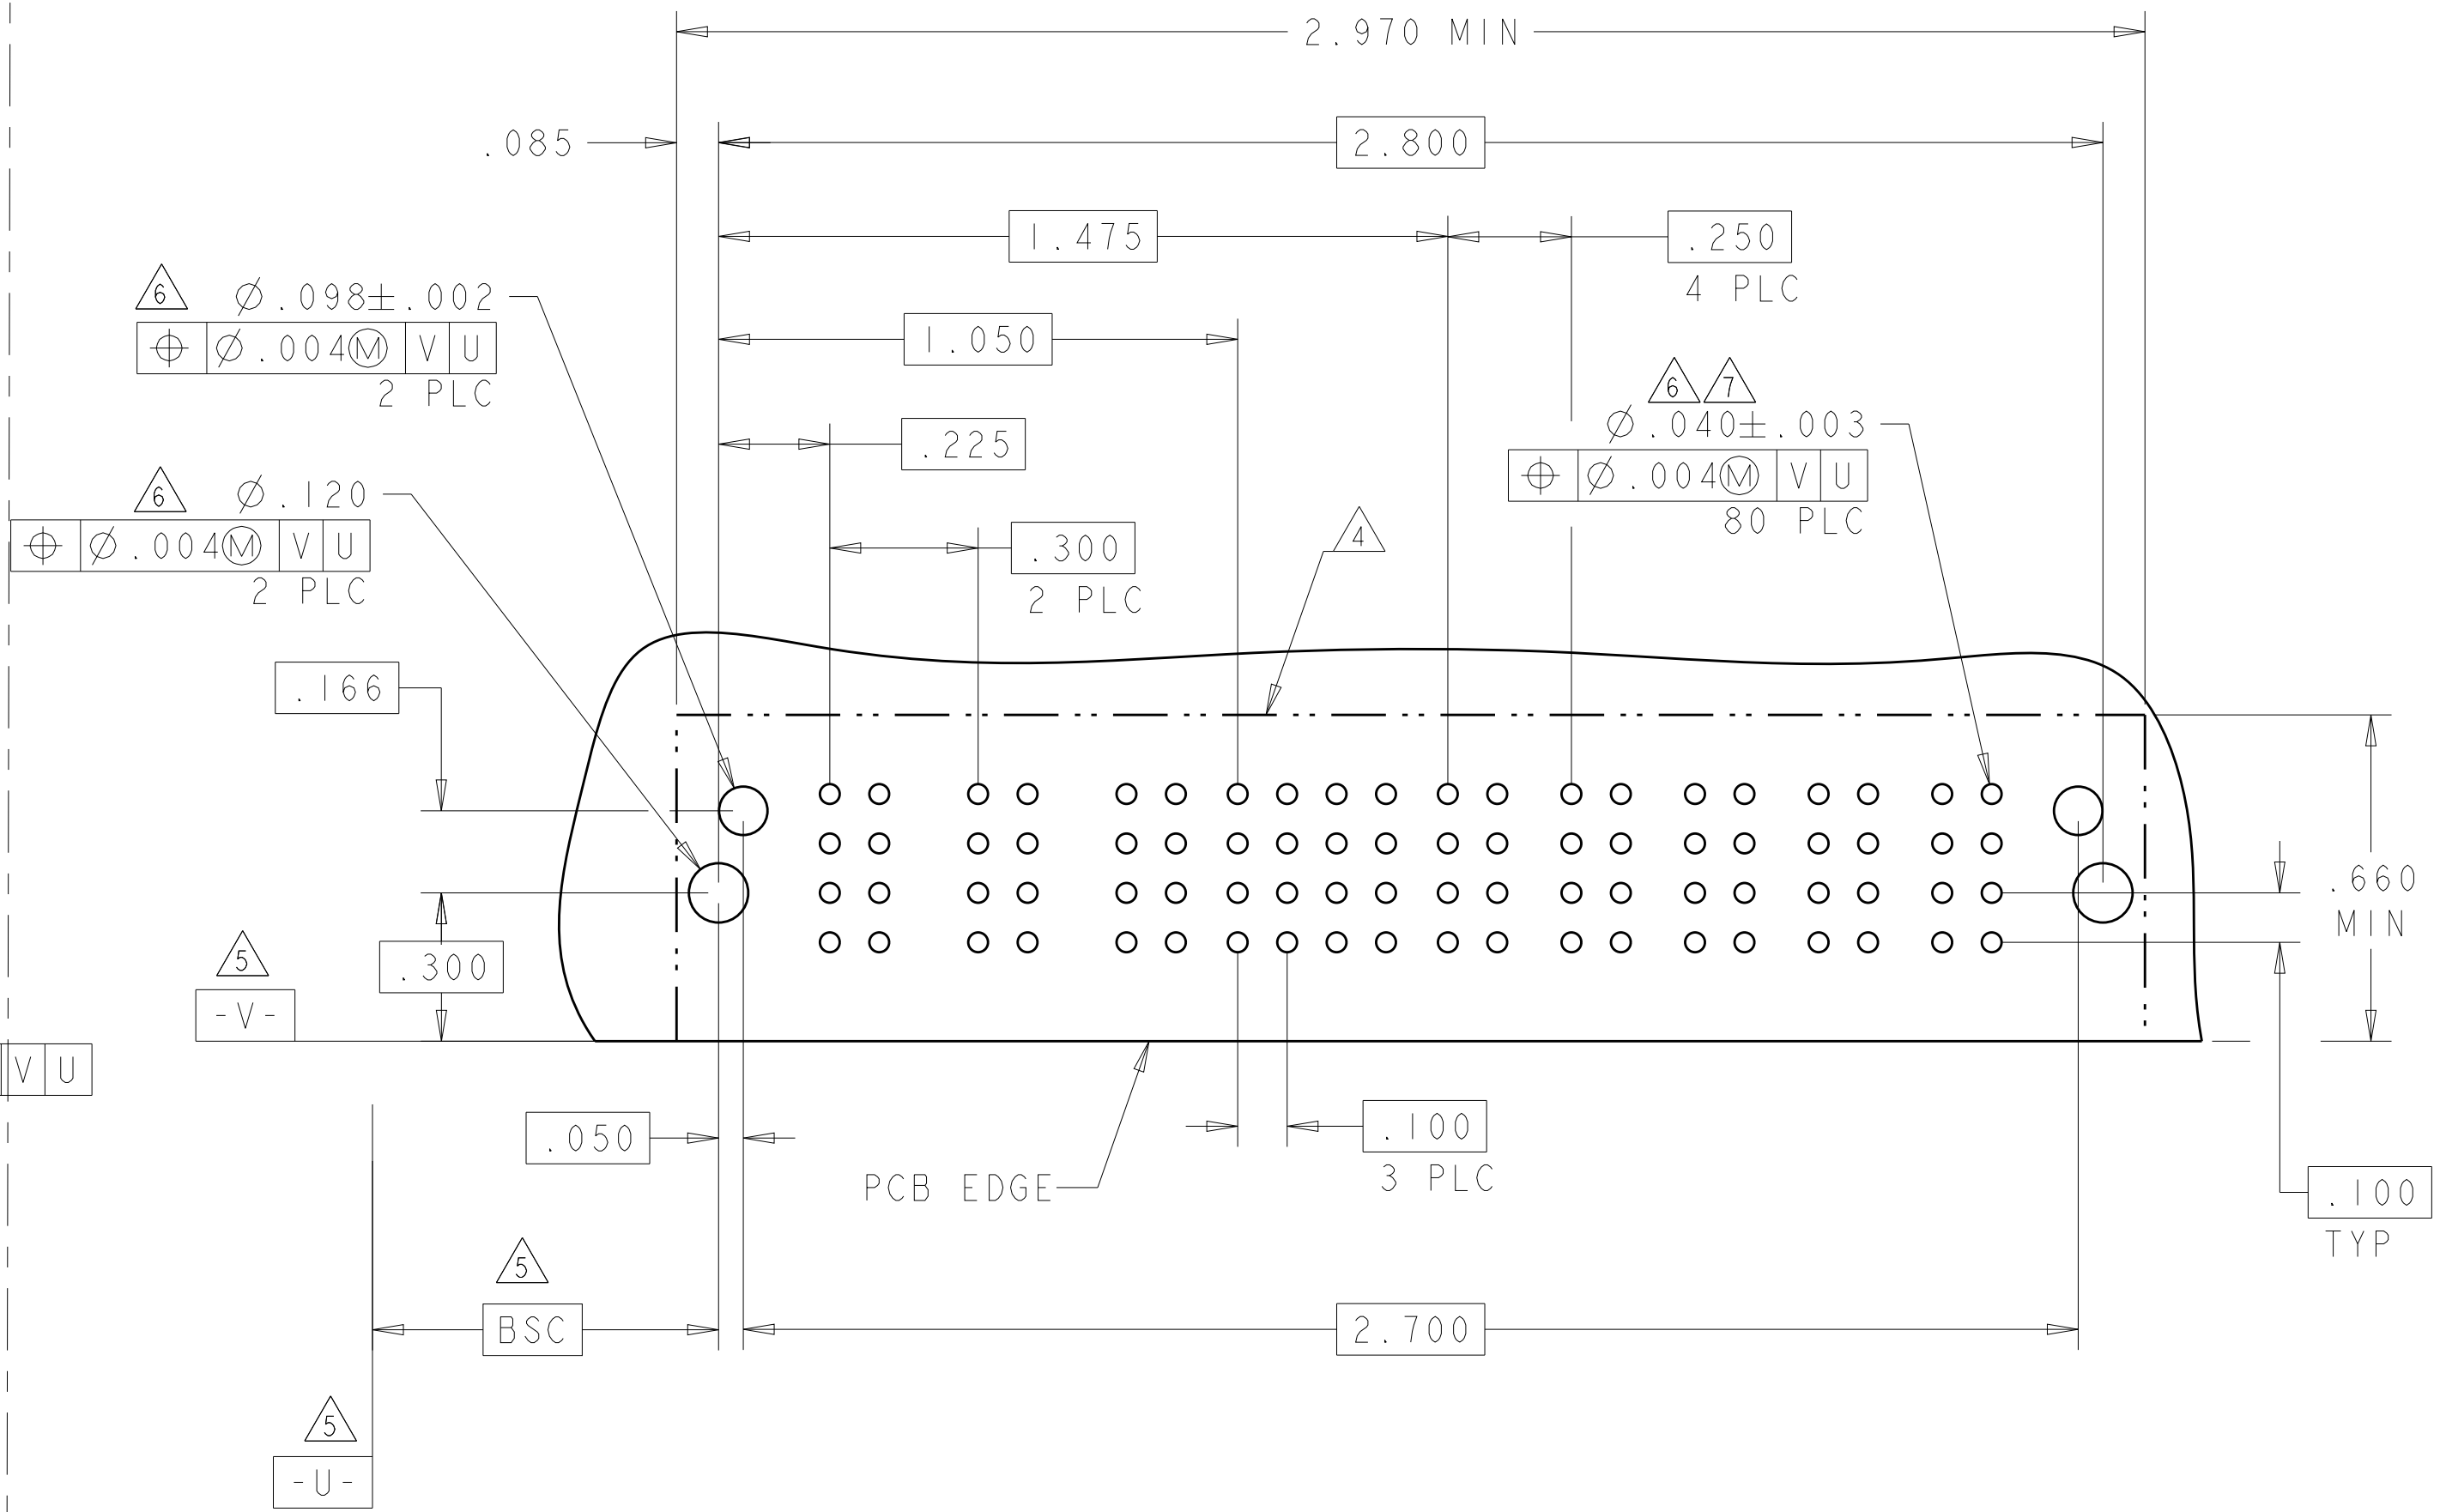4805 (3/11)


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-




PART NUMBER	ROWS		POWER				SIGNAL						POWER				
			P1	P2	P3	P4	1	2	3	4	5	6	P5	P6	P7	P8	
5-6450830-7	D		TM	TM	TM	TM	J	J	J	J	J	J	TM	TM	TM	TM	
	C						K	K	K	K	K	K					
	B						N	N	N	N	N	N					
	A						HD	S	S	S	S	S					
4P + 24S + 4P																	

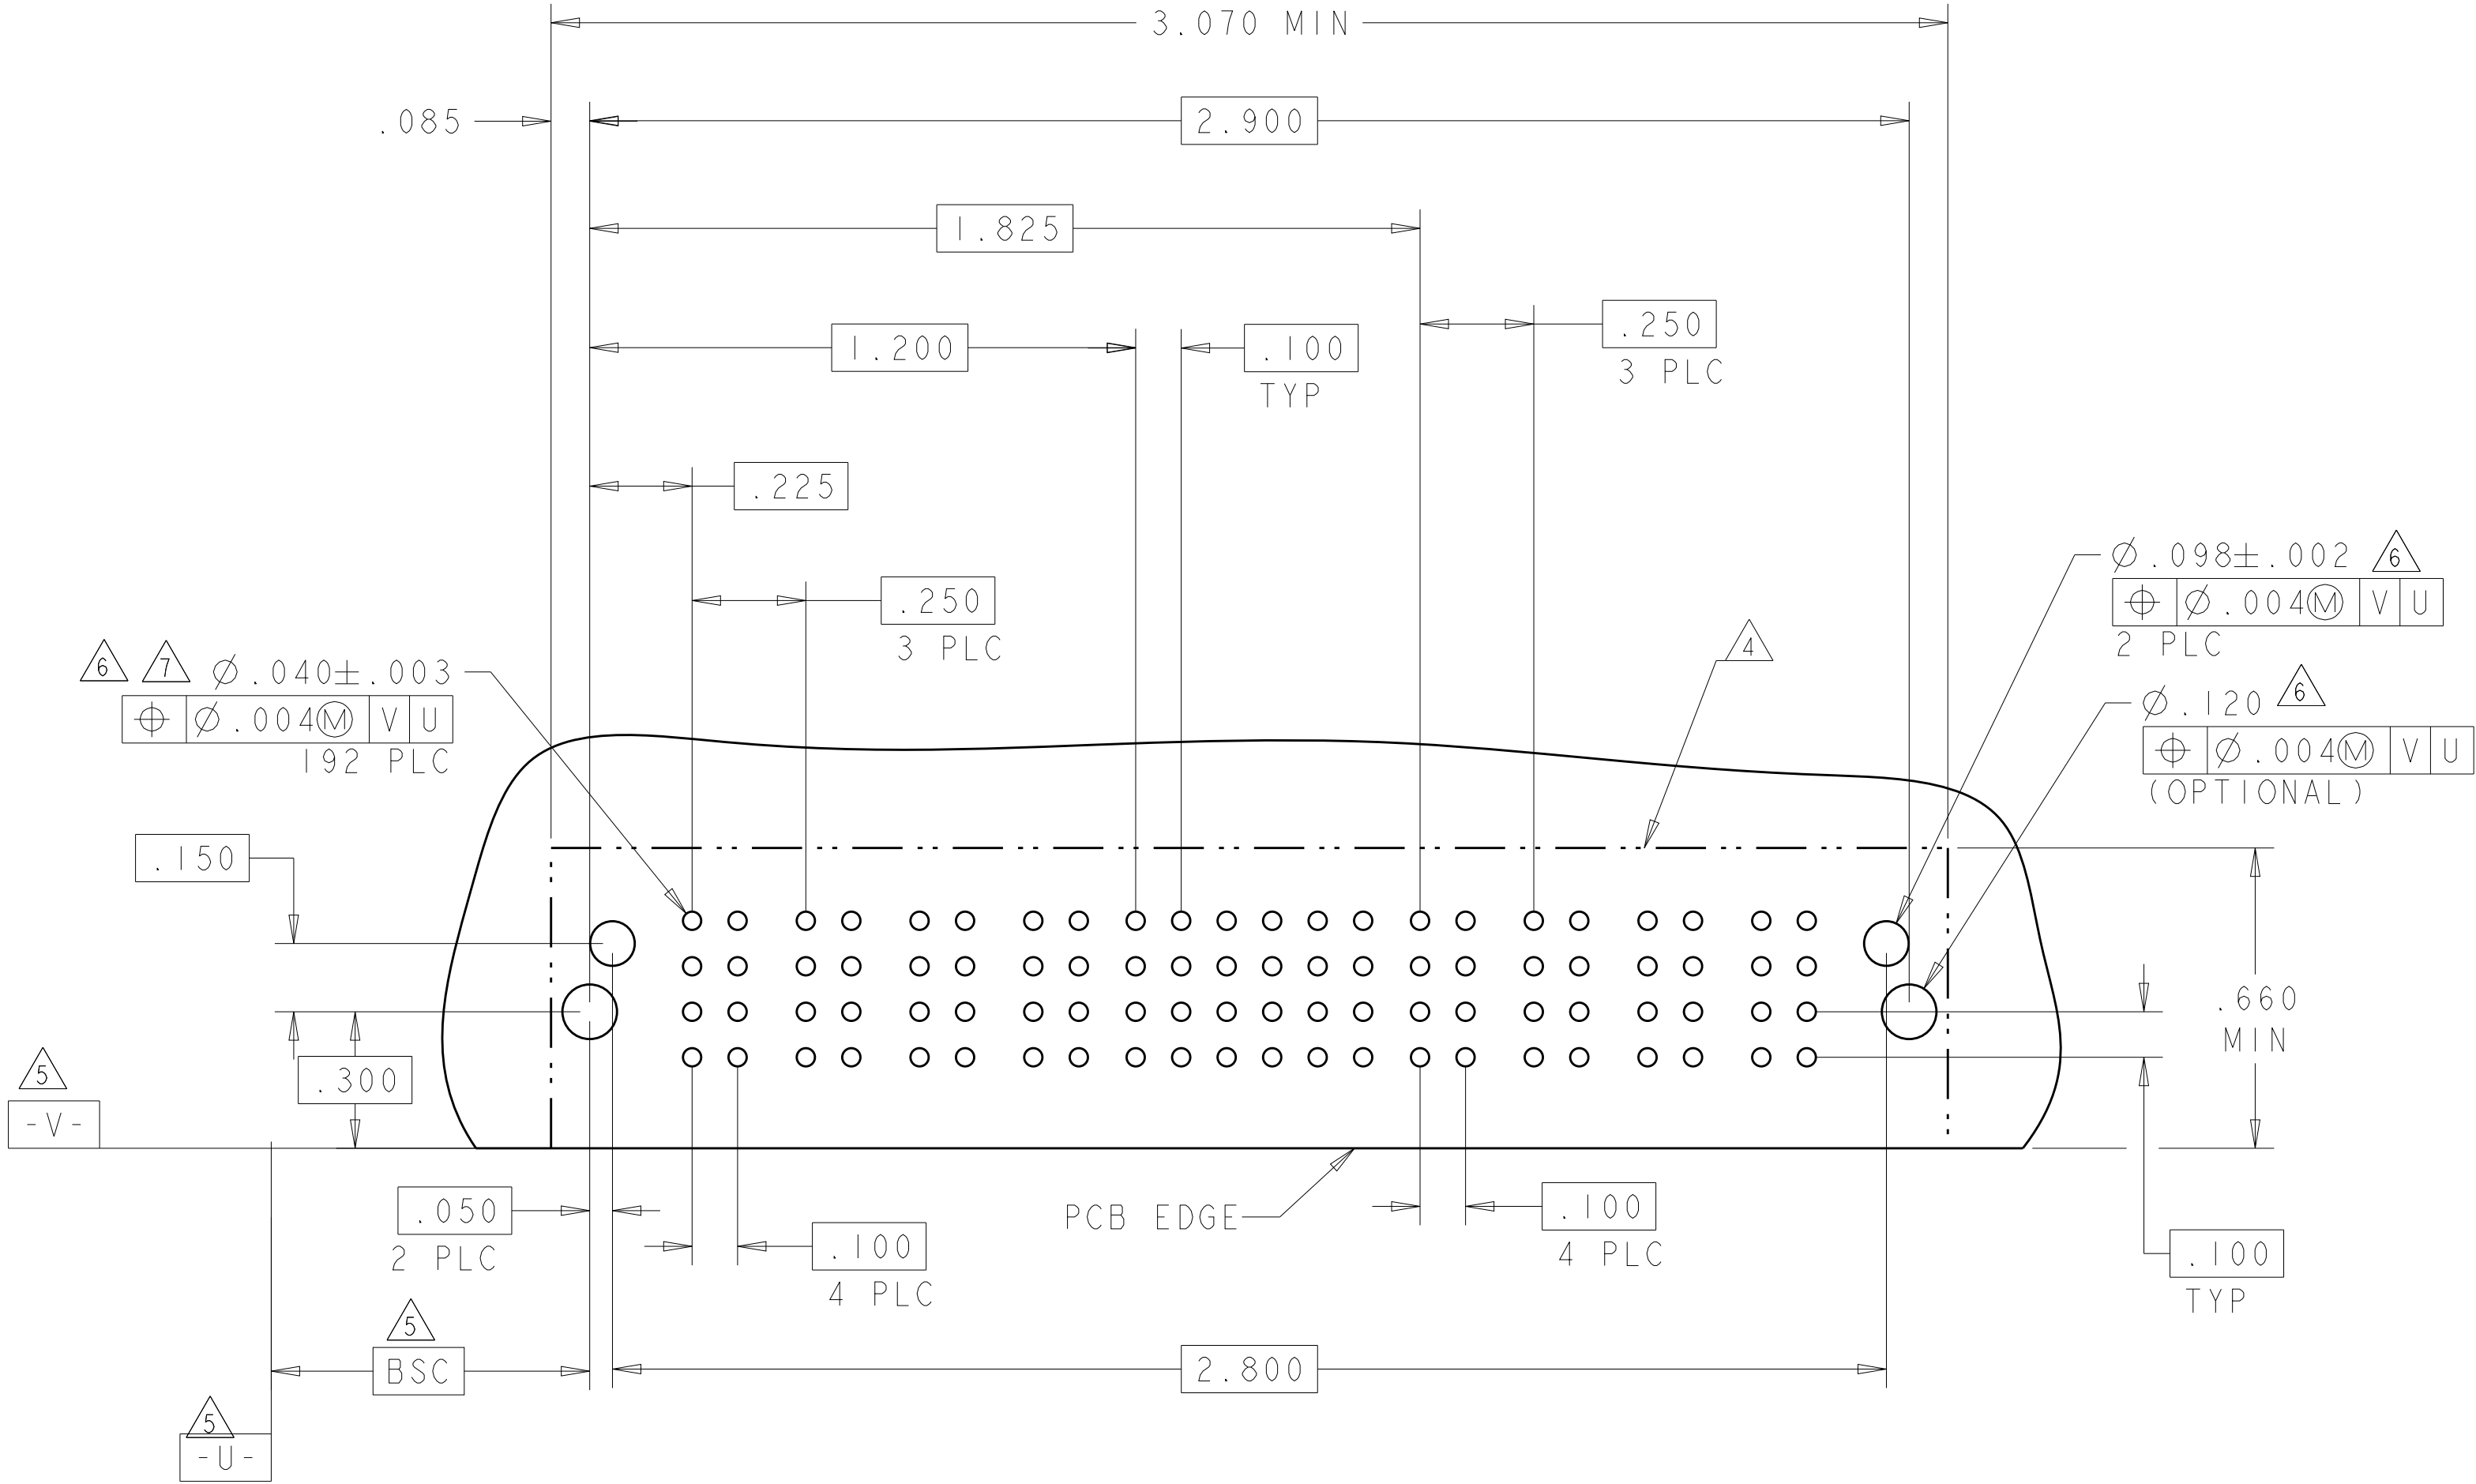


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. ZHAO	10APR2007		
		CHK S. ZHAO	10APR2007		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ± 1 PLC ± 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±2° FINISH		PRODUCT SPEC 108-2292 APPLICATION SPEC 114-13251	
MATERIAL -		WEIGHT -		SIZE A100779	
		CUSTOMER DRAWING		DRAWING NO C=6450830	
				RESTRICTED TO -	
				SCALE 4:1	
				SHEET 29	
				OF 42	
				REV S2	

N6

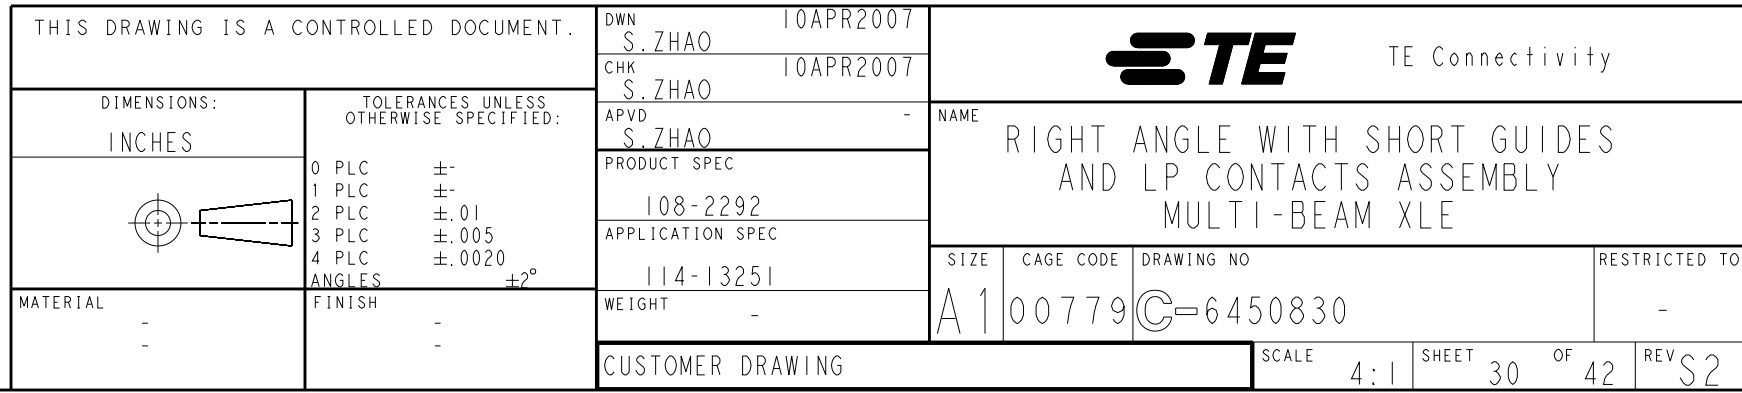

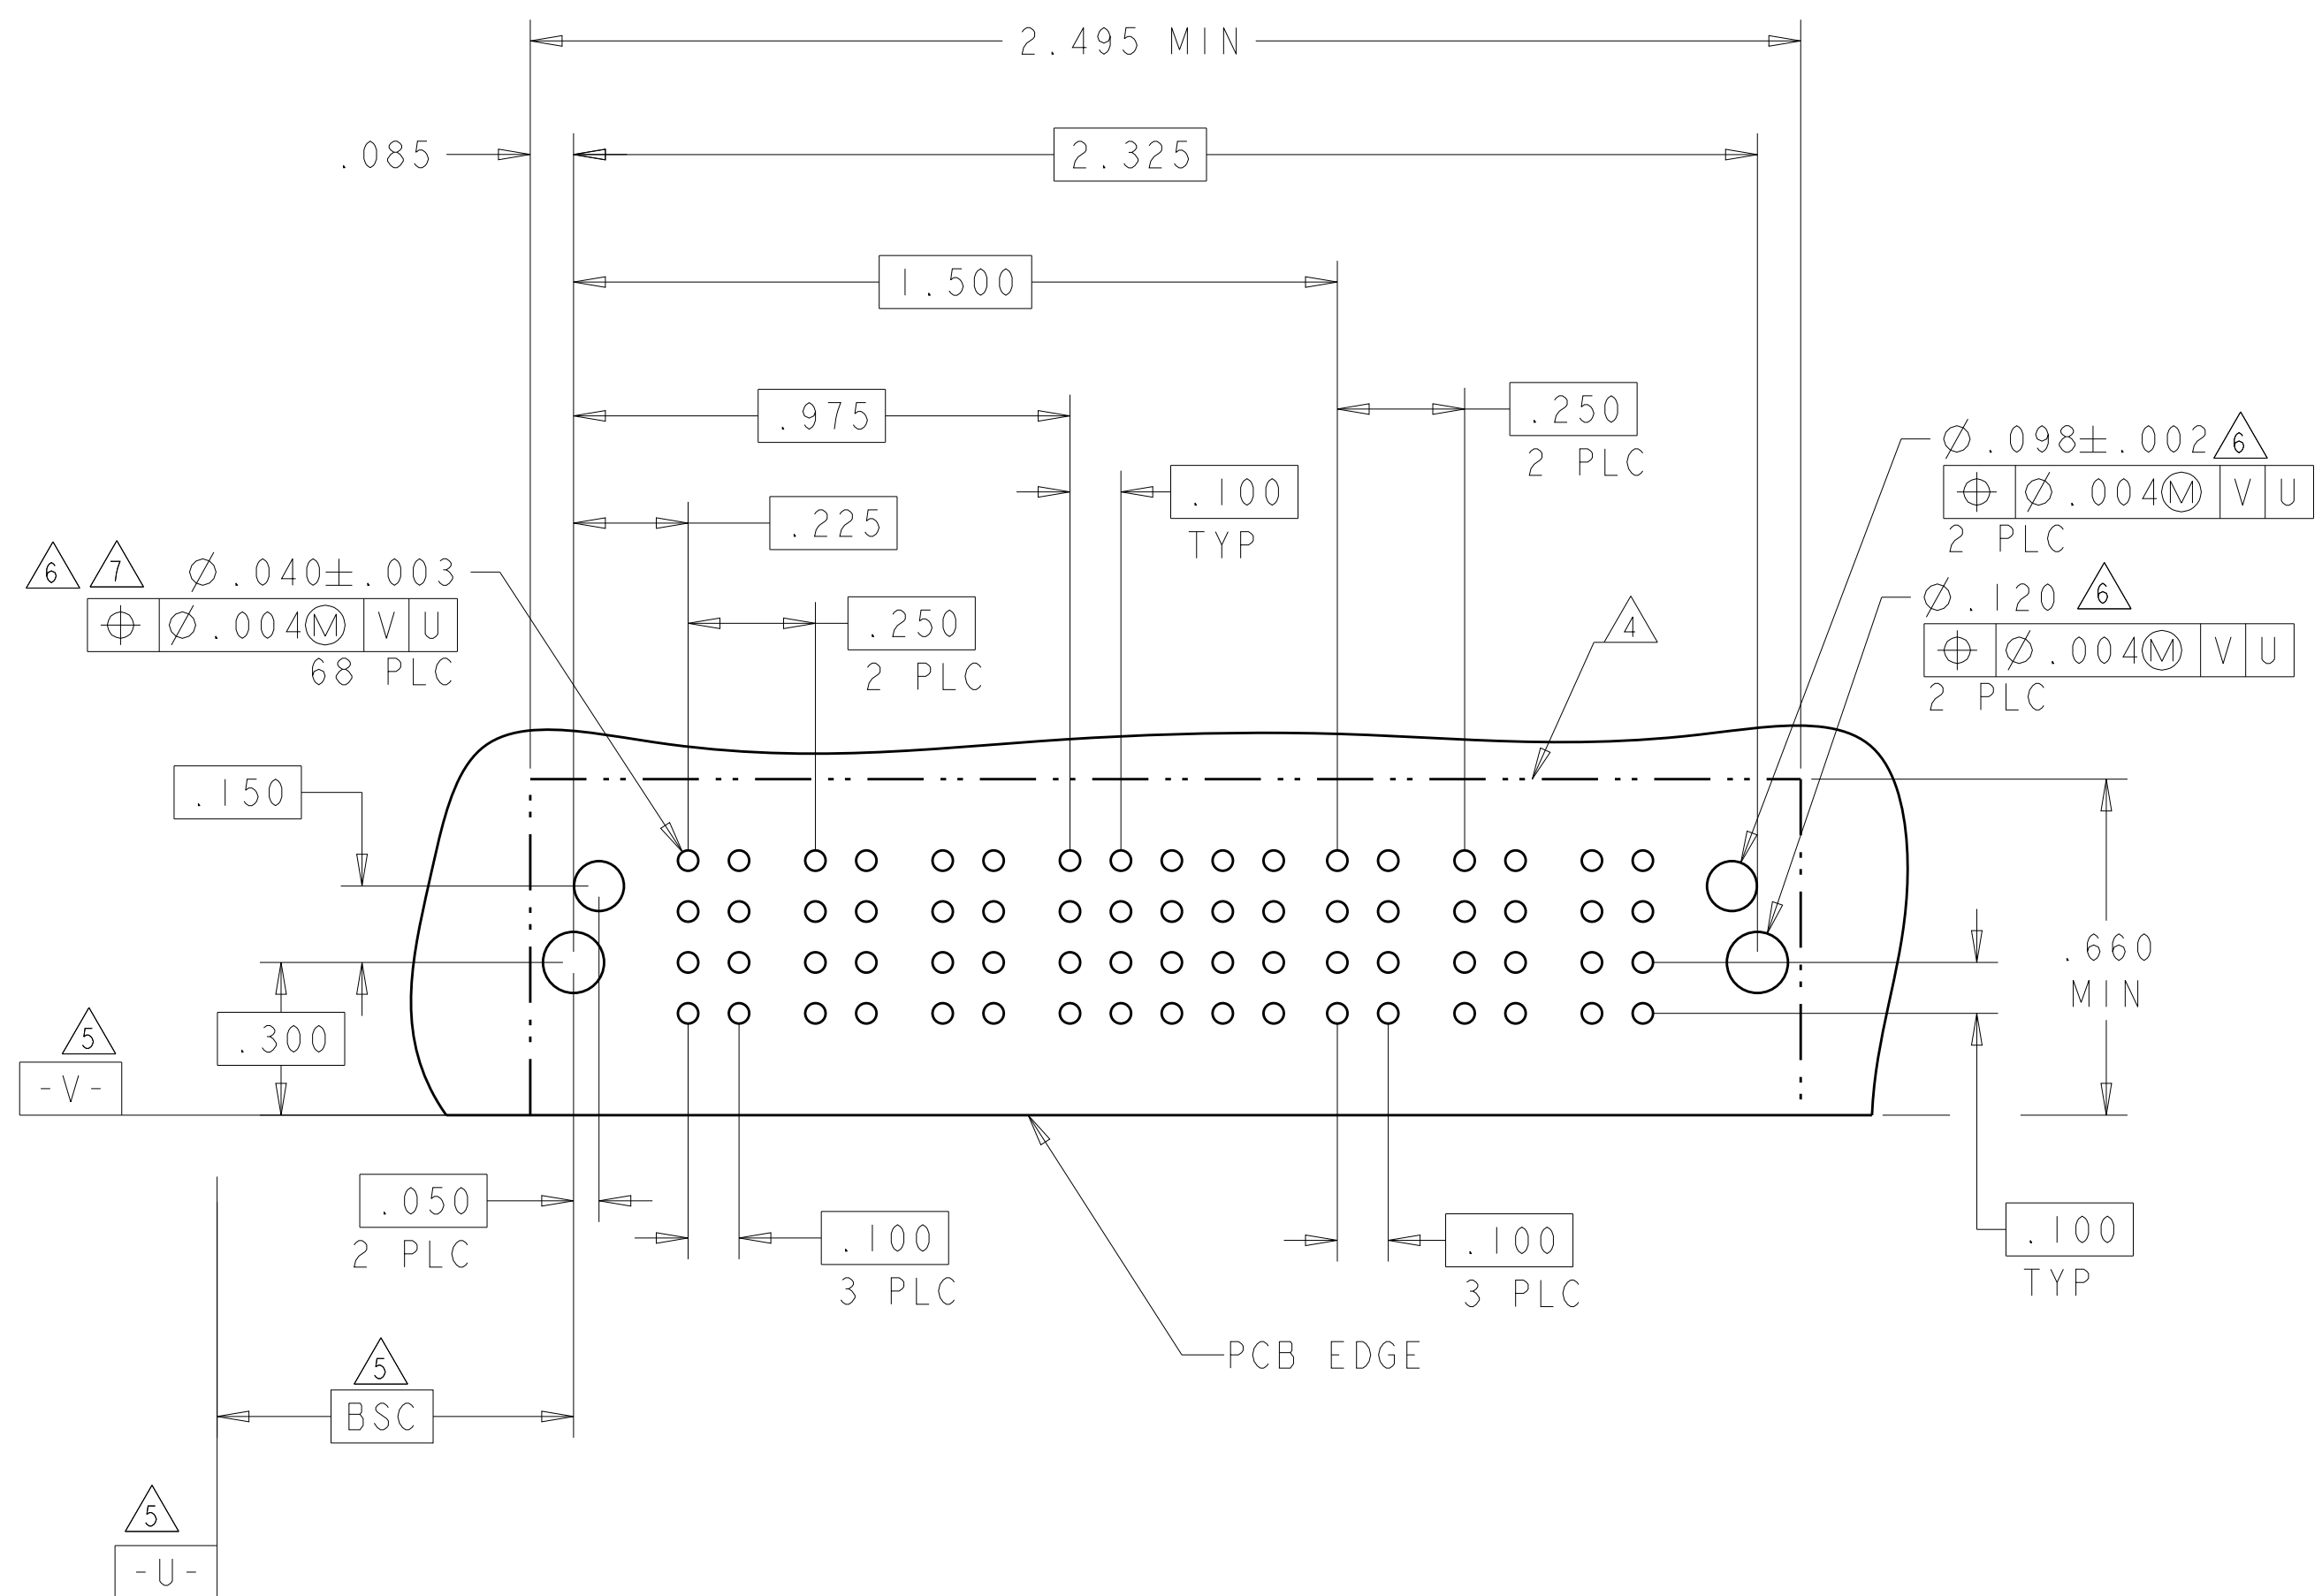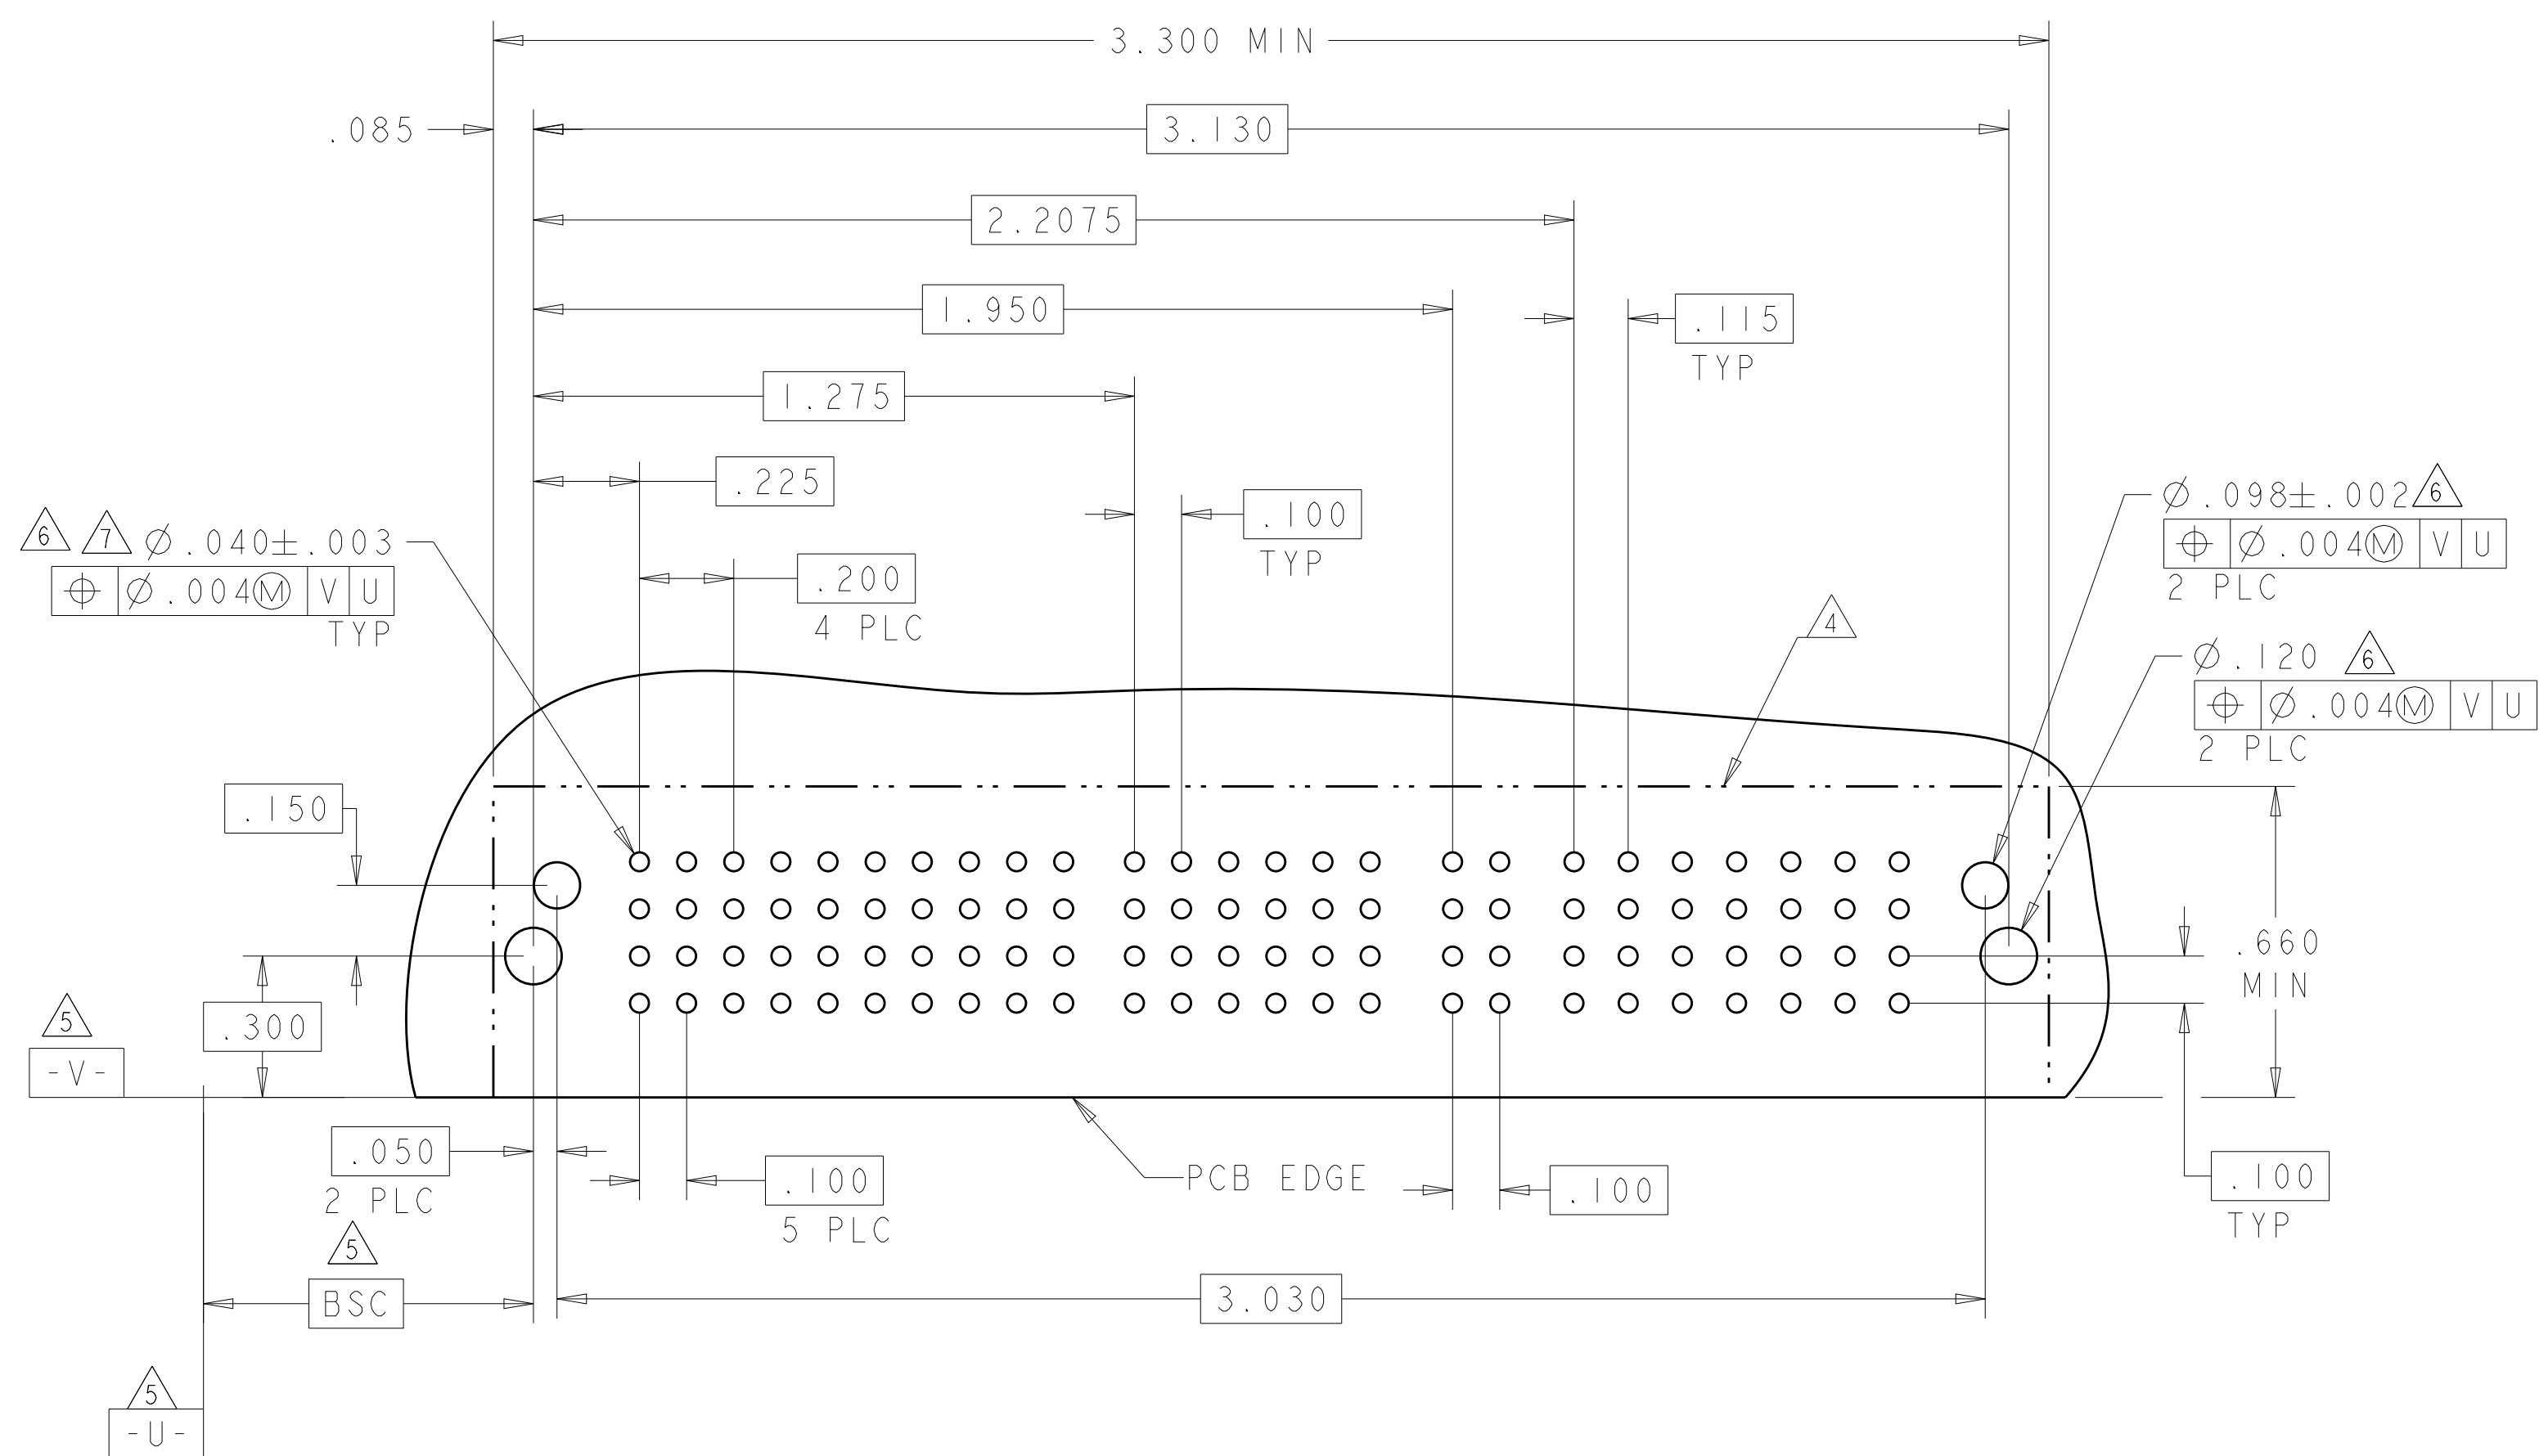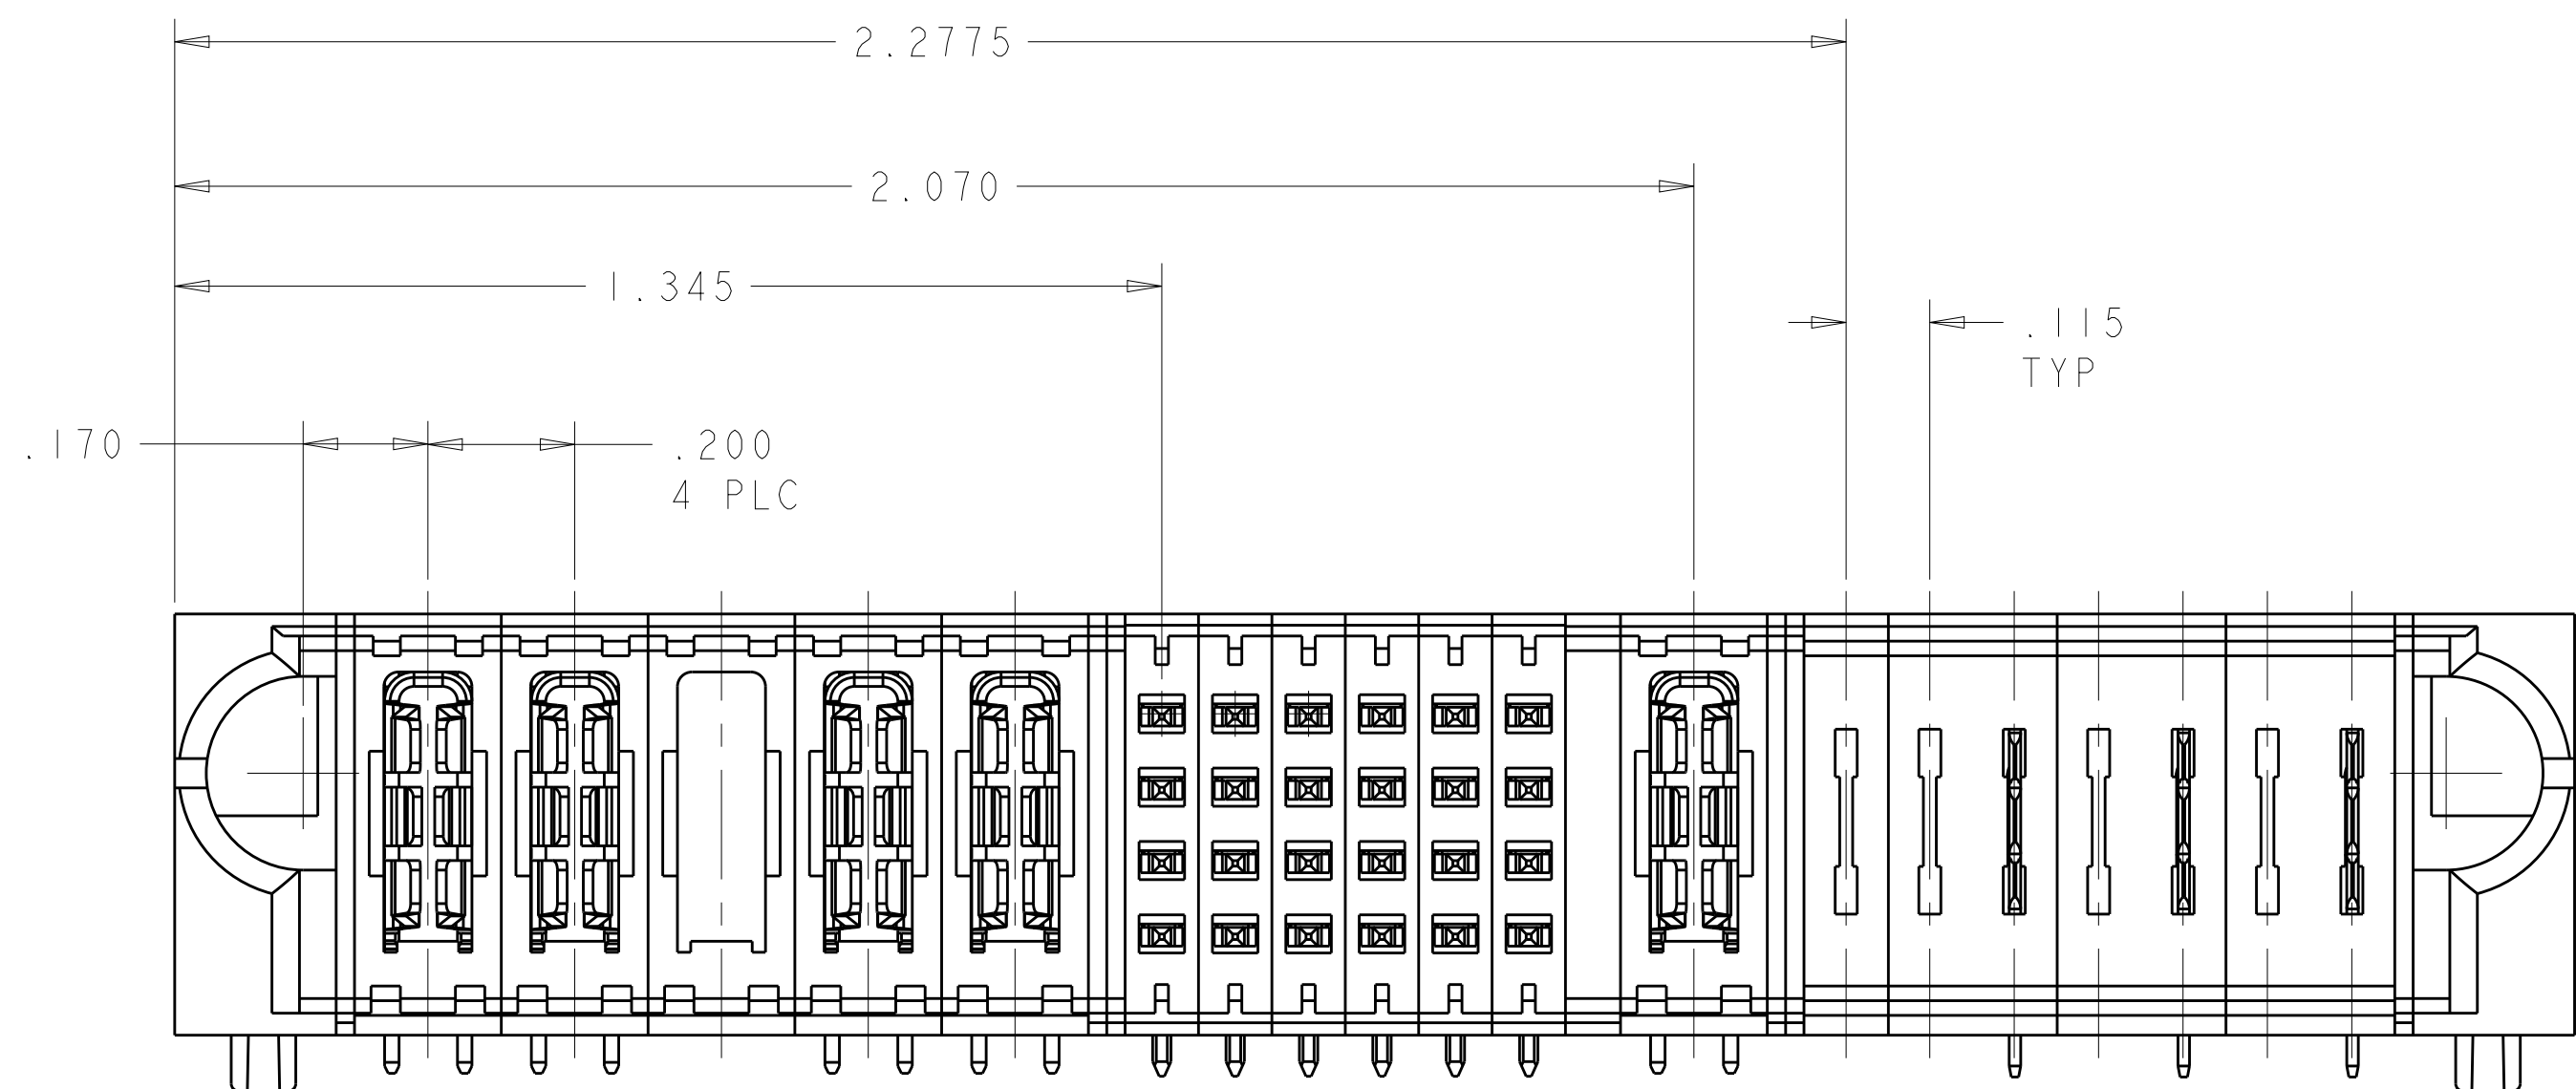[illegible]


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. ZHAO 10APR2007 CHG S. ZHAO 10APR2007 APP'D S. ZHAO		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE	
		0 PLC ±.01 1 PLC ±.01 2 PLC ±.005 3 PLC ±.0020 ANGLES ±0°		PRODUCT SPEC 108-2292 APPLICATION SPEC 114-13251	
MATERIAL -		FINISH -		SIZE CAGE CODE DRAWING NO A100779 C6450830	
		WEIGHT -		RESTRICTED TO -	
		CUSTOMER DRAWING		SCALE 4:1 SHEET 31 OF 42 REV S	

PART NUMBER	ROWS		POWER					SIGNAL						POWER				
			P1	P2	P3	P4	P5	1	2	3	4	5	6	LP1	LP2	LP3	LP4	
6-6450830-6	D		TM	TM	TM	TM	TM	J	J	J	J	J	J	LMF	LM	LM		
	C							K	K	K	K	K	K					
	B							N	N	N	N	N	N					
	A							S	S	S	S	S	S					
5ACP + 24S + 4LP																		

Top view drawing of a PCB. The overall dimensions are 3.130 MIN (width) and 2.860 (length). The drawing shows a grid of 100 circular holes (10 rows by 10 columns) with a pitch of .040 ± .003. The holes are located within a rectangular area of 2.4075 by 1.750. The PCB has a thickness of .0660 MIN. The drawing includes various dimensions and tolerances for the holes and the PCB edges. The holes are labeled with a diameter of .040 ± .003 and a tolerance of .004. The PCB edges are labeled with a thickness of .100 and a tolerance of .010. The drawing also shows a 5 PLC (Plating Layer) and a 2 PLC (Plating Layer) on the top and bottom surfaces. The drawing is labeled with a 4 (four) and a 6 (six) in the bottom right corner.

Dimensions and Tolerances:


- Overall Width: 3.130 MIN
- Overall Length: 2.860
- Grid Dimensions: 2.4075 (width), 1.750 (height)
- Hole Pitch: .040 ± .003
- Hole Diameter: $\varnothing .040 \pm .003$
- Hole Tolerance: .004
- PCB Thickness: .0660 MIN
- PCB Edge Thickness: .100
- PCB Edge Tolerance: .010
- Plating Layer (PLC): 5 PLC (top), 2 PLC (bottom)
- Surface Finish: 4 (four), 6 (six)

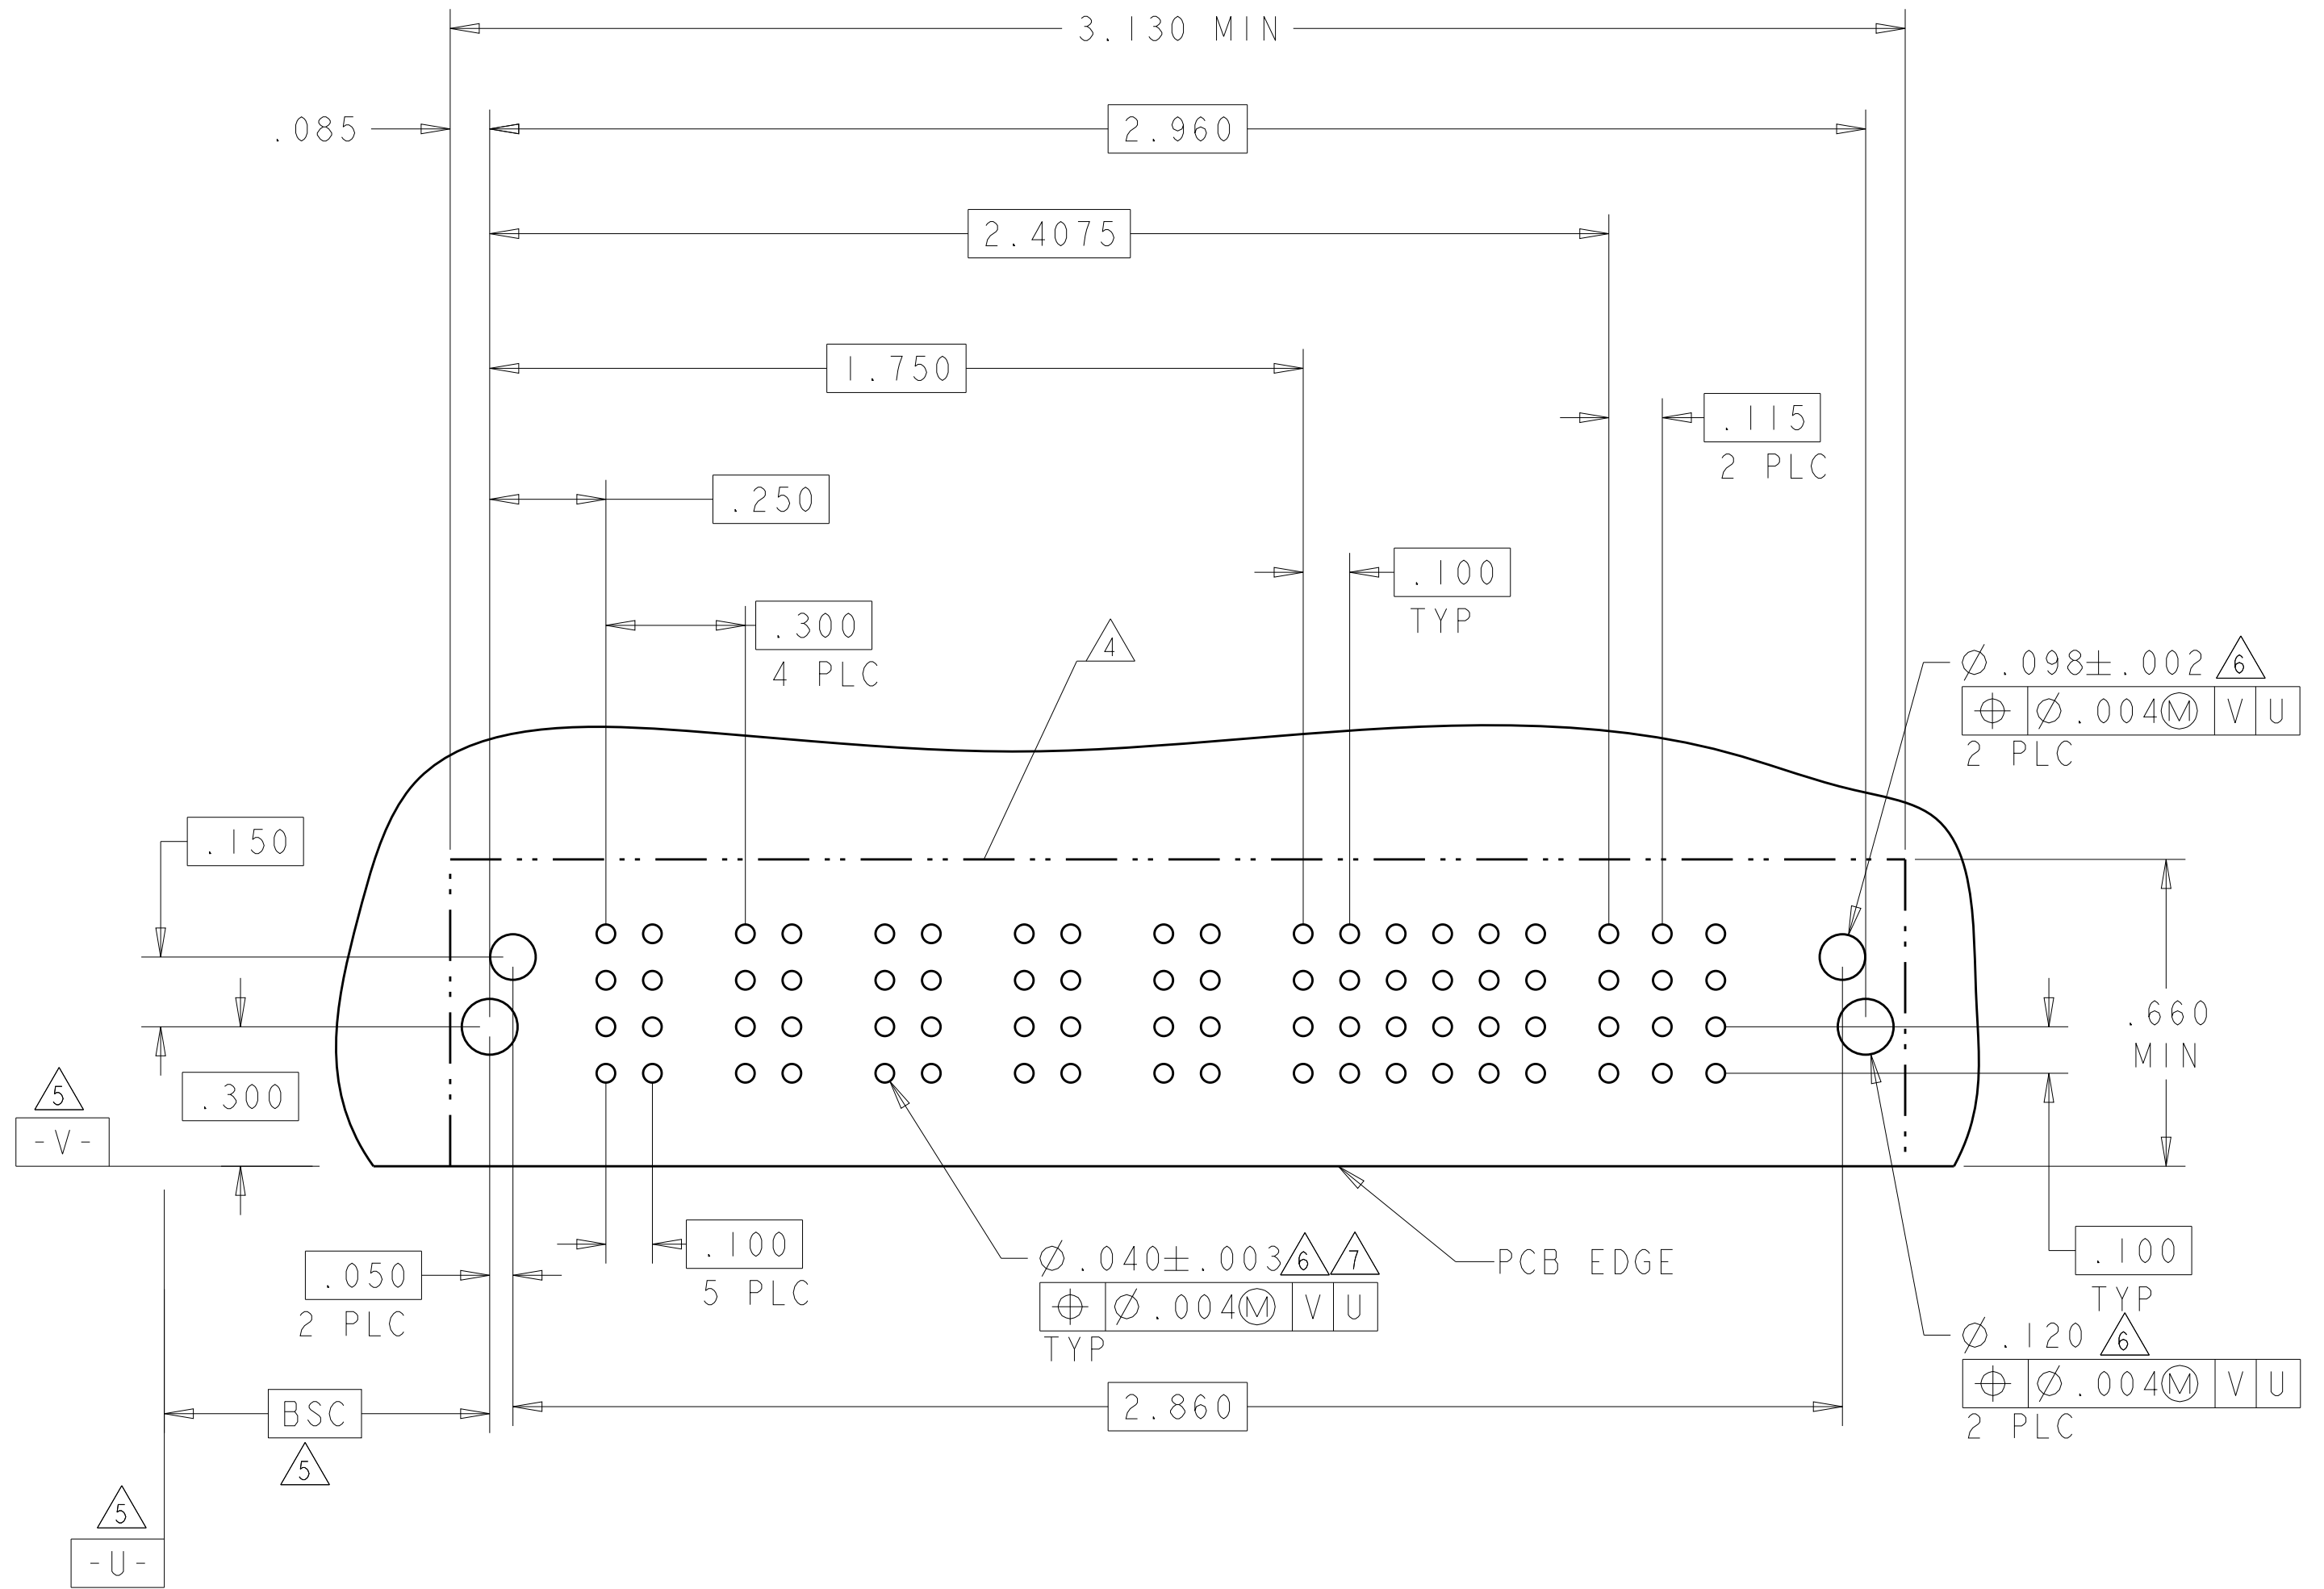


4805 (3/11)


PART NUMBER	ROWS		LOW POWER						SIGNAL																								LOW POWER						
			LP1	LP2	LP3	LP4	LP5	LP6	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	20	21	22	23	24	LP7	LP8	LP9	LP10				
6-6450830-9	D		LMF	LM	LM	LM	LMF	LM	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J				
	K								K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K
	N								N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N
	A	HD							S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S
6LP + 96S + 4LP																																							

[illegible]


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S_ZHAO 10APR2007		 TE Connectivity	
DIMENSIONS: INCHES 		CHG S_ZHAO 10APR2007			
		APVD S_ZHAO -			
		NAME			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±. 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±°		PRODUCT SPEC 108-2292		RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE	
		APPLICATION SPEC 114-13251			
		SIZE CAGE CODE DRAWING NO RESTRICTED TO			
		MATERIAL -		WEIGHT -	
FINISH -		CUSTOMER DRAWING		SCALE 4:1 SHEET 34 OF 42 REV S2	


Timing diagram for the 4-bit parallel adder showing the propagation of a carry signal through four full adder stages. The carry signal starts at 0.300 (3 PLC) and propagates through stages 1, 2, 3, and 4, with delays of 0.350, 0.250, and 0.275 respectively. The final carry output is 0.275 (8 PLC).

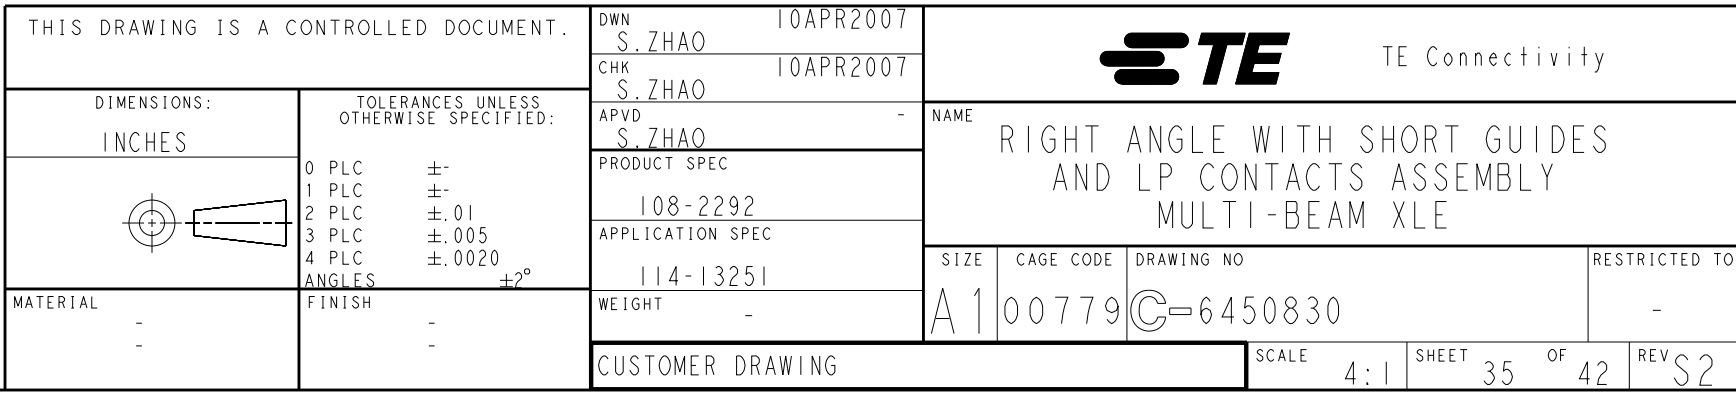


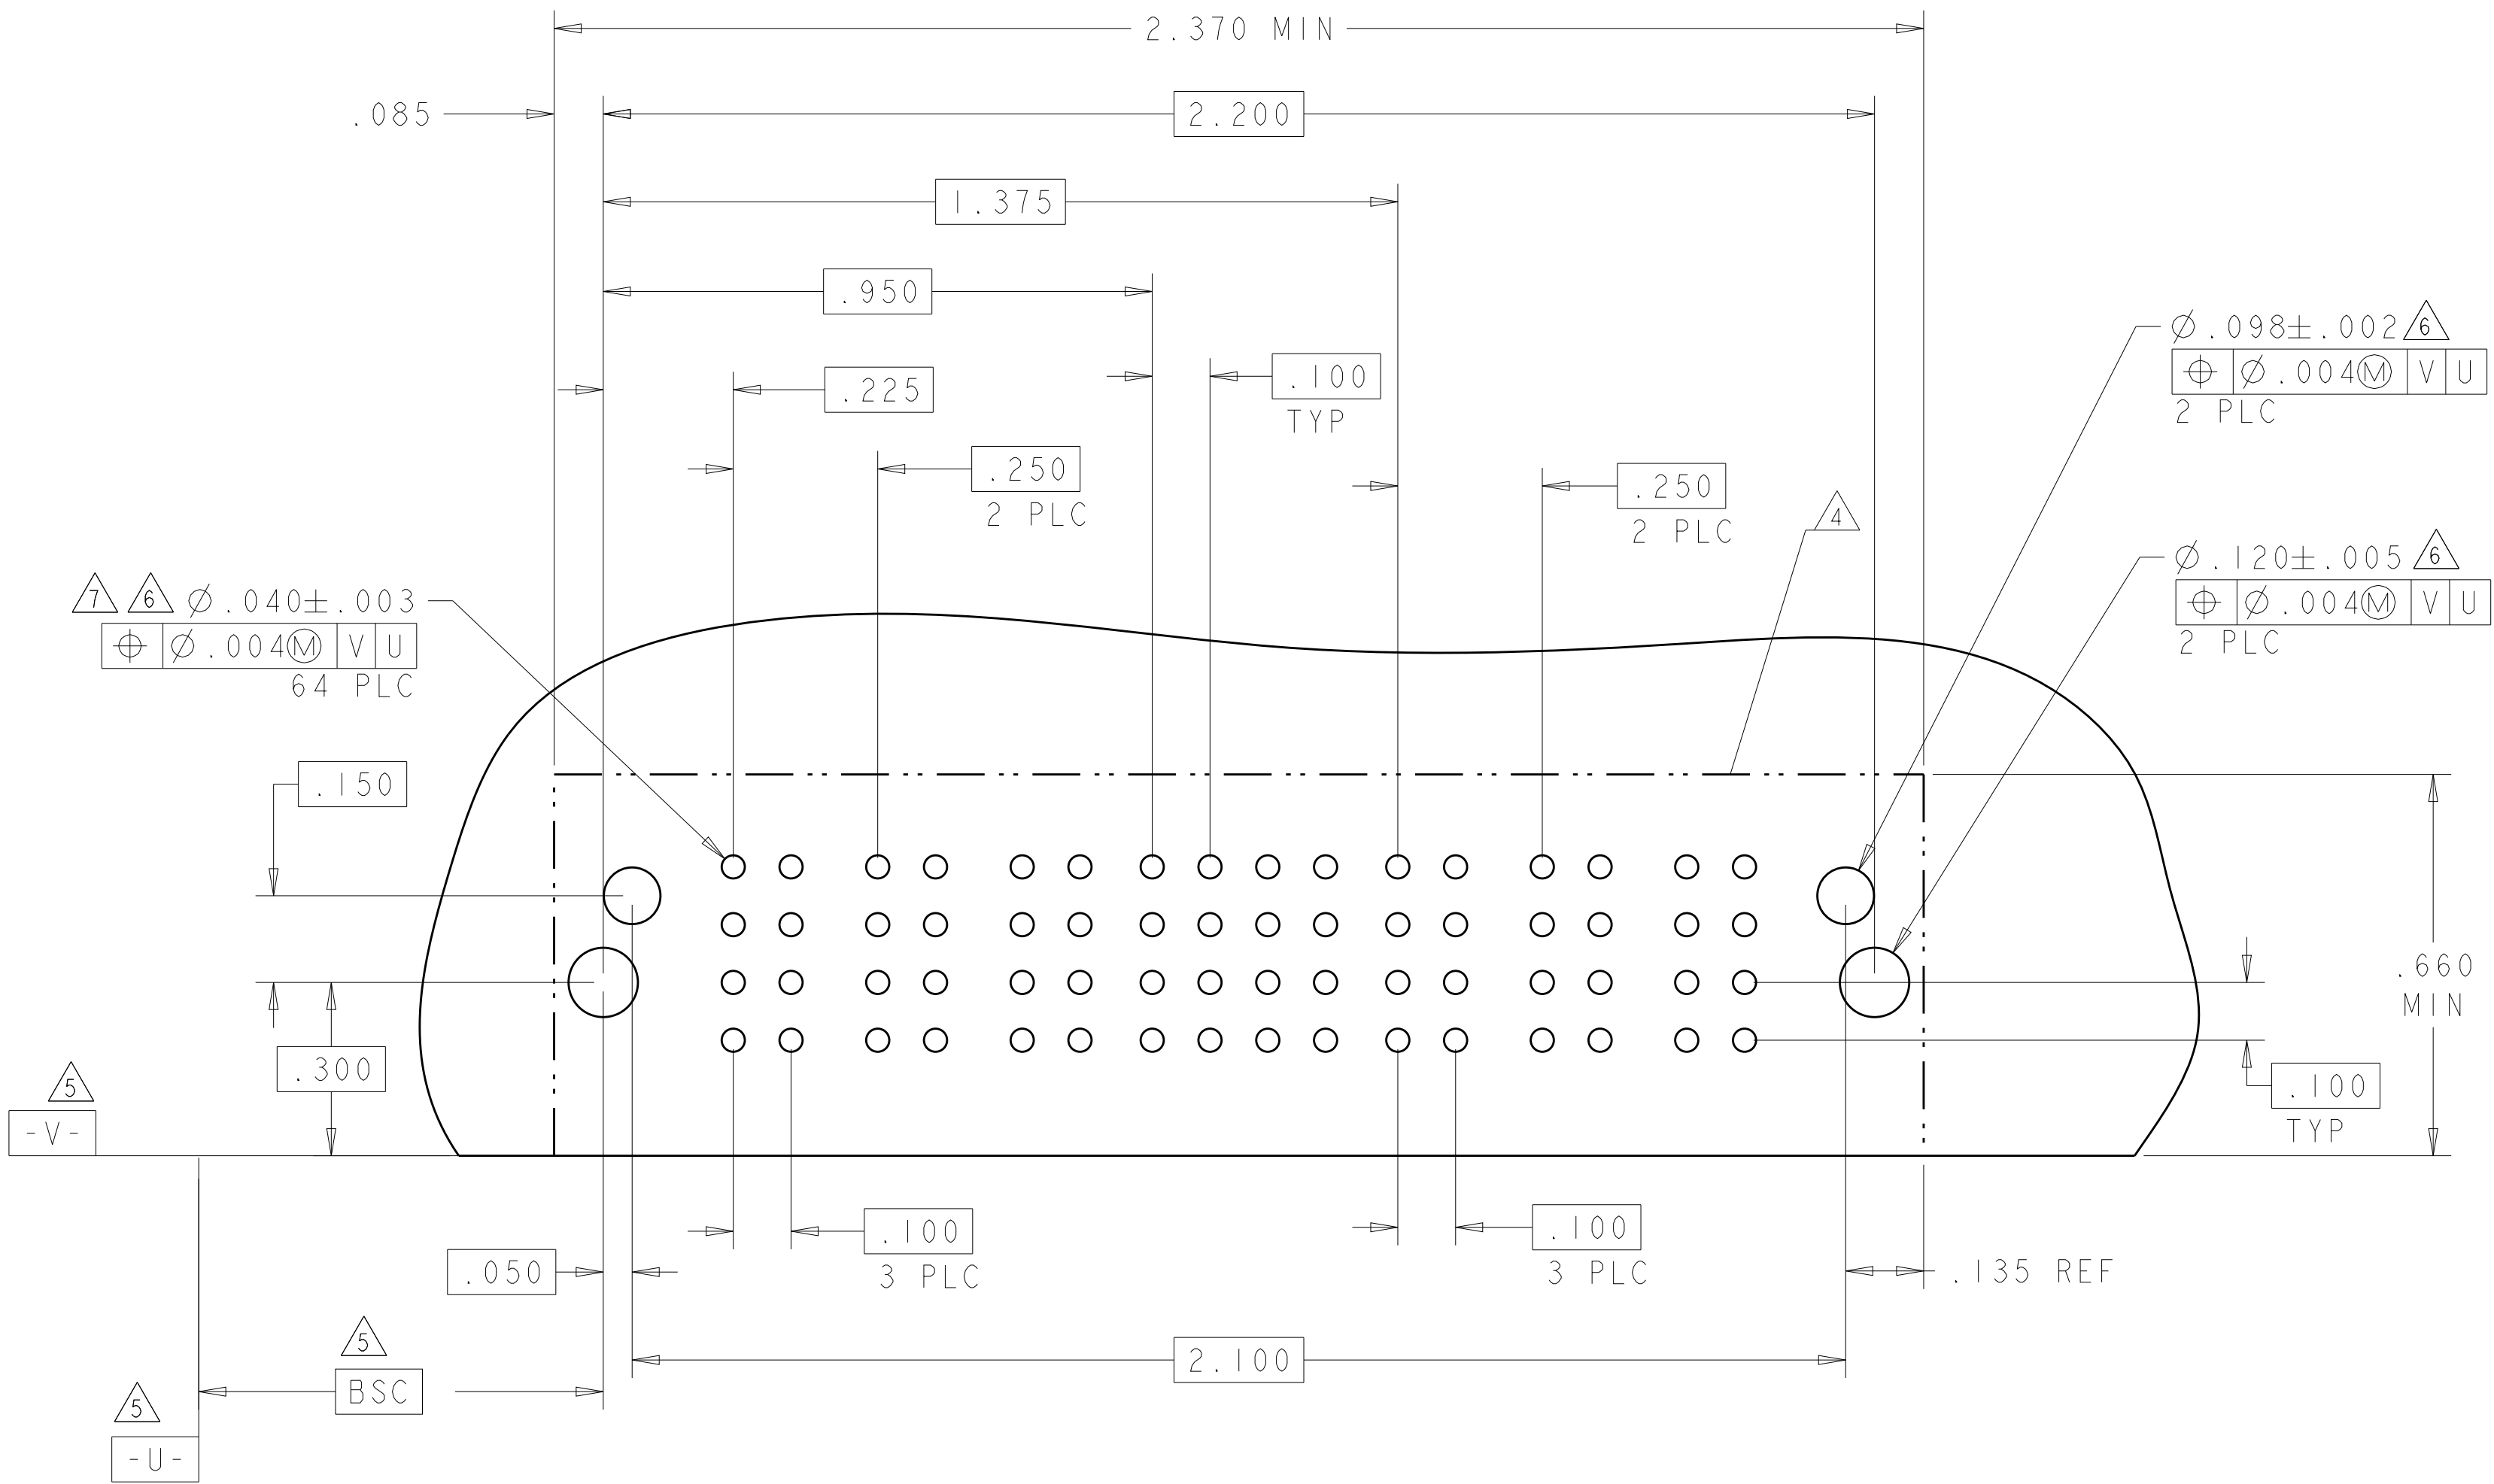
[illegible]4805 (3/11)

PART NUMBER	ROWS		POWER				SIGNAL												POWER	
			P1	P2	P3	P4	1	2	3	4	5	6	7	8	9	10	11	12	P4	
7-6450830-7	D		TM	TM	TM	TM	E			E	J		J		J	E		E	TM	
	C						F	F	F		K		K		F		F			
	B						G		G		N		N		G		N			
	A						H	H	H	H	H		S		H		H			
4P + 48S + 1P																				

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S_ZHAO	10APR2007	 TE Connectivity	
DIMENSIONS: INCHES		CHN S_ZHAO 10APR2007			
		APVD S_ZHAO			
		NAME RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM xLc		SIZE CAGE CODE DRAWING NO.	
		PRODUCT SPEC 108-2292			
		APPLICATION SPEC 114-13251			
		MATERIAL FINISH WEIGHT CUSTOMER DRAWING			
RESTRICTED TO - SCALE 4:1 SHEET 37 OF 42 REV S2					

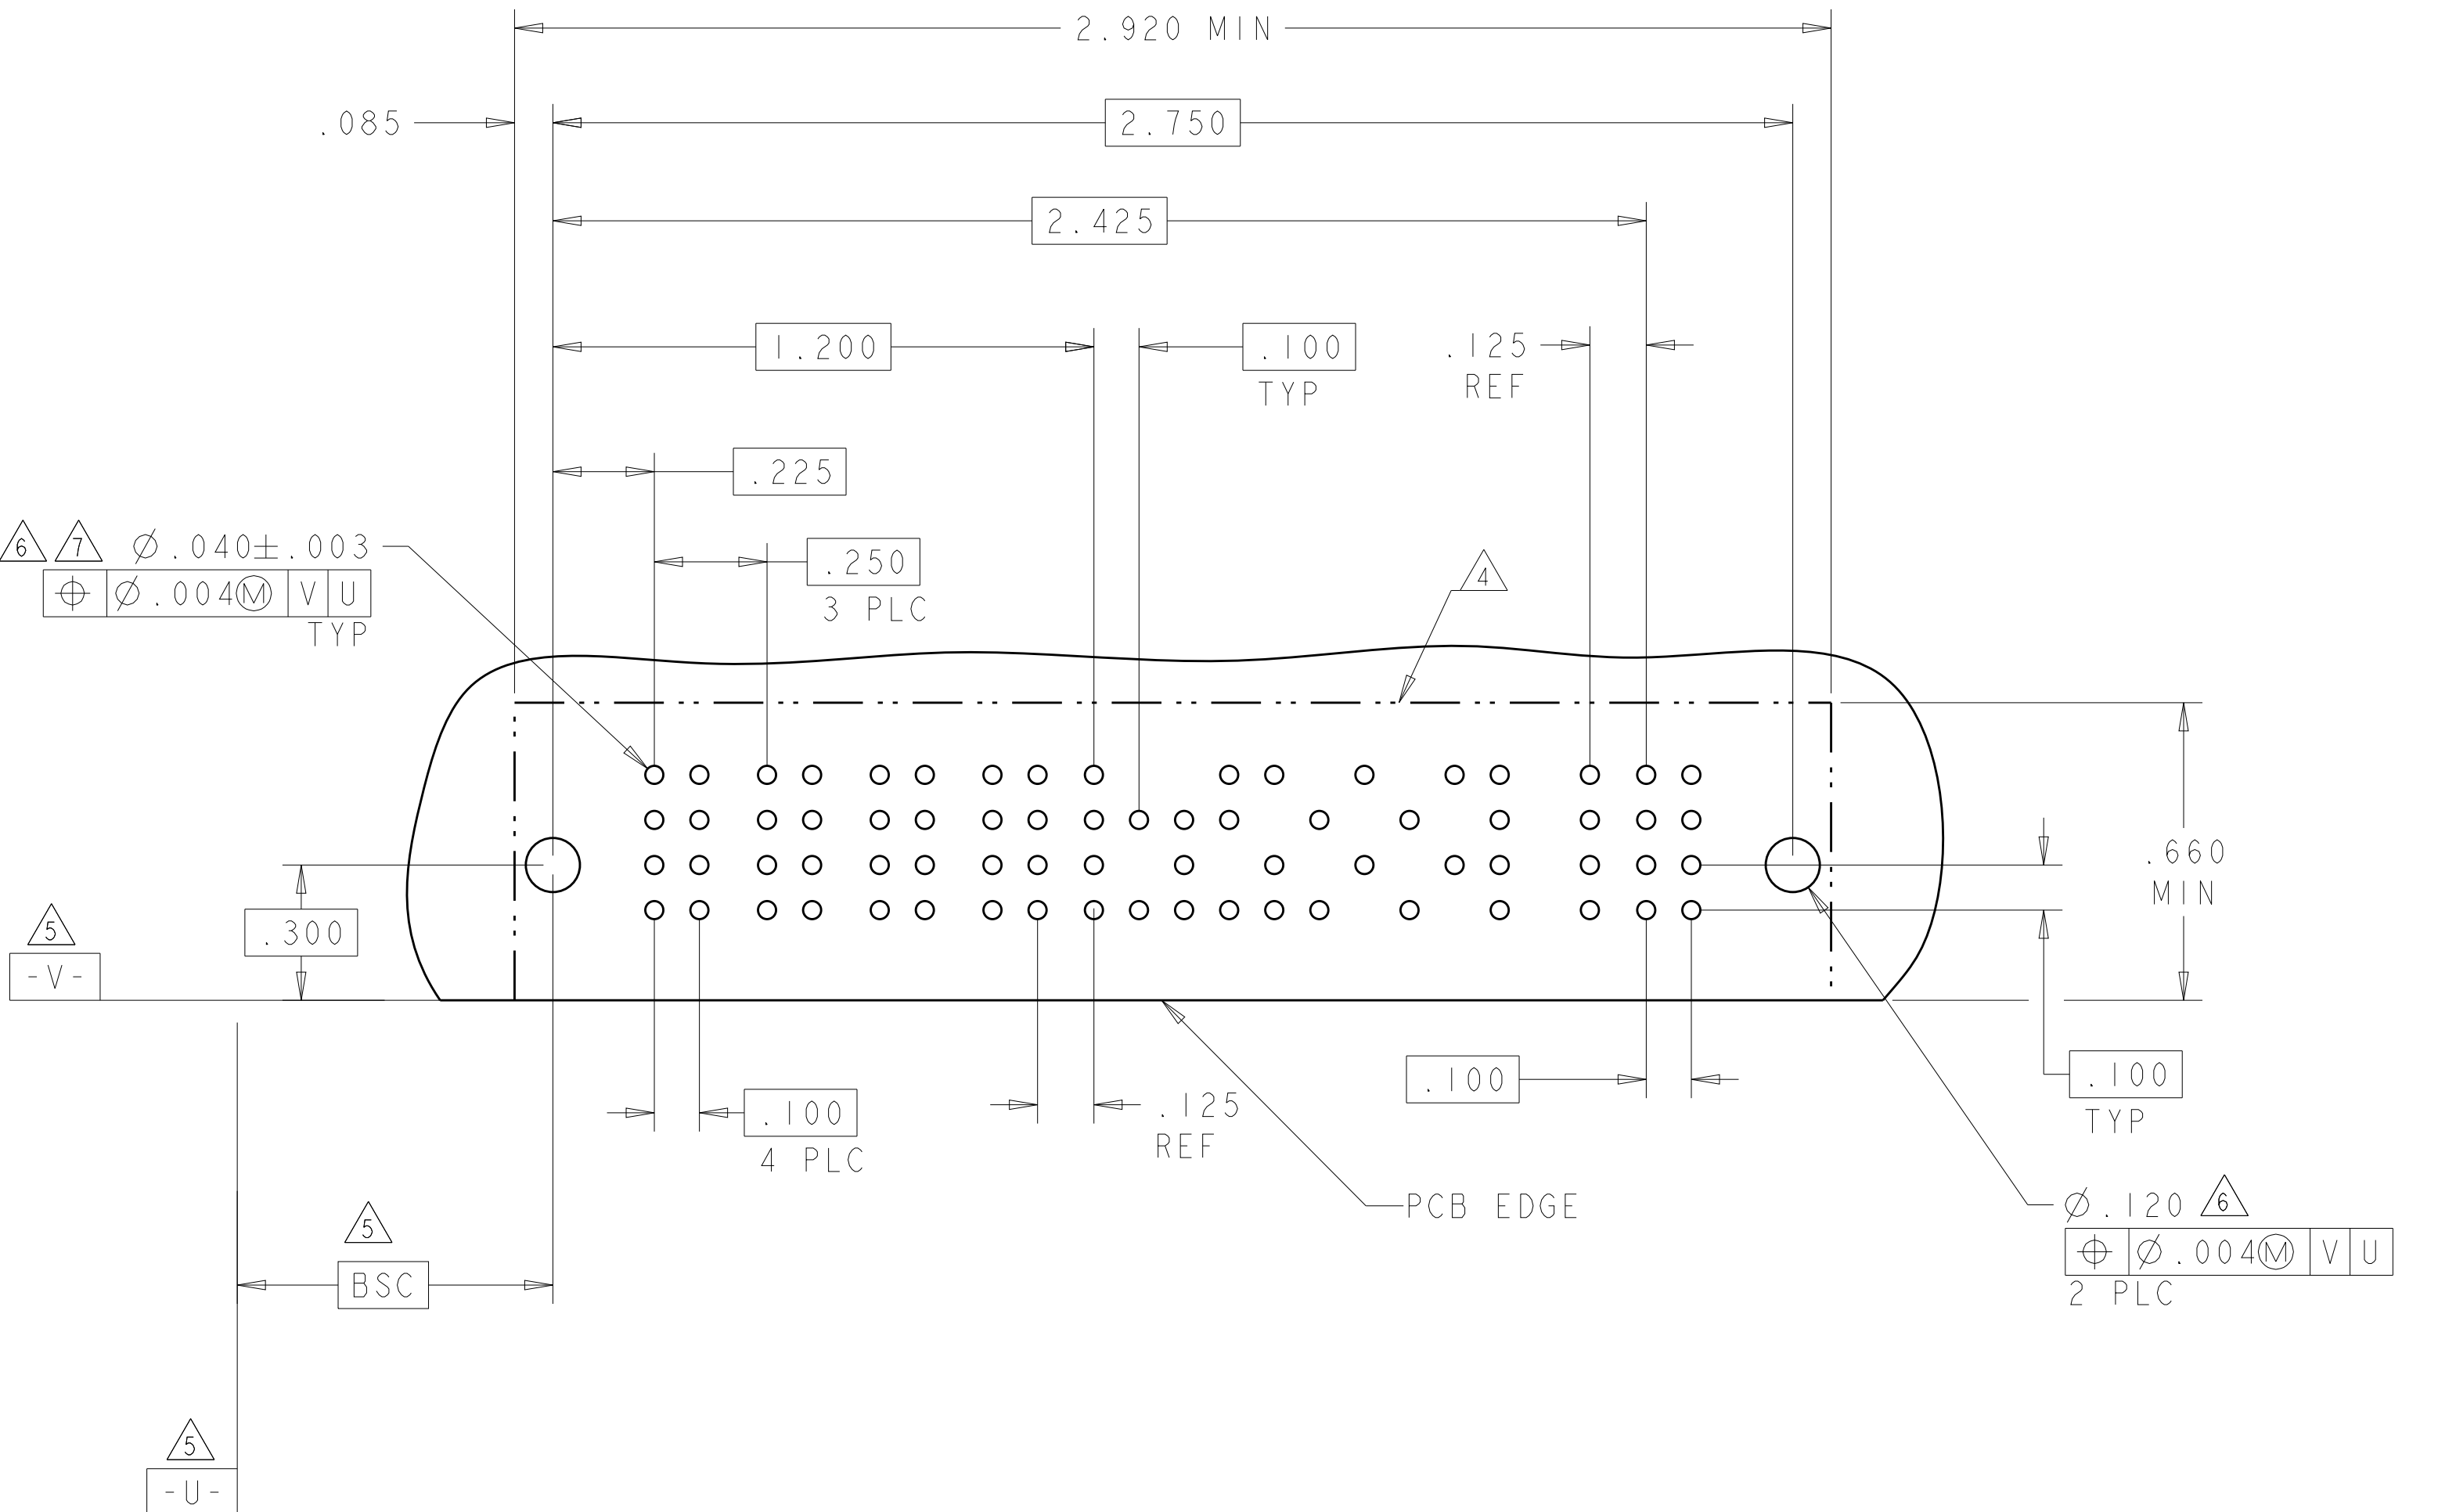


PART NUMBER	ROWS		LOW POWER												SIGNAL															POWER						
			LP1	LP2	LP3	LP4	LP5	LP6	LP7	LP8	LP9	LP10	LP12	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	P1	P2	P3	P4				
7-6450830-8	D		LM	LM	LM	LM	LM	LM	LM	LM	LM	LM	LM	J	J	J	J	J	J	J	J	J	J	J	J	J	J	TM	TM	TM	TM					
	K													K	K	K	K	K	K	K	K	K	K	K	K	K	K						K	K	K	
	N													N	N	N	N	N	N	N	N	N	N	N	N	N	N						N	N	N	N
	S													S	S	S	S	S	S	S	S	S	S	S	S	S	S						S	S	S	S
12LP + 60S + 4P			HD																											HD						

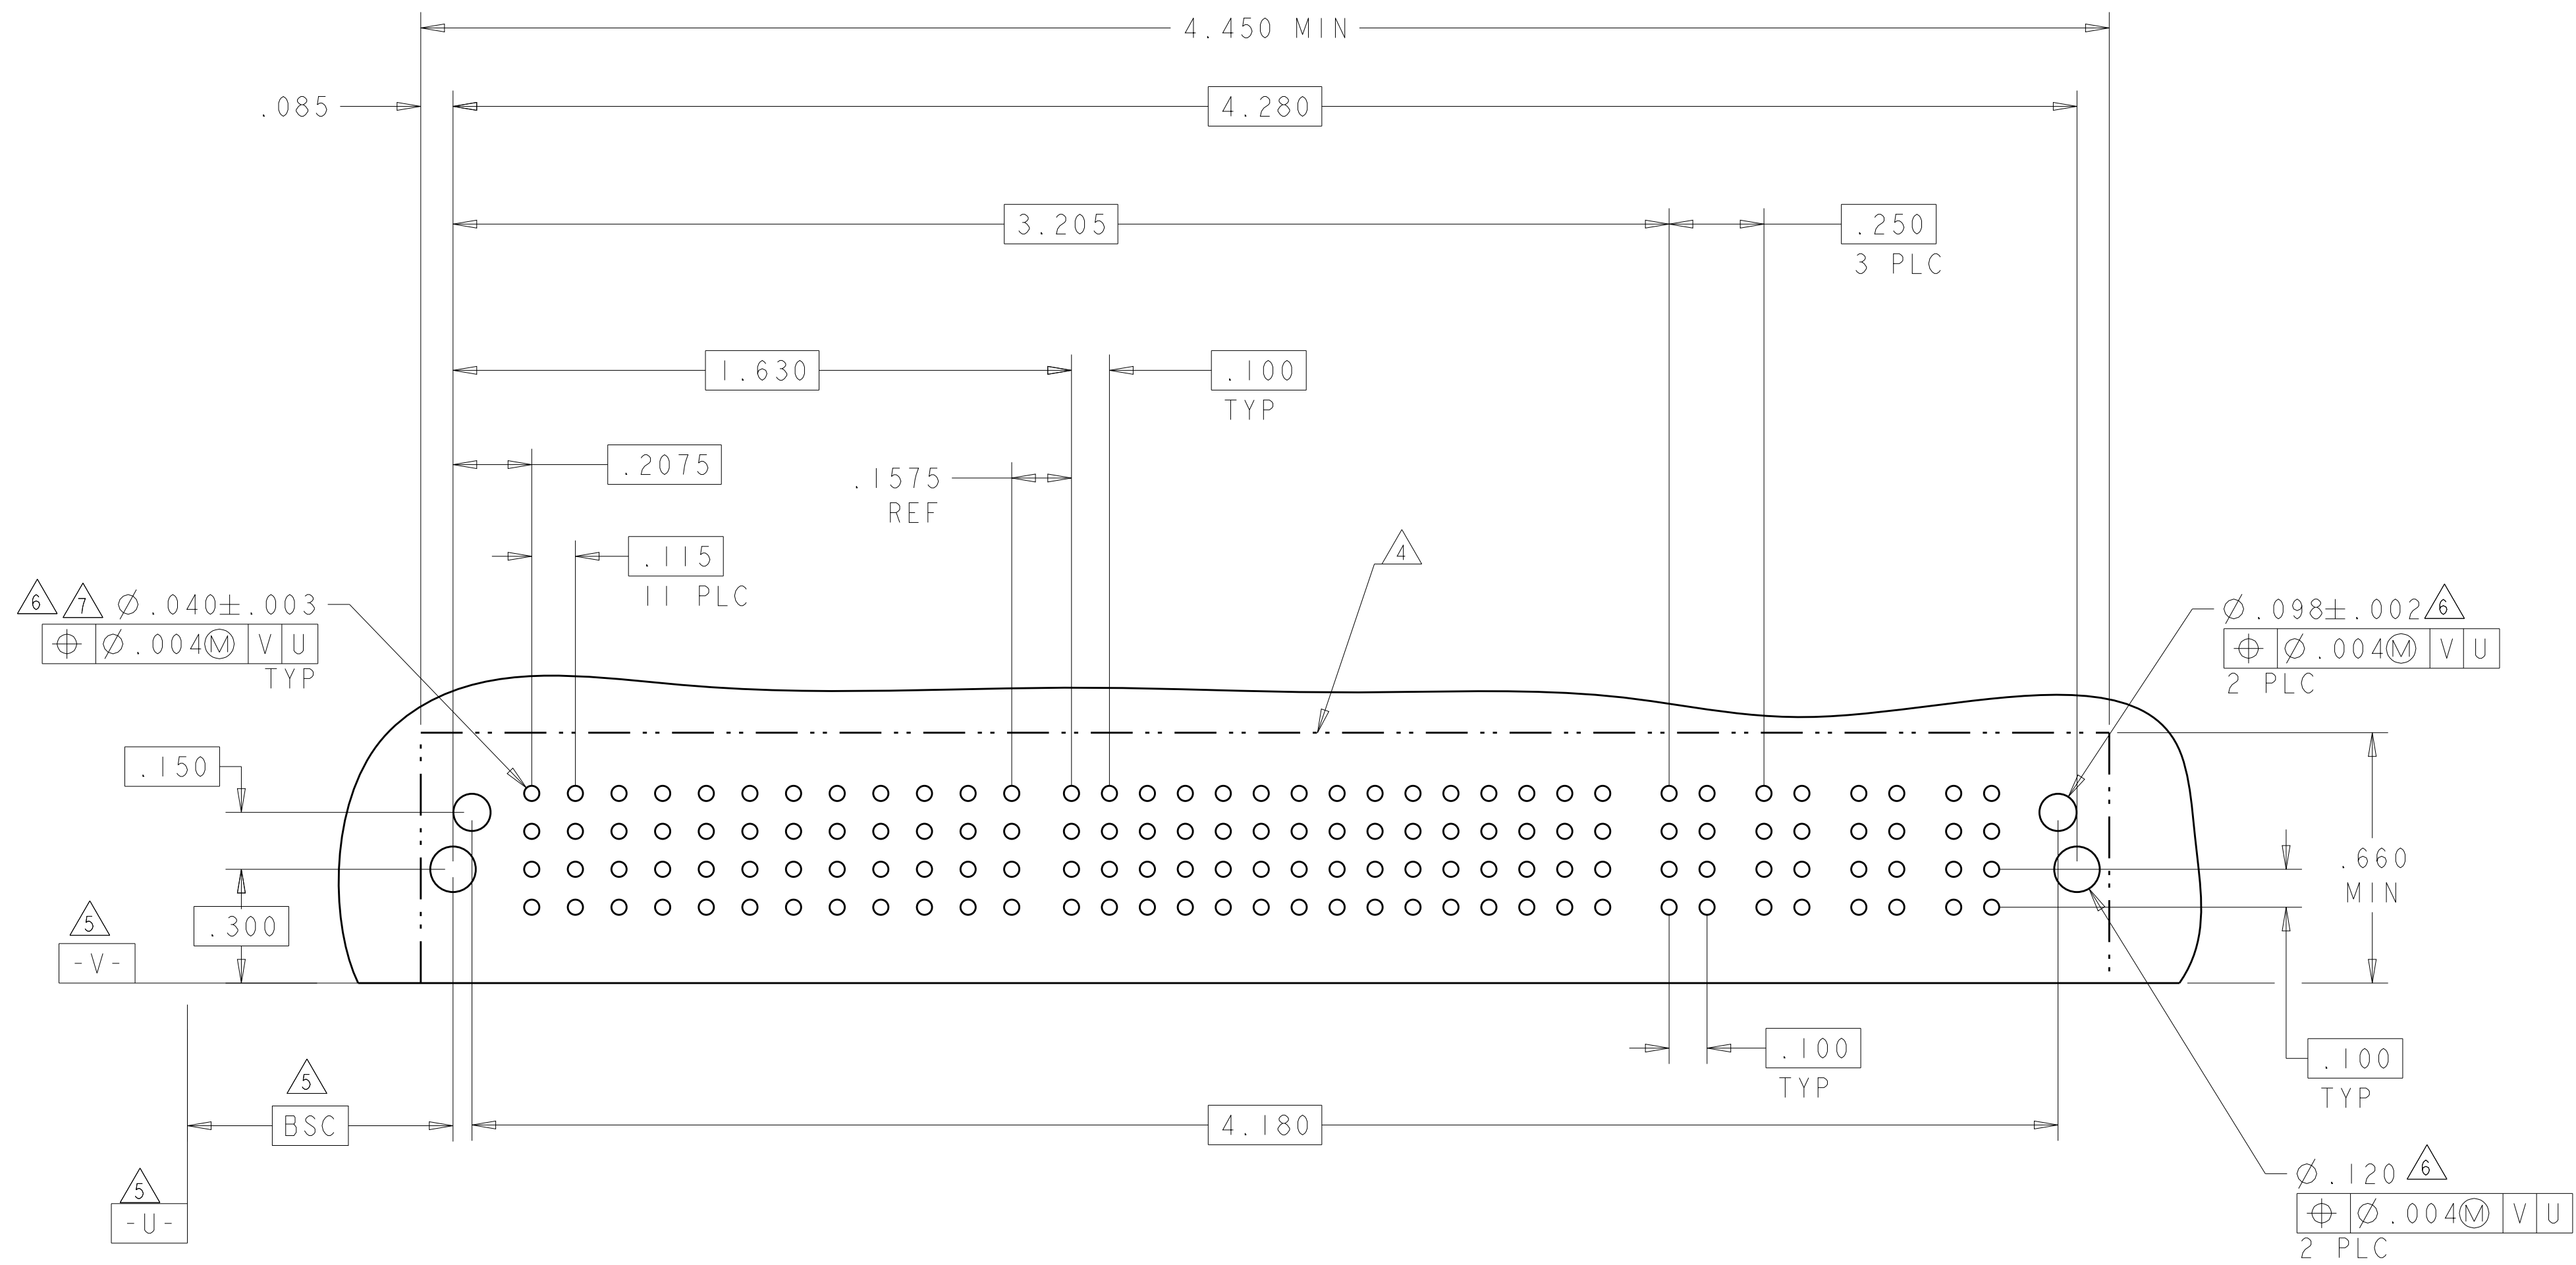

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S_ZHAO 10APR2007		 TE Connectivity	
DIMENSIONS:		CHN S_ZHAO 10APR2007			
INCHES		APVD S_ZHAO -			
		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±°		NAME RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE	
MATERIAL		PRODUCT SPEC 108-2292		SIZE	
FINISH		APPLICATION SPEC 114-13251		CAGE CODE	
WEIGHT		DRAWING NO		RESTRICTED TO	
A		00779		C=6450830	
CUSTOMER DRAWING		SCALE		SHEET	
4:1		38		OF 42	
REV		S2			

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER							SIGNAL						POWER							
			P1	P2	P3	P4	P5	P6	P7	1	2	3	4	5	6	P8	P9	P10	P11	P12	P13	P14	
7-6450830-9	D		TM	TM	TM	TM	TM	TM	TM	E	E	E	E	E	E	TM	TM	TM	TM	TM	TM	TM	
	C									F	F	F	F	F	F								
	B									G	G	G	G	G	G								
	A									HD	H	H	H	H	H								
7P + 24S + 7P																							

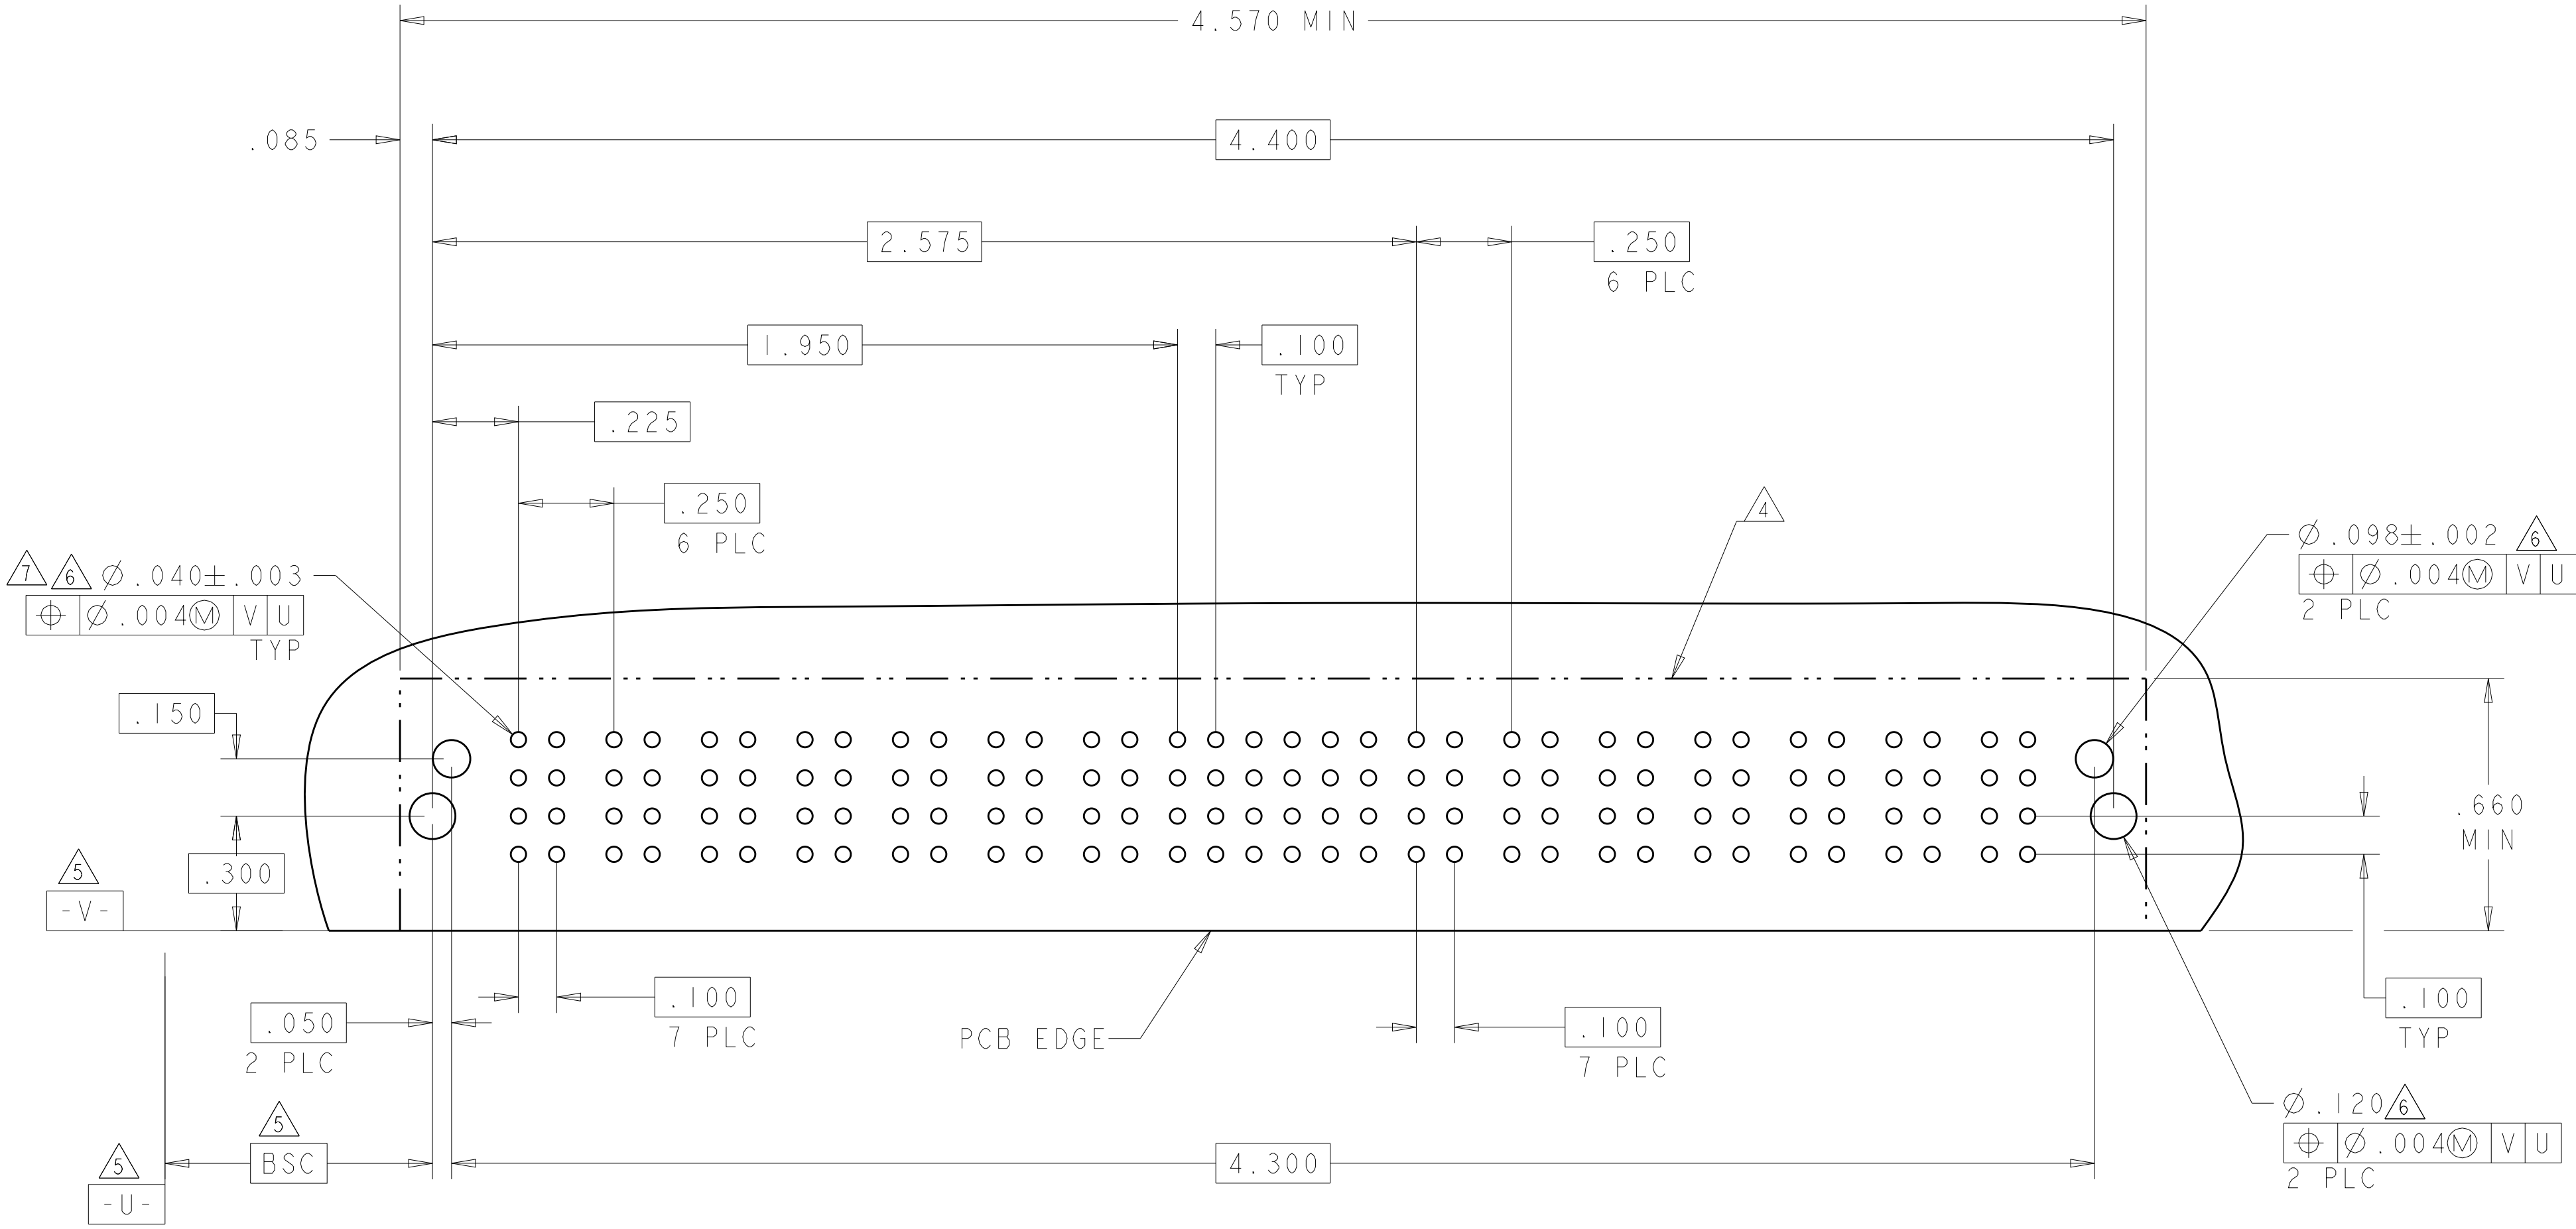

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

S.ZHAO

10APR2007

CHK

S.ZHAO

10APR2007

APVD

S.ZHAO

-

DIMENSIONS:

INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±"

1 PLC ±.01

2 PLC ±.01

3 PLC ±.005

4 PLC ±.0020

ANGLES ±2°

FINISH -

MATERIAL

-

PRODUCT SPEC

108-2292

APPLICATION SPEC

114-13251

WEIGHT

-

CUSTOMER DRAWING

NAME

RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE

SIZE

A1

CAGE CODE

100779

DRAWING NO

C=6450830

RESTRICTED TO

-

SCALE

4:1

SHEET

39

OF

42

REV


S2

TE Connectivity

NO CONTACTS LOADED


NO CONTACTS LOADED

NO CONTACTS LOADED

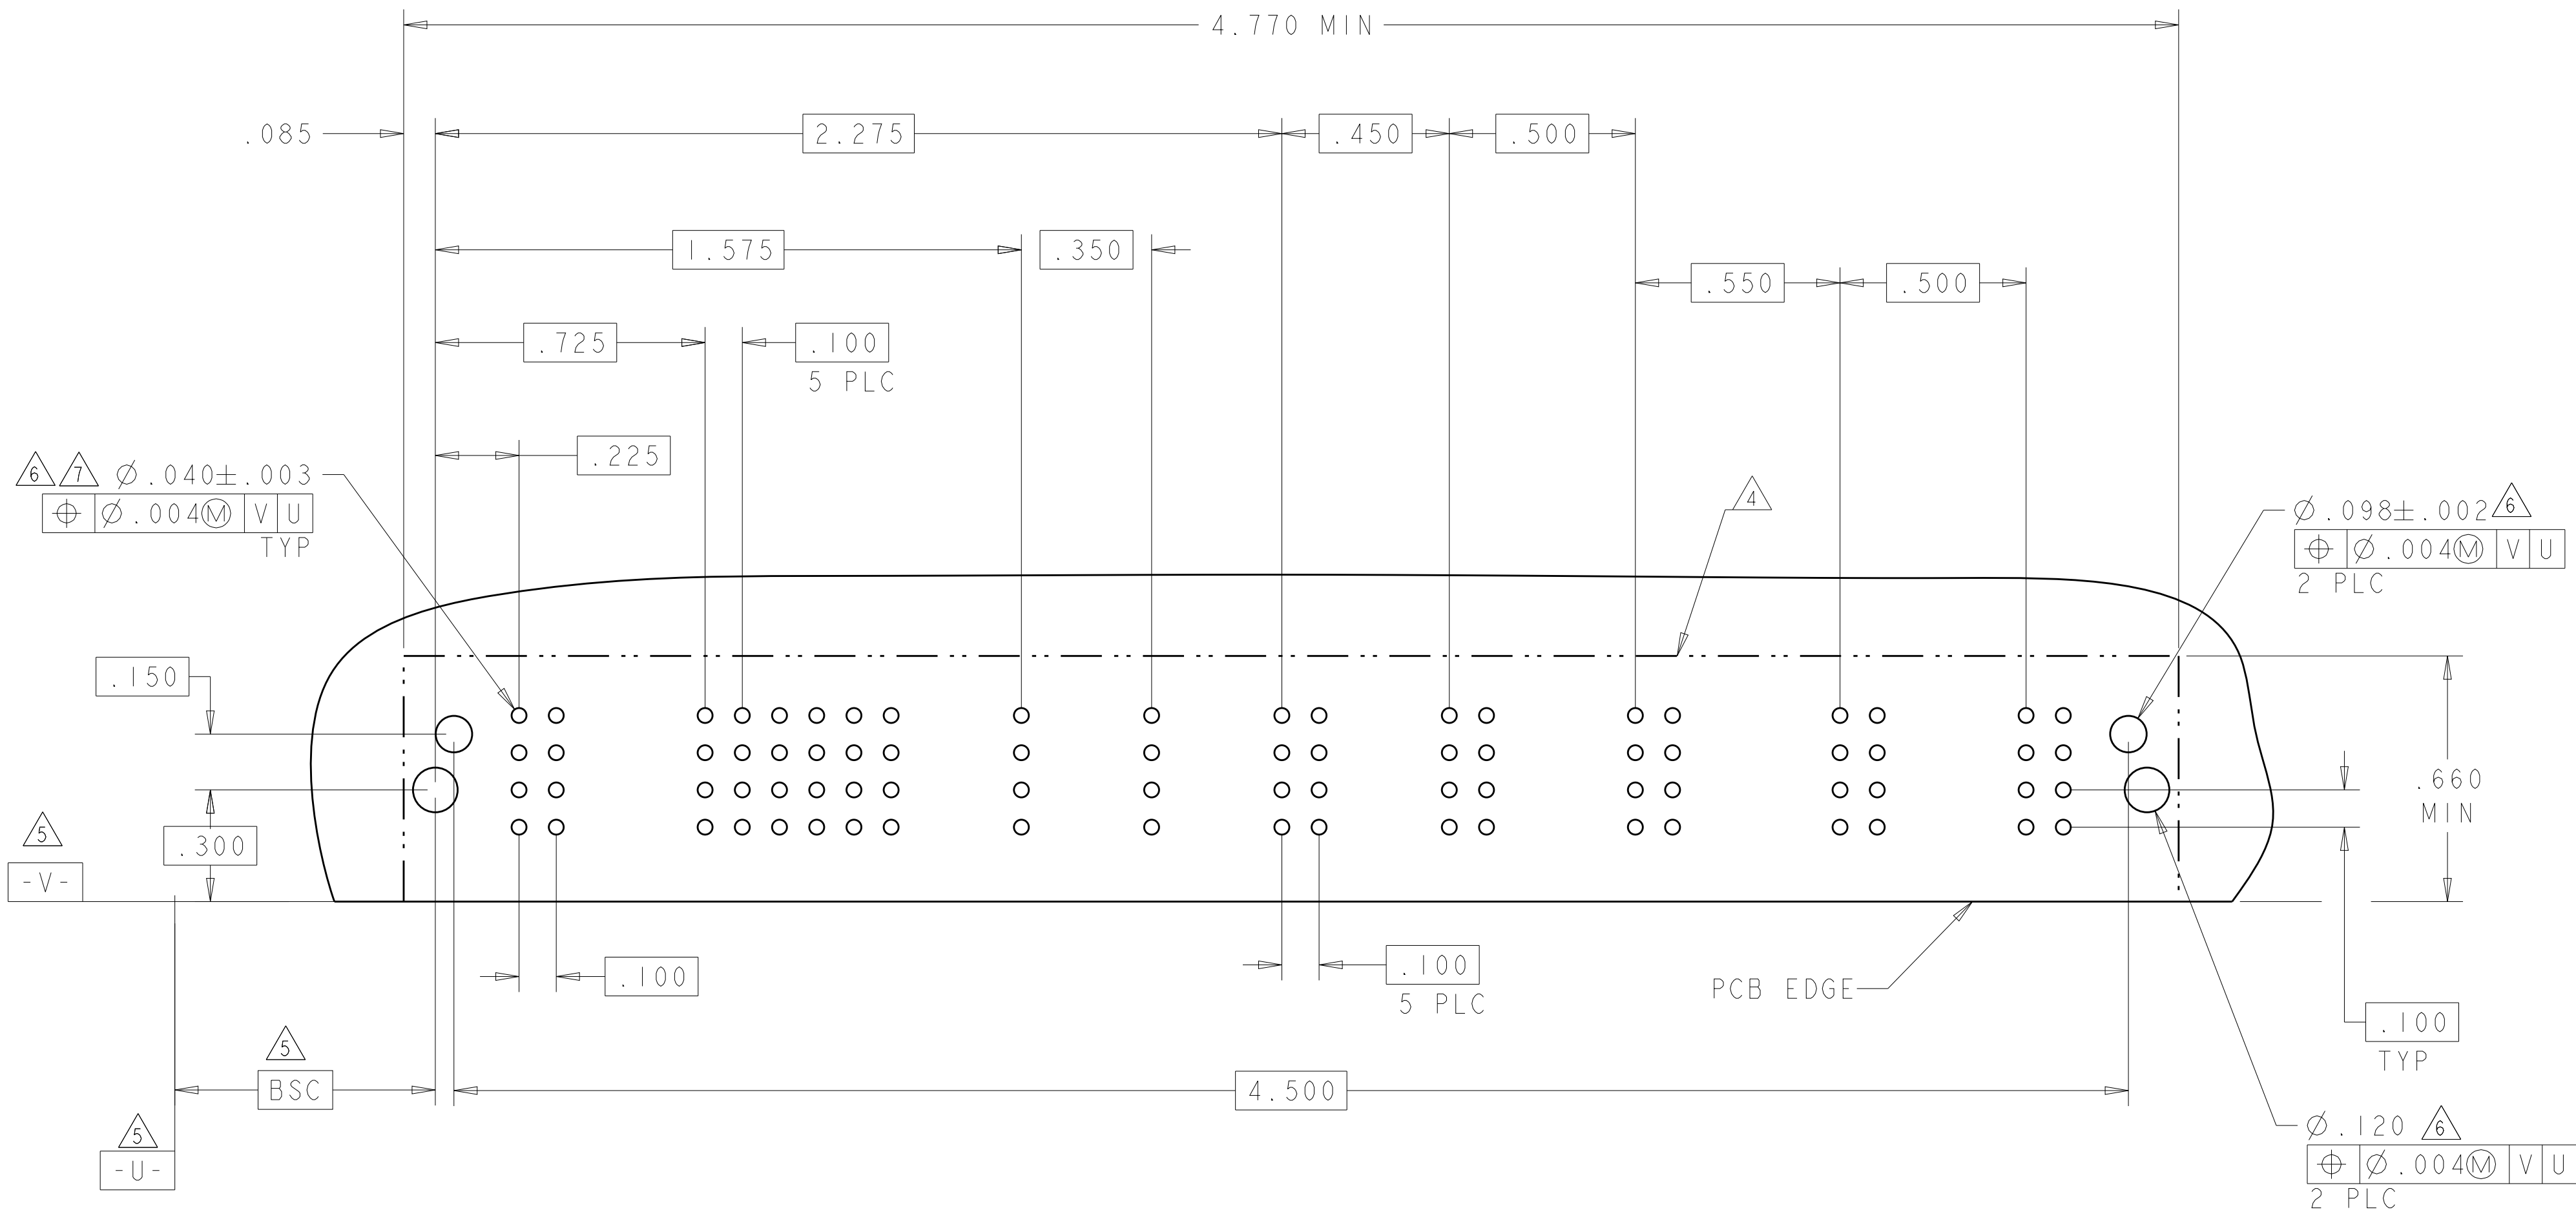4805 (3/11)

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS		POWER			SIGNAL				POWER			
			P1	P2	P3	1	2	3	4	P4	P5	P6	
8-6450830-0	D		TM	TM	TM	J	J	J	J	TM	TM	TM	
	K					K	K	K					
	N					N	N	N					
	S					S	S	S					
3ACP + 16S + 3P													

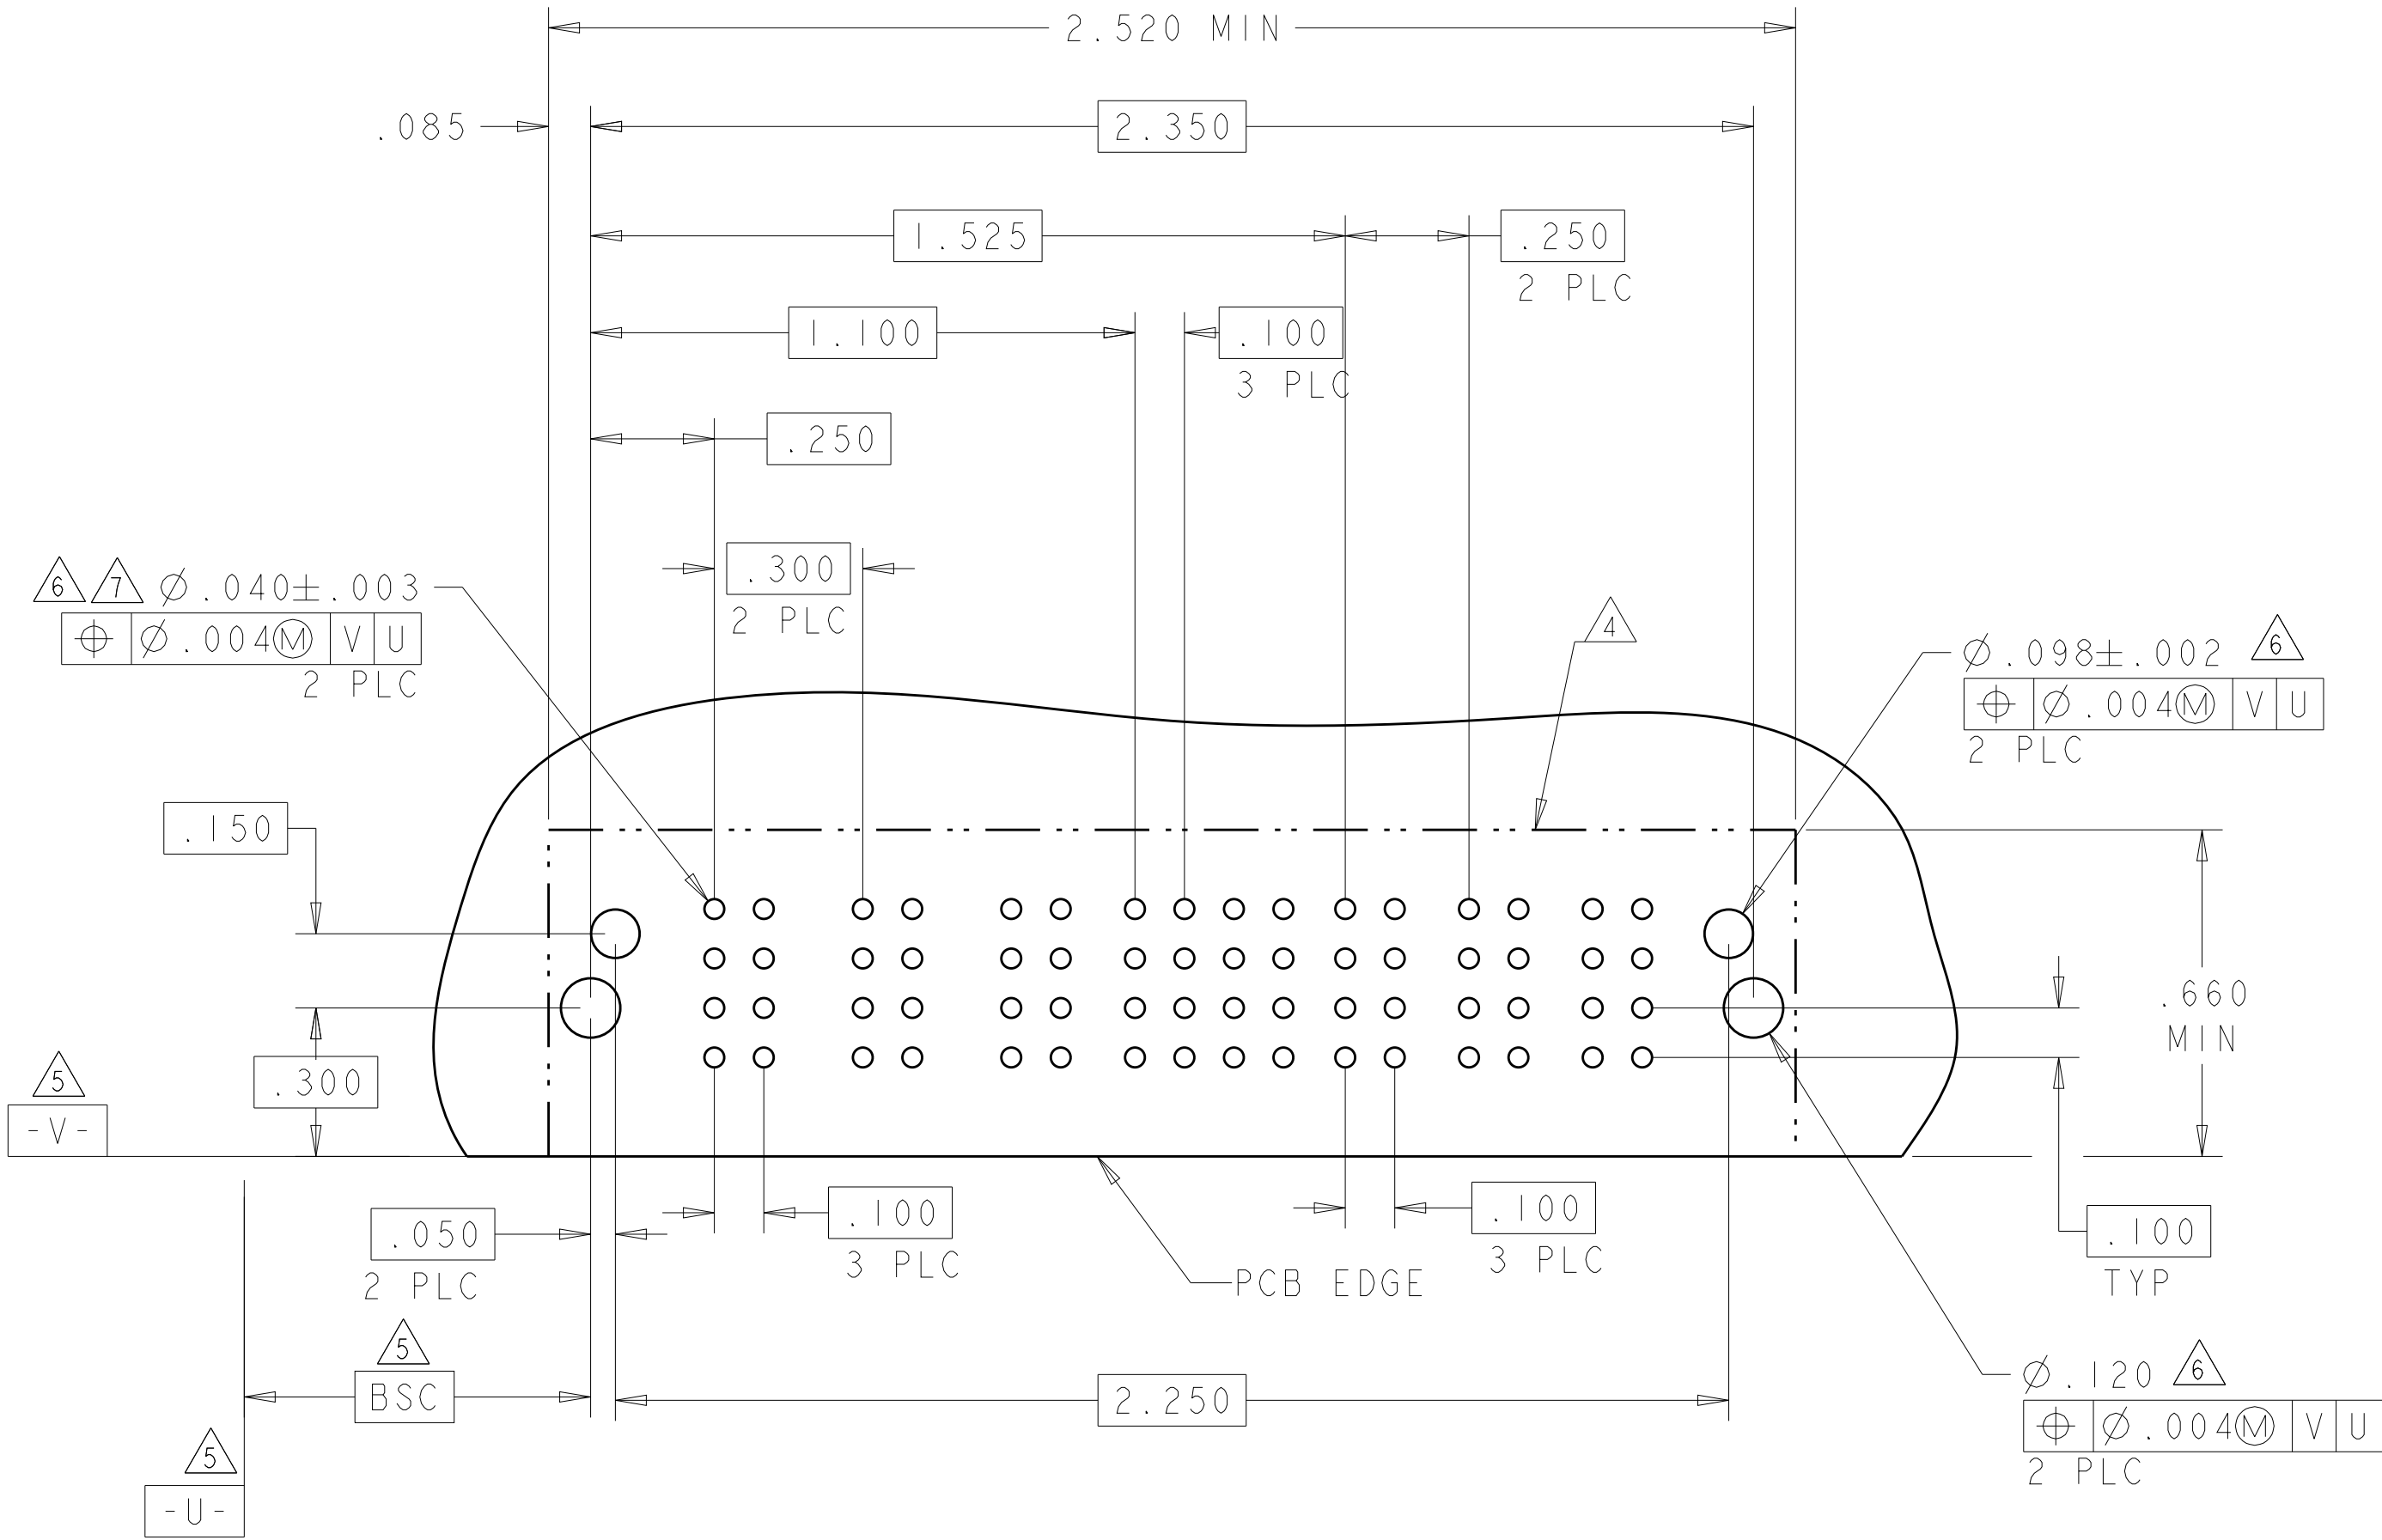

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

S.ZHAO

10APR2007

CHK

S.ZHAO

10APR2007

APVD

S.ZHAO

-

DIMENSIONS:

INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±"

1 PLC ±.01

2 PLC ±.01

3 PLC ±.005

4 PLC ±.0020

ANGLES #2°

FINISH

MATERIAL

-

DWN

S.ZHAO

10APR2007

CHK

S.ZHAO

10APR2007

APVD

S.ZHAO

-

PRODUCT SPEC

108-2292

APPLICATION SPEC

114-13251

WEIGHT

-

CUSTOMER DRAWING

NAME

RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE

SIZE

A1

CAGE CODE

00779

DRAWING NO

6450830

RESTRICTED TO

-

SCALE

4:1

SHEET

41

OF

42

REV

S2


TE

TE Connectivity

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		LOW POWER									SIGNAL									POWER	LOW POWER																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
			LP1	LP2	LP3	LP4	LP5	LP6	LP7	LP8	LP9	I	2	3	4	5	6	7	8	9		P1	LP10	LP11	LP12	LP13	LP14	LP15	LP16	LP17	LP18	LP19	LP20	LP21	LP22	LP23	LP24		LP25																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
8-6450830-2	D		LM	LM	LM	LMF	-	LMF	LM	LM	LM	E	E	E	E	E	-	-	E	E	TM	-	-	LML	LML	LML	LML		LML	LML	LML	LML	-	LML	LML	LML	LML																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
	C											F	F	F	F	F	G	-	-	F																			F																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
	B											G	G	G	G	G	G	-	-	G																			G																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
	A											H	H	H	H	H	-	-	H	H																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
9LP + 36S + 1P + 16LP																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												

- NO CONTACTS LOADED

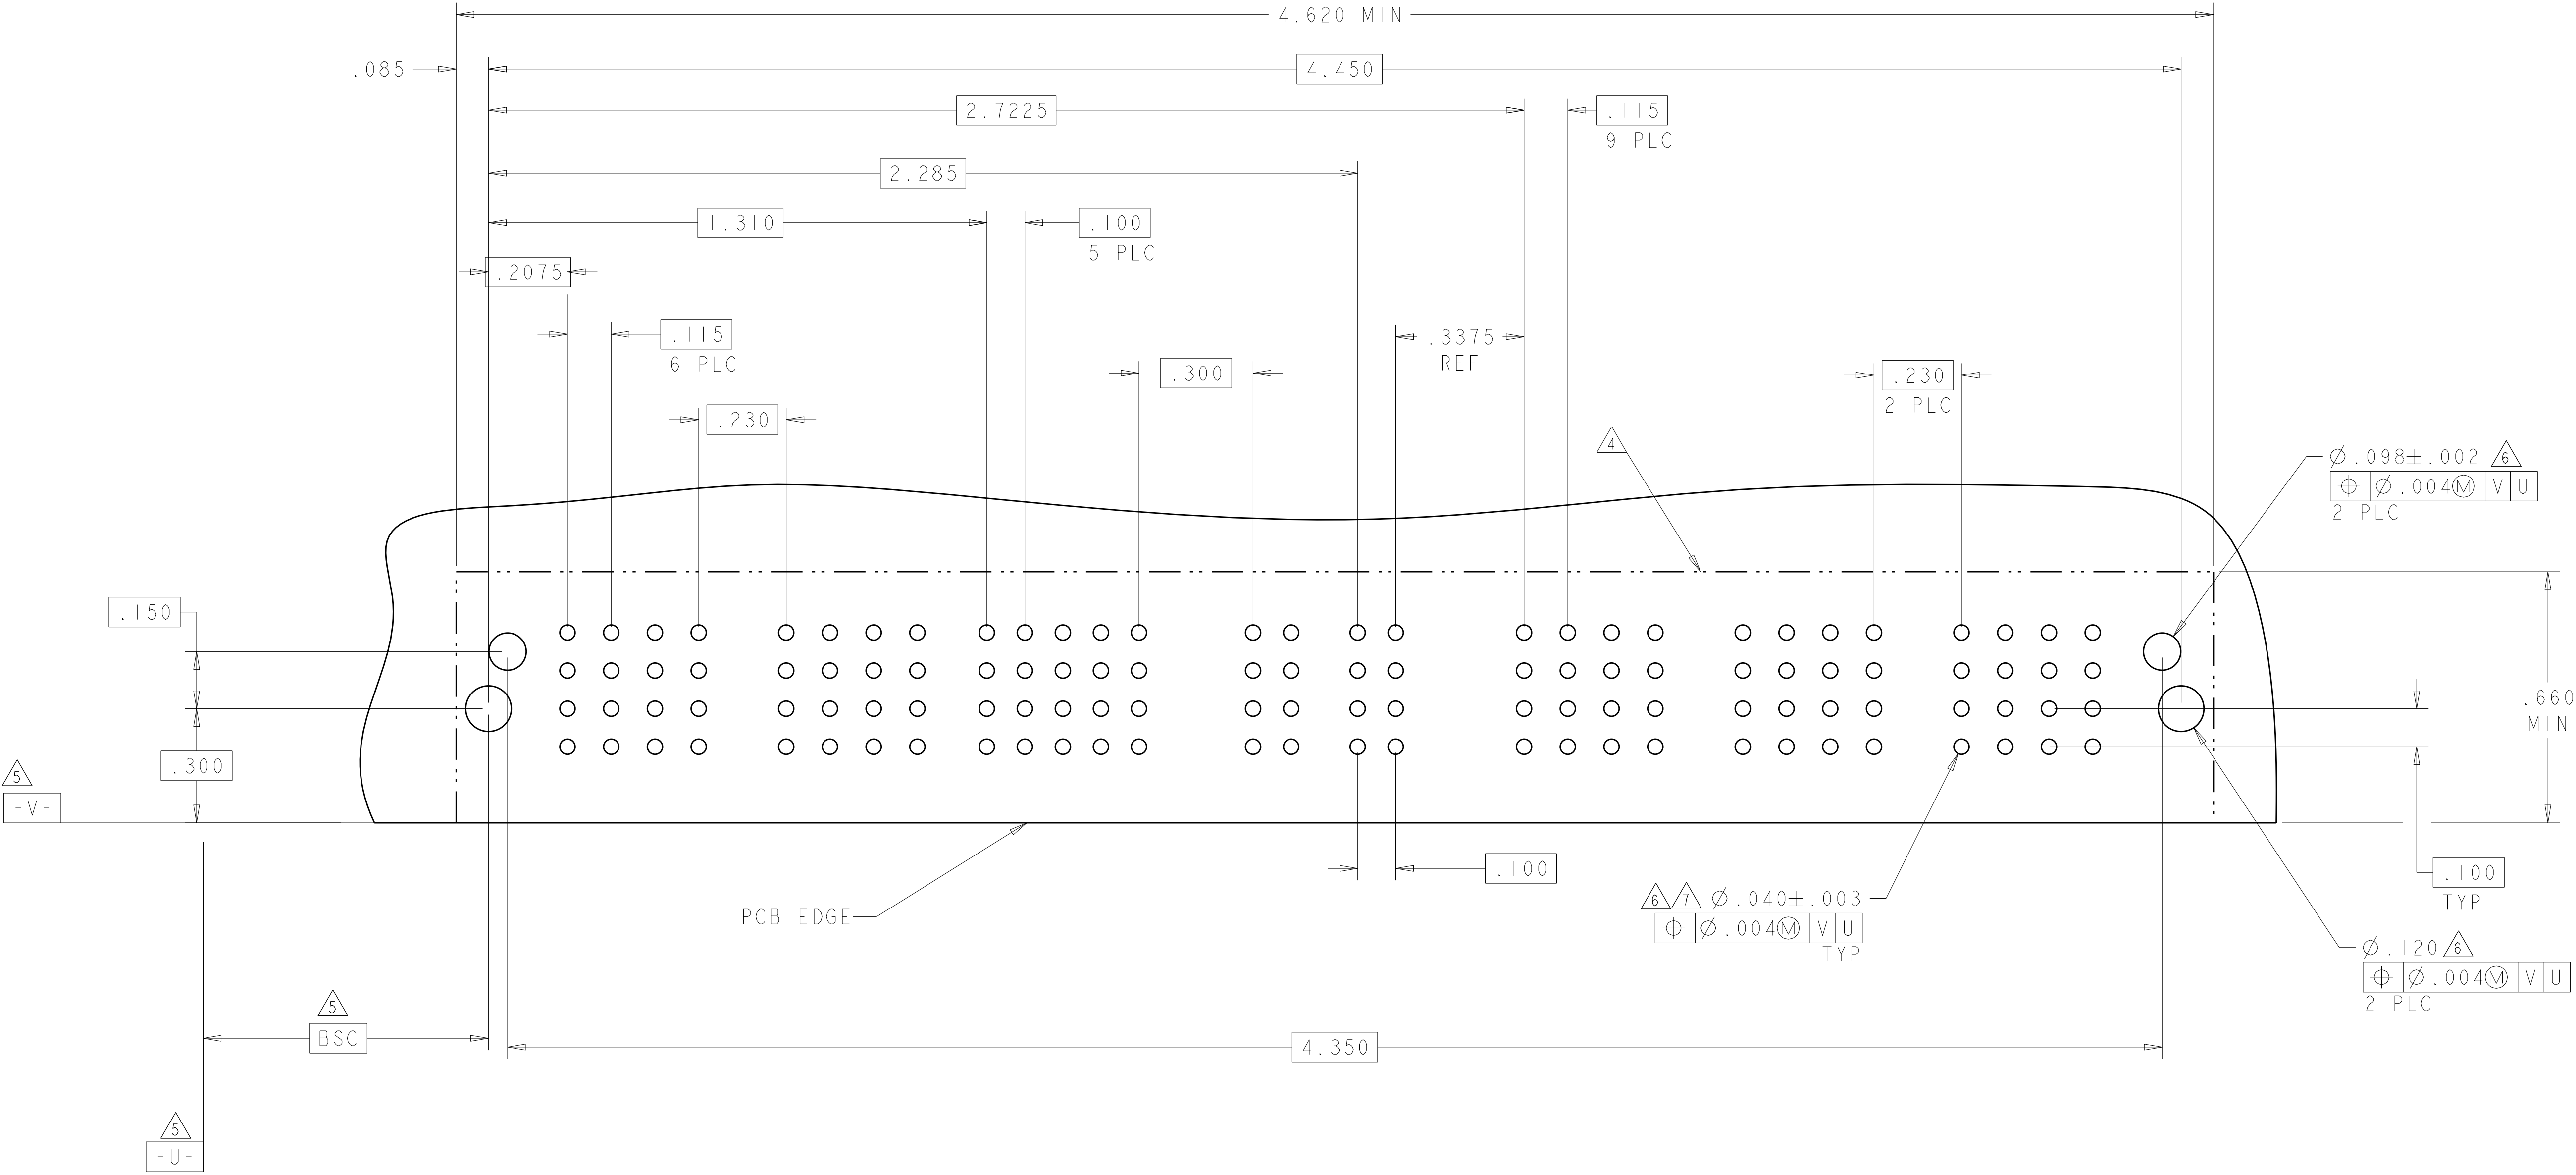

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN S.ZHAO 10APR2007
CHK S.ZHAO 10APR2007
APVD S.ZHAO -

NAME

DIMENSIONS:
INCHES

MATERIAL -

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±.2°
FINISH -

PRODUCT SPEC 108-2292
APPLICATION SPEC 114-13251
WEIGHT -

CUSTOMER DRAWING

TE Connectivity

RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE

SIZE A100779
CAGE CODE C=6450830
SHEET 42 OF 42
REV S2

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9