




ADLINK Mini-ITX Boards Infotainment Applications

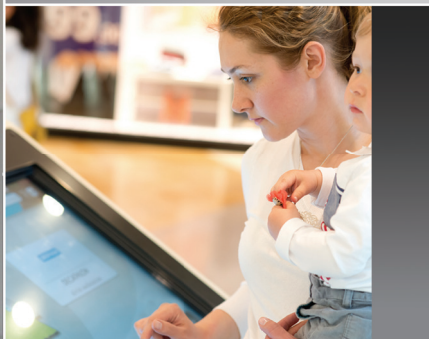


ADLINK
TECHNOLOGY INC.

www.adlinktech.com

ADLINK Mini-ITX Boards: Smaller form factor for today's compact systems

Industry trends indicate that users require a smaller and lower cost solution for their system requirements. Mini-ITX has a smaller board size and lower keep-out zones to enable a reduced chassis size for systems placed on the user's desk, mounted on a display, or installed in space-restrictive environments.

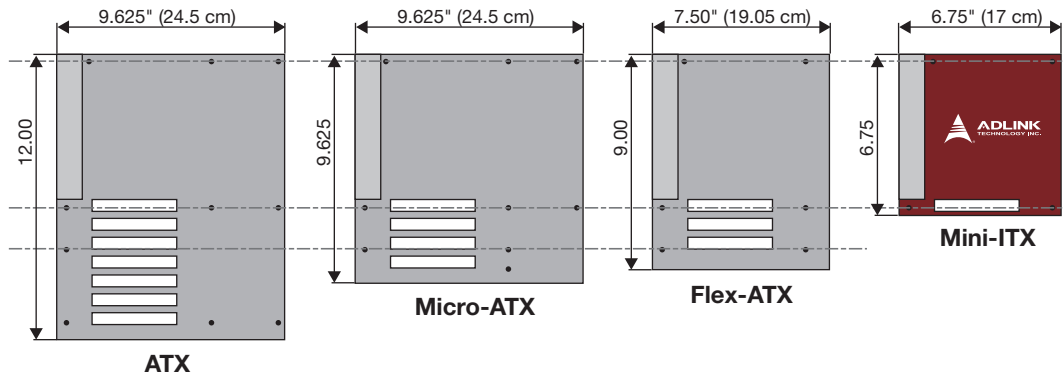

In addition to deployment in smaller chassis designed around the Mini-ITX form factor, these boards are compatible with ATX and microATX chassis without the need to retool the I/O shield. Mini-ITX boards are ideal for applications in industrial automation, self-service kiosks, and other infotainment driven solutions.

Flexible, high speed and better connectivity

ADLINK Mini-ITX boards support the latest Intel and AMD processors to deliver a high performance and space-saving platform for a wide array of embedded computing applications. Along with its compact footprint, this product line supports high processing speeds and high-bandwidth network connectivity with PCI Express®-based Gigabit Ethernet. Coupled with ample memory, diverse I/O, storage, and audio interfaces, ADLINK Mini-ITX boards are suitable for multimedia, automation control, and gaming applications requiring a compact, easy-to deploy, and cost-effective mainboard.

Rich I/O

- Vertical onboard USB interface

Easy Development and Maintenance

- Dual fail-safe BIOS
- BMC onboard
- SEMA and SEMA Cloud support IoT deployment

Excellent Graphics Performance

- HDMI
- LVDS onboard
- Multi DisplayPort
- PCIe slot for external graphics

Others

- SATADOM support
- +5VDC DC/DC converter
- TPM onboard
- ATX or 12VDC-only power input

SEMA Cloud IoT Solution based on ADLINK Mini-ITX Platform


SEMA - Intelligent Middleware to Monitor your Device



Today's Embedded PC Systems need to provide both optimal performance and low power consumption. This can be difficult to accomplish without adequate control and system management tools to detect potential problems before they get out of hand. To meet these requirements, a tool is needed which is able to monitor and gather performance and status necessary information from the hardware in a timely, flexible and precise manner. ADLINK's Smart Embedded Management Agent (SEMA) accomplishes these goals for you, the developer and end user.

Time-to-Market (TTM) and Total-Costs-of-Ownership (TCO) are key aspects to producing competitive products. To combine TTM and TCO in a reliable manner, a solid and reliable platform is fundamental. To assist in this endeavor, every new ADLINK computer-on-module (COM) is equipped with a Board Management Controller (BMC) device supporting SEMA.

Initially designed for power sequencing tasks, the BMC has evolved to include many new and useful features through the years. Measuring the supply current to get a snapshot of the system's power consumption is only one of the new capabilities. Being compatible with the latest Embedded Application Programming Interface specification (EAPI) reduces your effort to port existing calls to SEMA to nearly zero!

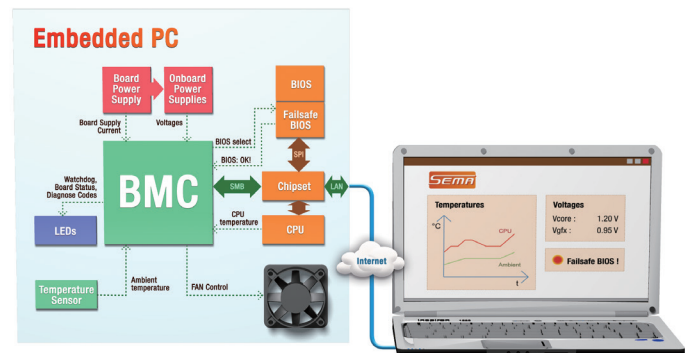

Interfacing the hardware to the operating system is one of SEMA's most important functions. The BMC first collects all relevant information from the chipset and other sources. Using the System Management Bus driver, the application layer fetches the data and presents it to the user.

An Intelligent Cloud Solution for Remote Monitoring, Management and Control


Configure, Control and Manage - Anywhere, Anytime




ADLINK's SEMA Cloud takes today's intelligent middleware a step further than previous generations of remote management technology. By employing cloud server architecture and a machine-to-machine (M2M) stack on top of the intelligent middleware, embedded devices can be connected to the cloud without additional design requirements. ADLINK's SEMA Cloud solution provides the entire infrastructure, from gathering local data on the device and pushing it securely to the cloud, to the cloud server which stores and processes the data, to the user interface that lets operators remotely monitor, control and configure devices. With SEMA Cloud, users can remotely access power supply voltage, CPU temperature, fan rotation speed and other critical data to push data to the cloud. It enables operators to verify, monitor and manage system performance from a single, central location – improving reliability and reducing management costs.

ADLINK's SEMA Cloud solution provides customers with a one-stop shopping model for bringing device data into the cloud rapidly and effectively. ADLINK offers all parts of a cloud solution:

- Client application for fetching and pushing data to the cloud
- Cloud server infrastructure for hosting and precessing data
- End application to monitor, control and configure devices

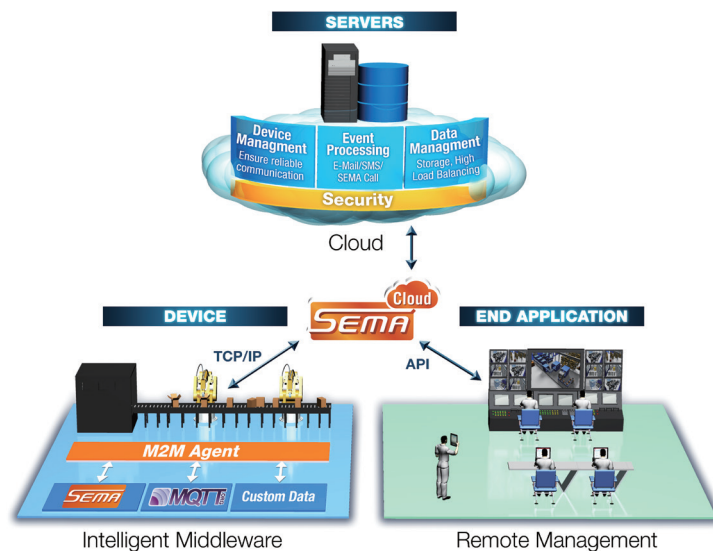






Infotainment Applications in Retail, Medical and Digital Signage

ADLINK Infotainment solution for Gaming and Retail services include ATMs, floor plan guides, lottery & slot machines and supermarket self-service kiosks. ADLINK Mini-ITX industrial motherboards provide flexible connection possibilities for system integrators to link and manage multiple peripherals to meet application needs. Video lottery terminal and slot machines must sustain continuous operation; thus, hardware stability and ease of maintenance become essential. ADLINK extensive experience and capabilities in hardware design and software development combined with our self-owned manufacturing base allows us to provide reliable products of superior quality for different solutions.

In the retail environment, multimedia digital signage that combines entertainment and information is one of the best ways to communicate with consumers. Intelligent display panels powered by ADLINK Mini-ITX motherboards can be installed above checkout counters or in other suitable locations. Supermarket self-service kiosks are stand-alone terminals which integrate environment information, promotional products, membership management and other relevant data through interactive multimedia communication.

Medical environments require highly accurate video images with low latency during surgical procedures, such as X-ray, ultrasound, and endoscopy. This market presents diverse opportunities for embedded designers, fueled by demand for real-time data processing and sharing, high definition imaging and graphics displays, and creative, compact solutions that enable healthcare anywhere. ADLINK expertly solves these medical design challenges, offering intelligent embedded platforms that help OEMs/ODMs innovate, reduce risk and accelerate time-to-market with solutions validated for high performance and complex regulatory requirements. For medical device developers and manufacturers, ADLINK is your complete supplier of Mini-ITX industrial motherboards that provide robust, fault-free connectivity, as well as the wide range of high-speed I/O required to support the broad and growing spectrum of imaging and diagnostics applications. Development time is reduced, and medical device manufacturers can focus on their core competencies in creating competitive, high performance healthcare applications.

Mini-ITX Applications

| | Retail | Medical | Digital Signage |
|--------------|--|---|---|
| |  |  |  |
| Requirements | <ul style="list-style-type: none"> • TTM • Processing performance | <ul style="list-style-type: none"> • High performance HD graphics • Quality product and service | <ul style="list-style-type: none"> • High performance HD graphics • Multi DisplayPort/HDMI/LVDS outputs |
| Applications | <ul style="list-style-type: none"> • Kiosk (e.g. ATM, POS) • Vending machine | <ul style="list-style-type: none"> • Ultrasound • MRI • Point-of-care terminal • Patient's bedside terminal | <ul style="list-style-type: none"> • Flight information display • Out of home advertising |

Mini-ITX boards



| Product Number | AmITX-BE-G | AmITX-BT-I |
|-----------------------|--|---|
| CPU | AMD® RX-427BB/425BB/225FB | Intel® Atom™ Processors E3800 series SoC Intel® Celeron® N2930/J1900 |
| Memory | non-ECC 1333/1666 MHz DDR3L memory up to 16 GB | non-ECC 1333/1066 MHz DDR3L memory up to 8 GB |
| SATA | 3x SATA 6.0 | 2x SATA 3.0 |
| USB | 4x USB 3.0 11x USB 2.0 | 4x USB 3.0 6x USB 2.0 |
| Expansion Slots | 1x PCIe x16 1x PCIe x1 1x full size Mini PCIe 1x half size Mini PCIe 1x SPI header for external BIOS | 1x PCIe x1 1x Mini-PCIe 1x mSATA |
| Serial Port | 1x RS-232/422/485 3x RS-232 | 1x RS-232 2x RS-232/422/485 2x RS-232/422/485 |
| Display | AMD® Radeon HD 9000 4 DisplayPort, LVDS | Intel® Gen7 graphics core VGA, HDMI, LVDS |
| Ethernet | 2x GbE | 2x GbE |
| Operating Temperature | 0°C to 60°C | 0°C to 60°C |



| Product Number | AmITX-HL-G | AmITX-IB-I |
|-----------------------|---|--|
| CPU | Intel® Core™ Processors i7-4700S/4770TE, i5-4570S/4570TE, i3-4330/4330TE Pentium® Processors G3420/G3320TE Celeron® Processors G1820/G1820TE | Intel® Xeon® Processors E3-1275v2/1224v2 Intel® Core™ Processors i7-3770, i5-3550S, i3-3220 Intel® Pentium® Processor G2120 Intel® Celeron® G1620 |
| Memory | non-ECC 1333/1666 MHz DDR3L memory up to 16 GB | non-ECC 1333/1066 MHz DDR3L memory up to 16 GB |
| SATA | 3x SATA 6.0 | 2x SATA 3.0 |
| USB | 4x USB 3.0 11x USB 2.0 | 2x USB3.0 7x USB2.0 |
| Expansion Slots | 1x PCIe x16 1x PCIe x1 1x full size Mini PCIe 1x half size Mini PCIe 1x SPI header for external BIOS | 1x PCI Express x4 1x Mini-PCIe |
| Serial Port | 1x RS-232/422/485 3x RS-232 | 5x RS-232 1x RS-232/422/485 |
| Display | Intel® Generation 7.5 3 DisplayPort, LVDS | Intel® HD Graphics VGA, DVI, HDMI, Dual Display VGA+DVI-D, VGA+HDMI, DVI+HDMI |
| Ethernet | 2x GbE | 2x GbE |
| Operating Temperature | 0°C to 60°C -40°C to + 85°C (optional) | 0°C to 60°C |



Headquarters

ADLINK Technology, Inc.

9F., No.166, Jian 1st Rd., Zhonghe Dist.,
New Taipei City 235, Taiwan
新北市中和區建一路166號9樓
Tel: +886-2-8226-5877
Fax: +886-2-8226-5729
Email: service@adlinktech.com

Worldwide Offices

Ampro ADLINK Technology, Inc.

5215 Hellyer Avenue, #110, San Jose, CA 95138, USA
Tel: +1-408-360-0200
Toll Free: +1-800-966-5200 (USA only)
Fax: +1-408-360-0222
Email: info@adlinktech.com

ADLINK Technology Singapore Pte. Ltd.

84 Genting Lane #07-02A, Cityneon Design Centre,
Singapore 349584
Tel: +65-6844-2261
Fax: +65-6844-2263
Email: singapore@adlinktech.com

ADLINK Technology Singapore Pte. Ltd. (Indian Liaison Office)

#50-56, First Floor, Spearhead Towers
Margosa Main Road (between 16th/17th Cross),
Malleswaram, Bangalore - 560 055, India
Tel: +91-80-65605817, +91-80-42246107
Fax: +91-80-23464606
Email: india@adlinktech.com

ADLINK Technology Japan Corporation

〒101-0045 東京都千代田区神田鍛冶町3-7-4
神田374ビル4F
Tel: +81-3-4455-3722
Fax: +81-3-5209-6013
Email: japan@adlinktech.com

ADLINK Technology, Inc. (Korean Liaison Office)

137-881 서울시 서초구 서초대로 326, 802 (서초동, 모인터빌딩)
Tel: +82-2-2057-0565
Fax: +82-2-2057-0563
Email: korea@adlinktech.com

ADLINK Technology (China) Co., Ltd.

上海市浦东新区张江高科技园区芳春路300号 (201203)
Tel: +86-21-5132-8988
Fax: +86-21-5192-3588
Email: market@adlinktech.com

ADLINK Technology Beijing

北京市海淀区上地东路1号盈创动力大厦E座801室(100085)
Tel: +86-10-5885-8666
Fax: +86-10-5885-8626
Email: market@adlinktech.com

ADLINK Technology Shenzhen

深圳市南山区科技园南区高新南七道数字技术园
A1栋2楼C区 (518057)
Tel: +86-755-2643-4858
Fax: +86-755-2664-6353
Email: market@adlinktech.com

LiPPERT ADLINK Technology GmbH

Hans-Thoma-Strasse 11, D-68163, Mannheim, Germany
Tel: +49 621 43214-0
Fax: +49 621 43214-30
Email: emea@adlinktech.com

ADLINK Technology, Inc. (French Liaison Office)

6 allée de Londres, Immeuble Ceylan 91940 Les Ulis, France
Tel: +33 (0) 1 60 12 35 66
Fax: +33 (0) 1 60 12 35 66
Email: france@adlinktech.com

ADLINK Technology, Inc. (Israeli Liaison Office)

27 Maskit St., Corex Building PO Box 12777 Herzliya 4673300, Israel
Tel: +972-54-632-5251
Fax: +972-77-208-0230
Email: israel@adlinktech.com



ADLINK
TECHNOLOGY INC.

www.adlinktech.com

All products and company names listed are trademarks or trade names of their respective companies.
All specifications are subject to change without further notice.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9