




ABC41 Series

Ultra Low Profile Open Frame Power Supplies

The ABC41 Series of ultra low open frame power supplies feature a wide universal AC input range of 85 V – 264 VAC, offering output power 40 W with natural convection cooling. They are available in a variety of isolated single output voltages. The ABC41 ultra low profile series is also available in a PCB mount format, facilitating simple embedded integration onto user's main PCB assembly.

The high efficiency and high power density of the ABC family ensures minimal power loss in end-use equipment, thereby facilitating higher reliability, easier thermal management and meets regulatory approvals for environmentally-friendly end products.

These power supplies are ideal for broad range of telecom, datacom, industrial equipment and other applications.

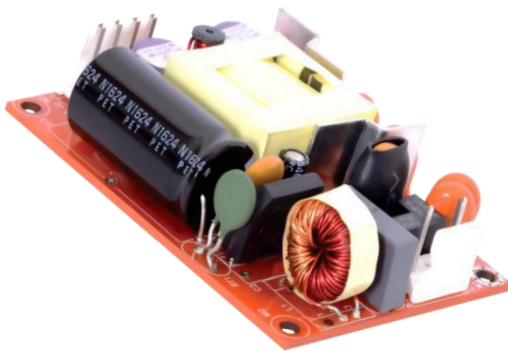

Key Features & Benefits

- 3 x 2 x 0.75 Inches Form factor
- PCB Mount option available
- 40 Watts Convection
- Approved to EN/IEC 60950
- Efficiencies 85% Typical
- -40 to 70 degree operating temperature
- 2 million hours, Telcordia -SR332-issue 3 MTBF
- Standby Power < 0.3 W

Applications

- Instrumentation
- Lighting
- Industrial Applications
- Applied Computing
- Renewable Energy
- Test and Measurement
- Robotics
- Wireless Communication



bel POWER
SOLUTIONS &
PROTECTION

a bel group

belfuse.com/power-solutions

1. MODEL SELECTION

| MODEL NUMBER ¹ | CONNECTOR | VOLTAGE | MAX. LOAD | MIN. LOAD | RIPPLE & NOISE ² |
|---------------------------|---------------------------|---------|-----------|-----------|-----------------------------|
| ABC41-1T05L | Screw Terminal | | | | |
| ABC41-1005L | Header | 5 V | 5 A | 0.0 A | 1.5% |
| ABC41-1005P | PCB Mount | | | | |
| ABC41-1T12L | Screw Terminal | | | | |
| ABC41-1012L | Header | 12 V | 3.33 A | 0.0 A | 1% |
| ABC41-1012P | PCB Mount | | | | |
| ABC41-1T15L | Screw Terminal | | | | |
| ABC41-1015L | Header | 15 V | 2.67 A | 0.0 A | 1% |
| ABC41-1015P | PCB Mount | | | | |
| ABC41-1T24L | Screw Terminal | | | | |
| ABC41-1024L | Header | 24 V | 1.67 A | 0.0 A | 1% |
| ABC41-1024P | PCB Mount | | | | |
| ABC41-1T30L | Screw Terminal | | | | |
| ABC41-1030L | Header | 30 V | 1.33 A | 0.0 A | 1% |
| ABC41-1030P | PCB Mount | | | | |
| ABC41-1T48L | Screw Terminal | | | | |
| ABC41-1048L | Header | 48 V | 0.83 A | 0.0 A | 1% |
| ABC41-1048P | PCB Mount | | | | |
| ABC41-1T58L | Screw Terminal | | | | |
| ABC41-1058L | Header | 58 V | 0.69 A | 0.0 A | 1% |
| ABC41-1058P | PCB Mount | | | | |
| COVER-41-XBC ³ | metal cover kit accessory | | | | |

¹ For Class II Option (without input Earth pin) add suffix: -2 (e.g.: ABC41-1012L-2).

² Ripple is peak to peak with 20 MHz bandwidth and 10 μ F (Tantalum capacitor) in parallel with a 0.1 μ F capacitor at rated line voltage and load ranges. Output ripple can be more than 10% of the output voltage.

³ When used in Cover Kit, de-rate output power to 70 % under all operating conditions. Cover Kit is not suited for PCB mount version.

2. INPUT SPECIFICATIONS

Specifications are for nominal input voltage, 25°C unless otherwise stated.

| PARAMETER | DESCRIPTION / CONDITION | SPECIFICATION |
|---------------------|---|--------------------------|
| Input Voltage | Universal | 85 - 264 VAC / 390 VDC |
| Input Frequency | | 47 - 63 Hz |
| Input Current | 115 VAC: 230 VAC: | 0.8 A max. 0.4 A max. |
| No Load Power | Typical | < 0.3 W |
| Inrush Current | 115 VAC: 230 VAC: 264 VAC: | 25 A 45 A 75 A |
| Leakage Current | Typical (N.A. For Class II Option- without input Earth pin) | 300 μ A |
| Switching Frequency | Typical | 65 kHz |

3. OUTPUT SPECIFICATIONS

| PARAMETER | DESCRIPTION / CONDITION | SPECIFICATION |
|--------------------------|---|-----------------------|
| Output Power | Convection cooling | 40 W |
| Efficiency | Typical | 85% |
| Hold-up Time | 230 VAC: | 6 ms |
| Line Regulation | | +/-0.5% |
| Load Regulation | | +/-1% |
| Transient Response | 25% step load change, at 0.1 A/ μ s slew rate, 50% duty cycle, 50 Hz = 4% | recovery time < 5 ms |
| Rise Time | Typical | 50 ms |
| Set Point Tolerance | | 2% (3% for 5 V model) |
| Over Current Protection | | > 110% |
| Over Voltage Protection | | 110 to 140% |
| Short Circuit Protection | Hiccup mode | |

4. ENVIRONMENTAL SPECIFICATIONS

| PARAMETER | DESCRIPTION / CONDITION | SPECIFICATION |
|-----------------------|--|----------------------------|
| Operating Temperature | Startup is guaranteed with spec. deviation, see Fig. 1 | -40 to +70°C -40 to 0°C |
| Storage Temperature | | -40 to +85°C |
| Relative Humidity | Non-condensing | 5% to 95% |
| Altitude | Operating: Non-operating: | 16,000 ft. 40,000 ft. |
| MTBF | Telcordia -SR332-issue 3 | 2 million hours |

5. EMC SPECIFICATIONS

| PARAMETER | DESCRIPTION / CONDITION | SPECIFICATION |
|------------------------------------|--|----------------------|
| Conducted Emissions | EN55032-B, CISPR22-B, FCC PART15-B | Pass |
| Radiated Emissions | EN 55032 A; with external core (King core K5B RC 25x12x15-M in input cable) | Pass Level B |
| Input Current Harmonics | EN 61000-3-2 | Class D |
| Voltage Fluctuation and Flicker | EN 61000-3-3 | Pass |
| ESD Immunity | EN 61000-4-2 | Level 3, Criterion A |
| Radiated Field Immunity | EN 61000-4-3 | Level 3, Criterion A |
| Electrical Fast Transient Immunity | EN 61000-4-4 | Level 3, Criterion A |
| Surge Immunity | EN 61000-4-5 | Level 3, Criterion A |
| Conducted Immunity | EN 61000-4-6 | Level 3, Criterion A |
| Magnetic Field Immunity | EN 61000-4-8 | Level 3, Criterion A |
| Voltage Dips, Interruptions | EN 61000-4-11 | Criterion A & B |

6. SAFETY SPECIFICATIONS

| PARAMETER | DESCRIPTION / CONDITION | SPECIFICATION |
|--------------------|--|---------------|
| Isolation Voltage | Input to Output: | 4242 VDC |
| Safety Standard(s) | Approved to the latest edition of the following standards: CSA/UL60950-1, EN60950-1 and IEC60950-1. Class1 SELV | |
| Agency Approvals | Nemko, UL, C-UL | |
| CE mark | Complies with LVD Directive | |

7. CONNECTOR & PIN DESCRIPTION

| CONNECTOR | PIN | DESCRIPTION / CONDITION | MANUFACTURER / PN |
|---------------------|----------------------------------|---|---|
| AC Input Connector | J1 Screw Terminal / Header | Pin 1 AC Line Pin 2 Not Fitted Pin 3 AC Neutral | Tyco: 640445-3 Mating: 647402-3; Pins: 3-647409-1 (Header) |
| DC Output Connector | J2 Screw Terminal / Header | Pin 1, 2 V1 +VE Pin 3, 4 V1 -VE | Tyco: 640445-4 Mating: 647402-4; Pins: 3-647409-1 |

8. MECHANICAL SPECIFICATIONS

| PARAMETER | DESCRIPTION / CONDITION |
|------------|--|
| Weight | approx. 100 g |
| Dimensions | 76.2 x 50.8 x 19.05 mm (3 x 2 x 0.75 inches) |



Figure 1. Derating Curve for all Outputs

De-rate linearly from 100% at 50°C to 50% at 70°C

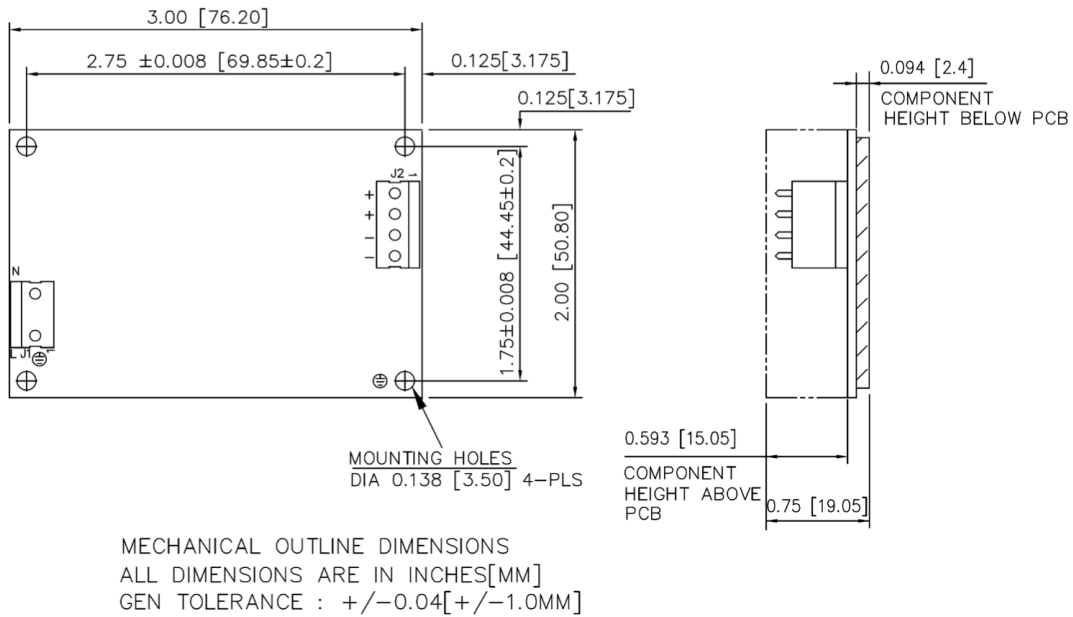


Figure 2. Mechanical Drawing – Option with Header

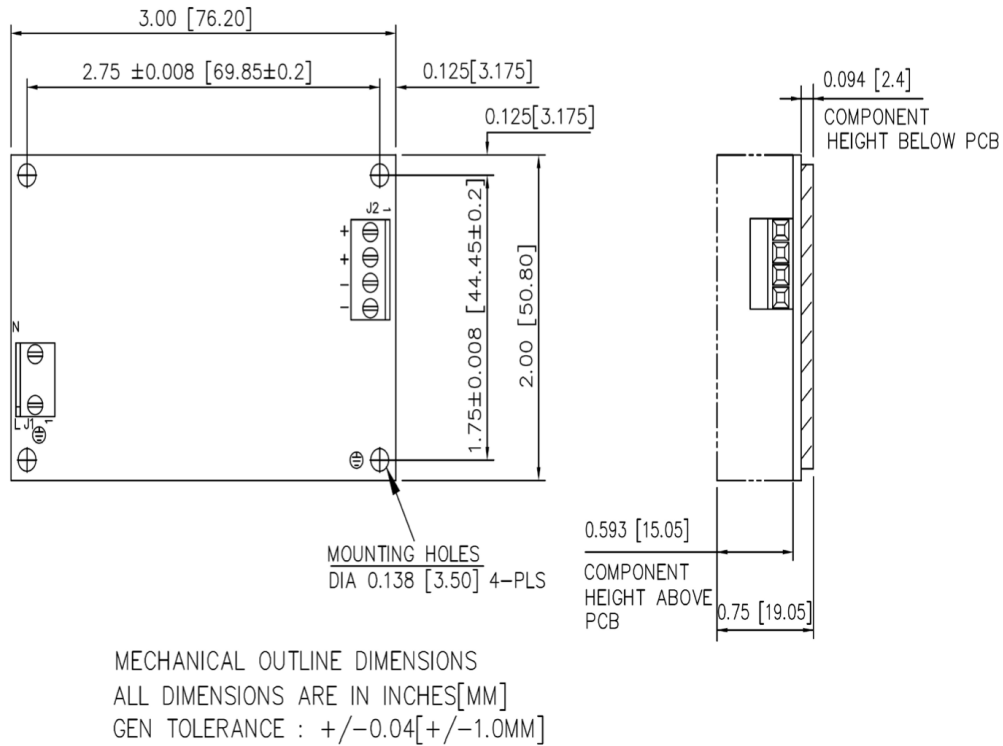


Figure 3. Mechanical Drawing – Option with Screw Terminal

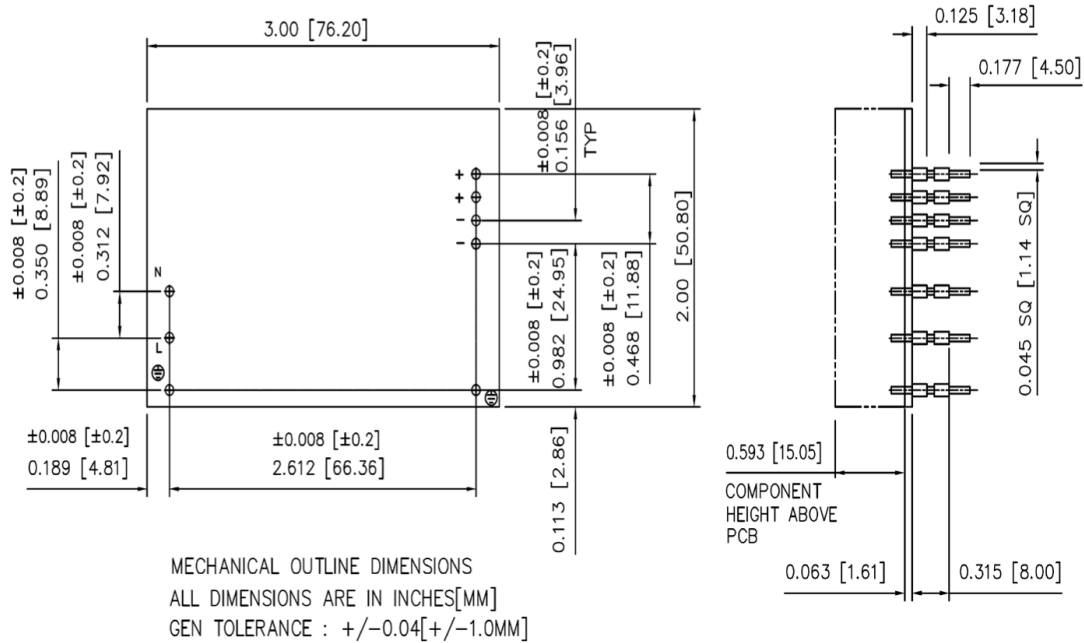


Figure 4. Mechanical Drawing – PCB Mount Option

NOTES: In case the PCB is mounted in a metal enclosure, using metal hardware ensure the following:

- 1 Stand off, used to mount PCB has OD of 5.4 mm max.
- 2 Screws, used to fix PCB on stand off, have head dia of 6.0 mm max.
- 3 Washer, if used, to have dia of 6.5 mm max.

For more information on these products consult: tech.support@psbel.com

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9