

Millivolt Output Pressure Sensors

C-Grade
Pressure Sensors



Features

- 0 to 0.3 PSI to 0 to 100 PSI Pressure Ranges
- 1 % linearity version
- Temperature Compensated
- Calibrated Zero and Span

Applications

- Medical Instrumentation
- Environmental Controls
- HVAC


General Description

The Millivolt Output pressure sensors is based upon a proprietary packaging technology to reduce output offset or common mode errors. This model provides a calibrated millivolt output with good output offset characteristics. In addition the sensor utilizes a silicon, micromachined, stress concentration enhanced structure to provide a very linear output to measured pressure.

These calibrated and temperature compensated sensors give an accurate and stable output over a wide temperature range. This series is intended for use with non-corrosive, non-ionic working fluids such as air, dry gases and the like. The C-GRADE is a lowest cost version of the millivolt output pressure sensors.

The output of the device is ratiometric to the supply voltage and operation from any D.C. supply voltage up to +16 V is acceptable.

Physical Dimensions

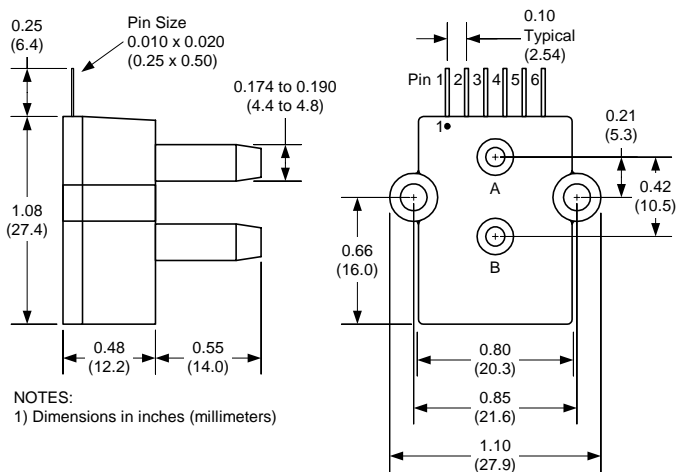

- pin 1: N/C
- pin 2: +V supply
- pin 3: +Voutput
- pin 4: -Vsupply
- pin 5: -Voutput
- pin 6: N/C



Pressure Sensor Characteristics Maximum Ratings

| | |
|--|---------|
| Supply Voltage ,Vs | 16 Vdc |
| Common-mode pressure | 50 psig |
| Lead Temperature (soldering 2-4 sec.) | 250°C |

Environmental Specifications

| | |
|--------------------|---------------------------------|
| Temperature Ranges | |
| Compensated | 0 to 70° C |
| Operating | -25 to 85° C |
| Storage | -40 to 125° C |
| Humidity Limits | 0 to 95% RH (non condensing) |

Standard Pressure Ranges

| Part Number | Operating Pressure | Nominal Span | Proof Pressure | Burst Pressure |
|---------------------|--------------------|--------------|----------------|----------------|
| 4 INCH-D-CGRADE-MV | 0 - 4 "H2O | 40 mV | 1 PSI | 5 PSI |
| 0.3 PSI-D-CGRADE-MV | 0 - 0.3 PSI | 20 mV | 5 PSI | 5 PSI |
| 1 PSI-D-CGRADE-MV | 0 - 1 PSI | 18 mV | 5 PSI | 15 PSI |
| 5 PSI-D-CGRADE-MV | 0 - 5 PSI | 60 mV | 10 PSI | 30 PSI |
| 15 PSI-D-CGRADE-MV | 0 - 15 PSI | 90 mV | 60 PSI | 120 PSI |
| 30 PSI-D-CGRADE-MV | 0 - 30 PSI | 90 mV | 90 PSI | 150 PSI |
| 100 PSI-D-CGRADE-MV | 0 - 100 PSI | 100mV | 200 PSI | 250 PSI |
| 150 PSI-D-CGRADE-MV | 0 - 150 PSI | 90mV | 200 PSI | 250 PSI |
| 15 PSI-A-CGRADE-MV | 0 - 15 PSIA | 60mV | 60 PSIA | 120 PSI |

Performance Characteristics for 4 INCH-D-CGRADE-MV

| Parameter, note 1 | Minimum | Nominal | Maximum | Units |
|---|---------|---------|---------|-------|
| Operating Range, differential pressure | | 4.0 | | "H2O |
| Output Span, note 5 | 38 | 40.0 | 42 | mV |
| Offset Voltage @ zero differential pressure | | | ±1.5 | mV |
| Offset Temperature Shift (0°C-50°C), note 2 | | | ±1.5 | mV |
| Linearity, hysteresis error, note 4 | | 0.5 | 1.0 | %fs |
| Span Shift (0°C-50°C), note 2 | | | ±2 | %fs |

Performance Characteristics for 0.3 PSI-D-CGRADE-MV

| Parameter, note 1 | Minimum | Nominal | Maximum | Units |
|---|---------|---------|---------|-------|
| Operating Range, differential pressure | | 0.3 | | PSI |
| Output Span, note 5 | 18 | 20.0 | 22 | mV |
| Offset Voltage @ zero differential pressure | | | ±1 | mV |
| Offset Temperature Shift (0°C-70°C), note 2 | | | ±1 | mV |
| Linearity, hysteresis error, note 4 | | 0.5 | 1 | %fs |
| Span Shift (0°C-70°C), note 2 | | | ±2 | %fs |

Performance Characteristics for 1 PSI-D-CGRADE-MV

| Parameter, note 1 | Minimum | Nominal | Maximum | Units |
|---|---------|---------|---------|-------|
| Operating Range, differential pressure | | 1.0 | | PSI |
| Output Span, note 5 | 16 | 18 | 20 | mV |
| Offset Voltage @ zero differential pressure | | | ±1 | mV |
| Offset Temperature Shift (0°C-70°C), note 2 | | | ±1 | mV |
| Linearity, hysteresis error, note 4 | | 0.5 | 1.0 | %fs |
| Span Shift (0°C-70°C), note 2 | | | ±2 | %fs |

Performance Characteristics for 5 PSI-D-CGRADE-MV

| Parameter, note 1 | Minimum | Nominal | Maximum | Units |
|---|---------|---------|---------|-------|
| Operating Range, differential pressure | | 5.0 | | PSI |
| Output Span, note 5 | 57 | 60 | 63 | mV |
| Offset Voltage @ zero differential pressure | | | ±1 | mV |
| Offset Temperature Shift (0°C-70°C), note 2 | | | ±1 | mV |
| Linearity, hysteresis error, note 4 | | 0.5 | 1.0 | %fs |
| Span Shift (0°C-70°C), note 2 | | | ±2 | %fs |

Performance Characteristics for 15 PSI-D-CGRADE-MV

| Parameter, note 1 | Minimum | Nominal | Maximum | Units |
|---|---------|---------|---------|-------|
| Operating Range, differential pressure | | 15.0 | | PSI |
| Output Span, note 5 | 86 | 90.0 | 94 | mV |
| Offset Voltage @ zero differential pressure | | | ±1 | mV |
| Offset Temperature Shift (0°C-70°C), note 2 | | | ±1 | mV |
| Linearity, hysteresis error, note 4 | | 0.5 | 1.0 | %fs |
| Span Shift (0°C-70°C), note 2 | | | ±2 | %fs |

Performance Characteristics for 30 PSI-D-CGRADE-MV

| Parameter, note 1 | Minimum | Nominal | Maximum | Units |
|---|---------|---------|---------|-------|
| Operating Range, differential pressure | | 30.0 | | PSI |
| Output Span, note 5 | 86 | 90 | 94 | mV |
| Offset Voltage @ zero differential pressure | | | ±1 | mV |
| Offset Temperature Shift (0°C-70°C), note 2 | | | ±1 | mV |
| Linearity, hysteresis error, note 4 | | 0.5 | 1.0 | %fs |
| Span Shift (0°C-70°C), note 2 | | | ±2 | %fs |



Performance Characteristics for 100 PSI-D-CGRADE-MV

| Parameter, note 1 | Minimum | Nominal | Maximum | Units |
|---|---------|---------|---------|-------|
| Operating Range, differential pressure | | 100.0 | | PSI |
| Output Span, note 5 | 96 | 100 | 104 | mV |
| Offset Voltage @ zero differential pressure | | | ±1 | mV |
| Offset Temperature Shift (0°C-70°C), note 2 | | | ±1 | mV |
| Linearity, hysteresis error, note 4 | | 0.5 | 1.0 | %fs |
| Span Shift (0°C-70°C), note 2 | | | ±2 | %fs |

Performance Characteristics for 150 PSI-D-CGRADE-MV

| Parameter, note 1 | Minimum | Nominal | Maximum | Units |
|---|---------|---------|---------|-------|
| Operating Range, differential pressure | | 150.0 | | PSI |
| Output Span, note 5 | 88 | 90 | 95 | mV |
| Offset Voltage @ zero differential pressure | | | ±1 | mV |
| Offset Temperature Shift (0°C-70°C), note 2 | | | ±1 | mV |
| Linearity, hysteresis error, note 4 | | 0.5 | 1.0 | %fs |
| Span Shift (0°C-70°C), note 2 | | | ±2 | %fs |

Performance Characteristics for 15 PSI-A-CGRADE-MV

| Parameter, note 1 | Minimum | Nominal | Maximum | Units |
|---|---------|---------|---------|-------|
| Operating Range, absolute pressure | | 15.0 | | PSIA |
| Output Span, note 5 | 86 | 90.0 | 94 | mV |
| Offset Voltage @ zero absolute pressure | | | ±1 | mV |
| Offset Temperature Shift (0°C-70°C), note 2 | | | ±1 | mV |
| Linearity, hysteresis error, note 4 | | 0.5 | 1.0 | %fs |
| Span Shift (0°C-70°C), note 2 | | | ±2 | %fs |

Specification Notes

NOTE 1: ALL PARAMETERS ARE MEASURED AT 12.0 VOLT EXCITATION, FOR THE NOMINAL FULL SCALE PRESSURE AND ROOM TEMPERATURE UNLESS

OTHERWISE SPECIFIED. PRESSURE MEASUREMENTS ARE WITH POSITIVE PRESSURE APPLIED TO PORT B.


NOTE 2: SHIFT IS RELATIVE TO 25°C.

NOTE 3: SHIFT IS WITHIN THE FIRST HOUR OF EXCITATION APPLIED TO THE DEVICE.

NOTE 4: MEASURED AT ONE-HALF FULL SCALE RATED PRESSURE USING BEST STRAIGHT LINE CURVE FIT.

NOTE 5: THE VOLTAGE ADDED TO THE OFFSET VOLTAGE AT FULL SCALE PRESSURE.

Input Resistance 5.0 k ohm
Output Resistance 3.0 k ohm



Equivalent Circuit

All Sensors reserves the right to make changes to any products herein. All Sensors does not assume any liability arising out of the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9