Heyco® Original Strain Relief Bushings

Pigtail with Integral Nylon Spring, for Flat and Round Cables

WILL FIT THESE CABLES				PANEL DIMENSIONS						PART	DESC	PART DIMENSIONS				Mounting
UL Type	AWG/ Conductors	Approximate Size		A Mounting Hole Dia.		B To Prevent Rotation		Finished Fit Panel Thickness*		NO. Black		C HEAD LENGTH		D BODY LENGTH		Hole Plug
		in.	mm.	in.	mm.	in.	mm.	in.	mm.			in.	mm.	in.	mm.	PART NO.
For Flat Cables																
SPT-1	18/3	.12x.30	3,0x7,6	.500	12,7	.465	11,8	.062	1,6	**1541**	SR 4N-7	1.718	43,6	1.984	50,4	2491
SPT-2 & HPN	18/2	.15x.28	3,8x7,1													
For Round Cables																
SV & SVT	18/2	.250	6,4	.500	12,7	.450	11,4	.062	1,6	**1590**	SR 5N-7	1.703	43,3	1.984	50,4	2491
	18/3	.255	6,5	.500-.515	12,7-13,1											
HPD	18/2	.270	6,9	.500	12,7											
	16/2	.290	7,4	.500-.515	12,7-13,1											
Same as SR 5N-7 above except →								.125	3,2	**1593**	SR 5P-7	1.703	43,3	1.984	50,4	2491
SJ, SJO & SJT	18/2	.300	7,6	.625	15,9	.550	14,0	.062	1,6	**1596**	SR 6N-7	1.718	43,6	2.109	53,6	2497
Same as SR 6N-7 above except →								.125	3,2	**1602**	SR 6P-7	1.718	43,6	2.109	53,6	2497
SJ, SJO & SJT	16/2	.315	8,0	.625	15,9	.550	14,0	.062	1,6	**1599**	SR 6N3-7	1.718	43,6	2.109	53,6	2497
	18/3	.320	8,1													
	14/2	.350	8,9													
	16/3	.355	9,0													
	18/4	.360	9,1													
Same as SR 6N3-7 above except →								.125	3,2	**1605**	SR 6P3-7	1.718	43,6	2.109	53,6	2497
										1604	SR 6P3-7S**					
SJT	18/4	.360	9,1	.750	19,0	.660	16,8	.125	3,2	**1611**	SR 7P-7	2.156	54,9	2.598	66,0	2503
SJT & SJTO	14/3	.370	9,4													
S & ST	18/2	.390	9,9													
	18/3	.405	10,3													
	16/2	.405	10,3													
	16/3	.430	10,9	.750-.781	19,0-19,8											

Standard color black. Consult Heyco for white and other colors.
*Maximum Panel Thickness. Part has additional clearance. Consult Heyco for your Custom Finished Fit Panel Thickness.
**For use in split housings only: Larger locking step on body and key, for additional pull out resistance.

- **Integral nylon spring eases the cable into a lazy bend**; prevents sharp bending and assures longest cable and product life.
- Adds reliability, longevity, and safety. Will pass CSA's 50,000 cycle vacuum cleaner test (C22.2 No. 67).
- Protects the lifeline of your electric/ electronic products by absorbing the forces of pull, push, twist, and flex.
- Securely anchors, insulates, and protects cables at panel entry points.
- Not recommended for applications where the power supply cord is subject to whipping or jump rope type motion.
- See page 4-38 for corresponding **Mounting Hole Plugs** which can be used to fill blank/unused Mounting Holes and thus allow for a single panel design for multiple applications.
- Consult Heyco for other wire types and sizes.
- See pages 4-27 & 4-28 for SR assembly tools.
- For Double D Mounting Hole Punches, see page 4-30.



MOUNTING HOLE

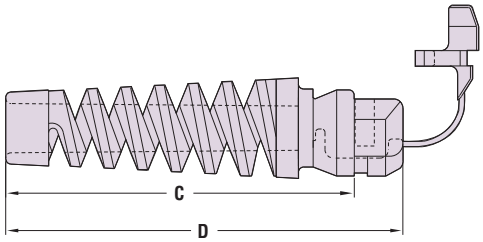

Material	Nylon 6/6
Certifications	Recognized under the Component Program of Underwriters' Laboratories File E15331
	Certified by the Canadian Standards Association File 8919
Flammability Rating	94V-2
Temperature Range	-.04°F (-18°C) to 221°F (105°C)

Quick Specs

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001
Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:
moschip.ru
moschip.ru_4
moschip.ru_6
moschip.ru_9