

EMC filter - TT-SLKK 5-C 12N-230AC - 2748069

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Modular terminal block with radio interference suppression capacitor between clamping connector and DIN rail, separate ground connection, nominal voltage: 12 nF, for mounting on NS 35/7.5, terminal width: 6.2 mm, terminal height: 69 mm

Product Features

- Modular terminal blocks with screw connection technology
- Protective element between the feed-through terminal block and the metal mounting foot



Key Commercial Data

Packing unit	1 pc
GTIN	 4 017918 062316
Weight per Piece (excluding packing)	21.29 g
Custom tariff number	85363010
Country of origin	Germany

Technical data

Environmental Product Compliance

REACH SVHC	4-Nonylphenol, ethoxylated
------------	----------------------------

Dimensions

Height	66.5 mm
Width	6.2 mm
Depth	69.5 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 85 °C
Degree of protection	IP20

General

EMC filter - TT-SLKK 5-C 12N-230AC - 2748069

Technical data

General

Housing material	PA
Flammability rating according to UL 94	V-2
Color	black
Mounting type	DIN rail: 35 mm
Type	Single-level terminal block – separate PE connection
Number of positions	1
Direction of action	Line-Earth Ground

Protective circuit

Nominal voltage U_N	230 V AC
Maximum continuous voltage U_C	250 V AC
Maximum continuous voltage U_C (wire-ground)	250 V AC
Nominal current I_N	34 A (45°C)
Cut-off frequency f_g (3 dB), asym. (PE) in 50 Ohm system	typ. 500 kHz
Cut-off frequency f_g (3 dB), asym. (PE) in 150 Ohm system	typ. 150 kHz
Cut-off frequency f_g (3 dB), asym. (PE) in 600 Ohm system	typ. 40 kHz
Capacity (Core-Earth)	12 nF

Connection data

Connection method	Screw connection
Connection type IN	Screw terminal blocks
Connection type OUT	Screw terminal blocks
Screw thread	M3
Tightening torque	0.5 Nm
Stripping length	8 mm
Conductor cross section flexible	0.2 mm ² ... 4 mm ²
Conductor cross section solid	0.2 mm ² ... 4 mm ²
Conductor cross section AWG	24 ... 12

Standards and Regulations

Standards/specifications	VDE 0565-1
--------------------------	------------

Classifications

eCl@ss

eCl@ss 4.0	27140201
eCl@ss 4.1	27130801
eCl@ss 5.0	27130801
eCl@ss 5.1	27130801

EMC filter - TT-SLKK 5-C 12N-230AC - 2748069

Classifications

eCl@ss

eCl@ss 6.0	27130807
eCl@ss 7.0	27130807
eCl@ss 8.0	27130807
eCl@ss 9.0	27130807

ETIM

ETIM 2.0	EC000943
ETIM 3.0	EC000943
ETIM 4.0	EC000943
ETIM 5.0	EC000943

UNSPSC

UNSPSC 6.01	30212010
UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610
UNSPSC 13.2	39121620

Approvals

Approvals

Approvals

EAC / EAC

Ex Approvals

Approvals submitted

Approval details

EAC

EAC

EMC filter - TT-SLKK 5-C 12N-230AC - 2748069

Accessories

Accessories

End cover

End cover - D-UKK 3/5 BK - 2770228



End cover, Length: 56 mm, Width: 2.5 mm, Height: 66.5 mm, Color: black

Labeled terminal marker

Zack Marker strip, flat - ZBF 6,LGS:FORTL.ZAHLEN - 0808749



Zack Marker strip, flat, Strip, white, labeled, Printed horizontally: Consecutive numbers 1 - 10, 11 - 20, etc. up to 91 - 100, Mounting type: Snap into flat marker groove, for terminal block width: 6.2 mm, Lettering field: 5.15 x 6.15 mm

Marker for terminal blocks - ZB 6,LGS:L1-N,PE - 1051414



Marker for terminal blocks, Strip, white, labeled, can be labeled with: Plotter, Horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, Mounting type: Snap into tall marker groove, for terminal block width: 6.2 mm, Lettering field: 6.15 x 10.5 mm

Marker for terminal blocks - ZB 6,LGS:U-N - 1051430



Marker for terminal blocks, Strip, white, labeled, can be labeled with: Plotter, Printed horizontally: U, V, W, N, GND, U, V, W, N, GND, Mounting type: Snap into tall marker groove, for terminal block width: 6.2 mm, Lettering field: 6.15 x 10.5 mm

EMC filter - TT-SLKK 5-C 12N-230AC - 2748069

Accessories

Zack marker strip - ZB 6,LGS:FORTL.ZAHLEN - 1051016



Zack marker strip, Strip, white, labeled, can be labeled with: Plotter, Printed horizontally: Consecutive numbers 1 - 10, 11 - 20, etc. up to 491 - 500, Mounting type: Snap into tall marker groove, for terminal block width: 6.2 mm, Lettering field: 6.15 x 10.5 mm

Marker pen

Marker pen - B-STIFT - 1051993



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

Partition plate

Spacer plate - DP-UKK 3/5 BK - 2770833



Spacer plate, to compensate for level offsets, Length: 56 mm, Width: 2.5 mm, Height: 25 mm, Color: black

Terminal marking

Zack Marker strip, flat - ZBF 6:UNBEDRUCKT - 0808710



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: Plotter, Mounting type: Snap into flat marker groove, for terminal block width: 6.2 mm, Lettering field: 5.15 x 6.15 mm

EMC filter - TT-SLKK 5-C 12N-230AC - 2748069

Accessories

Zack Marker strip, flat - ZBF 6/WH-100:UNBEDRUCKT - 0808736



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: Plotter, Mounting type: Snap into flat marker groove, for terminal block width: 6.2 mm, Lettering field: 5.15 x 6.15 mm

Zack marker strip - ZB 6:UNBEDRUCKT - 1051003



Zack marker strip, Strip, white, unlabeled, can be labeled with: Plotter, Mounting type: Snap into tall marker groove, for terminal block width: 6.2 mm, Lettering field: 6.15 x 10.5 mm

Additional products

End cover - D-UKK 3/5 BK - 2770228



End cover, Length: 56 mm, Width: 2.5 mm, Height: 66.5 mm, Color: black

Spacer plate - DP-UKK 3/5 BK - 2770833



Spacer plate, to compensate for level offsets, Length: 56 mm, Width: 2.5 mm, Height: 25 mm, Color: black

Shield connection - SSA 3-6 - 2839295



shield fast connections for conductor diameter 3 - 6 mm. Potential connection cable: 200 mm, black

EMC filter - TT-SLKK 5-C 12N-230AC - 2748069

Accessories


Shield connection - SSA 5-10 - 2839512



Shield fast connection for conductor diameters 5 - 10 mm. Potential connection cable: 200 mm, black


Drawings

Circuit diagram



EMC filter - TT-SLKK 5-C 12N-230AC - 2748069

Diagram

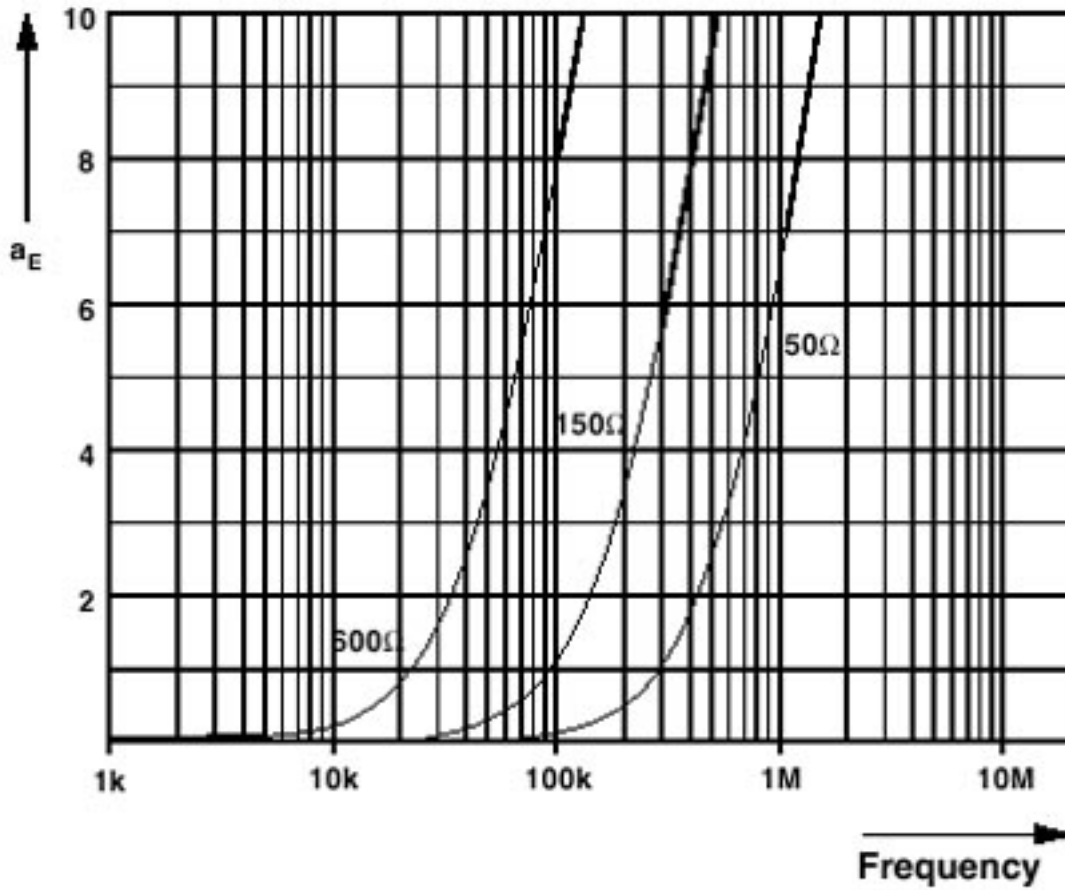

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9