
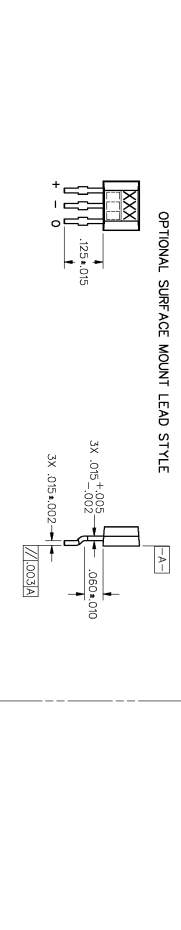
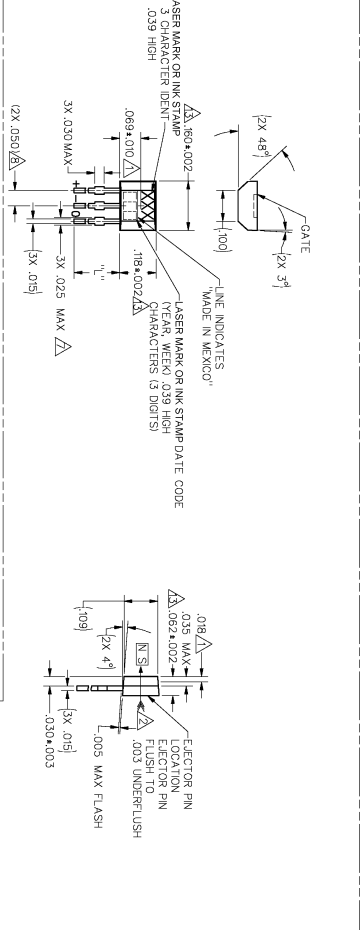
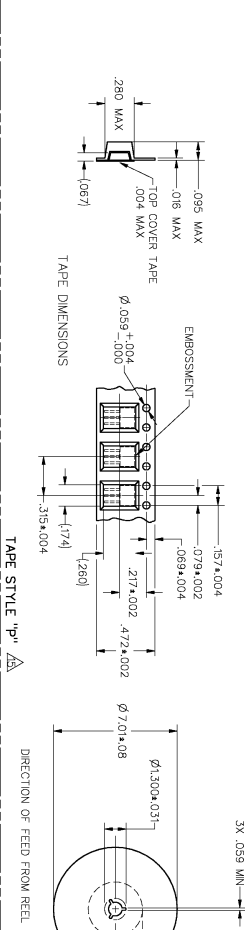
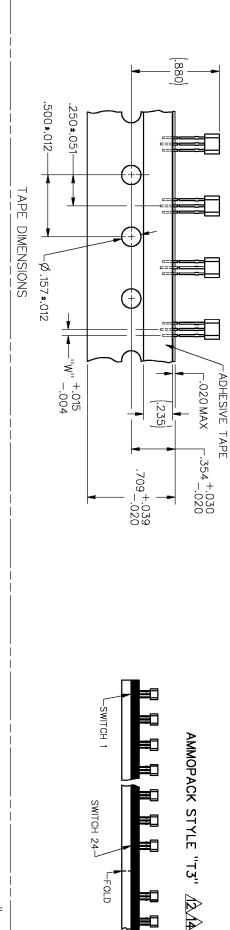


TAPE PACKING OPTIONS

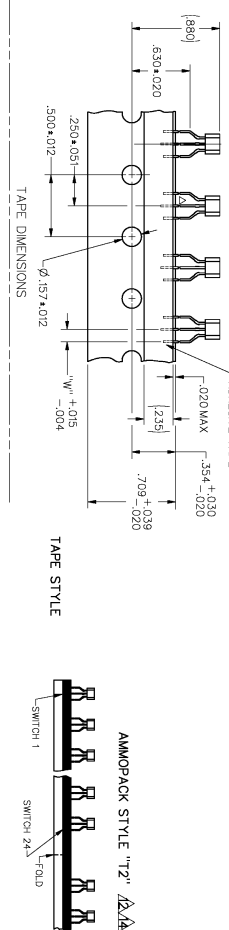

- NOTES
- 1 - CENTERLINE OF HALL CELL
 - 2 - DIMENSION "L" IS IN THE DIRECTION SHOWN. THIS ASSURES THE CONNECTION OF THE EXTERNAL FLUX OF A MOUNT IS FROM THE NORTH TO THE SOUTH POLE OF THE MAGNET
 - 3 - THE DEVICE CANNOT BE DAMAGED BY MAGNETIC OVERDRIVE
 - 4 - OUTPUT TYPE - RADIOMETRIC SUPPORTED DURING ANY FORMING/SHEERING OPERATION TO PREVENT DAMAGE TO THE DEVICE
 - 5 - ASSURE THAT THE LEADS ARE NOT STRESSED WITHIN THE ELASTIC RANGE
 - 6 - PCB WAVE SOLDERING GUIDELINES ARE AS FOLLOWS:
 - 6.1 - BUBBLES ARE ALLOWED ONLY IF FULL LENGTH OF LEADS WILL PASS THROUGH $\phi 0.23$ HOLE.
 - 6.2 - ABSOLUTE MAXIMUM RATING IS 260°C PEAK FOR 10 S MAX OR 280°C PEAK FOR 5 S MAX.
 - 7 - DIMENSION REFERS TO THE LOCATION OF LEAD CENTERLINES AS THE EXIT THE PLASTIC PACKAGE
 - 8 - ABSOLUTE MAXIMUM RATINGS ARE THE EXTREME LIMITS THE DEVICE WILL MOMENTARILY WITHSTAND WITHOUT DAMAGE TO THE DEVICE. ELECTRICAL AND MAGNETIC CHARACTERISTICS OF THE DEVICE NECESSARILY OPERATE AT ABSOLUTE MAXIMUM RATINGS
 - 9 - APPLICATIONS HAVING A CRITICAL LEAD STRAIGHTNESS REQUIREMENT SHOULD USE A TAPE PACKAGING OPTION 24 SWITCHES BETWEEN FOLDS, SWP 1 SPACE AT FOLD. MAY BE REFERRED TO AS "AN FOLD"
 - 10 - WOLDED PART DIMENSIONS DO NOT INCLUDE FLASH. FLASH IS LIMITED TO .005 MAXIMUM
 - 11 - TAPE AND AMMOPACK PER EA-468
 - 12 - POCKET TAPE PER EA-461

CATALOG LISTING	TAPE STYLE	DIM "L"	DIM "W"	COMMENTS
SS496A	NONE	0.590	0.050	BULK-1000/BAG
SS496A-T2	NONE	0.590	0.050	BULK-1000/BOX
SS496A-T3	NONE	0.590	0.050	BULK-1000/BOX
SS496A-S	P	1.25	0.50	BULK-1000/BAG
SS496A-SP	NONE	1.25	0.50	1000/PACKET TAPE AND REEL
SS496A-T2	NONE	0.590	0.050	BULK-1000/BAG
SS496A-T3	NONE	0.590	0.050	BULK-1000/BOX
SS496A-S	NONE	1.25	0.50	BULK-1000/BAG
SS496A-SP	P	1.25	0.50	1000/PACKET TAPE AND REEL
SS496B	NONE	0.590	0.050	BULK-1000/BAG
SS496B-T2	NONE	0.590	0.050	BULK-1000/BOX
SS496B-T3	T3	0.590	0.050	5000/BOX
SS496B-S	NONE	1.25	0.50	BULK-1000/BAG
SS496B-SP	P	1.25	0.50	1000/PACKET TAPE AND REEL

ESD SENSITIVITY

Micro Switch

MINIATURE RADIO-METRIC

SS496 SERIES CHART 1

THIS DRAWING CONVEYS A PRODUCT'S SPECIFIC USE AS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR REPRODUCED WITHOUT THE APPROVAL OF MICRO SWITCH.

SCALE 5:1

DO NOT SCALE PARTS

UNLESS OTHERWISE SPECIFIED

ONE PLACE (Ø) ±.030

TWO PLACES (Ø) ±.005

THREE PLACES (Ø) ±.001

ANGLES ±.2°

THIS ANGLE INDICATION


ANSI Y14.5M-1987 APPLIES

CHARACTERISTICS ARE AT $V_s=5.00$ WITH 4.7K OUTPUT TO MINUS WITH $T_A = -40^\circ\text{C}$ TO $+125^\circ\text{C}$ UNLESS OTHERWISE SPECIFIED

SS496A










PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
SENSITIVITY	$T_A = 25^\circ\text{C}$	2.4	2.5	2.6	mV/GAUSS
NULL	$T_A = 25^\circ\text{C}$	2.425	2.50	2.575	VOLTS
SUPPLY CURRENT	$T_A = 25^\circ\text{C}$		7	8.7	mA
OUTPUT CURRENT SOURCE	$V_s > 4.5$	1mA	1.5mA		
OUTPUT CURRENT SINK	$V_s > 4.5$.6mA	1.5mA		
OUTPUT CURRENT SINK	$V_s > 5.0$	1mA	1.5mA		
RESPONSE TIME			3μs		
OUTPUT VOLTAGE SWING					
VOM -	-B APPLIED	.4	.2		VOLTS
VOM +	+B APPLIED	$V_s - .4$	$V_s - .2$		VOLTS
B LIMITS FOR LINEAR OPERATION	-B MAX	-750	-840		GAUSS
	+B MAX	+750	+840		GAUSS
Vnull DRIFT	$B = 0, T_A = 25^\circ\text{C}$ TO 125°C		-0.048		% / °C
Vnull DRIFT	$B = 0, T_A = +125^\circ\text{C}$ TO $+150^\circ\text{C}$		-0.064		% / °C
SENSITIVITY DRIFT	$T_A = +25^\circ\text{C}$ TO $+125^\circ\text{C}$		-0.01		% / °C
SENSITIVITY DRIFT	$T_A = -40^\circ\text{C}$ TO $+25^\circ\text{C}$		0		% / °C
LINEARITY	$B = -600$ TO $+600$	0	-1.0		% OF SPAN
SUPPLY VOLTAGE	-40°C TO $+125^\circ\text{C}$	4.5	5.0	10.5	VOLTS
OPERATING TEMP	SEE MAX TEMPERATURE CHART	-40		+150	°C

BLOCK DIAGRAM CURRENT SINKING OR SOURCING OUTPUT



ABSOLUTE MAXIMUM CHARACTERISTICS

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN	MAX	UNITS
SUPPLY VOLTAGE	V_{cc}		-0.5	11	V
OUTPUT VOLTAGE	V_{out}		-0.5	11	V
OUTPUT CURRENT	I_{out}	SOURCE OR SINK		10	mA
TEMPERATURE	T_A	OPERATING	-55	150	°C
	T_s	STORAGE ($V_{cc}=0$)	-55	165	°C

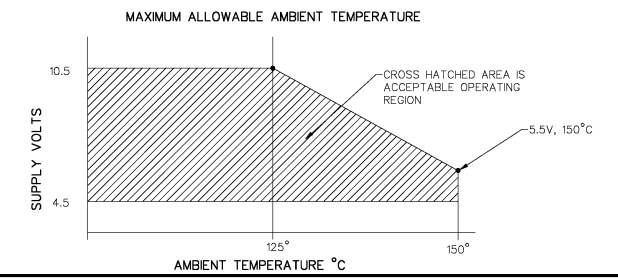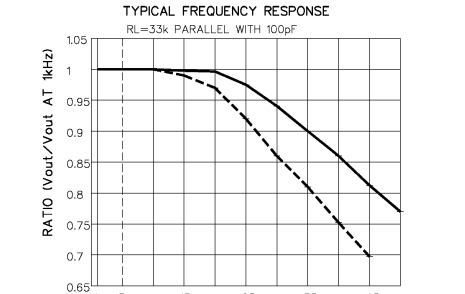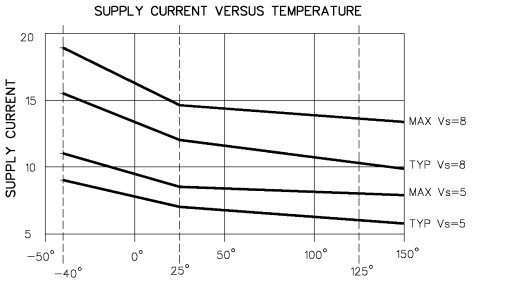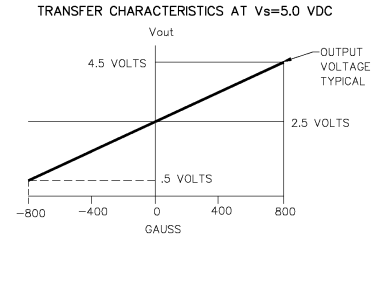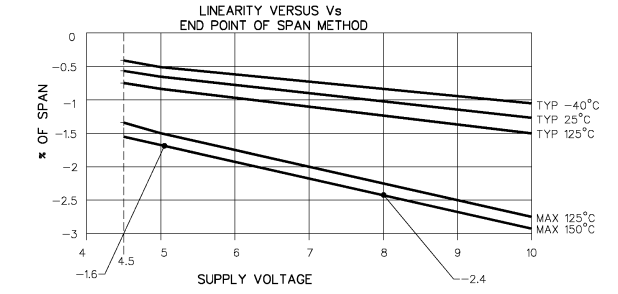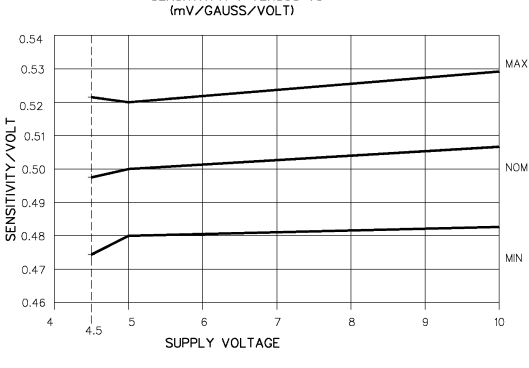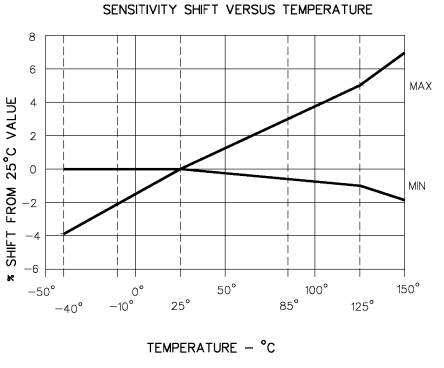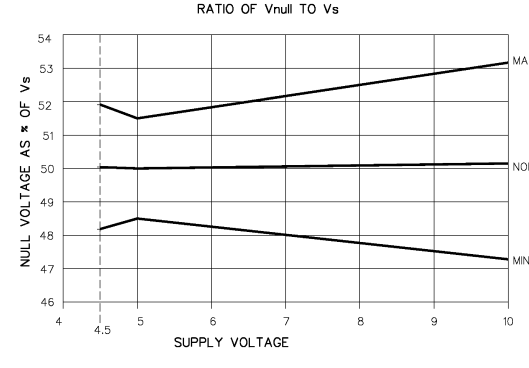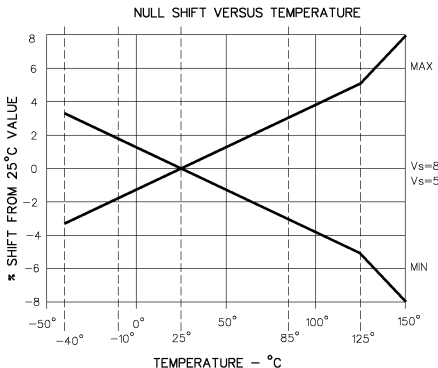

CAUTION: ESD SENSITIVITY: CLASS 3

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

PRO. WFD. CODE 01928

MICRO SWITCH a Honeywell Division

MINIATURE RATIO-METRIC LINEAR HALL EFFECT SENSOR

SS496 SERIES CHART 1

ONE PLACE I/O ±.030
TWO PLACES I/O01 ±.015
THREE PLACES I/O001 ±.005
ANGLES ±2°

THIRD ANGLE PROJECTION
SCALE: NONE
DO NOT SCALE PRINT
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE


DRAWING NUMBER: SS496 SERIES CHART 1
 OF: 10
 PAGE: 7
 REVISED: 10/82
 BY: J.A. HANSEN
 CHECKED: J.A. HANSEN
 APPROVED: J.A. HANSEN
 DATE: 10/82
 FILE: 100796-SS

CHARACTERISTICS ARE AT $V_s=5.00$ WITH 4.7K OUTPUT TO MINUS WITH $T_A=-40^{\circ}\text{C}$ TO $+125^{\circ}\text{C}$ UNLESS OTHERWISE SPECIFIED

SS496B

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
SENSITIVITY	$T_A = 25^{\circ}\text{C}$	2.300	2.500	2.700	mV/GAUSS
NULL	$T_A = 25^{\circ}\text{C}$	2.350	2.50	2.650	VOLTS
SUPPLY CURRENT	$T_A = 25^{\circ}\text{C}$		7	8.7	mA
OUTPUT CURRENT SOURCE	$V_s > 4.5$	1mA	1.5mA		
SINK	$V_s > 4.5$		1.5mA		
SINK	$V_s > 5.0$	1mA	1.5mA		
RESPONSE TIME			3 μ S		
OUTPUT VOLTAGE SWING					
VOM +	-B APPLIED	.4	.2		VOLTS
VOM -	+B APPLIED	$V_s - .4$	$V_s - .2$		VOLTS
B LIMITS FOR LINEAR OPERATION					GAUSS
-B MAX		-750	-840		
+B MAX		+750	+840		
Vnull DRIFT	$B = 0, T_A = 25^{\circ}\text{ TO } 125^{\circ}\text{C}$	-0.64		+0.64	$\mu\text{V}/^{\circ}\text{C}$
Vnull DRIFT	$B = 0, T_A = +125^{\circ}\text{ TO } +150^{\circ}\text{C}$	-0.64		+0.64	$\mu\text{V}/^{\circ}\text{C}$
SENSITIVITY DRIFT	$T_A = +25^{\circ}\text{C TO } +150^{\circ}\text{C}$	-0.02		+0.08	$\mu\text{V}/^{\circ}\text{C}$
SENSITIVITY DRIFT	$T_A = -40^{\circ}\text{C TO } +25^{\circ}\text{C}$	-0.02		+0.08	$\mu\text{V}/^{\circ}\text{C}$
LINEARITY	$B = -600\text{ TO } +600$	0	-1.0	+1.5	% OF SPAN
SUPPLY VOLTAGE	$-40^{\circ}\text{C TO } +125^{\circ}\text{C}$	4.5	5.0	10.5	VOLTS
OPERATING TEMP	SEE MAX TEMPERATURE CHART	-40		+150	$^{\circ}\text{C}$


BLOCK DIAGRAM CURRENT SINKING OR SOURCING OUTPUT

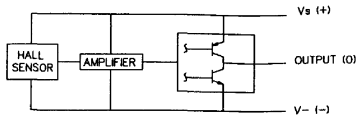


ABSOLUTE MAXIMUM CHARACTERISTICS

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN	MAX	UNITS
SUPPLY VOLTAGE	V_{cc}		-0.5	11	V
OUTPUT VOLTAGE	V_{out}		-0.5	11	V
OUTPUT CURRENT	I_{out}	SOURCE OR SINK		10	mA
TEMPERATURE	T_A	OPERATING	-55	150	$^{\circ}\text{C}$
	T_s	STORAGE ($V_{cc}=0$)	-55	165	$^{\circ}\text{C}$


NULL SHIFT VERSUS TEMPERATURE

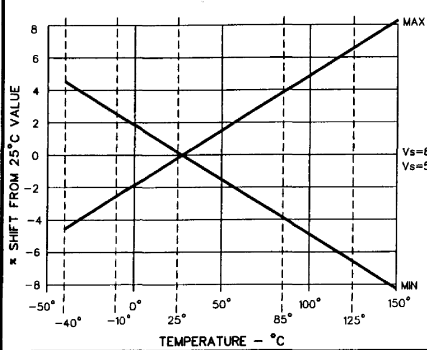


RATIO OF V_{null} TO V_s

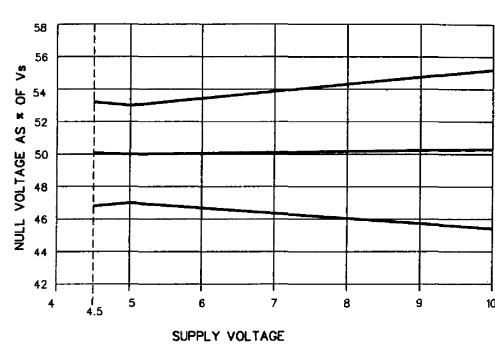


SENSITIVITY SHIFT VERSUS TEMPERATURE

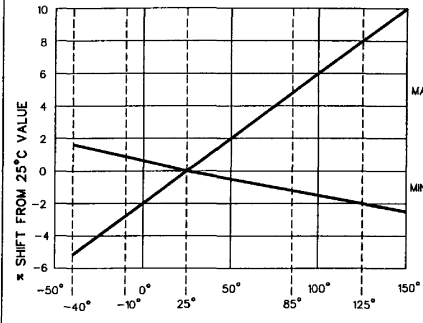


SENSITIVITY/V VERSUS V_s (mV/GAUSS/VOLTI)

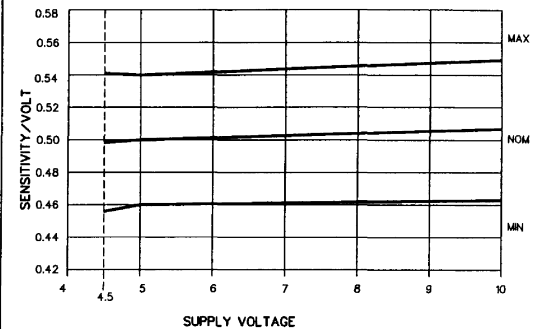


LINEARITY VERSUS V_s END POINT OF SPAN METHOD

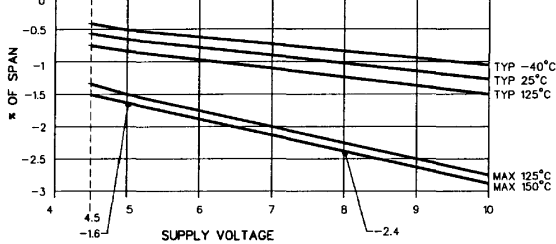


TRANSFER CHARACTERISTICS AT $V_s=5.0$ VDC

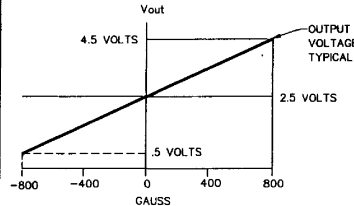


SUPPLY CURRENT VERSUS TEMPERATURE

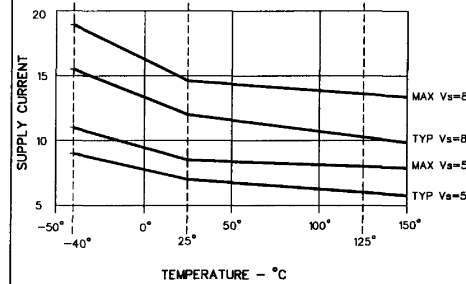

TYPICAL FREQUENCY RESPONSE

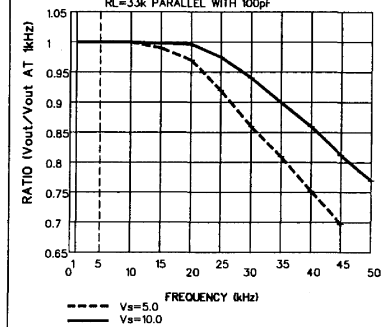

MAXIMUM ALLOWABLE AMBIENT TEMPERATURE

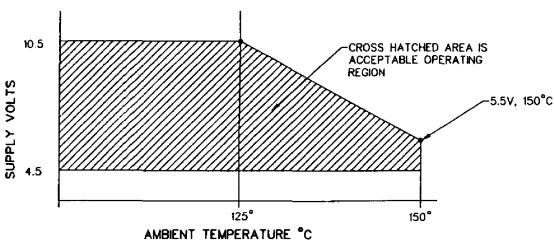

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

FIG. 1000 CODE 8180

ESD SENSITIVITY CLASS 3

MASTER REDUCED ANSI Y14.5M-1982 APPLIES

MINIATURE RATIO-METRIC LINEAR HALL EFFECT SENSOR

SS496 SERIES CHART 1

THIRD ANGLE PROJECTION		
SCALE	NONE	
DO NOT SCALE PRINT		
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
ONE PLACE	(0)	±0.030
TWO PLACES	(00)	±0.015
THREE PLACES	(000)	±0.005
ANGLES		±2°
WEIGHT		

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9