
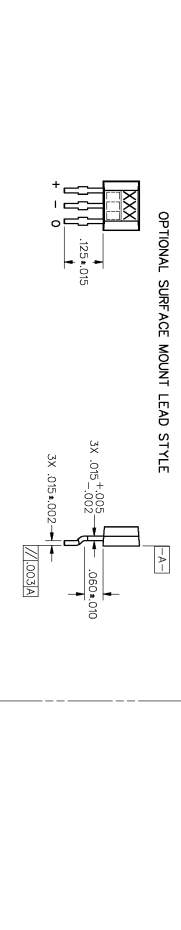
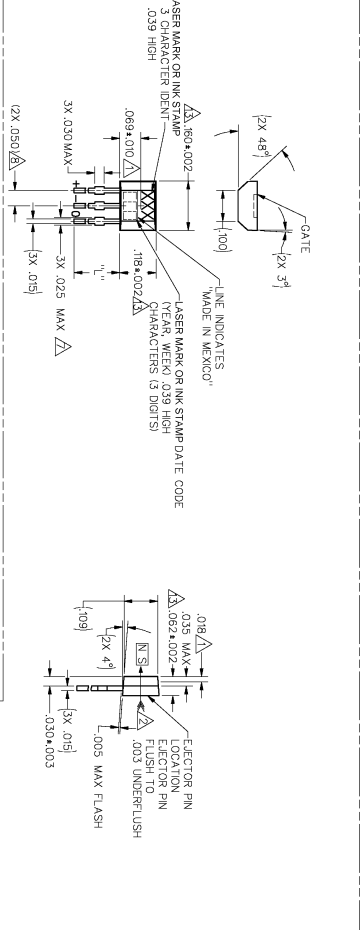
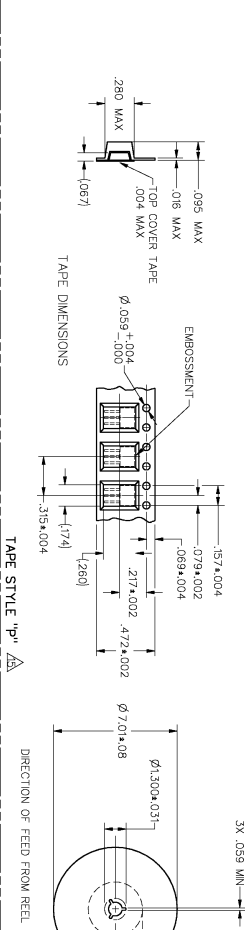
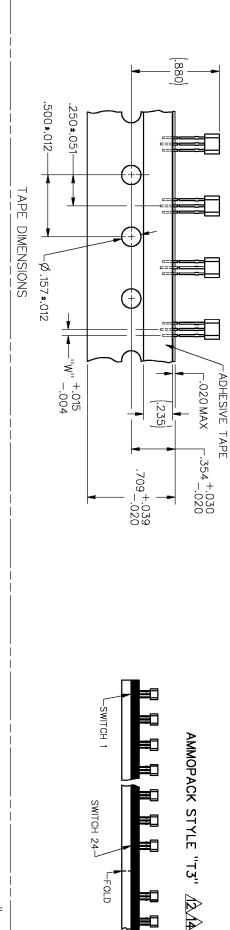


TAPE PACKING OPTIONS

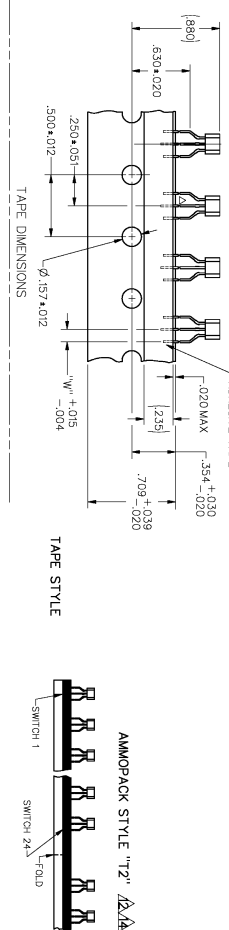

- NOTES
- 1 - CENTERLINE OF HALL CELL
  - 2 - DIMENSION "L" IS IN THE DIRECTION SHOWN. THIS ASSURES THE CONNECTION OF THE EXTERNAL FLUX OF A MOUNT IS FROM THE NORTH TO THE SOUTH POLE OF THE MAGNET
  - 3 - THE DEVICE CANNOT BE DAMAGED BY MAGNETIC OVERDRIVE
  - 4 - OUTPUT TYPE - RADIOMETRIC SUPPORTED DURING ANY FORMING/SHEERING OPERATION TO AVOID DAMAGE TO THE DEVICE
  - 5 - ASSURE THAT THE LEADS ARE NOT STRESSED WITHIN THE ELASTIC RANGE
  - 6 - PCB WAVE SOLDERING GUIDELINES ARE AS FOLLOWS:
    - 6.1 - BARS ARE ALLOWED ONLY IF FULL LENGTH OF LEADS WILL PASS THROUGH  $\phi 0.23$  HOLE.
    - 6.2 - ABSOLUTE MAXIMUM RATINGS ARE THE EXTREME LIMITS THE DEVICE WILL MOMENTARILY WITHSTAND WITHOUT DAMAGE TO THE DEVICE. ELECTRICAL AND MAGNETIC CHARACTERISTICS OF THE DEVICE NECESSARILY OPERATE AT ABSOLUTE MAXIMUM RATINGS.
    - 6.3 - LEAD STRAIGHTNESS MAY BE DETERIORATED ON SOME UNITS BY BULK PACKAGING. APPLICATIONS HAVING A CRITICAL LEAD STRAIGHTNESS REQUIREMENT SHOULD USE A TAPE PACKAGING OPTION 24 SWITCHES BETWEEN FOLDS, SWP 1 SPACE AT FOLD. MAY BE REFERRED TO AS "AN FOLD"
    - 6.4 - DIMENSION REFERS TO THE LOCATION OF LEAD CENTERLINES AS THE EXIT THE PLASTIC PACKAGE
    - 6.5 - ABSOLUTE MAXIMUM RATINGS ARE THE EXTREME LIMITS THE DEVICE WILL MOMENTARILY WITHSTAND WITHOUT DAMAGE TO THE DEVICE. ELECTRICAL AND MAGNETIC CHARACTERISTICS OF THE DEVICE NECESSARILY OPERATE AT ABSOLUTE MAXIMUM RATINGS.
    - 6.6 - LEAD STRAIGHTNESS MAY BE DETERIORATED ON SOME UNITS BY BULK PACKAGING. APPLICATIONS HAVING A CRITICAL LEAD STRAIGHTNESS REQUIREMENT SHOULD USE A TAPE PACKAGING OPTION 24 SWITCHES BETWEEN FOLDS, SWP 1 SPACE AT FOLD. MAY BE REFERRED TO AS "AN FOLD"
    - 6.7 - WOLED PART DIMENSIONS DO NOT INCLUDE FLASH. FLASH IS LIMITED TO .005 MAXIMUM.
    - 6.8 - TAPE AND AMMOPACK PER EA-468
    - 6.9 - POCKET TAPE PER EA-461

CATALOG LISTING	TAPE STYLE	DIM "L"	DIM "W"	COMMENTS
SS496A	NONE	0.590	0.050	BULK-1000/BAG
SS496A-T2	T2	0.590	0.050	BULK-1000/BOX
SS496A-T3	T3	0.590	0.050	BULK-1000/BOX
SS496A-S	P	1.25	0.50	BULK-1000/BAG
SS496A-SP	P	1.25	0.50	1000/PACKET TAPE AND REEL
SS496A-T2	NONE	0.590	0.050	BULK-1000/BAG
SS496A-T3	NONE	0.590	0.050	BULK-1000/BAG
SS496A-T3	T3	0.590	0.050	BULK-1000/BOX
SS496A-S	NONE	1.25	0.50	BULK-1000/BAG
SS496A-SP	P	1.25	0.50	1000/PACKET TAPE AND REEL
SS496B	NONE	0.590	0.050	BULK-1000/BAG
SS496B-T2	T2	0.590	0.050	BULK-1000/BOX
SS496B-T3	T3	0.590	0.050	5000/BOX
SS496B-S	NONE	1.25	0.50	BULK-1000/BAG
SS496B-SP	P	1.25	0.50	1000/PACKET TAPE AND REEL

ESD SENSITIVITY

Micro Switch

MINIATURE RADIOMETRIC

SS496 SERIES CHART 1

THIS DRAWING CONVEYS A PRODUCT'S SPECIFIC USE AS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS INTENDED TO BE CAPABLE OF USE WITHIN THE APPROVAL OF HONEYWELL'S PATENT RIGHTS.

SCALE 5:1

DO NOT SCALE PARTS

UNLESS OTHERWISE SPECIFIED

ONE PLACE (0.1)

TWO PLACES (0.01)

THREE PLACES (0.001)

ANGLES ± 2°


THIS ANGLE INDICATION

CHARACTERISTICS ARE AT  $V_s=5.00$  WITH 4.7K OUTPUT TO MINUS WITH  $T_A = -40^{\circ}\text{C}$  TO  $+125^{\circ}\text{C}$  UNLESS OTHERWISE SPECIFIED

SS496A










PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
SENSITIVITY	$T_A = 25^{\circ}\text{C}$	2.4	2.5	2.6	mV/GAUSS
NULL	$T_A = 25^{\circ}\text{C}$	2.425	2.50	2.575	VOLTS
SUPPLY CURRENT	$T_A = 25^{\circ}\text{C}$		7	8.7	mA
OUTPUT CURRENT SOURCE SINK	$V_s > 4.5$	1mA	1.5mA		
	$V_s > 4.5$	.6mA	1.5mA		
	$V_s > 5.0$	1mA	1.5mA		
RESPONSE TIME			3μs		
OUTPUT VOLTAGE SWING					
VOM -	-B APPLIED	.4	.2		VOLTS
VOM +	+B APPLIED	$V_s - .4$	$V_s - .2$		VOLTS
B LIMITS FOR LINEAR OPERATION	-B MAX	-750	-840		GAUSS
	+B MAX	+750	+840		GAUSS
$V_{null}$ DRIFT	$B = 0, T_A = 25^{\circ}\text{C}$ TO $125^{\circ}\text{C}$		-0.048		% / °C
$V_{null}$ DRIFT	$B = 0, T_A = +125^{\circ}\text{C}$ TO $+150^{\circ}\text{C}$		-0.064		% / °C
SENSITIVITY DRIFT	$T_A = +25^{\circ}\text{C}$ TO $+125^{\circ}\text{C}$		-0.01		% / °C
SENSITIVITY DRIFT	$T_A = -40^{\circ}\text{C}$ TO $+25^{\circ}\text{C}$		0		% / °C
LINEARITY	$B = -600$ TO $+600$	0	-1.0		% OF SPAN
SUPPLY VOLTAGE	$-40^{\circ}\text{C}$ TO $+125^{\circ}\text{C}$	4.5	5.0	10.5	VOLTS
OPERATING TEMP	SEE MAX TEMPERATURE CHART	-40		+150	°C

BLOCK DIAGRAM CURRENT SINKING OR SOURCING OUTPUT



ABSOLUTE MAXIMUM CHARACTERISTICS

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN	MAX	UNITS
SUPPLY VOLTAGE	$V_{cc}$		-0.5	11	V
OUTPUT VOLTAGE	$V_{out}$		-0.5	11	V
OUTPUT CURRENT	$I_{out}$	SOURCE OR SINK		10	mA
TEMPERATURE	$T_A$	OPERATING	-55	150	°C
	$T_s$	STORAGE ( $V_{cc}=0$ )	-55	165	°C

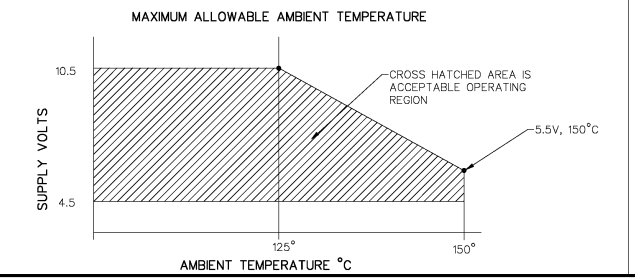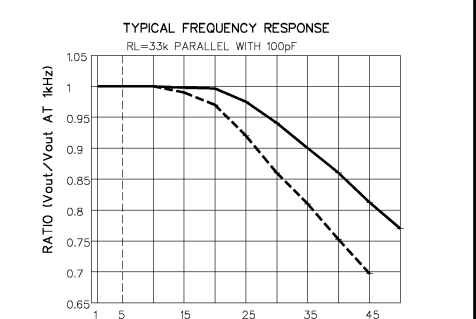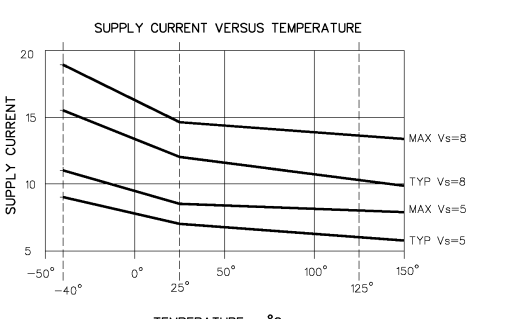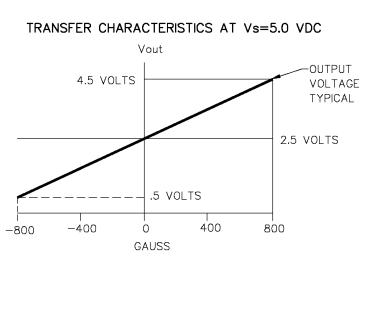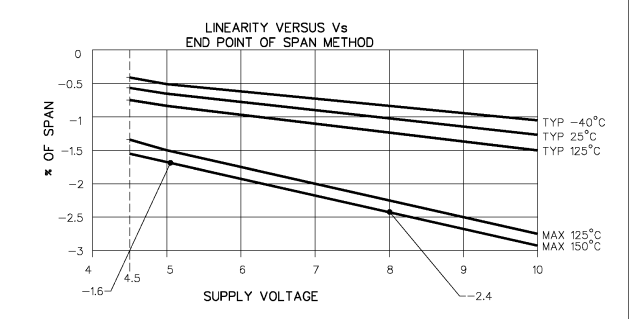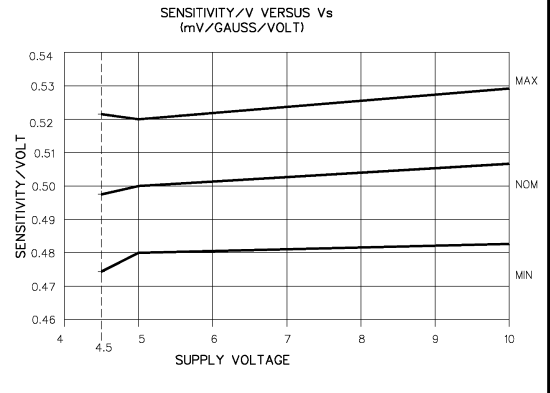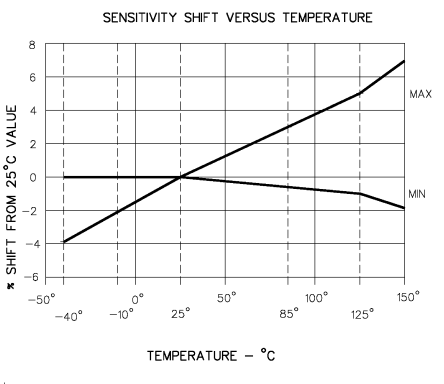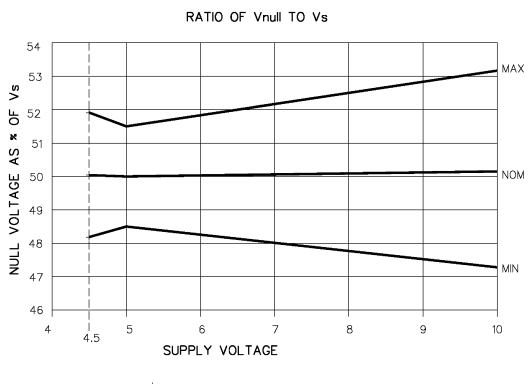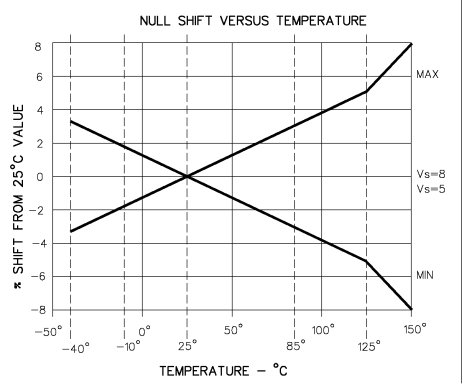

MINIATURE RATIO METRIC LINEAR HALL EFFECT SENSOR  
 SS496 SERIES CHART 1

THIRD ANGLE PROJECTION	
DO NOT SCALE PRINT	
SCALE: NONE	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:	
ONE PLACE	±.030
TWO PLACES	±.015
THREE PLACES	±.005
ANGLES	±2°
WEIGHT	

DRAWING NUMBER: SS496 SERIES CHART 1  
 10 OF 10 PAGES  
 REVISIONS: 1, 2, 3, 4, 5, 6, 7, 8, 9, 10  
 DATE: 12/15/94  
 BY: J.A. WILSON  
 CHECKED: J.A. WILSON  
 APPROVED: J.A. WILSON  
 TITLE: MASTER REDUCED ANSI Y14.5M-1982 APPLIES


CHARACTERISTICS ARE AT  $V_s=5.00$  WITH 4.7K OUTPUT TO MINUS WITH  $T_A = -40^\circ\text{C}$  TO  $+125^\circ\text{C}$  UNLESS OTHERWISE SPECIFIED

SS496A1

SS496 SERIES CHART 1










PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
SENSITIVITY	$T_A = 25^\circ\text{C}$	2.425	2.500	2.575	mV/GAUSS
NULL	$T_A = 25^\circ\text{C}$	2.425	2.50	2.575	VOLTS
SUPPLY CURRENT	$T_A = 25^\circ\text{C}$		7	8.7	mA
OUTPUT CURRENT SOURCE	$V_s > 4.5$	1mA		1.5mA	
SINK	$V_s > 4.5$	.6mA		1.5mA	
SINK	$V_s > 5.0$	1mA		1.5mA	
RESPONSE TIME				3μs	
OUTPUT VOLTAGE SWING					
VOM -	-B APPLIED	.4	.2		VOLTS
VOM +	+B APPLIED	$V_s - .4$	$V_s - .2$		VOLTS
B LIMITS FOR LINEAR OPERATION					
-B MAX		-750	-840		GAUSS
+B MAX		+750	+840		GAUSS
Vnull DRIFT	$B = 0, T_A = 25^\circ\text{ TO } 125^\circ\text{C}$			$\pm .032$	$\% / ^\circ\text{C}$
Vnull DRIFT	$B = 0, T_A = +125^\circ\text{ TO } +150^\circ\text{C}$			$\pm .064$	$\% / ^\circ\text{C}$
SENSITIVITY DRIFT	$T_A = +25^\circ\text{C TO } +125^\circ\text{C}$			$\pm .05$	$\% / ^\circ\text{C}$
SENSITIVITY DRIFT	$T_A = -40^\circ\text{C TO } +25^\circ\text{C}$			$\pm .06$	$\% / ^\circ\text{C}$
SENSITIVITY DRIFT	$T_A = +125^\circ\text{C TO } +150^\circ\text{C}$			$\pm .08$	$\% / ^\circ\text{C}$
LINEARITY	$B = -6.00\text{ TO } +6.00$	0	-1.0	-1.5	$\% \text{ OF SPAN}$
SUPPLY VOLTAGE	$-40^\circ\text{C TO } +125^\circ\text{C}$	4.5	5.0	10.5	VOLTS
OPERATING TEMP	SEE MAX TEMPERATURE CHART	-40		+150	$^\circ\text{C}$

BLOCK DIAGRAM CURRENT SINKING OR SOURCING OUTPUT

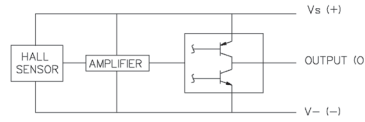

ABSOLUTE MAXIMUM CHARACTERISTICS

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN	MAX	UNITS
SUPPLY VOLTAGE	$V_{cc}$		-0.5	11	V
OUTPUT VOLTAGE	$V_{out}$		-0.5	11	V
OUTPUT CURRENT	$I_{out}$	SOURCE OR SINK		10	mA
TEMPERATURE	$T_A$	OPERATING	-55	150	$^\circ\text{C}$
	$T_s$	STORAGE ( $V_{cc}=0$ )	-55	165	$^\circ\text{C}$

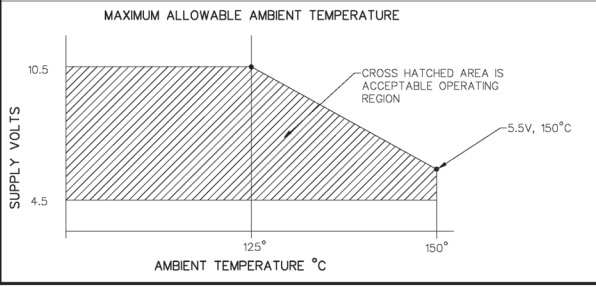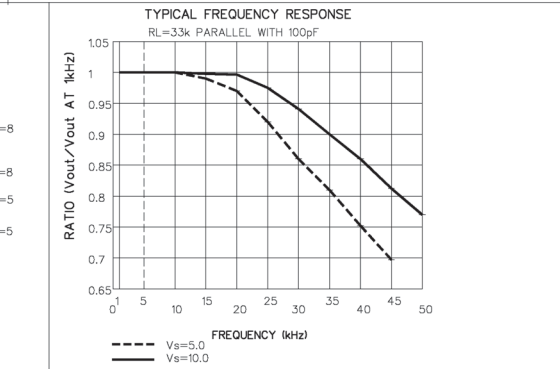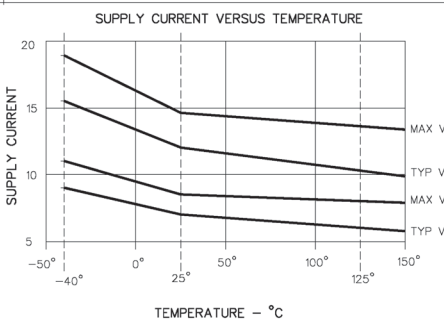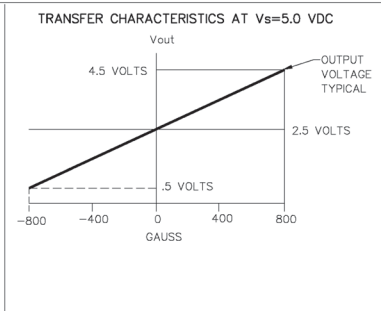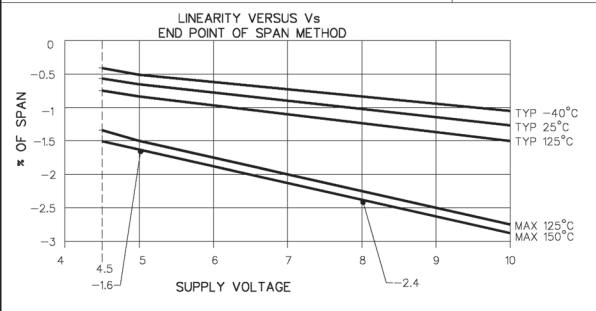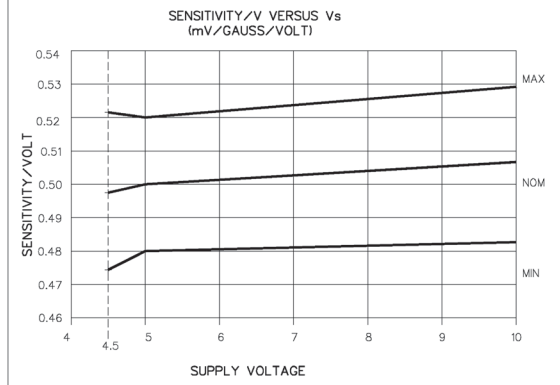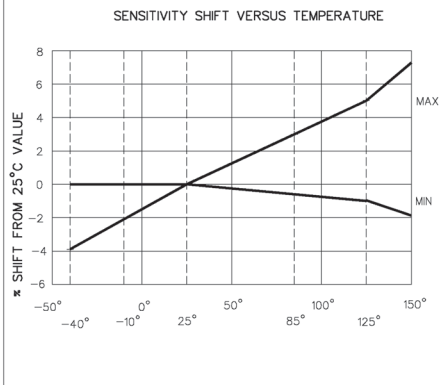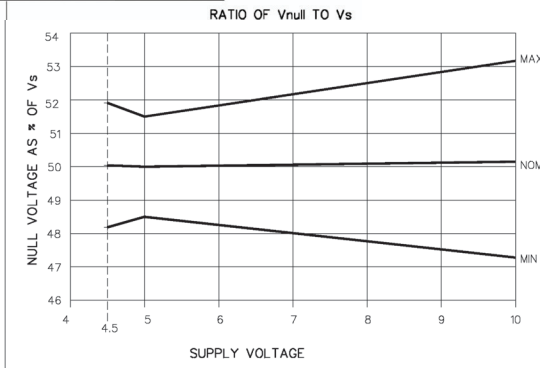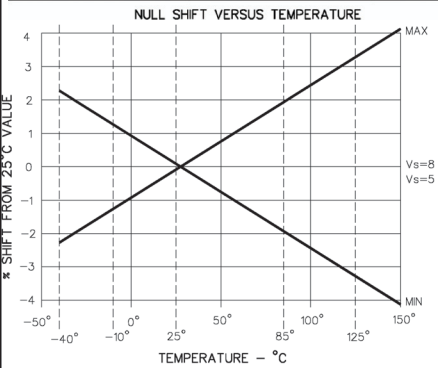

CAUTION: ESD SENSITIVITY: CLASS 3

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH. MICRO SWITCH MINATURE RATIO-METRIC LINEAR HALL EFFECT SENSOR

THIRD ANGLE PROJECTION  
SCALE: NONE  
DO NOT SCALE PRINT  
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:  
ONE PLACE (L0) ±.030  
TWO PLACES (L00) ±.015  
THREE PLACES (L000) ±.005  
ANGLES ±2°  
WEIGHT


REVISION NUMBER: 10 SS496 SERIES CHART 1  
PAGE: 3 OF 3  
REVISED: 10/03/81  
BY: J.A.F. / J.E.S. / P.B. / R.M.  
DATE: 10/03/81  
REVISIONS: 1. ORIGINAL DESIGN  
2. REVISED TO ADD 150°C AMBIENT TEMPERATURE  
3. REVISED TO ADD 5.5V SUPPLY VOLTAGE  
4. REVISED TO ADD 10.5V SUPPLY VOLTAGE  
5. REVISED TO ADD 1.5mA OUTPUT CURRENT  
6. REVISED TO ADD 1.5mA SINK CURRENT  
7. REVISED TO ADD 3μs RESPONSE TIME  
8. REVISED TO ADD 1.5mA SINK CURRENT  
9. REVISED TO ADD 1.5mA SINK CURRENT  
10. REVISED TO ADD 1.5mA SINK CURRENT

CHARACTERISTICS ARE AT  $V_s=5.00$  WITH 4.7K OUTPUT TO MINUS WITH  $T_A = -40^\circ\text{C}$  TO  $+125^\circ\text{C}$  UNLESS OTHERWISE SPECIFIED

SS496B

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
SENSITIVITY	$T_A = 25^\circ\text{C}$	2.300	2.500	2.700	mV/GAUSS
	$T_A = 25^\circ\text{C}$	2.350	2.50	2.650	VOLTS
NULL	$T_A = 25^\circ\text{C}$		7	8.7	mA
SUPPLY CURRENT	$T_A = 25^\circ\text{C}$				
OUTPUT CURRENT SOURCE	$V_s > 4.5$	1mA	1.5mA		
	SINK	$V_s > 4.5$	6mA	1.5mA	
SINK	SINK	$V_s > 4.5$	6mA	1.5mA	
	SINK	$V_s > 5.0$	1mA	1.5mA	
RESPONSE TIME			3 $\mu$ S		
OUTPUT VOLTAGE SWING	-B APPLIED		.4	.2	VOLTS
	+B APPLIED		$V_s - .4$	$V_s - .2$	VOLTS
B LIMITS FOR LINEAR OPERATION	-B MAX	-750	-840		GAUSS
	+B MAX	+750	+840		GAUSS
Vnull DRIFT	$B = 0, T_A = 25^\circ\text{ TO } 125^\circ\text{C}$	-0.64		+0.64	% / °C
Vnull DRIFT	$B = 0, T_A = +125^\circ\text{ TO } +150^\circ\text{C}$	-0.64		+0.64	% / °C
SENSITIVITY DRIFT	$T_A = +25^\circ\text{C TO } +150^\circ\text{C}$	-0.02		+0.08	% / °C
SENSITIVITY DRIFT	$T_A = -40^\circ\text{C TO } +25^\circ\text{C}$	-0.02		+0.08	% / °C
LINEARITY	$B = -600\text{ TO } +600$	0	-1.0	+1.5	% OF SPAN
SUPPLY VOLTAGE	$-40^\circ\text{C TO } +125^\circ\text{C}$	4.5	5.0	10.5	VOLTS
OPERATING TEMP	SEE MAX TEMPERATURE CHART	-40		+150	°C


BLOCK DIAGRAM CURRENT SINKING OR SOURCING OUTPUT




ABSOLUTE MAXIMUM CHARACTERISTICS

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN	MAX	UNITS
SUPPLY VOLTAGE	$V_{cc}$		-0.5	11	V
OUTPUT VOLTAGE	$V_{out}$		-0.5	11	V
OUTPUT CURRENT	$I_{out}$	SOURCE OR SINK		10	mA
TEMPERATURE	$T_A$	OPERATING	-55	150	°C
	$T_s$	STORAGE ( $V_{cc}=0$ )	-55	165	°C


NULL SHIFT VERSUS TEMPERATURE

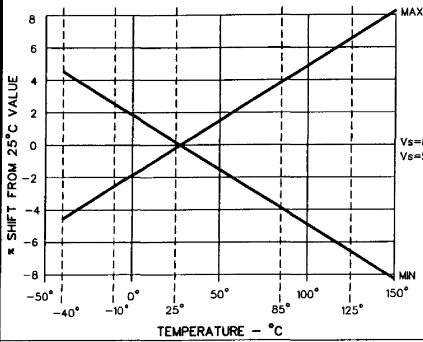


RATIO OF  $V_{null}$  TO  $V_s$

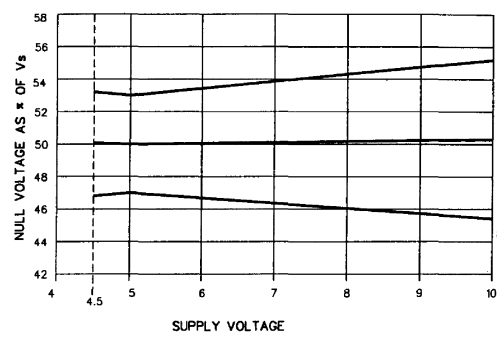


SENSITIVITY SHIFT VERSUS TEMPERATURE

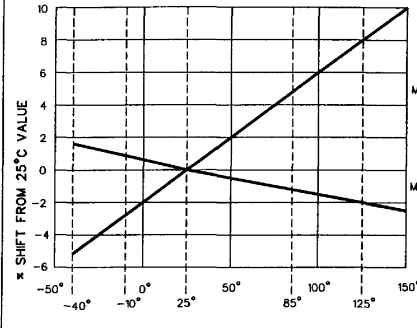


SENSITIVITY/V VERSUS  $V_s$  (mV/GAUSS/VOLTI)

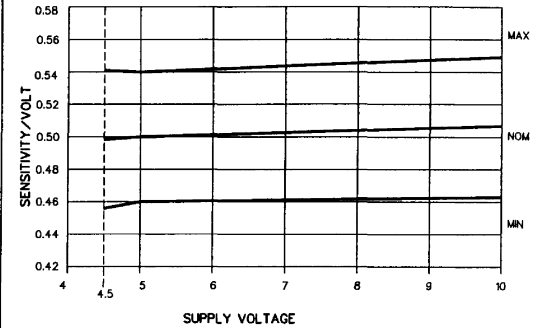


LINEARITY VERSUS  $V_s$  END POINT OF SPAN METHOD

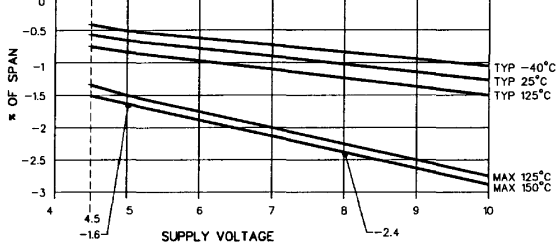


TRANSFER CHARACTERISTICS AT  $V_s=5.0$  VDC

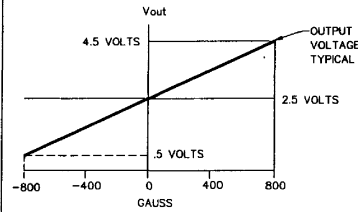


SUPPLY CURRENT VERSUS TEMPERATURE

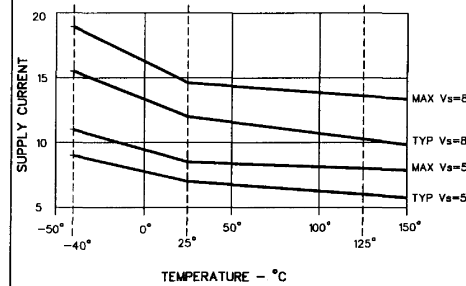

TYPICAL FREQUENCY RESPONSE

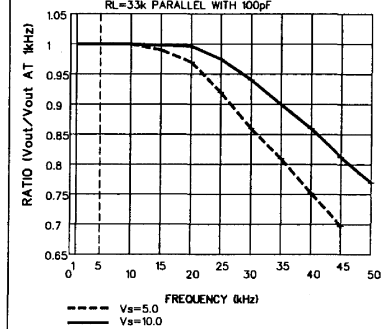

MAXIMUM ALLOWABLE AMBIENT TEMPERATURE

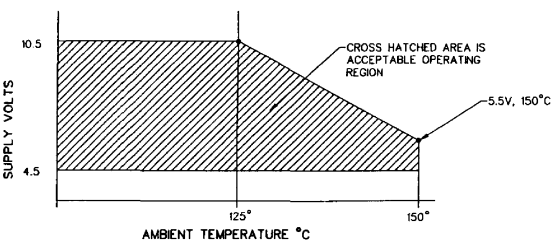

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH  
Honeywell Division

MASTER REDUCED  
ANSI Y14.5M-1982 APPLIES

MINIATURE RATIOMETRIC  
LINEAR HALL EFFECT SENSOR

SS496 SERIES CHART 1

THIRD ANGLE PROJECTION

SCALE	NONE
DO NOT SCALE PRINT	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
ONE PLACE	(0) ±0.030
TWO PLACES	(00) ±0.015
THREE PLACES	(000) ±0.005
ANGLES	±2'
WEIGHT	

MICRO SWITCH  
 SS496 SERIES CHART 1  
 PAGE 1 OF 2  
 REVISIONS: R1, R2, R3, R4, R5, R6, R7, R8, R9, R10, R11, R12, R13, R14, R15, R16, R17, R18, R19, R20, R21, R22, R23, R24, R25, R26, R27, R28, R29, R30, R31, R32, R33, R34, R35, R36, R37, R38, R39, R40, R41, R42, R43, R44, R45, R46, R47, R48, R49, R50, R51, R52, R53, R54, R55, R56, R57, R58, R59, R60, R61, R62, R63, R64, R65, R66, R67, R68, R69, R70, R71, R72, R73, R74, R75, R76, R77, R78, R79, R80, R81, R82, R83, R84, R85, R86, R87, R88, R89, R90, R91, R92, R93, R94, R95, R96, R97, R98, R99, R100

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9