

STELLA-RS

~25° spot beam. Compatible with up to 30 mm LES size COBs. Variant with black frame.

TECHNICAL SPECIFICATIONS:

| | |
|----------------|-----------|
| Dimensions | Ø 90.0 mm |
| Height | 39.2 mm |
| Fastening | screw |
| ROHS compliant | yes ⓘ |


MATERIAL SPECIFICATIONS:

| Component | Type | Material | Colour | Finish |
|--------------|-------------|----------|--------|--------|
| STELLA-RS | Single lens | Silicone | clear | |
| STELLA-FRAME | Holder | PA66 | black | |

ORDERING INFORMATION:

| Component | | Qty in box | MOQ | MPQ | Box weight (kg) |
|--------------------------------|-------------|------------|-----|-----|-----------------|
| FN16258_STELLA-RS | Single lens | 90 | 90 | 15 | 9.8 |
| » Box size: 480 x 280 x 300 mm | | | | | |





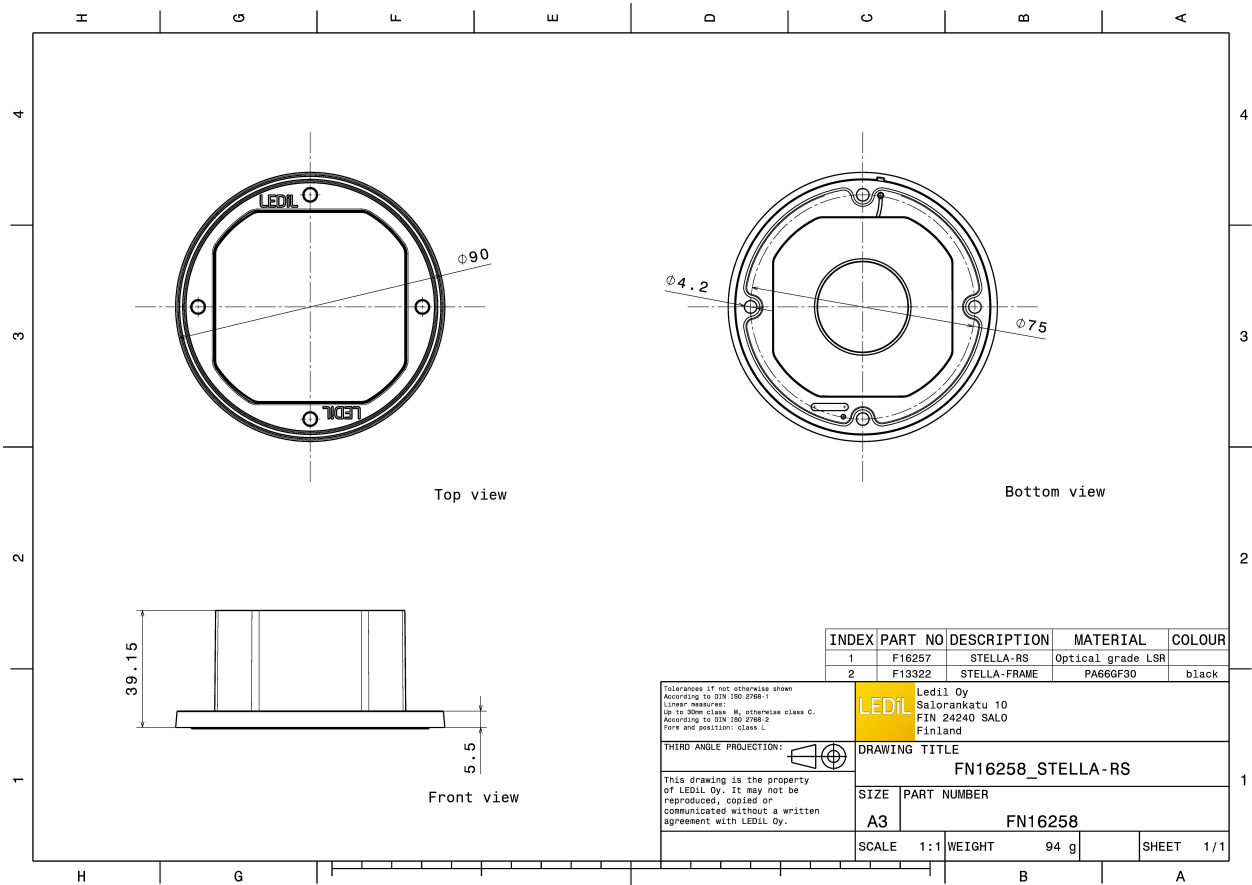



PHOTOMETRIC DATA (MEASURED):





LED V22 Gen7
FWHM 29.0°
Efficiency 94 %
Peak intensity 2.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:

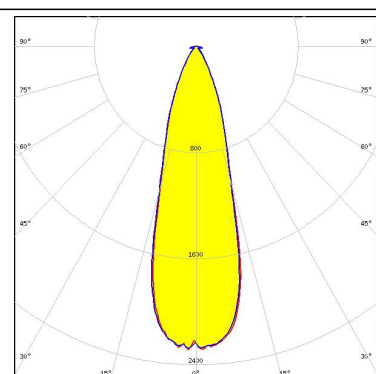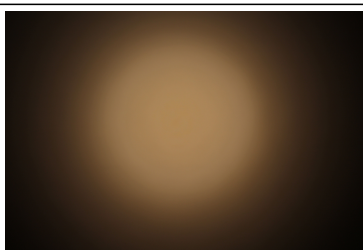



LED V22 Gen7
FWHM 29.0°
Efficiency 94 %
Peak intensity 2.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:
TE: 2213480-1

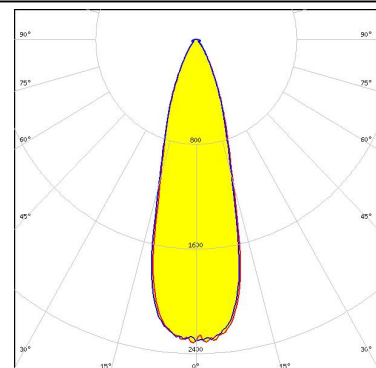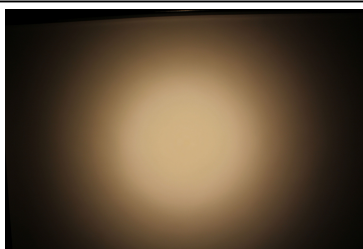

LED V22 Gen7
FWHM 29.0°
Efficiency 94 %
Peak intensity 2.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:
Bender Wirth: 431 Typ Z1

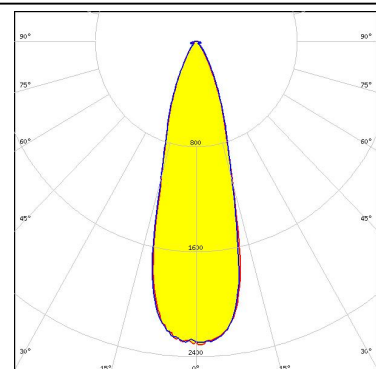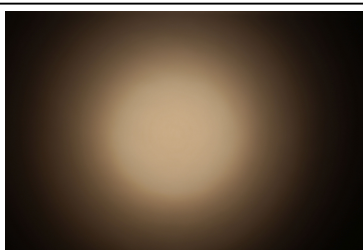



LED VERO13
FWHM 18.0°
Efficiency 94 %
Peak intensity 6.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

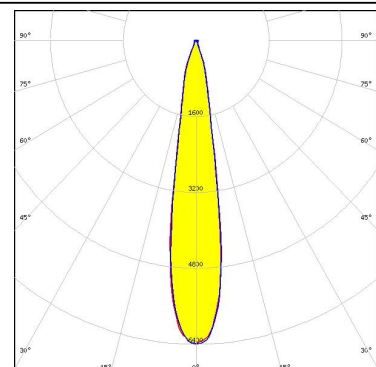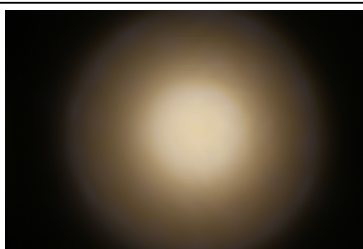



PHOTOMETRIC DATA (MEASURED):



LED VERO18
FWHM 24.0°
Efficiency 94 %
Peak intensity 3.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:

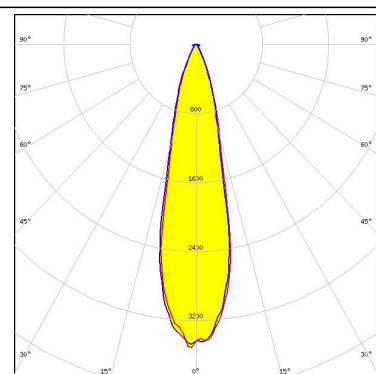
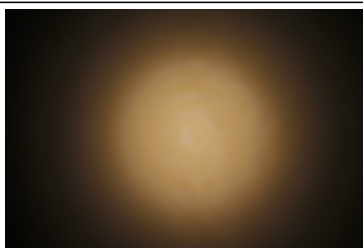


LED VERO29
FWHM 39.0°
Efficiency 94 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:

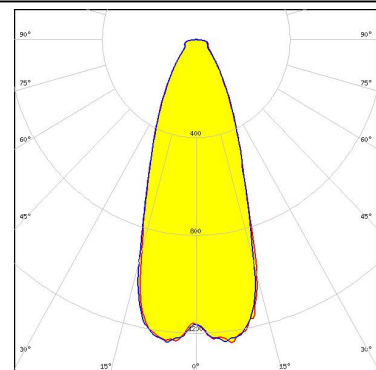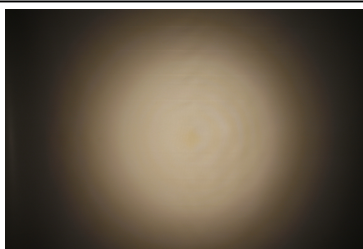


CITIZEN

LED CLL04x/CLU04x
FWHM 29.0°
Efficiency 94 %
Peak intensity 2.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

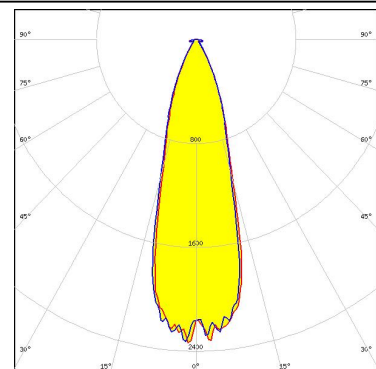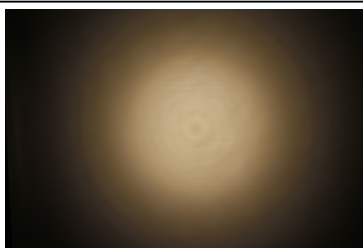



LED CXA/B 1816 & CXA/B 1820 & CXA 1850
FWHM 18.0°
Efficiency 94 %
Peak intensity 6.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:

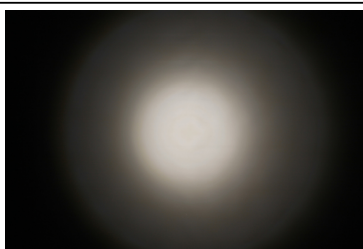



PHOTOMETRIC DATA (MEASURED):





LED CXA/B 30xx
FWHM 31.0°
Efficiency 94 %
Peak intensity 2.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:

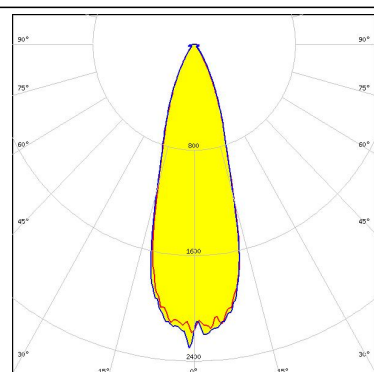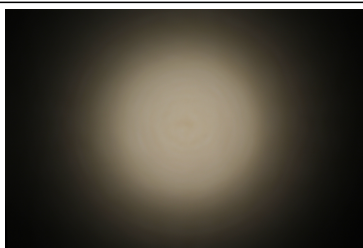


LED LUXEON CoB 1211
FWHM 26.0°
Efficiency 94 %
Peak intensity 3 cd/lm
LEDs/each optic 1
Light colour White
Required components:
Bender Wirth: 431 Typ L3

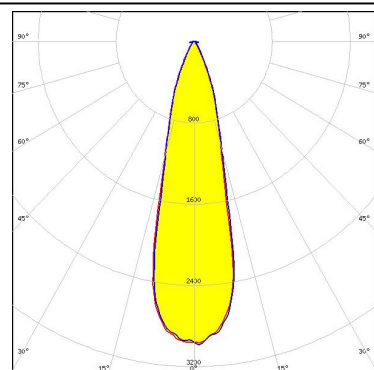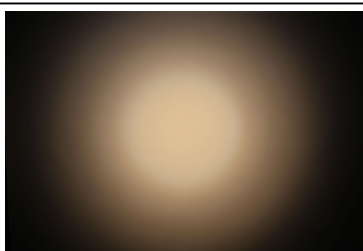

LED COB H-Type
FWHM 30.0°
Efficiency 94 %
Peak intensity 2.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:

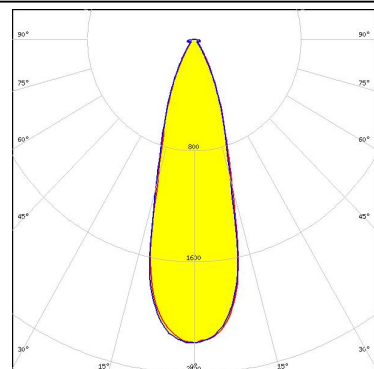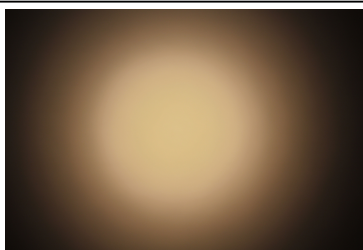



LED COB J-Type
FWHM 20.0°
Efficiency 94 %
Peak intensity 5 cd/lm
LEDs/each optic 1
Light colour White
Required components:

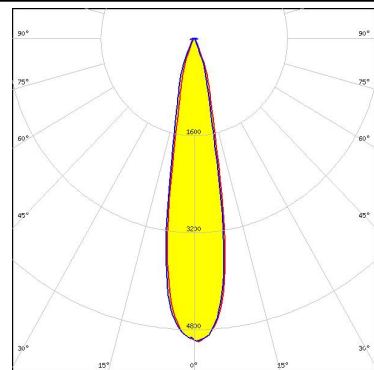

PHOTOMETRIC DATA (MEASURED):

SAMSUNG


LED LC040D / LC060D / LC080D
FWHM 29.0°
Efficiency 93 %
Peak intensity 2.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:

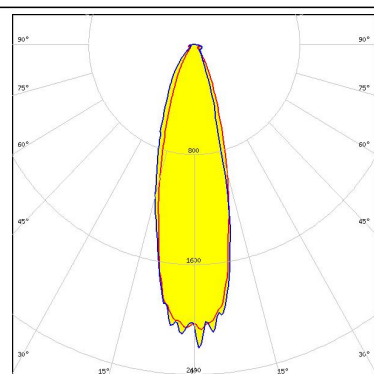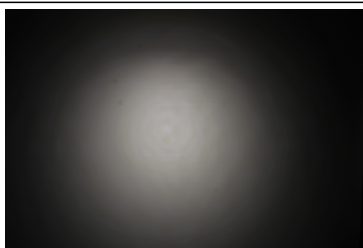


PHOTOMETRIC DATA (SIMULATED):



LED V10 Gen7
FWHM 14.0°
Efficiency 96 %
Peak intensity 9.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:
Bender Wirth: 486 Typ L1

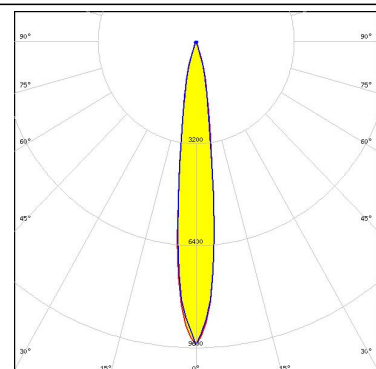

LED VERO10
FWHM 13.0°
Efficiency 94 %
Peak intensity 11.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:

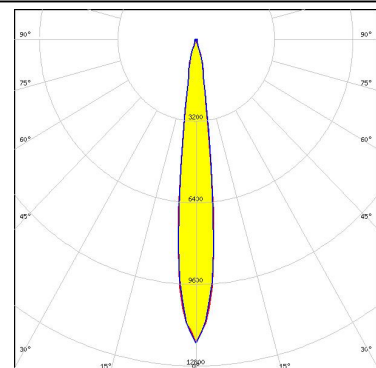


CITIZEN

LED CLL03x/CLU03x
FWHM 18.0°
Efficiency 95 %
Peak intensity 5.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:

CITIZEN


LED CLL05x/CLU05x
FWHM 43.0°
Efficiency 94 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

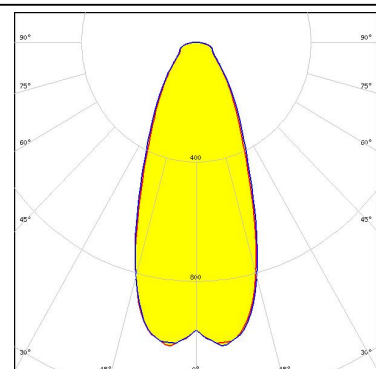


PHOTOMETRIC DATA (SIMULATED):



LED CMA2550
FWHM 27.0°
Efficiency 94 %
Peak intensity 3.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:

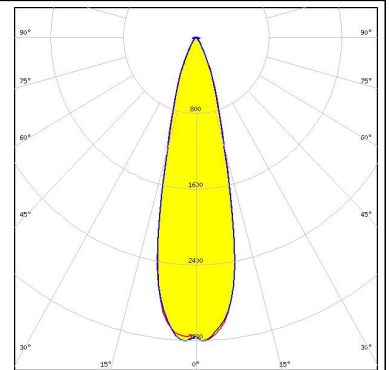

LED CMA3090
FWHM 30.0°
Efficiency 94 %
Peak intensity 2.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

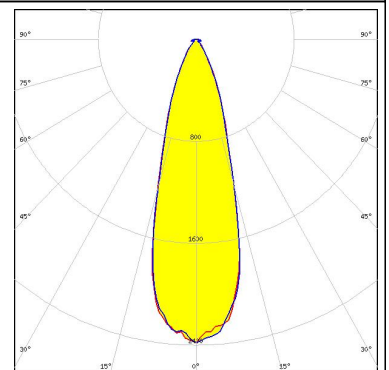

LED CMT19xx
FWHM 20.0°
Efficiency 95 %
Peak intensity 5 cd/lm
LEDs/each optic 1
Light colour White
Required components:




LED CMT28xx
FWHM 30.0°
Efficiency 95 %
Peak intensity 2.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:


PHOTOMETRIC DATA (SIMULATED):




LED CXA/B 25xx
FWHM 25.0°
Efficiency 94 %
Peak intensity 3.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

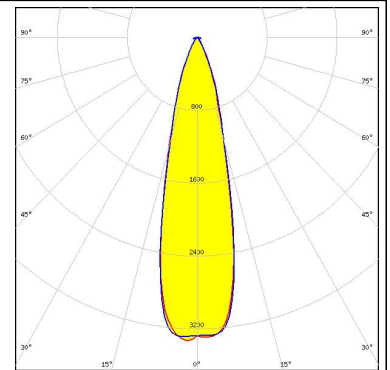


LED LUXEON CoB 1216/1812
FWHM 31.0°
Efficiency 94 %
Peak intensity 2.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

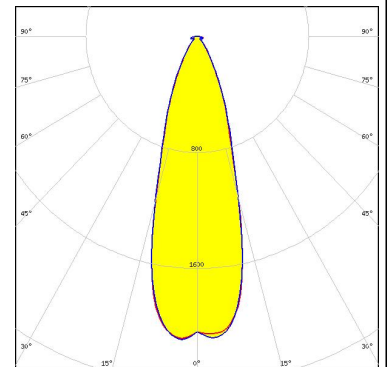

LED LUXEON CoB 1321
FWHM 41.0°
Efficiency 94 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:

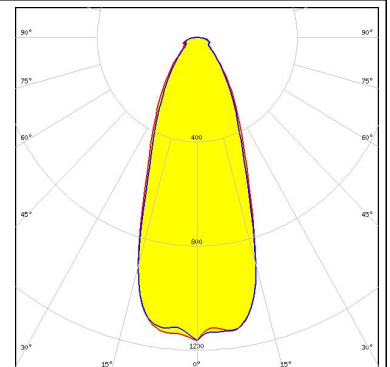

LED LUXEON CoB 1825
FWHM 44.1°
Efficiency 94 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:

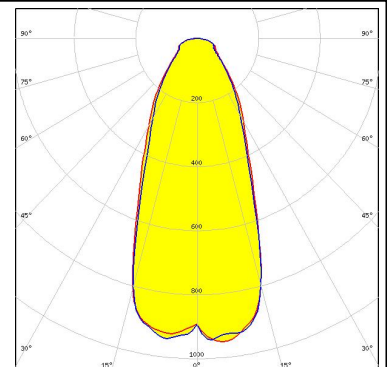

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9