



Eliminate the need for hard wiring systems with the NEW Souriau UTS threaded receptacles

NPT, PG & M threaded receptacle - Threads into existing installation allowing for easy conversion from a hard wired to pluggable solution

NPT, PG & M threaded receptacle



No need to change drilling pattern when using the UTS threaded receptacle as your connector solution!

UL 1977 qualified



Easy qualification of your System by regulation authorities

Fire & smoke: UL94-VO



Suitable for public environment

IP68/69K + UV resistant



Suitable for outdoor use

Hexagonal shape



Easy to fasten to a box with standard wrench



UTS Series

UTS range overview

The UTS series offers a range of plastic connectors rugged enough to withstand industrial applications.

The bayonet coupling system makes it simple to use. With only a 1/3 twist of the coupling ring, connectors are mated with an audible and sensitive "click".



UTS series is available with a diverse range of options.....

Everything from power & signal connectors, box mounted receptacles, cable mounted plugs, cable mounted in-line and PCB mounted receptacles.

A full range of wire termination options include: Crimp, Solder and Screw.



Screw termination version

The philosophy of the UTS series is built around three key elements:

Dynamic IP68/69K



UTS series is rated at IP68/69K... even in dynamic conditions. This means that it remains sealed even when used continuously underwater or cleaned using a high pressure hose and cable is moving.

This extreme level of performance is achievable with jacketed cable or discrete wires.

If this same level of performance is required when connectors are not mated, we offer the UTS Hi Seal; a product designed to remain watertight if an environmental cap is not fitted or if the equipment is likely to get wet when cables have been disconnected.

UV Resistant



In most applications, our connectors are exposed to extreme climatic conditions; it was therefore key for us to select the materials best able to cope with the targeted environment.

Part of our product qualification process involved subjecting connectors to a simulated five years of exposure to various elements including Temperature, UV and Humidity.

The results were positive in that there were no visible signs of weakness, such as cracking.

UL/IEC Compliant








The utmost priority for any electrical installation is to protect personnel from any shock hazard.

In North America, Underwriters Laboratories requires connector manufacturers to respect their standards based on application use.

In Europe and in Asia, IEC standards are better known and trusted by end users. Like its American equivalent, the IEC refers to safety rules. The UTS series was obviously designed to respect these rules.

UTS Series

Layout

Shell size	Contact size
10	 106 - 10E6 6 x #20 (Ø 1.0) - M16x1.5
	 10E7 7 x #20 (Ø 1.0) - M16x1.5
14	 142G1 3 x #8 (Ø 3.6) - NPT 1/2
18	 183G1 4 x #8 (Ø 3.6) - NPT 3/4"
	 18X2M3 2 x #8 (Ø 3.6) + 3 x #16 (Ø 1.6)- NPT 3/4"

Contact identification positions shown are for mating face of pin contact connectors and wire face of socket contact connectors.

UTS Series

142G1



Specifications

Contact type	Connector type	Backshell	Part number	
			Male insert	Female insert
Crimp contacts supplied separately see page 7	Free hanging receptacle	Cable gland (Fig. 1)	UTS1JC142G1P	UTS1JC142G1S ✓
	Plug	Without (Fig.3)	UTS6142G1P	UTS6142G1S ✓
		Cable gland (Fig.4)	UTS6JC142G1P ✓	UTS6JC142G1S ✓
	Jam nut receptacle	Without (Fig.2)	UTS7142G1P ✓	UTS7142G1S ✓
	NPT threaded receptacle	Without (Fig.5)		new UTS7142G1SNPT ✓







48h sample service ✓

UTS Series

142G1

Dimensions

2 + ground
44A/600V
per UL 1977

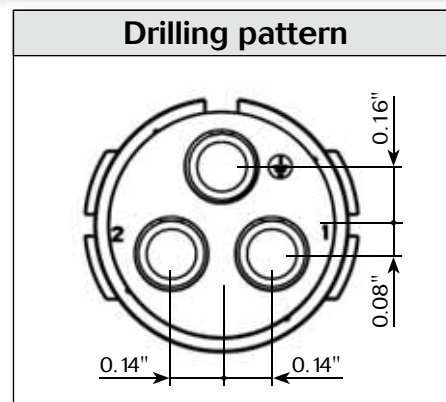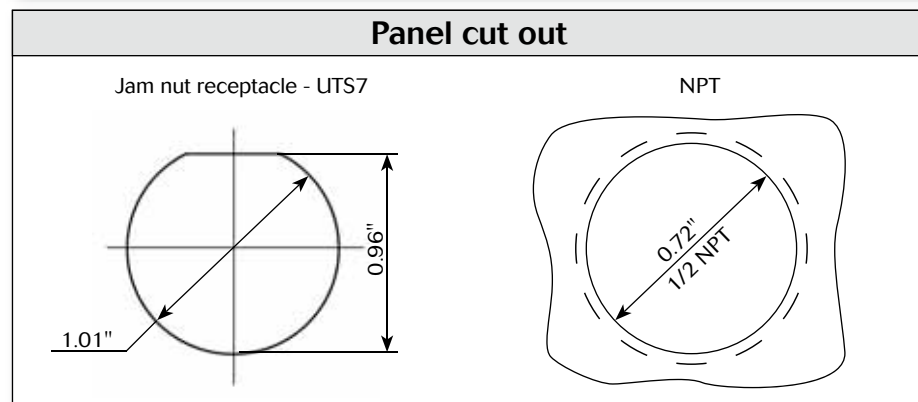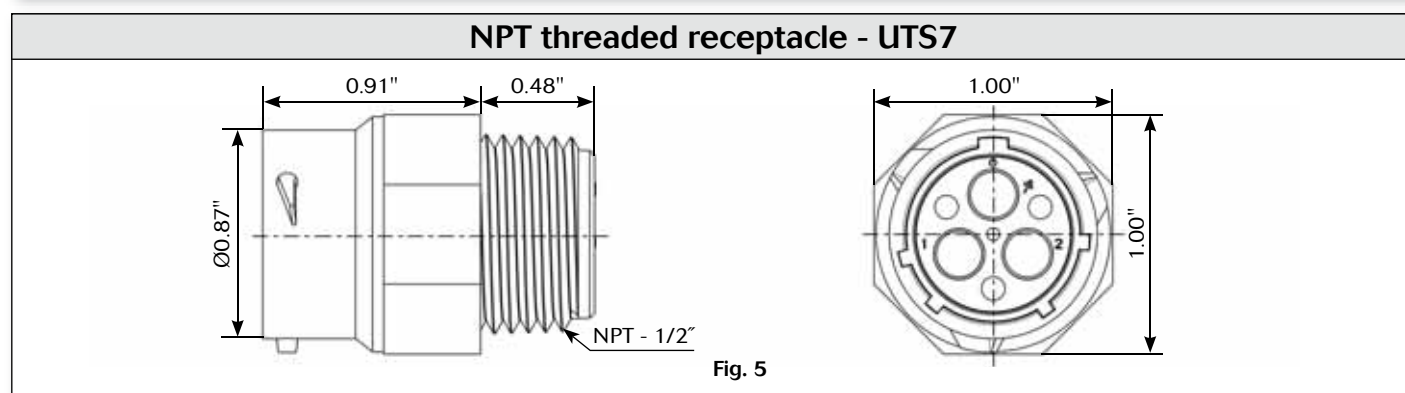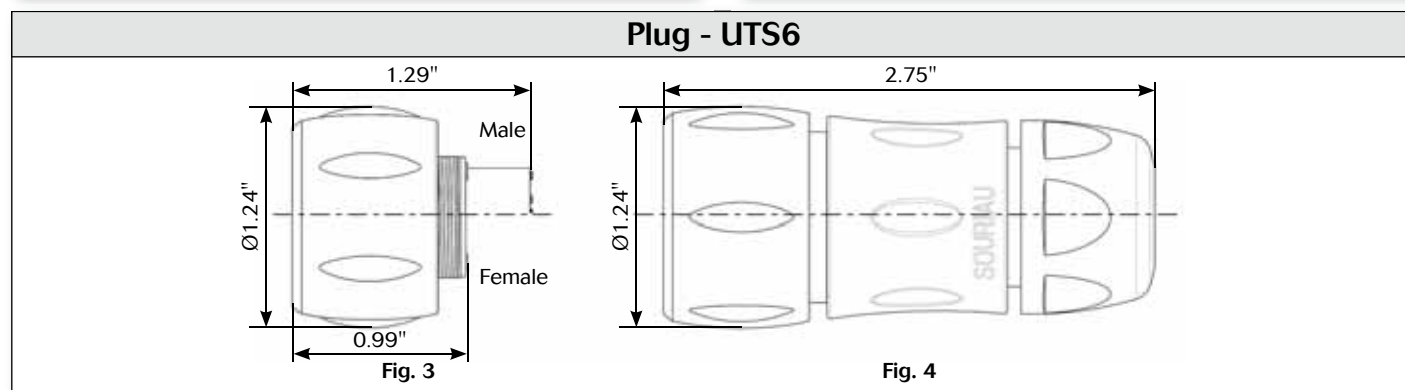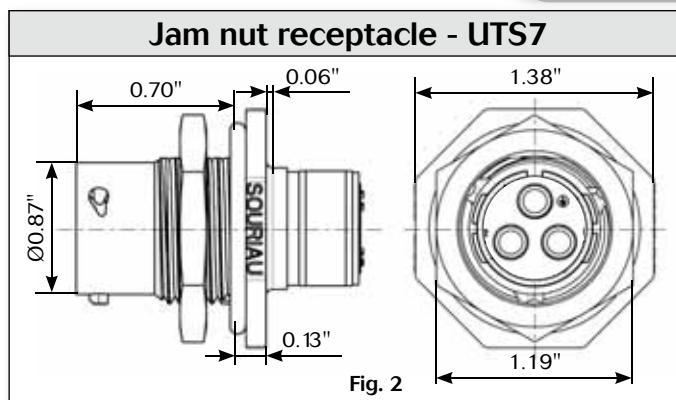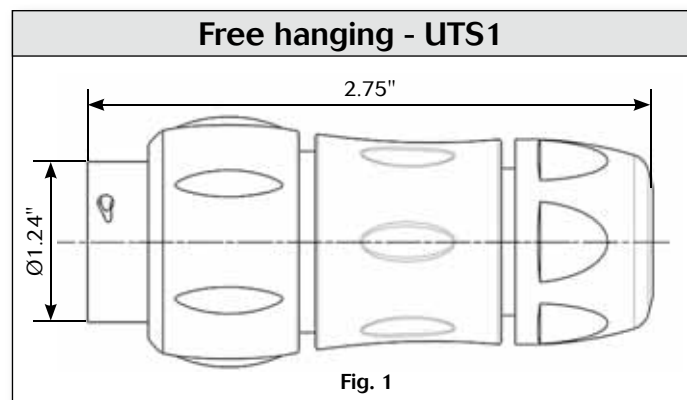

Note: All dimensions in inches unless otherwise noted.

UTS Series

142G1

Accessories and tooling

Jam nut sealing caps



Part number
UTS14DCG



Metal terminal

Part number
UTS14DCGR

Hand tool



Part number
M317

Plug sealing cap



Part number
UTS614DCG

Positioner + locator setting



Part number
VGE10078A

Plastic protective cap



Part numbers	
Receptacle cap	Plug cap
85005588A	85005597

Extraction tool



Part number
51060210936

Color coding rings

G for Green



Y for Yellow



R for Red



Part numbers	
Receptacles	Plugs
UTS714CCRR	UTS614CCRR
UTS714CCRY	UTS614CCRY
UTS714CCRG	UTS614CCRG

* Add G for Green, Y for Yellow, R for Red

UTS Series

142G1

Contacts

2 + ground
44A/600V
per UL 1977

#8	Contact type	AWG	Part number		Max wire Ø (inch)	Max insulator Ø (inch)
			Male	Female		
Crimp	Machined	16	82913601A ⁽¹⁾ ✓	82913600A ⁽¹⁾ ✓	-	0.25"
		14	82913603A ⁽¹⁾ ✓	82913602A ⁽¹⁾ ✓	-	
		12	82913605A ⁽¹⁾ ✓	82913604A ⁽¹⁾ ✓	-	
		10	82913607A ⁽¹⁾ ✓	82913606A ⁽¹⁾ ✓	-	
		8	82913609A ⁽¹⁾ ✓	82913608A ⁽¹⁾ ✓	-	

(1): Example of plating, for other plating see page 26

48h sample service ✓


Electrical characteristics

UL
44A 600V UL94 V-0

CSA
30A 600V UL94 V-0

IEC
40A 300V 4kV 3

UTS 142G1 derating curves

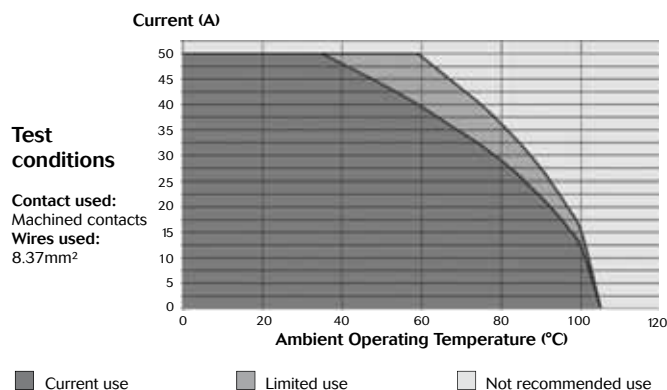

UTS Series

183G1



Specifications

Contact type	Connector type	Backshell	Part number	
			Male insert	Female insert
Crimp contacts supplied separately see page 11	NPT threaded receptacle	Without (Fig.1)	UTS7183G1PNPT	UTS7183G1SNPT
	Plug	Without (Fig.2)	UTS6183G1P	UTS6183G1S
	Plug	Cable gland (Fig.3)	UTS6JC183G1P	UTS6JC183G1S

48h sample service

UTS Series

183G1

Dimensions

3 + ground
44A/600V
per UL 1977

NPT threaded receptacle - UTS7

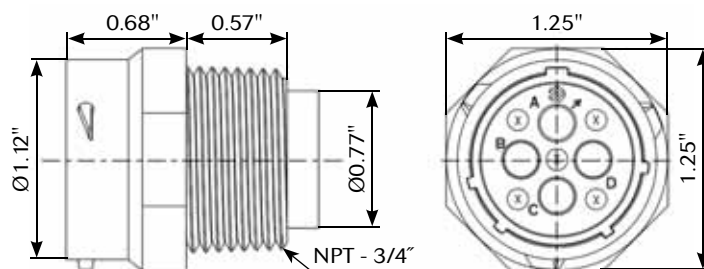


Fig. 1

Plug - UTS6




Fig. 2



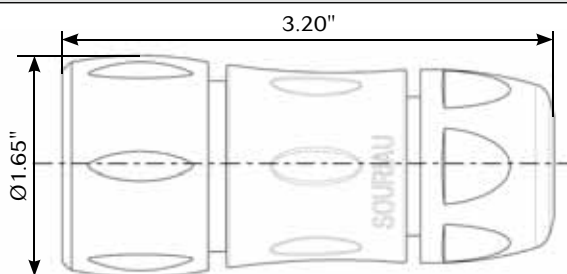


Fig. 3


Mated connector length - UTS6JC

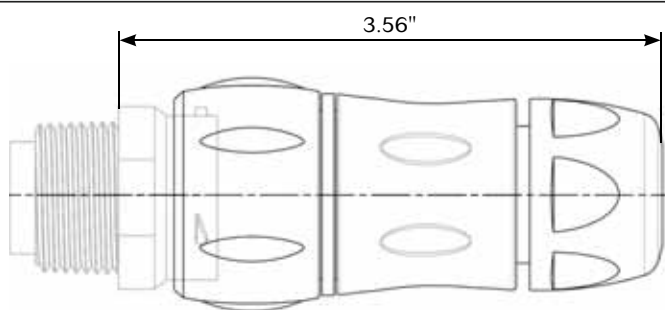

Panel cut



Drilling pattern



Note: All dimensions in inches unless otherwise noted.

UTS Series

183G1

Accessories and tooling

Jam nut sealing caps



Part number

UTS18DCG



Metal terminal

Part number

UTS18DCGR

Hand tool



Part number

M317

Plug sealing cap



Part number

UTS618DCG

Positioner + locator setting



Part number

VGE10078A

Plastic protective cap



Part numbers

Receptacle
cap

85005590A

Plug cap

85005599

Extraction tool



Part number

51060210936

Color coding rings

G for Green



Y for
Yellow



R for Red



Part numbers

Receptacles

UTS714CCRR

UTS714CCRY

UTS714CCRG

Plugs

UTS614CCRR

UTS614CCRY

UTS614CCRG

* Add G for Green, Y for Yellow, R for Red

UTS Series

183G1

Contacts

3 + ground
44A/600V
per UL 1977

#8	Contact type	AWG	Part number		Max wire Ø (inch)	Max insulator Ø (inch)
			Male	Female		
Crimp	Machined	16	82913601A ⁽¹⁾ Ⓢ	82913600A ⁽¹⁾ Ⓢ	-	0.25"
		14	82913603A ⁽¹⁾ Ⓢ	82913602A ⁽¹⁾ Ⓢ	-	
		12	82913605A ⁽¹⁾ Ⓢ	82913604A ⁽¹⁾ Ⓢ	-	
		10	82913607A ⁽¹⁾ Ⓢ	82913606A ⁽¹⁾ Ⓢ	-	
		8	82913609A ⁽¹⁾ Ⓢ	82913608A ⁽¹⁾ Ⓢ	-	

(1): Example of plating, for other plating see page 26

48h sample service Ⓢ


Electrical characteristics

UL
44A 600V UL94 V-0

CSA
26A 600V UL94 V-0


IEC
32A 300V 4kV 3

UTS 183G1 derating curves

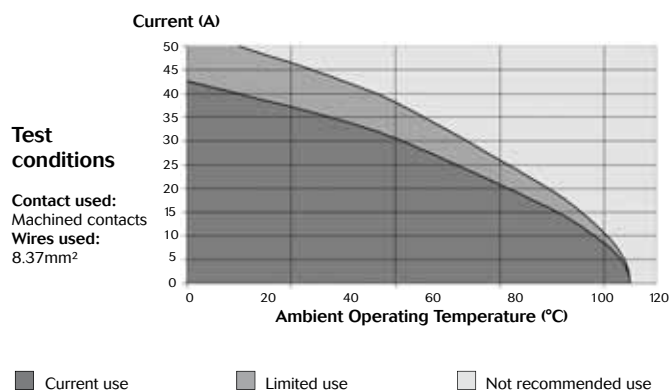

UTS Series

106 - 10E6

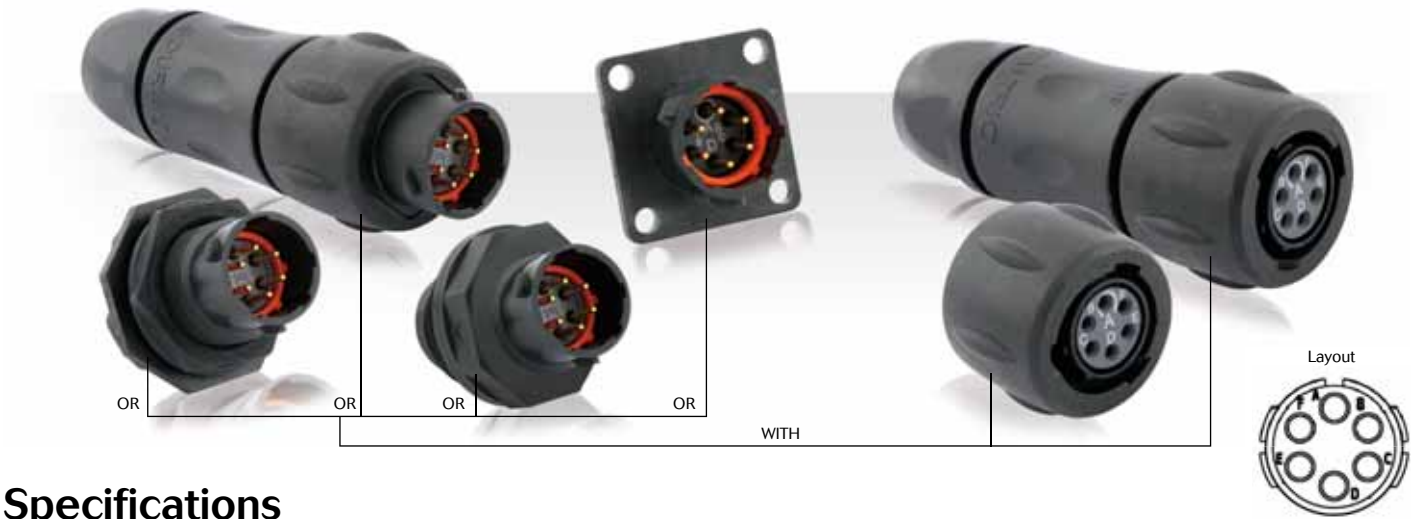

Specifications

Contact type	Connector type	Backshell	Part number	
			Male insert	Female insert
Crimp contacts supplied separately see page 15	Free hanging receptacle	Cable gland (Fig. 1)	UTS1JC106P	UTS1JC106S
	Plug	Without (Fig.2)	UTS6106P	UTS6106S
	Plug	Cable gland (Fig.3)	UTS6JC106P	UTS6JC106S
	Jam nut receptacle	Without (Fig.4)	UTS7106P	UTS7106S
Hand solder electrical contacts loaded	Square flange receptacle	Without (Fig.6)	UTS010E6P	UTS010E6S
	Plug	Without (Fig.2)	UTS610E6P	UTS610E6S
		Cable gland (Fig.3)	UTS6JC10E6P	UTS6JC10E6S
	Jam nut receptacle	Without (Fig.5)	UTS710E6P	UTS710E6S
PCB contacts supplied separately see page 15	Jam nut receptacle	Without (Fig.4)	UTS7106P	UTS7106S
Hand solder electrical contacts loaded	NPT threaded receptacle	Without (Fig.7)	 UTS710E6PM16	 UTS710E6SM16









Sealed unmated

UTS Series

106 - 10E6

Dimensions

6 contacts
6A/250V
per UL 1977

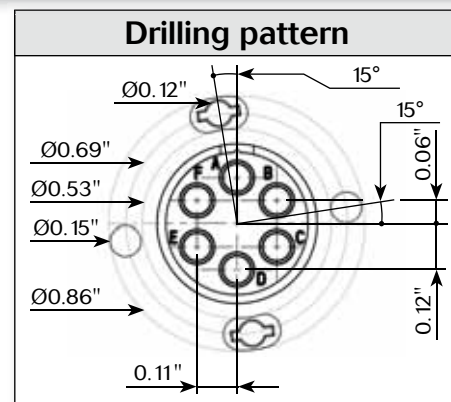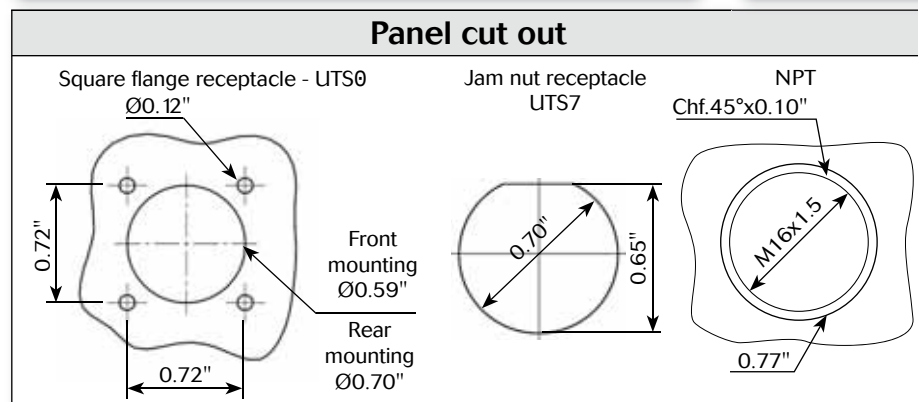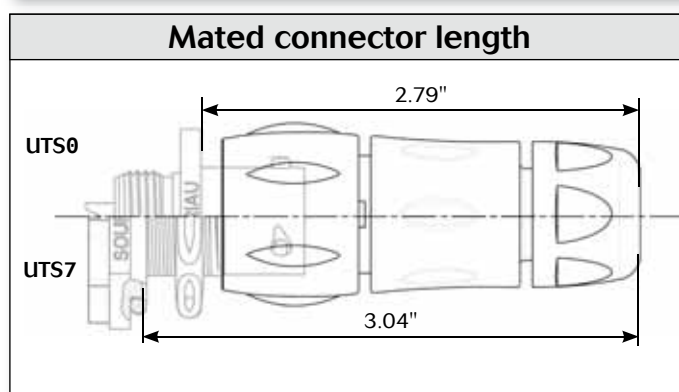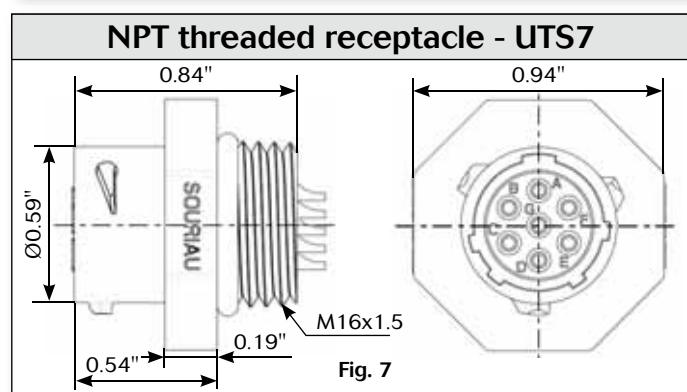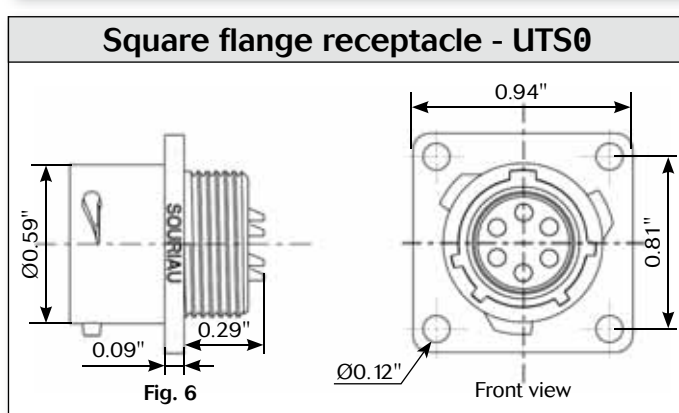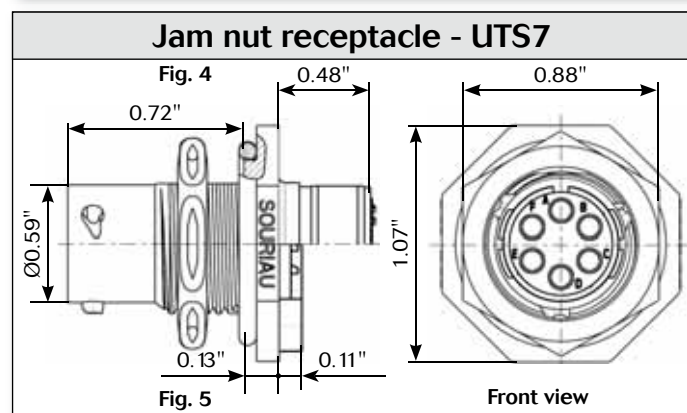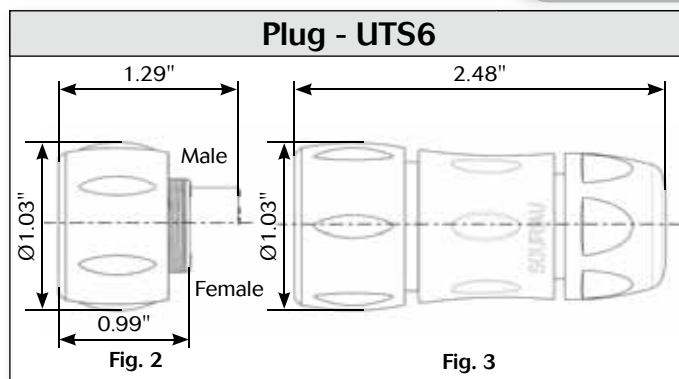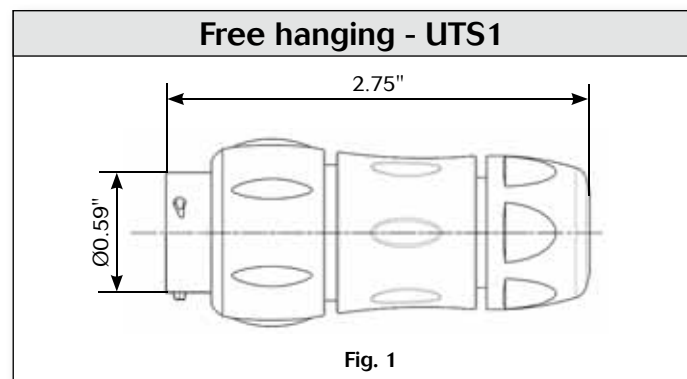

Note: All dimensions in inches unless otherwise noted.

UTS Series

106 - 10E6

Accessories and tooling

Jam nut sealing caps



Part number
UTS10DCG



Metal terminal

Part number
UTS10DCGR

Handle



Part number
SHANDLES

Tool kit



Part number
TOOLKIT

Plug sealing cap



Part number
UTS610DCG

Square flange sealing cap



Metal terminal

Part number
UTS10DCGE

Plastic protective cap



Part numbers	
Receptacle cap	Plug cap
85005586A	85005595

Gasket



Part numbers / neoprene
UTFD12B

Crimp tooling



Contacts	Contact size	Part number of head
RM/RC 24W3K ⁽¹⁾	Standard contacts #20 Ø0.03"	S20RM
RM/RC 20W3K ⁽¹⁾		S20RM
RM/RC 18W3K ⁽¹⁾		S20RM
SM/SC 24W3S ⁽²⁾		S20SCM20
SM/SC 24WL3S ⁽³⁾		S20SCM20
SM/SC 20W3S ⁽²⁾		S20SCM20
SM/SC 20WL3S ⁽³⁾		S20SCM20

(1): Example of plating, for other plating see page 26
(2): contact reeled
(3): loose contact

Color coding rings

G for Green

Y for Yellow

R for Red



Part numbers	
Receptacles	Plugs
UTS710CCRR	UTS610CCRR
UTS710CCRY	UTS610CCRY
UTS710CCRG	UTS610CCRG

* Add G for Green, Y for Yellow, R for Red

UTS Series

106 - 10E6

Contacts

6 contacts
6A/250V
per UL 1977

#20	Contact type	AWG	Part number		Max wire Ø (inch)	Max insulator Ø (inch)
			Male	Female		
Crimp	Machined	26-24	RM24W3K ⁽¹⁾ Ⓢ	RC24W3K ⁽¹⁾ Ⓢ	-	0.06"
		22-20	RM20W3K ⁽¹⁾ Ⓢ	RC20W3K ⁽¹⁾ Ⓢ	-	0.06"
		20-18	RM18W3K ⁽¹⁾ Ⓢ	RC18W3K ⁽¹⁾ Ⓢ	-	0.08"
	stamped & formed reeled contacts	26-24	SM24WL3TK6 ⁽²⁾	SC24WL3TK6 ⁽²⁾	-	0.03"-0.06"
		26-24	SM24WL3TK6 ⁽²⁾	SC24WL3TK6 ⁽²⁾	-	0.03"-0.06"
		22-20	SM20WL3TK6 ⁽²⁾	SC20WL3TK6 ⁽²⁾	-	0.04"-0.08"
		22-20	SM20WL3TK6 ⁽²⁾	SC20WL3TK6 ⁽²⁾	-	0.04"-0.08"
	PCB	Machined	-	RMW5016K Ⓢ	RCW5016K Ⓢ	-

(1): Example of plating, for other plating see page 26


(2): To obtain contact reeled remove L in part number. Example: SM20M1TK6

48h sample service Ⓢ

Electrical characteristics

UTS 106	UTS 10E6
UL	UL
5A 250V UL94 V-0	6A 250V UL94 HB
CSA	CSA
4A 250V UL94 V-0	6A 250V UL94 HB
IEC	
7A 32V 1.5kV 3	

UTS 106 - 10E6 derating curves

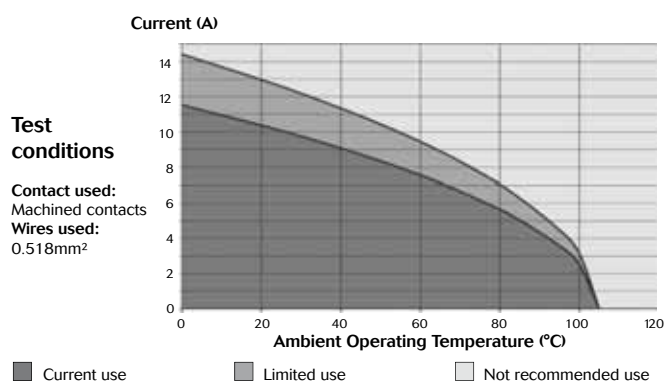

UTS Series

10E7



Specifications

Contact type	Connector type	Backshell	Part number	
			Male insert	Female insert
Hand solder electrical contacts loaded	Square flange receptacle	Without (Fig.1)	UTS010E7P	UTS010E7S
	Plug	Without (Fig.2)	UTS610E7P	UTS610E7S
		Cable gland (Fig.3)	UTS6JC10E7P	UTS6JC10E7S
	Jam nut receptacle	Without (Fig.4)	UTS710E7P	UTS710E7S
	NPT threaded receptacle	Without (Fig.5)	 UTS710E7PM16	 UTS710E7SM16








Sealed unmated

UTS Series

10E7

Dimensions

7 contacts
6A/250V
per UL 1977

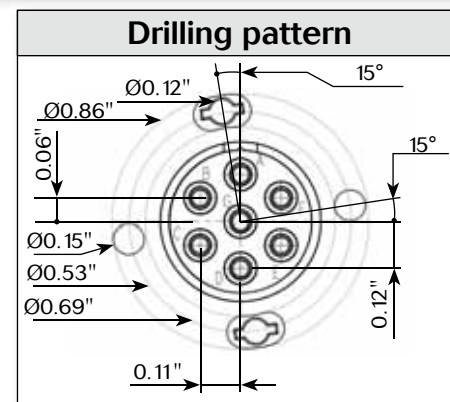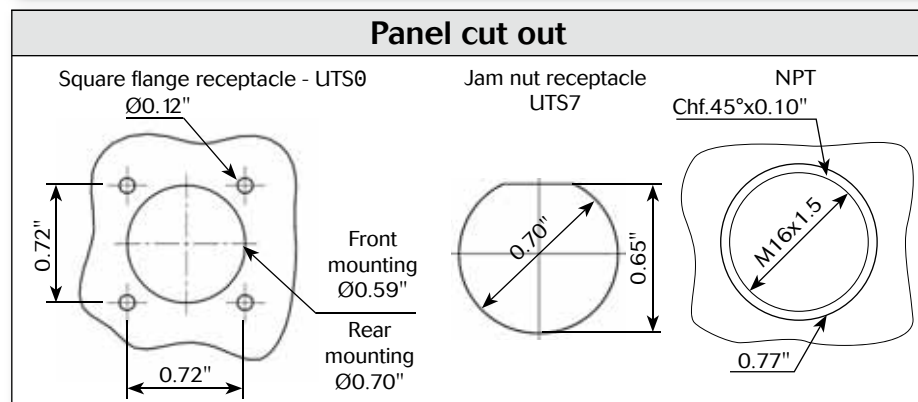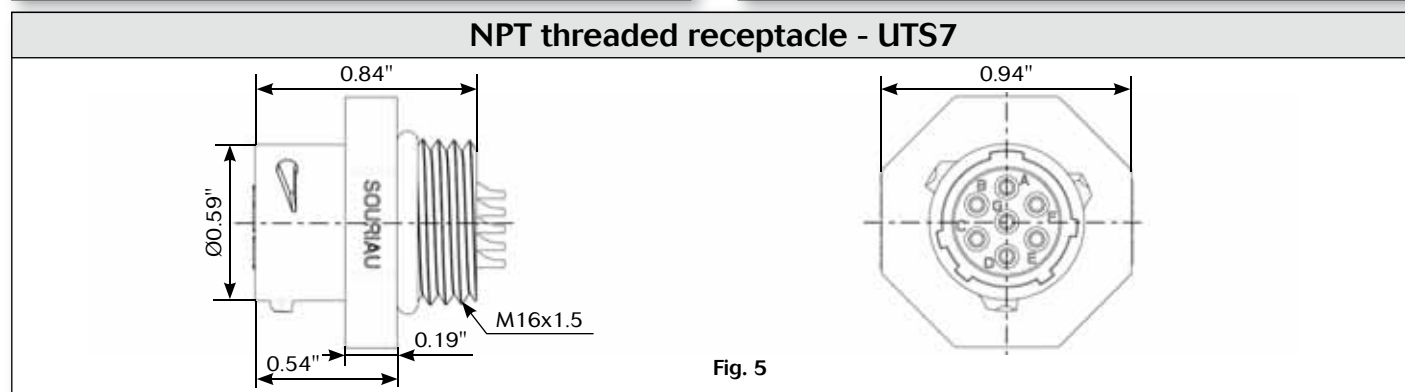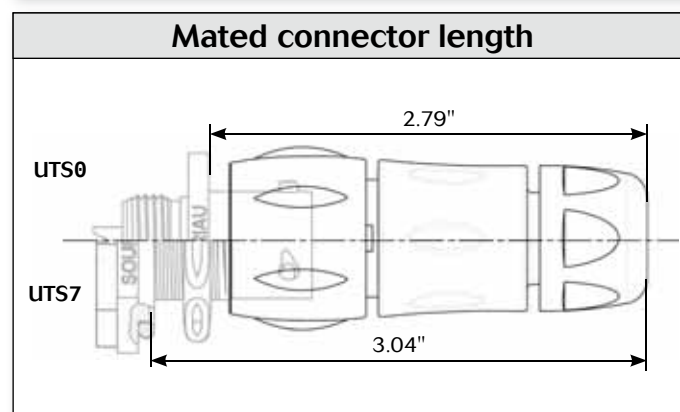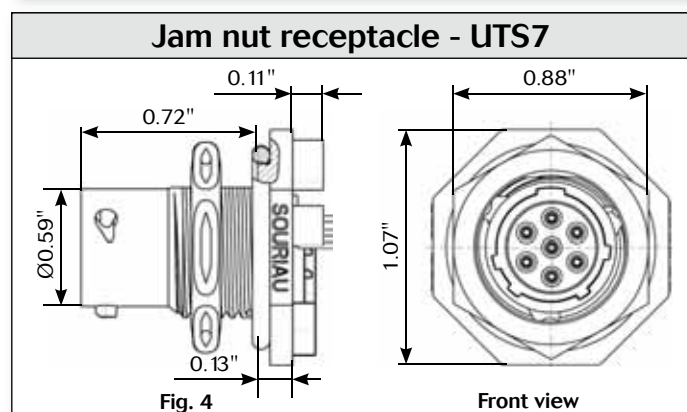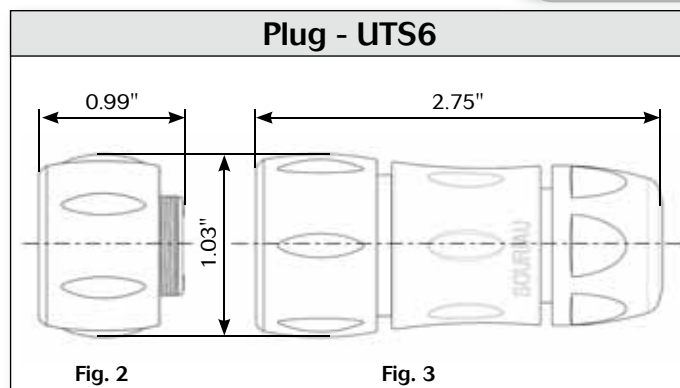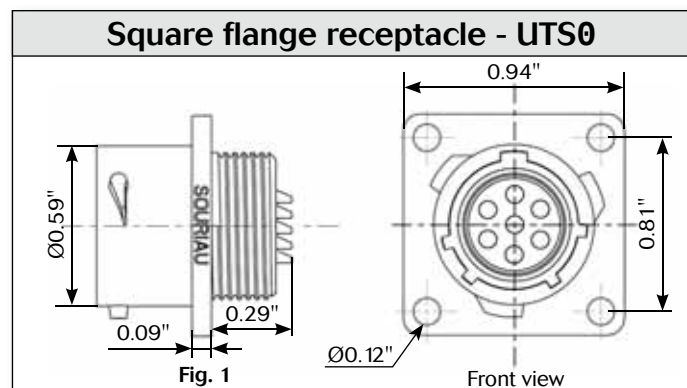

Note: All dimensions in inches unless otherwise noted.

UTS Series

10E7

Accessories and tooling

Jam nut sealing caps



Part number
UTS10DCG

Part number
UTS10DCGR

Plug sealing cap



Part number
UTS610DCG

Square flange sealing cap



Metal terminal

Part number
UTS10DCGE

Plastic protective cap



Part numbers	
Receptacle cap	Plug cap
85005586A	85005595

Gasket



Part numbers / neoprene
UTFD12B

Color coding rings

G for Green

Y for Yellow

R for Red



Part numbers	
Receptacles	Plugs
UTS710CCRR	UTS610CCRR
UTS710CCRY	UTS610CCRY
UTS710CCRG	UTS610CCRG

* Add G for Green, Y for Yellow, R for Red

UTS Series

10E7

7 contacts
6A/250V
per UL 1977


Electrical characteristics

UL
6A 250V UL94 HB

CSA
6A 250V UL94 HB

IEC
7A 50V 1.5kV 3

UTS 10E7 derating curves

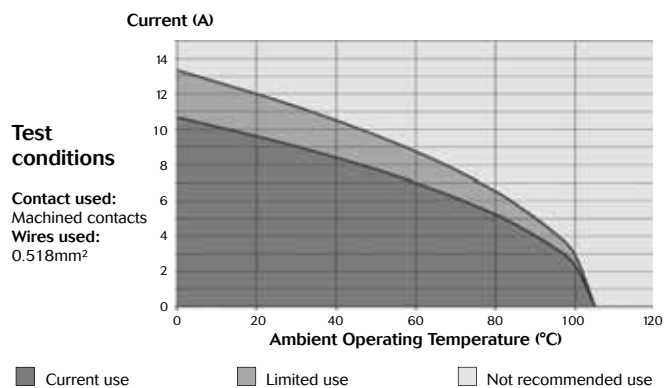

UTS Series

18X2M3



Specifications

Contact type	Connector type	Backshell	Part number	
			Male insert	Female insert
Crimp contacts supplied separately see page 23	NPT threaded receptacle	Without (Fig.1)	UTS718X2M3PNPT	UTS718X2M3SNPT
	Plug	Without (Fig.2)	UTS618X2M3P	UTS618X2M3S
	Plug	Cable gland (Fig.3)	UTS6JC18X2M3P	UTS6JC18X2M3S

48h sample service

UTS Series

18X2M3

Dimensions

5 contacts
44A/600V
per UL 1977

NPT threaded receptacle - UTS7

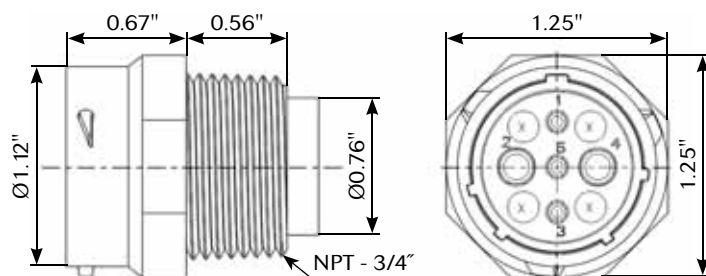


Fig. 1

Plug - UTS6

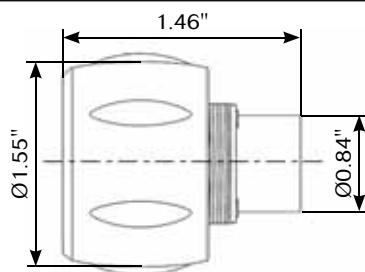


Fig. 2



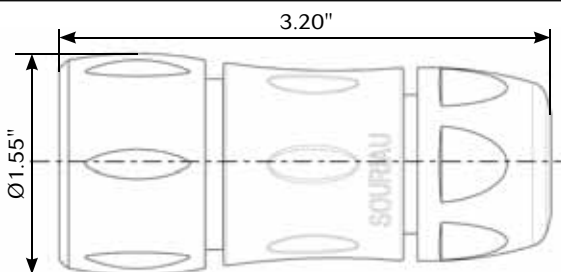


Fig. 3


Mated connector length - UTS6JC

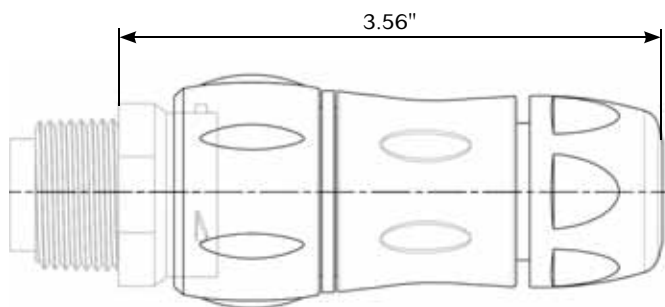

Panel cut



Drilling pattern



Note: All dimensions in inches unless otherwise noted.

UTS Series

18X2M3

Accessories and tooling

Jam nut sealing caps



Part number
UTS18DCG



Metal terminal

Part number
UTS18DCGR

Plug sealing cap



Part number
UTS618DCG

Plastic protective cap



Part numbers

Receptacle cap	Plug cap
85005590A	85005599

Color coding rings

G for Green



Y for Yellow



R for Red



Part numbers

Receptacles	Plugs
UTS714CCRR	UTS614CCRR
UTS714CCRY	UTS614CCRY
UTS714CCRG	UTS614CCRG

* Add G for Green, Y for Yellow, R for Red

Crimp tooling #16



Part number
SHANDLES



Part number
TOOLKIT



Contacts	Contact size	Part number of head
RM/RC 28M1K ⁽¹⁾	Standard contacts #16 Ø0.06"	S16RCM20
RM/RC 24M9K ⁽¹⁾		S16RCM20
RM/RC 20M13K ⁽¹⁾		S16RCM20
RM/RC 20M12K ⁽¹⁾		S16RCM20
RM/RC 16M23K ⁽¹⁾		S16RCM16
RM/RC 14M50K ⁽¹⁾		S16RCM1450
RM/RC 14M30K ⁽¹⁾		S16RCM14
SM/SC 24ML1TK6 ⁽¹⁾		S16SCM20
SM/SC 20ML1TK6 ⁽¹⁾		S16SCM20
SM/SC 16ML1TK6 ⁽¹⁾		S16SCML1
SM/SC 14ML1TK6 ⁽¹⁾		S16SCML1
SM/SC 16ML11TK6 ⁽¹⁾		S16SCML11

(1): Example of plating, for other plating see page 26

Crimp tooling #8



Part number hand tool
M317



Part number
positioner + locator setting
VGE10078A



Part number
extraction tool
51060210924

UTS Series

18X2M3

Contacts

5 contacts
44A/600V
per UL 1977

#16	Contact type	AWG	Part number		Max wire Ø (inch)	Max insulator Ø (inch)
			Male	Female		
Crimp	Machined	30-28	RM28M1K ⁽¹⁾ ☑	RC28M1K ⁽¹⁾ ☑	0.02"	0.04"
		26-24	RM24M9K ⁽¹⁾ ☑	RC24M9K ⁽¹⁾ ☑	0.03"	0.06"
		22-20	RM20M13K ⁽¹⁾ ☑	RC20M13K ⁽¹⁾ ☑	0.04"	0.07"
		22-20	RM20M12K ⁽¹⁾ ☑	RC20M12K ⁽¹⁾ ☑	0.04"	0.08"
		20-16	RM16M23K ⁽¹⁾ ☑	RC16M23K ⁽¹⁾ ☑	0.07"	0.12"
		16-14	RM14M50K ⁽¹⁾	RC14M50K ⁽¹⁾	0.08"	0.12"
		16-14	RM14M30K ⁽¹⁾ ☑	RC14M30K ⁽¹⁾ ☑	0.08"	0.12"
	Stamped & formed reeled contacts	26-24	SM24ML1TK6 ⁽¹⁾⁽²⁾	SC24ML1TK6 ⁽¹⁾⁽²⁾	0.03"-0.05"	-
		22-20	SM20ML1TK6 ⁽¹⁾⁽²⁾	SC20ML1TK6 ⁽¹⁾⁽²⁾	0.04"-0.08"	-
		18-16	SM16ML1TK6 ⁽¹⁾⁽²⁾	SC16ML1TK6 ⁽¹⁾⁽²⁾	0.11"	-
		18-16	SM16ML11TK6 ⁽¹⁾⁽²⁾	SC16ML11TK6 ⁽¹⁾⁽²⁾	0.07"-0.11"	-
		14	SM14ML1TK6 ⁽¹⁾⁽²⁾	SC14ML1TK6 ⁽¹⁾⁽²⁾	0.12"	-
PCB	Machined	-	RM20M12E8K ⁽¹⁾	RC20M12E84K ⁽¹⁾	-	-

#8	Contact type	AWG	Part number		Max wire Ø (mm)	Max insulator Ø (mm)
			Male	Female		
Crimp	Machined	16	82913601A ⁽¹⁾ ☑	82913600A ⁽¹⁾ ☑	-	0.25"
		14	82913603A ⁽¹⁾ ☑	82913602A ⁽¹⁾ ☑	-	
		12	82913605A ⁽¹⁾ ☑	82913604A ⁽¹⁾ ☑	-	
		10	82913607A ⁽¹⁾ ☑	82913606A ⁽¹⁾ ☑	-	
		8	82913609A ⁽¹⁾ ☑	82913608A ⁽¹⁾ ☑	-	

(1): Example of plating, for other plating see page 26

(2): To obtain contact reeled remove L in part number. Example: SM20M1TK6

48h sample service ☑


Electrical characteristics

UL
44A 600V UL94 V-0

CSA
34A 600V UL94 V-0

IEC
32A 300V 4kV 3

UTS 183G1 derating curves

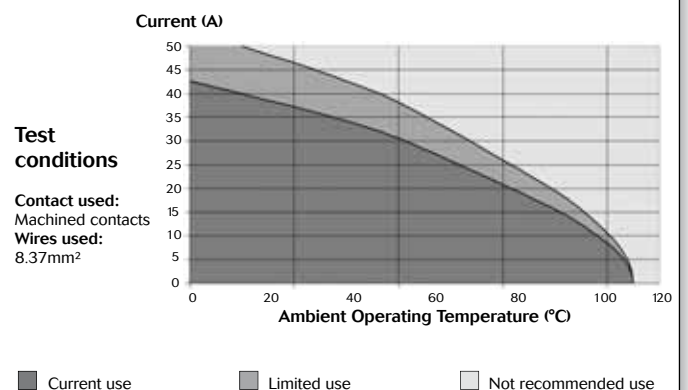

UTS Series


Technical information

Assembly instruction

UTS NPT assembly (mounting suggestion)

- Place the wires into the panel hole
- UTS standard version: Strip wires and crimp the contacts. Recommended strip length: see below
- UTS Hi Seal version: strip wires and solder the contacts. Recommended strip length: 0.19"
- Tighten the connector to the recommended torque (see table)

Shell size	Jam nut torque (Nm)	Tool tightening width (inch)
10	3	0.87"
14	5	1.18"
18	5	1.43"

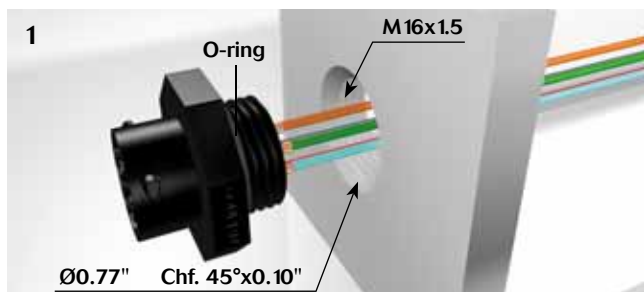

Wire stripping crimp version

	Part number		Stripping length L (inch)
	Male	Female	
Machined contact 	#20		
	RM24W3- / RM20W3- RM18W3-	RC24W3- / RC20W3- RC18W3-	0.18"
	#16		
	RM28M1- / RM24M9- RM20M13- / RM20M12-	RC28M1- / RC24M9- RC20M13- / RC20M12-	0.18"
	RM16M23- / RM14M30-	RC16M23- / RC14M30-	0.27"
Stamped & formed Without insulation support 	#8		
	8291 3601- / 8291 3603- 8291 3605- / 8291 3607- 8291 3609-	8291 3600- / 8291 3602- 8291 3604- / 8291 3606- 8291 3608-	0.25" to 0.29"
	#16		
	SM24M1- / SM24ML1- SM20M1- / SM20ML1-	SC24M1- / SC24ML1- SC20M1- / SC20ML1-	0.15"
	SM16M11- / SM16ML11-	SC16M11- / SC16ML11-	0.18"
With insulation support 	SM16M1- / SM16ML1-	SC16M1- / SC16ML1-	0.24"
	SM14M1- / SM14ML1-	SC16M11- / SC16ML11-	0.24"

UTS Series

Technical information

Tooling

Standard contacts

Contact size	Part number	Head	Handles	Extraction tools
#20 1mm	RM/RC 24W3 -	S20RCM	SHANDLES	RX20D44
	RM/RC 20W3 -			
	RM/RC 18W3 -			
	SM 24W3S- ⁽¹⁾ SC 24W3S- ⁽¹⁾	S20SCM20		
	SM 24WL3S- ⁽²⁾ SC 24WL3S- ⁽²⁾			
	SM/SC 20W3S- ⁽¹⁾ SM/SC 20WL3S- ⁽²⁾			
#16 1.6mm	RM/RC 28M1- RM/RC 24M9- RM/RC 20M13- RM/RC 20M12- RM/RC 16M23- RM/RC 14M30-	S16RCM20		RX2025GE1
		S16RCM16		
		S16RCM14		
	SM/SC 24M1- SM/SC 24ML1- SM/SC 20M1- SM/SC 20ML1-	S16SCM20		
	SM/SC 16M1- SM/SC 16ML1- SM/SC 14M1- SM/SC 14ML1-	S16SCML1		
	SM/SC 16M11- SM/SC 16ML11-	S16SCML11		

(1) contact reeled (2) loose contact

Note: endurance of SHANDLES tool = 5,000 cycles.

Contact size	Part number	Tool with separate locator			Extraction tools
		Hand tool	Positioner + locator setting		
#8 3.6mm	8291 3601A / 8291 3600A	M317	VGE10078A	3	51060210936
	8291 3603A / 8291 3602A			3	
	8291 3605A / 8291 3604A			4	
	8291 3607A / 8291 3606A			5	
	8291 3609A / 8291 3608A			6/7	

Specific contacts

Contact size	Part number	Hand tools (SHANDLES) head	Tool with separate locator			Extraction tools
			Hand tool	Positioner + locator setting		
# 16 Ø 1.6mm Longer RM contact	RM28M1GE1-	S16RCM20				RX2025GE1
	RM24M9GE1-					
	RM20M13GE1-					
	RM16M23 GE1-	S16RCM16	MH860	MH86186	6/8	
	RM14M50 GE1-	S16RCM1450	M317	UH25	3	
	RM14M30 GE1-	S16RCM14				
# 16 Ø 1.6mm Shorter RC contact	RC28M1GE7-	S16RCM20	MH860	MH86164G	4/6	
	RC24M9GE7-				5/6	
	RC20M13GE7- RC20M12GE7-				5/7	
	RC16M23GE7-				6/8	
	RC14M50GE7-	S16RCM1450	M317	UH25	3	
	RC14M30GE7-	S16RCM14				

UTS Series

Contacts

Contact selector guide

Contact preloaded

Electrical characteristics: contact resistance		
#20 Ø1mm	Machined	< 4mΩ
#16 Ø1.6mm	Machined	< 3mΩ

Available platings (contact preloaded)
Min 0.4μ gold over 2μ Ni

Contact supplied separately

Electrical characteristics: contact resistance		
#20 Ø1mm	Machined	< 6mΩ
	Stamped & formed	< 15mΩ
#16 Ø1.6mm	Machined	< 3mΩ
	Stamped & formed	< 6mΩ
#12 Ø2.4mm	Machined	< 5mΩ
#8 Ø3.6mm	Machined	< 5mΩ

Available platings (contact supplied separately)	
A	2μ Ni + 2μ Ag
J	Gold flash over 2μ Ni
K	Min 0.4μ gold over 2μ Ni
S31	Active part: Gold flash over Ni Crimp area: Nickel
S18	Active part: 0.75μ gold min over 2μ Ni Crimp area: 1.3μ tin over Ni Other: Nickel
S25 S26	Active part: 0.75μ Au over Ni Crimp area: flash Au over Ni
T	T: 2μm Ni mini all over + 3 to 5 μm Sn all over
TK6	2-5μ Sn pre-plated

Packaging

Conscious of the wide variety of applications, contact packaging has been considered for small series (bulk packaging) and high volume production (reeled contacts):

Size contacts #20 & #16



- 25 pieces loose packing (stamped & formed contacts)



- 50 pieces bulk packing (machined contacts)



- 1000 pieces bulk packing (machined contacts)



- 3000 pieces reeled (stamped & formed contacts)



- 5000 pieces reeled (machined contacts)

Size contacts #8



- 100 pieces bulk packing (stamped & formed contacts)

UTS Series

Contacts

Crimp contacts

Standard version



Contact size	Type	Wire size		Part number		Max wire Ø	Max insulator Ø	Plating available
		AWG	mm ²	Male	Female			
#20 Ø0.03	Machined	26-24	0.13-0.20	RM24W3K	RC24W3K		0.06" max	K
	Stamped & Formed	26-24	0.13-0.25	SM24W3 - ⁽¹⁾	SC24W3 - ⁽¹⁾		0.03"-0.06"	TK6 S25 (female) S26 (male)
				SM24WL3 - ⁽²⁾	SC24WL3 - ⁽²⁾			
	Machined	22-20	0.32-0.52	RM20W3K	RC20W3K		0.06" max	K
	Stamped & Formed	22-20	0.35-0.5	SM20W3 - ⁽¹⁾	SC20W3 - ⁽¹⁾		0.04"-0.08"	TK6 S25 (female) S26 (male)
				SM20WL3 - ⁽²⁾	SC20WL3 - ⁽²⁾			
	Machined	20-18	0.50-0.93	RM18W3K	RC18W3K		0.08" max	K
#16 Ø0.06"	Machined	30-28	0.05-0.08	RM28M1 -	RC28M1 -	0.02"	0.04"	K, J, T
	Machined	26-24	0.13-0.2	RM24M9 -	RC24M9 -	0.03"	0.06"	K, J, T
	Stamped & Formed	26-24	0.13-0.25	SM24M1 - ⁽¹⁾ SM24ML1 - ⁽²⁾	SC24M1 - ⁽¹⁾ SC24ML1 - ⁽²⁾	0.03"-0.05"	Insulation grip	S31, S18, TK6
	Machined	22-20	0.32-0.52	RM20M13 -	RC20M13 -	0.04"	0.07"	K, J, T
				RM20M12 -	RC20M12 -		0.08"	
	Stamped & Formed	22-20	0.35-0.5	SM20M1 - ⁽¹⁾ SM20ML1 - ⁽²⁾	SC20M1 - ⁽¹⁾ SC20ML1 - ⁽²⁾	0.04"-0.81"	Insulation grip	S31, S18, TK6
	Machined	20-16	0.52-1.5	RM16M23 -	RC16M23 -	0.07"	0.12"	K, J, T
	Stamped & Formed	18-16	0.8-1.5	SM16M1 - ⁽¹⁾ SM16ML1 - ⁽²⁾	SC16M1 - ⁽¹⁾ SC16ML1 - ⁽²⁾	0.11"	No insulation grip	S31, S18, TK6
	Stamped & Formed	18-16	0.8-1.5	SM16M11 - ⁽¹⁾ SM16ML11 - ⁽²⁾	SC16M11 - ⁽¹⁾ SC16ML11 - ⁽²⁾	0.07"-0.11"	Insulation grip	S31, S18, TK6
#8 Ø0.14"	Machined	16	1.5	82913601A	82913600A	-	0.25"	A
		14	2.5	82913603A	82913602A			
		12	4	82913605A	82913604A			
		10	6.0	82913607A	82913606A			
		8	10.0	82913609A	82913608A			

(1) contact reeled (2) loose contact

Example: RM24W3K - Size #20, Machined, AWG24 wire.

UTS Series

Stage - Light

Building automation & control



Industry

Off road - Mining
Railway

Medical



SOURIAU

www.souriau-industrial.com

technicalsupport@souriau.com

Esterline
Connection Technologies

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9