

# NCS2553

## 3-Channel Video Amp with Standard Definition Reconstruction Filters

### Description

The NCS2553 is a 3-channel high speed video amplifier with 6th order butterworth standard definition reconstruction filter.

All three channels can accommodate either all component and RGB video signals or composite and S-Video signals. All channels can accept DC or AC coupled signals. If AC coupled, the internal clamps are employed. The outputs can drive both AC and DC coupled 150  $\Omega$  loads.

It is designed to be compatible with most digital-to-analog converters (DAC) embedded in most video processors.

### Feature

- Three 6th Order Standard Definition 8 MHz Filters
- Internally Fixed Gain = 6 dB
- AC- or DC- Coupled Inputs
- AC- or DC- Coupled Outputs
- Integrated Level Shifter
- Operating Voltage +5 V
- Available in a SOIC-8 Package
- These are Pb-Free Devices

### Applications

- Digital Set-Top Box
- DVD / Video Players and Related
- SD-TV
- Video On Demand (VOD)
- Video Recorders




ON Semiconductor®

<http://onsemi.com>




SOIC-8 NB  
D SUFFIX  
CASE 751

### MARKING DIAGRAM



A = Assembly Location  
L = Wafer Lot  
Y = Year  
W = Work Week  
▪ = Pb-Free Package

### PINOUT

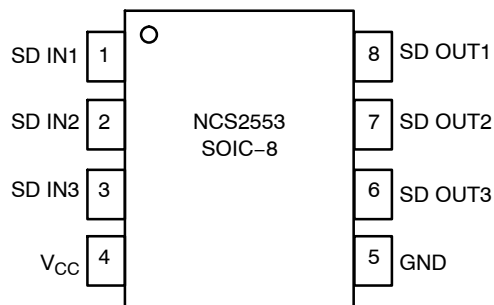


### ORDERING INFORMATION

| Device      | Package          | Shipping†          |
|-------------|------------------|--------------------|
| NCS2553DG   | SOIC-8 (Pb-Free) | 98 Units / Rail    |
| NCS2553DR2G | SOIC-8 (Pb-Free) | 2500 / Tape & Reel |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

## NCS2553

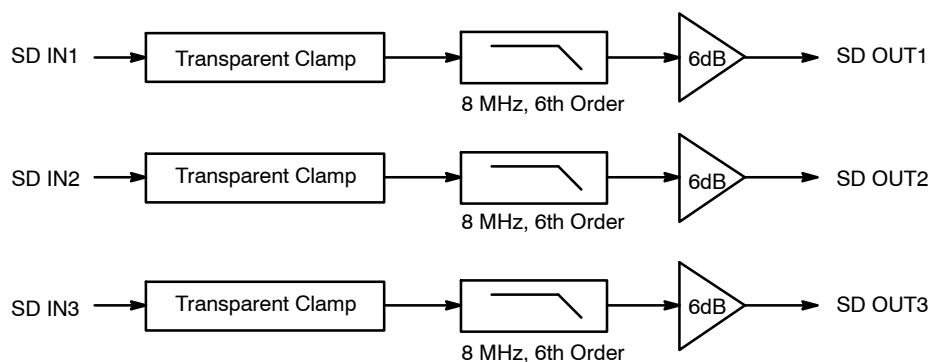

**Figure 1. Block Diagram**

### PIN FUNCTION AND DESCRIPTION

| Pin | Name | Type   | Description                                                                                                                  |
|-----|------|--------|------------------------------------------------------------------------------------------------------------------------------|
| 1   | IN1  | Input  | Video Input 1 for Video Signal featuring a frequency bandwidth compatible with Standard Definition Video (8 MHz) – Channel 1 |
| 2   | IN2  | Input  | Video Input 2 for Video Signal featuring a frequency bandwidth compatible with Standard Definition Video (8 MHz) – Channel 2 |
| 3   | IN3  | Input  | Video Input 3 for Video Signal featuring a frequency bandwidth compatible with Standard Definition Video (8 MHz) – Channel 3 |
| 4   | VCC  | Power  | Device Power Supply Voltage: +5 V                                                                                            |
| 5   | GND  | GND    | Connected to Ground                                                                                                          |
| 6   | OUT3 | Output | SD Video Output 3 – Channel 3                                                                                                |
| 7   | OUT2 | Output | SD Video Output 2 – Channel 2                                                                                                |
| 8   | OUT1 | Output | SD Video Output 1 – Channel 1                                                                                                |

### ATTRIBUTES

| Characteristics                              | Value                |
|----------------------------------------------|----------------------|
| ESD                                          |                      |
| Human Body Model All Pins (Note 1)           | 8 kV                 |
| Machine Model Pins 1 to 5 (Note 2)           | 400 V                |
| Machine Model All Output Pins (Note 2)       | 800 V                |
| Moisture Sensitivity (Note 3)                | Level 1              |
| Flammability Rating – Oxygen Index: 28 to 34 | UL 94 V-0 @ 0.125 in |

- Human Body Model (HBM): R = 1500  $\Omega$ , C = 100 pF
- Machine Model (MM)
- For additional information, see Application Note AND8003/D.

**MAXIMUM RATINGS**

| Parameter                             | Symbol          | Rating                       | Unit |
|---------------------------------------|-----------------|------------------------------|------|
| Power Supply Voltages                 | $V_{CC}$        | $-0.35 \leq V_{CC} \leq 5.5$ | Vdc  |
| Input Voltage Range                   | $V_I$           | $-0.3 \leq V_I \leq V_{CC}$  | Vdc  |
| Input Differential Voltage Range      | $V_{ID}$        | $V_I \leq V_{CC}$            | Vdc  |
| Output Current                        | $I_O$           | 50                           | mA   |
| Maximum Junction Temperature (Note 4) | $T_J$           | 150                          | °C   |
| Operating Ambient Temperature         | $T_A$           | -40 to +85                   | °C   |
| Storage Temperature Range             | $T_{stg}$       | -60 to +150                  | °C   |
| Power Dissipation                     | $P_D$           | (See Graph)                  | mW   |
| Thermal Resistance, Junction-to-Air   | $R_{\theta JA}$ | 112.7                        | °C/W |


Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

4. Power dissipation must be considered to ensure maximum junction temperature ( $T_J$ ) is not exceeded.

**Maximum Power Dissipation**

The maximum power that can be safely dissipated is limited by the associated rise in junction temperature.

For the plastic packages, the maximum safe junction temperature is 150°C. If the maximum is exceeded momentarily, proper circuit operation will be restored as soon as the die temperature is reduced. Leaving the device in the “overheated” condition for an extended period can result in device burnout. To ensure proper operation, it is important to observe the de-rating curves.

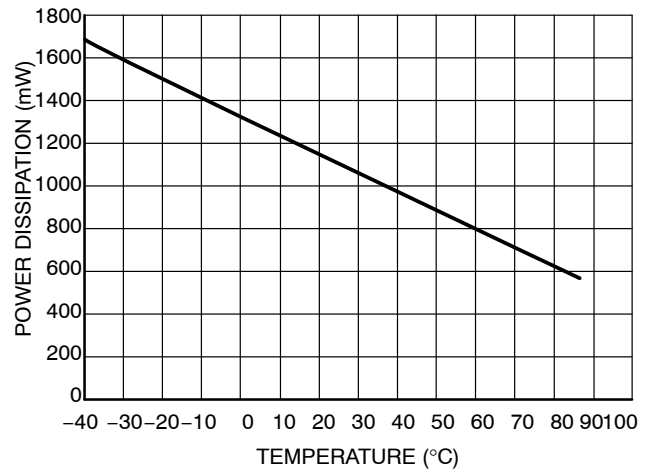

**Figure 2. Power Dissipation vs Temperature**

## NCS2553

**DC ELECTRICAL CHARACTERISTICS** ( $V_{CC} = +5.0\text{ V}$ ,  $T_A = 25^\circ\text{C}$ ,  $0.1\text{ }\mu\text{F}$  AC coupled inputs,  $R_{\text{source}} = 37.5\text{ }\Omega$ ,  $220\text{ }\mu\text{F}$  AC coupled outputs into  $150\text{ }\Omega$  load, referenced to  $400\text{ kHz}$ , unless otherwise specified)

| Symbol   | Characteristics                 | Conditions                      | Min  | Typ | Max  | Unit |
|----------|---------------------------------|---------------------------------|------|-----|------|------|
| $V_{CC}$ | Supply Voltage Range            |                                 | 4.75 | 5.0 | 5.25 | V    |
| $I_{CC}$ | Power Supply Current            | No Load                         |      | 23  | 30   | mA   |
| $V_{IN}$ | Input Common Mode Voltage Range | Referenced to GND if DC-Coupled | GND  |     | 1.4  |      |
| PSRR     | Power Supply Rejection          | DC (All Channels)               |      | -50 |      | dB   |

NOTE: Device will meet the specifications after thermal equilibrium has been established when mounted in a test socket or printed circuit board with maintained transverse airflow greater than  $500\text{ lfm}$ . Electrical parameters are guaranteed only over the declared operating temperature range. Functional operation of the device exceeding these conditions is not implied. Device specification limit values are applied individually under normal operating conditions and not valid simultaneously.

**AC ELECTRICAL CHARACTERISTICS** ( $V_{CC} = +5.0\text{ V}$ ,  $T_A = 25^\circ\text{C}$ ,  $0.1\text{ }\mu\text{F}$  AC coupled inputs,  $R_{\text{source}} = 37.5\text{ }\Omega$ ,  $220\text{ }\mu\text{F}$  AC coupled outputs into  $150\text{ }\Omega$  load, referenced to  $400\text{ kHz}$ , unless otherwise specified)

| Symbol            | Characteristics                                               | Conditions                                            | Min | Typ | Max | Unit |
|-------------------|---------------------------------------------------------------|-------------------------------------------------------|-----|-----|-----|------|
| $A_{VOL}$         | Voltage Gain (Note 5)                                         | $V_{IN} = 1\text{ V}$ (All Channels)                  | 5.8 | 6.0 | 6.2 | dB   |
| BW                | Low Pass Filter Bandwidth                                     | -1 dB (Note 6)                                        | 5.5 | 7.2 |     | MHz  |
|                   |                                                               | -3 dB                                                 |     | 9.0 |     | MHz  |
| $A_R$             | Stop-Band Attenuation (Rejection)                             | at $27\text{ MHz}$                                    |     | 45  |     | dB   |
| dG                | Differential Gain                                             |                                                       |     | 0.3 |     | %    |
| d $\theta$        | Differential Phase                                            |                                                       |     | 0.6 |     | °    |
| THD               | Total Harmonic Distortion                                     | $V_{OUT} = 1.8\text{ V}_{PP}$ @ $1\text{ MHz}$        |     | 0.4 |     | %    |
| $X_{\text{talk}}$ | Channel-to-Channel Crosstalk                                  | $V_{OUT} = 1.8\text{ V}_{PP}$ @ $1\text{ MHz}$        |     | -60 |     | dB   |
| SNR               | Signal-to-Noise Ratio                                         | NTSC-7, $100\text{ kHz}$ to $4.2\text{ MHz}$ (Note 7) |     | 75  |     | dB   |
| Tpd               | Propagation Delay                                             | Input-to-Output, $4.5\text{ MHz}$                     |     | 60  |     | nsec |
| $\Delta\text{GD}$ | Group Delay Variation from $100\text{ kHz}$ to $8\text{ MHz}$ |                                                       |     | 27  |     | ns   |

NOTE: Device will meet the specifications after thermal equilibrium has been established when mounted in a test socket or printed circuit board with maintained transverse airflow greater than  $500\text{ lfm}$ . Electrical parameters are guaranteed only over the declared operating temperature range. Functional operation of the device exceeding these conditions is not implied. Device specification limit values are applied individually under normal operating conditions and not valid simultaneously.

5. 100% of tested IC fit to the bandwidth tolerance.
6. Guaranteed by design and characterization.
7.  $\text{SNR} = 20 \times \log(714\text{ mV/RMS Noise})$

# TYPICAL CHARACTERISTICS

$V_{CC} = +5.0\text{ V}$ ,  $R_{source} = 37.5\ \Omega$ ,  $T_A = 25^\circ\text{C}$ ,  $0.1\ \mu\text{F}$  AC-coupled inputs,  $220\ \mu\text{F}$  AC-coupled outputs into  $150\ \Omega$  referenced to  $400\text{ kHz}$ , all channels, unless otherwise specified

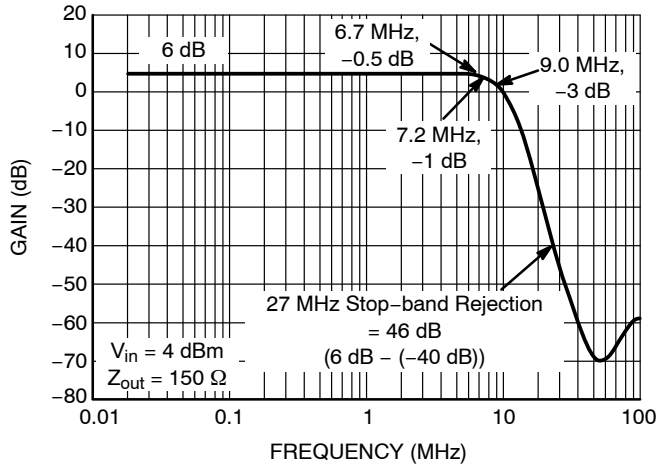


Figure 3. Frequency Response

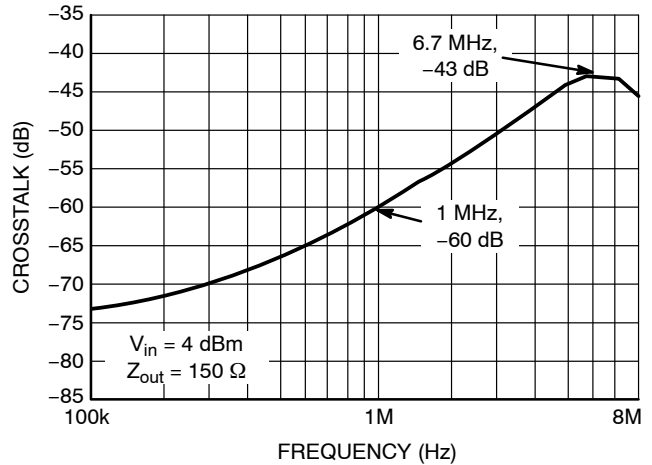


Figure 4. Channel-to-Channel Crosstalk

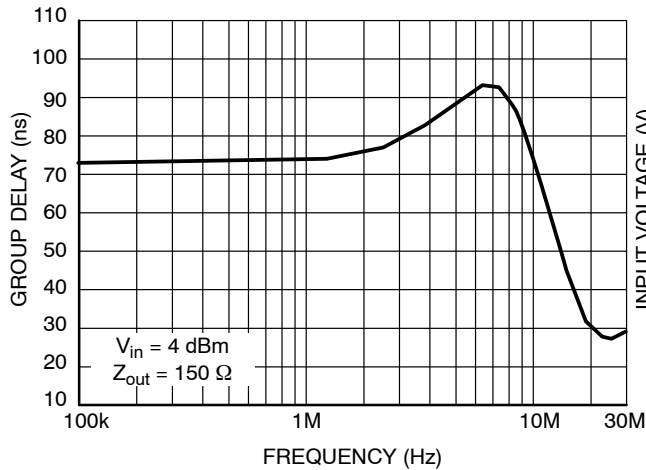


Figure 5. Group Delay

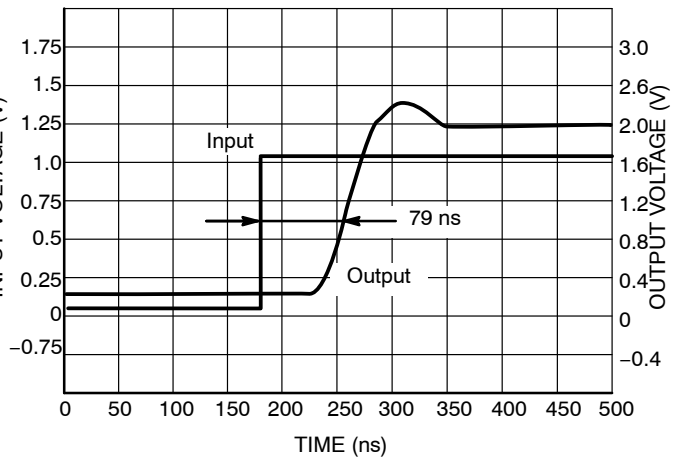


Figure 6. Propagation Delay

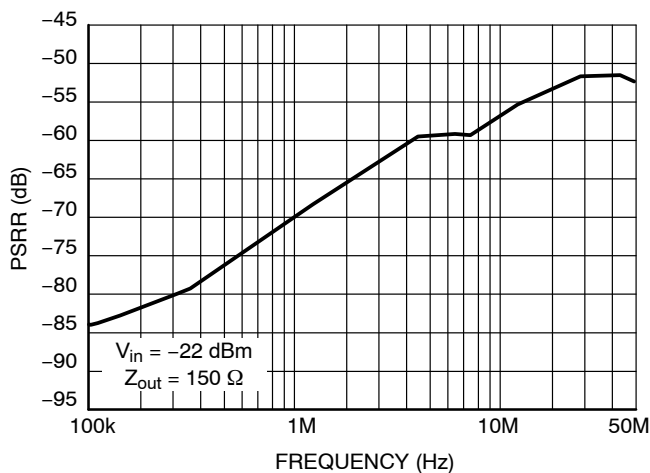


Figure 7. PSRR vs Frequency  
(No Bypass Capacitor)

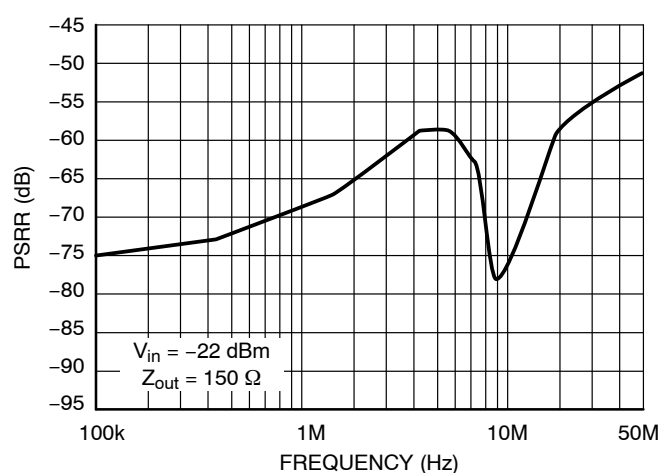


Figure 8. PSRR vs. Frequency  
(Bypass Capacitor)

# TYPICAL CHARACTERISTICS

$V_{CC} = +5.0\text{ V}$ ,  $R_{source} = 37.5\ \Omega$ ,  $T_A = 25^\circ\text{C}$ ,  $0.1\ \mu\text{F}$  AC-coupled inputs,  $220\ \mu\text{F}$  AC-coupled outputs into  $150\ \Omega$  referenced to  $400\text{ kHz}$ , all channels, unless otherwise specified

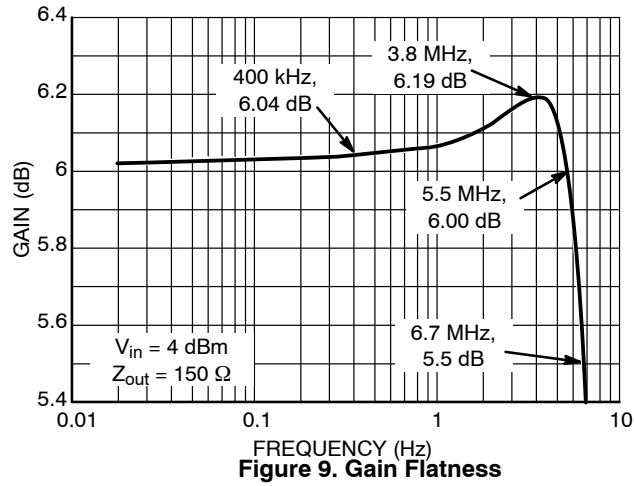


Figure 9. Gain Flatness

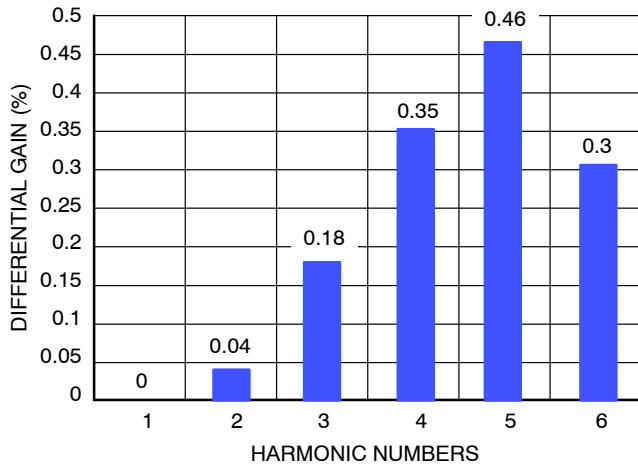


Figure 10. Differential Gain (NTSC 5 Steps Input Signal)

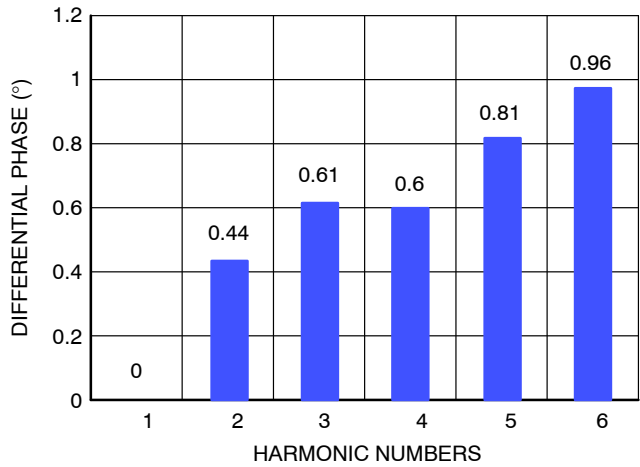


Figure 11. Differential Phase (NTSC 5 Steps Input Signal)

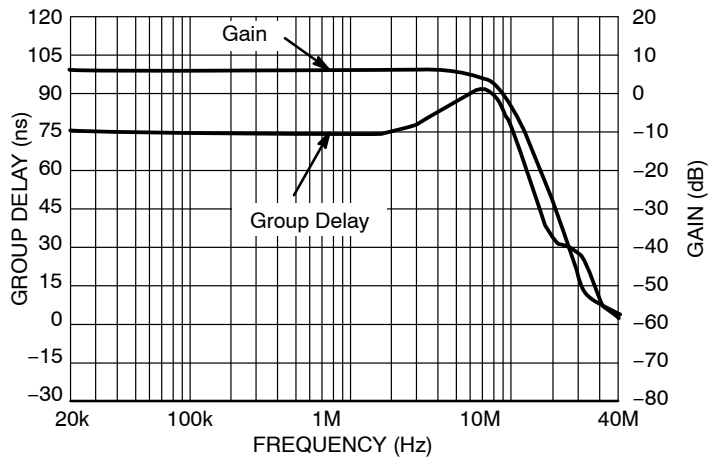


Figure 12. Normalized Frequency Response and Group Delay vs. Frequency

## APPLICATIONS INFORMATION

The NCS2553 triple video driver has been optimized for Standard Definition video applications covering the requirements of the CVBS, S-Video, 480i/525i & 576i/625i standards. All the 3 channels feature the same specifications and similar behaviors guaranteed by a high channel-to-channel crosstalk isolation (down to 60 dB at 1 MHz). Each channel provides an internal voltage-to-voltage gain of 2 from its input to its output reducing the number of external components usually needed in the case of some discrete approaches (using stand-alone op amps). An internal level shifter is employed shifting up the output voltage by adding an offset of about 280 mV. This avoids sync pulse clipping

and allows DC-coupled output to the 150  $\Omega$  video load. In addition, the NCS2553 integrates a 6<sup>th</sup> order Butterworth filter per channel with a 3 dB frequency bandwidth of 8 MHz. This allows rejecting out the aliases or unwanted over-sampling effects produced by the video DAC. Similarly, in the case of DVD recorders using ADC, this anti-aliasing filter (reconstruction filter) will avoid picture quality issues and will help to filter out parasitic signals caused by EMI interference.

A built-in diode-like clamp is used in the chip for each channel to support AC-coupled mode of operation. The clamp is active when the input signal goes below 0 V.

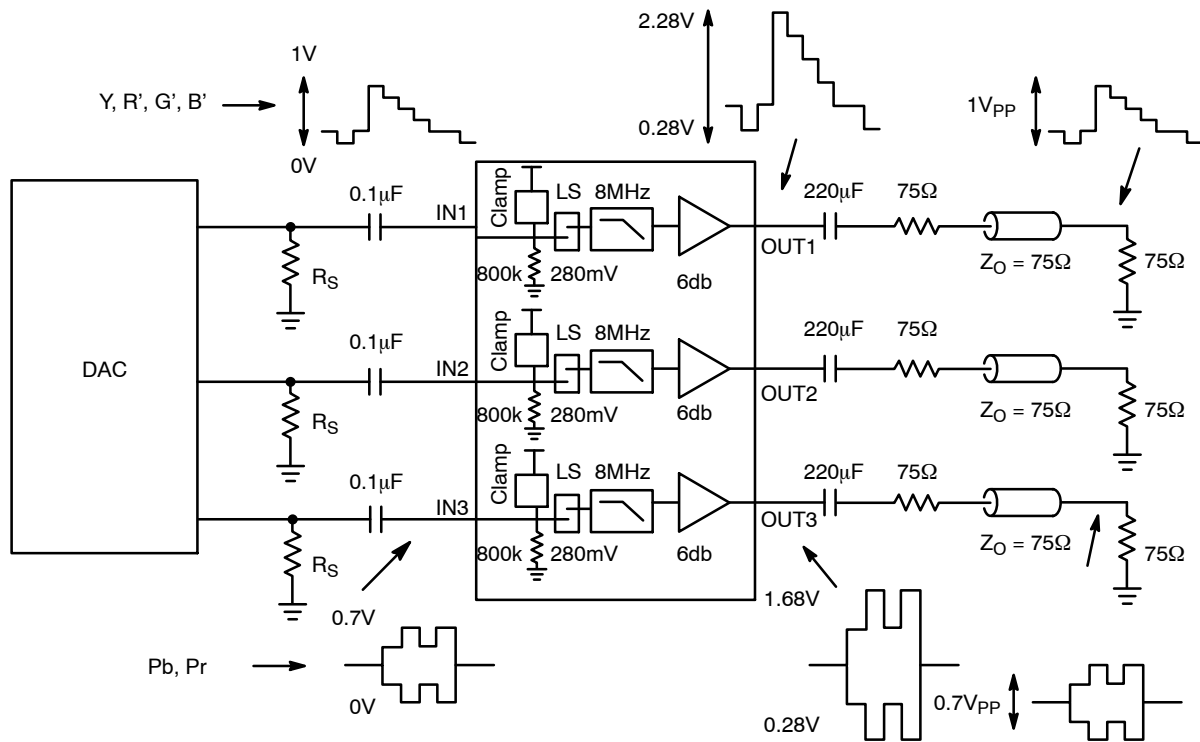



Figure 13. AC-Coupled Inputs and Outputs

Figure 13 shows an example for which the external video source coming from the DAC is AC-coupled at the input and output. But thanks to the built-in transparent clamp and level shifter the device can operate in different configuration modes depending essentially on the DAC output signal level High and Low and how it fits the input common mode voltage of the video driver. When the configuration is DC-Coupled at the Inputs and Outputs the 0.1  $\mu$ F and 220  $\mu$ F coupling capacitors are no longer used, the clamps are in that case inactive; this configuration has the big advantage of being relatively low cost with the use of less external components.

The input is AC-coupled if for example the input-signal amplitude goes over the range 0 to 1.4 V or if the video source requires such a coupling. In some circumstances it may be necessary to auto-bias signals by the addition of a pull-up and pull-down resistor or only pull-up resistor (Typical 7.5 M $\Omega$  combined with the internal 800 k $\Omega$  pull-down) making the clamp inactive.


The output AC-coupling configuration has the advantage of eliminating DC ground loop with the drawback of making the device more sensitive to video line or field tilt issues in the case of a too low output coupling capacitor. In some cases it may be necessary to increase the nominal 220  $\mu$ F capacitor value.

# NCS2553

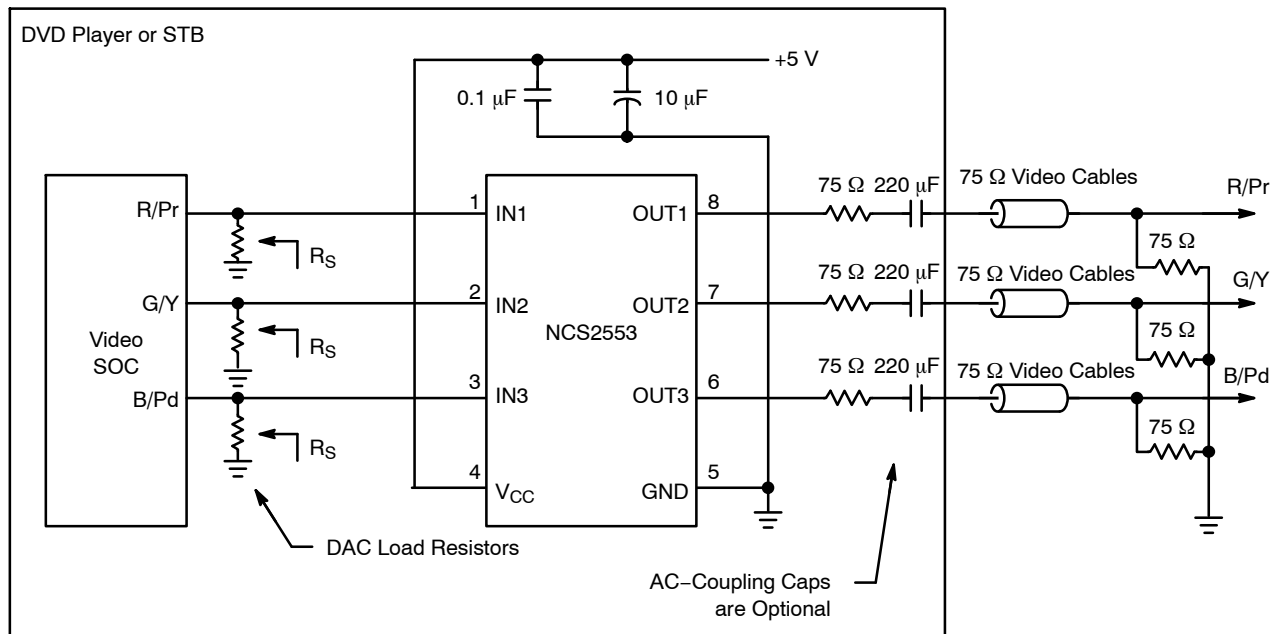

**Figure 14. Typical Application Circuit**

## PACKAGE DIMENSIONS

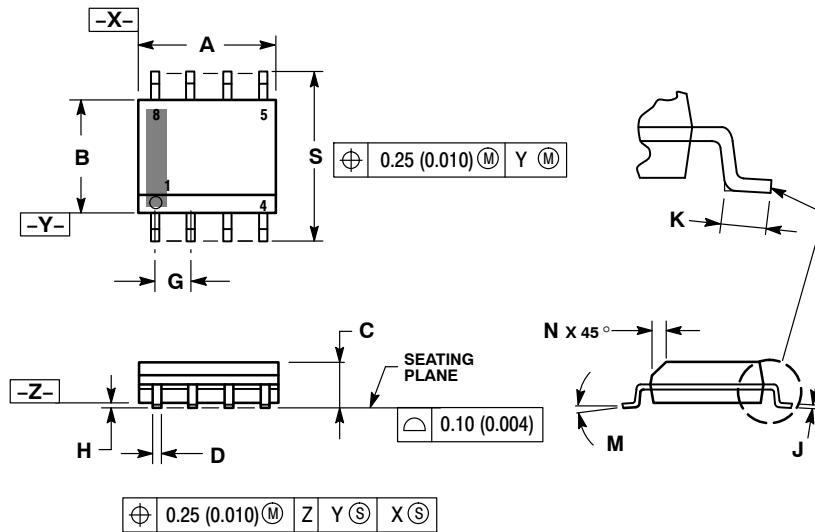
SOIC-8 NB  
CASE 751-07  
ISSUE AJ

## NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A AND B DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.
6. 751-01 THRU 751-06 ARE OBSOLETE. NEW STANDARD IS 751-07.

| DIM | MILLIMETERS |      | INCHES    |       |
|-----|-------------|------|-----------|-------|
|     | MIN         | MAX  | MIN       | MAX   |
| A   | 4.80        | 5.00 | 0.189     | 0.197 |
| B   | 3.80        | 4.00 | 0.150     | 0.157 |
| C   | 1.35        | 1.75 | 0.053     | 0.069 |
| D   | 0.33        | 0.51 | 0.013     | 0.020 |
| G   | 1.27 BSC    |      | 0.050 BSC |       |
| H   | 0.10        | 0.25 | 0.004     | 0.010 |
| J   | 0.19        | 0.25 | 0.007     | 0.010 |
| K   | 0.40        | 1.27 | 0.016     | 0.050 |
| M   | 0°          | 8°   | 0°        | 8°    |
| N   | 0.25        | 0.50 | 0.010     | 0.020 |
| S   | 5.80        | 6.20 | 0.228     | 0.244 |

## SOLDERING FOOTPRINT\*

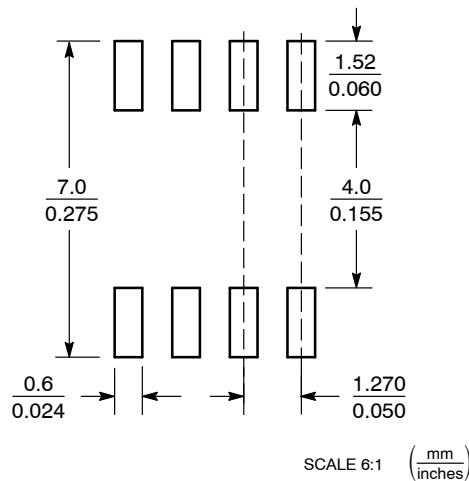

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

## LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
 P.O. Box 5163, Denver, Colorado 80217 USA  
 Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
 Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
 Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free  
 USA/Canada  
 Europe, Middle East and Africa Technical Support:  
 Phone: 421 33 790 2910  
 Japan Customer Focus Center  
 Phone: 81-3-5773-3850

ON Semiconductor Website: [www.onsemi.com](http://www.onsemi.com)

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9