

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [5027905091](#)
Status: **Active**
Description: 0.50mm (.020") Pitch FPC Connector, ZIF, Easy-On™, Double Bottom Contact, 50 Circuits

Documents:

3D Model	Product Specification PS-502790-001 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)

General

Product Family	FFC/FPC Connectors
Series	502790
Product Name	Easy-On™

Physical

Circuits (Loaded)	50
Contact Position	Bottom
Durability (mating cycles max)	20
Entry Angle	90° Angle
Mated Height (in)	0.098 In
Mated Height (mm)	2.50 mm
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Gold
Number of Rows	1
Orientation	Right Angle
PCB Retention	Yes
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface (in)	0.020 In
Pitch - Mating Interface (mm)	0.50 mm
Polarized to PCB	Yes
Stackable	No
Temperature Range - Operating	-20°C to +85°C
Termination Interface: Style	Surface Mount
Wire/Cable Type	FPC only

Electrical

Current - Maximum per Contact	0.5A
Voltage - Maximum	50V

Material Info

Reference - Drawing Numbers

Product Specification	PS-502790-001, RPS-502790-001, RPS-502790-005, RPS-502790-006, RPS-502790-007, RPS-502790-009, RPS-502790-010, RPS-502790-011
Sales Drawing	SD-502790-001, SD-502790-002

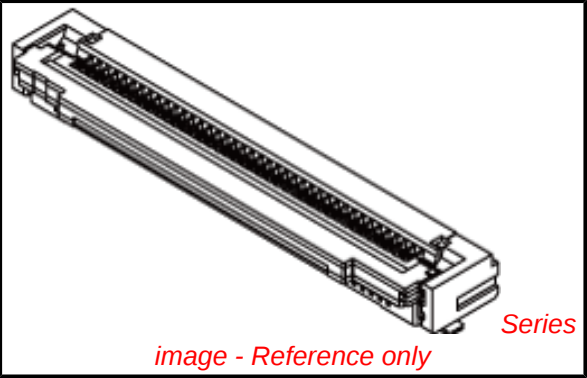


image - Reference only

EU RoHS
ELV and RoHS
Compliant
REACH SVHC
Not Reviewed
Halogen-Free
Status
Not Reviewed

China RoHS





Need more information on product environmental compliance?




Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
[502790Series](#)

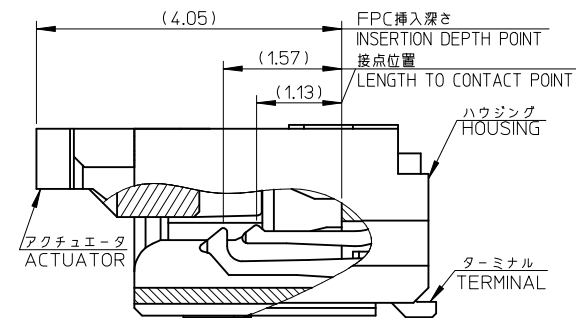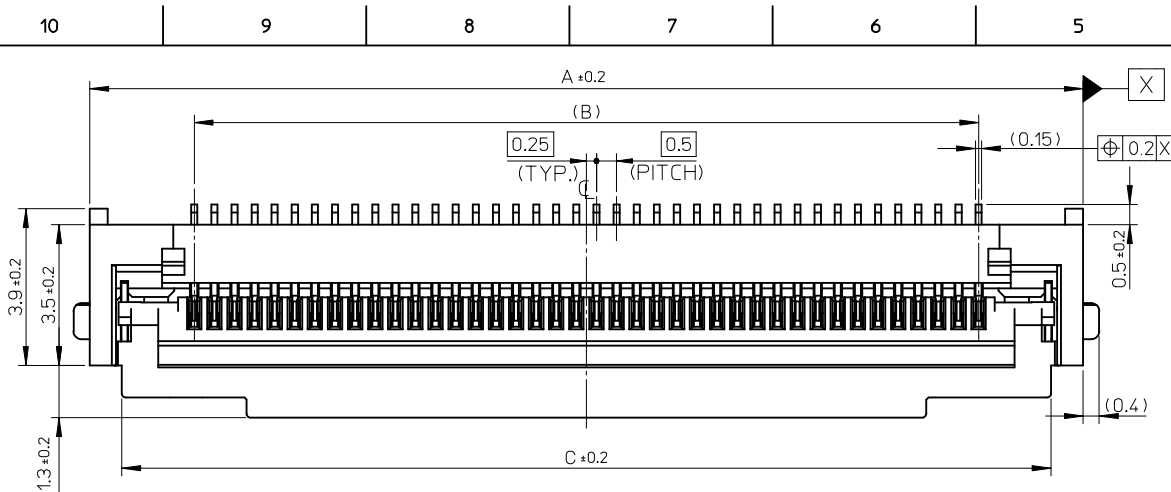

SECTION X-X
Scale 15:1

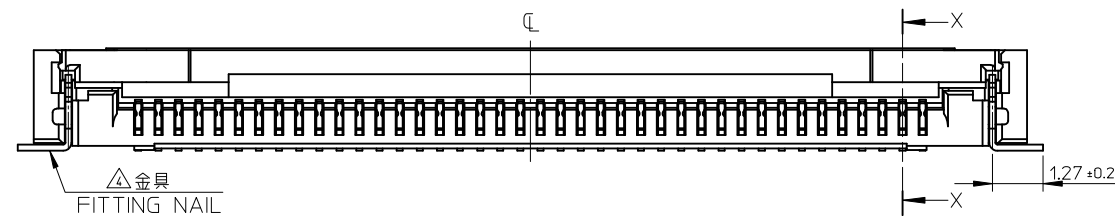

注記 NOTES

1. 使用材料 MATERIAL

ハウジング : 液晶ポリマー ガラス充填, UL94-V0(ベージュ)
HOUSING : LIQUID CRYSTAL POLYMER
GLASS FILLED,UL94V-0(BEIGE)
アクチュエータ : PPS ガラス充填, UL94-V0(黒)
ACTUATOR : PPS GLASS FILLED, UL94V-0(BLACK)
ターミナル : リン青銅(t=0.15)
TERMINAL : PHOSPHOR BRONZE
金具 : リン青銅(t=0.15)
FITTING NAIL : PHOSPHOR BRONZE

2. めっき仕様 PLATING

ターミナル TERMINAL
コンタクト部 : 部分金めっき (0.05 μm以上)
テール部 : 部分金めっき
下地 : ニッケルめっき (1.0 μm以上)
CONTACT AREA : SEPARATED GOLD PLATING
(0.05 MICROMETER MINIMUM)
SOLDER TAIL AREA : SEPARATED GOLD PLATING
UNDERPLATE : NICKEL OVERALL
(1.0 MICROMETER MINIMUM)
金具 FITTING NAIL
銅めっき (1.0 μm以上)
下地 : ニッケルめっき (1.0 μm以上)
TIN PLATING (1.0 MICROMETER MIN.)
UNDER PLATING : NICKEL PLATING
(1.0 MICROMETER MIN.)

3. エンボステープ梱包時は、アクチュエータが開いた状態とする。
IN THE PACKAGE, ACTUATOR OF
PART 502790-**11 SHOULD BE CLOSED.

4. パターン剥離止め用金具
FITTING NAIL FOR PREVENTION OF
PEELING OF P.C.B. PATTERN.

5. R0.3は、FPC導体部にかからないこと。
R0.3 MUST NOT BE OVERLAPPED
TO PATTERN OF FPC.

6. N: 極数 N: CIRCUIT.

7. ELV及びRoHS適合品
ELV AND RoHS COMPLIANT

8. テールと金具を併せた平坦度は0.1mm以下とする。
TAILS AND NAILS COPLANALITY
TO BE 0.1mm MAX.

43.1	39.5	44.7	502790-8091	80
35.1	31.5	36.7	502790-6491	64
33.1	29.5	34.7	502790-6091	60
28.1	24.5	29.7	502790-5091	50
23.1	19.5	24.7	502790-4091	40
18.1	14.5	19.7	502790-3091	30
C	B	A	EMBOSSED PACKAGE	CIRCUIT
			オーダー番号 ORDER No.	

CONNECTOR SERIES No. 502790-**11


SCALE --- DESIGN UNITS METRIC THIRD ANGLE PROJECTION

0.5 FPC CONN. ZIF E/O
2 CONTACTS TYPE
HSG ASS'Y (H=2.5)


MOLEX INCORPORATED

DOCUMENT NO. SD-502790-001 SHEET NO. 1 OF 2


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

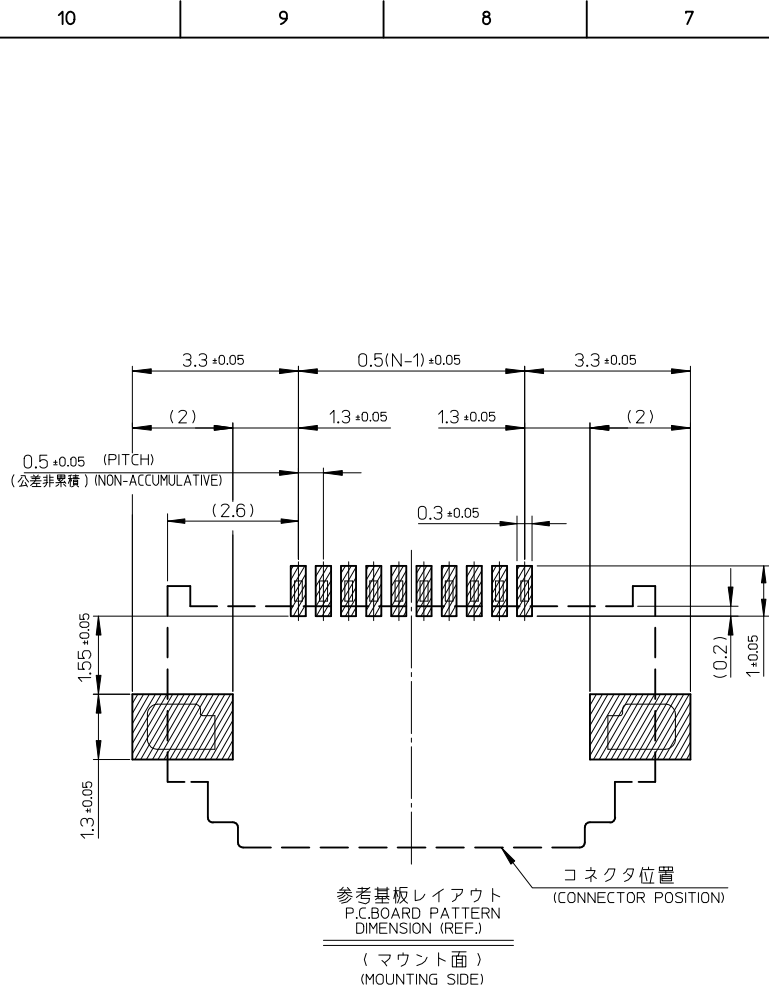

参考基板レイアウト
P.C. BOARD PATTERN
DIMENSION (REF.)
(マウント面)
(MOUNTING SIDE)

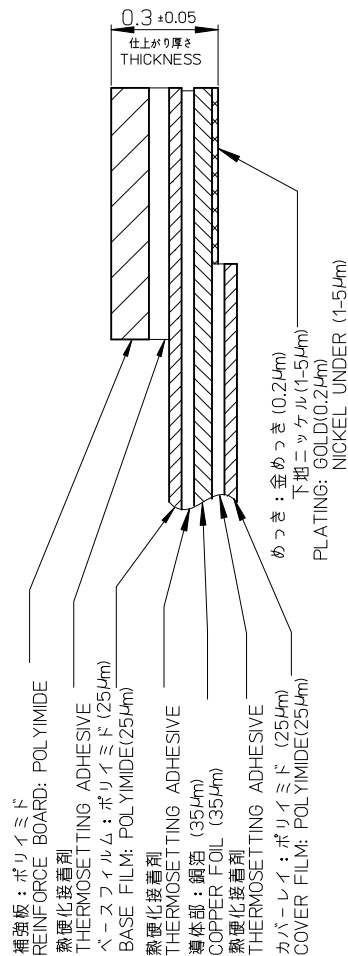

FPC構成推奨仕様
STRUCTURE OF FPC

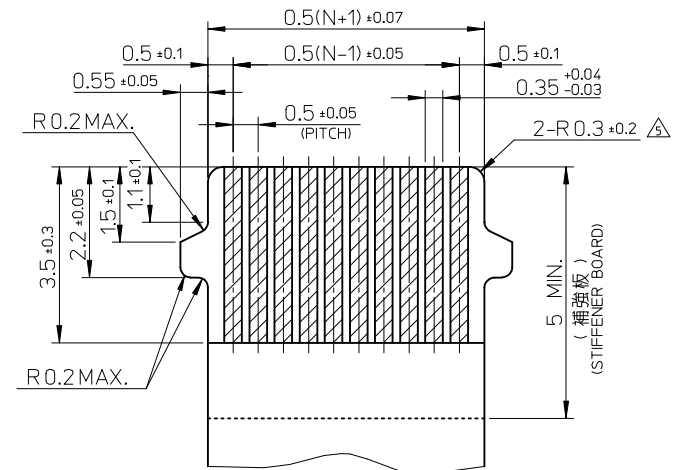

FPC について:

打ち抜き方向は導体側から補強板側を推奨します。
導体部については軟銅箔35μmまたは50μmを推奨します。
補強フィルム材質はポリイミドを推奨します。ベースフィルムは25μmを推奨します。
接着剤は熱硬化接着剤を推奨します。
尚、接着剤の接点部への付着は導通不良の原因になりますので、染み出しが無い様お願い致します。

ABOUT FPC

RECOMMENDED PUNCHER DIRECTION : FROM CONDUCTOR SIDE TO STIFFENER FILM SIDE.
RECOMMENDED CONDUCTOR SPEC :
THICKNESS OF SOFT COPPER FOIL : 35 MICROMETER OR 50 MICROMETER.

RECOMMENDED MATERIAL/THICKNESS.
STIFFENER FILM : POLYIMIDE
BASE FILM THICKNESS : 25μm
BONDING AGENT : THERMOSETTING BONDING AGENT

PLEASE PUT APPROPRIATE AMOUNT OF ADHESIVE ON ADHEREND BECAUSE THERE IS A POSSIBILITY THAT THE EXTRA ADHESIVE CAUSES THE DEFECT IN ELECTRICAL CONTINUITY.

SEE SHEET 1 OF 2 EC NO: J2009-2576 DRAWN: TAKASAKI 2009/05/25 CHKD: MAYASHI 2009/05/28 APPR: NUKITA 2009/05/28	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± ---	DRAWN BY YTAKAYASU	DATE 2007/08/10	TITLE 0.5 FPC CONN. ZIF E/O 2 CONTACTS TYPE HSG ASS'Y (H=2.5)				
		10 OVER 30 UNDER	± ---	CHECKED BY KTAKAHASHI	DATE 2007/08/10					
		30 OVER	± ---	APPROVED BY HHIRATA	DATE 2007/08/10	MOLEX INCORPORATED				
		ANGULAR ± --- °		MATERIAL NO. 502790-**11		DOCUMENT NO. SD-502790-001				SHEET NO. 2 OF 2
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
	REV									

10

9

8

7

6

5



4

3

2

1


引き出し方向

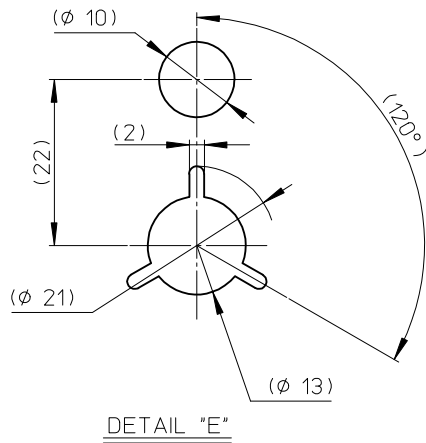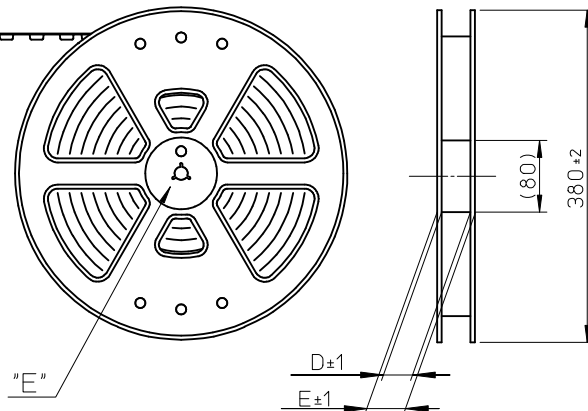PULL OUT
DIRECTION

NOTES

1. 梱包数量 : 2000個/リール
NUMBER OF CONNECTORS : 2000PIECES/REEL

2. リードテープ長さ
LEAD TAPE LENGTH

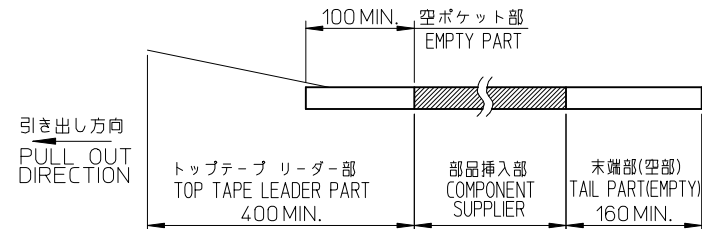

3. 製品詳細寸法については図面 SD-502790-001を参照下さい。
FOR DIMENSIONS OF PRODUCT, REFER TO SD-502790-001.

4. 材料 MATERIAL

キャリアテープ : ポリスチレン

CARRIER TAPE : POLYSTYRENE

トップテープ : ポリエチレンテレフタレート, ポリエチレン

TOP TAPE : POLYETHYLENE TEREPHTHALATE , POLYETHYLENE

リール : ポリスチレン<リサイクル材を含む>

REEL : POLYSTYRENE<RECYCLE MATERIAL CONTAINED>

5. ELV及びRoHS適合品 ELV AND RoHS COMPLIANT

REVISED	EC NO. J2009-2322	DRAWN: MTAKASAKI 2009/04/20	CHKD: MHAYASHI 2009/04/20	APPR: NUKITA 2009/04/21	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
								MM ONLY		--	METRIC		
						10 UNDER	± ---	DRAWN BY	DATE	TITLE 0.5 FPC CONN ZIF E/O 2 CONTACTS TYPE EMBSTP PACKAGE (H=2.5)			
						10 OVER 30 UNDER	± ---	CHECKED BY	DATE				
						30 OVER	± ---	KTAKAHASHI	2007/11/05				
						APPROVED BY	DATE		MOLEX INCORPORATED				
						HHIRATA	2007/11/05						
						ANGULAR ± --- °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
						DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		502790-**91		SD-502790-002		1 OF 2	
								SIZE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

9

8

7

6

5


4

3



2

10 9 8 7 6 5 4 3 2 1

引き出し方向
PULL OUT
DIRECTION

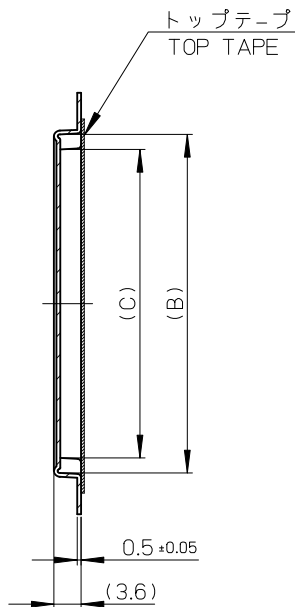

SECT. Y-Y

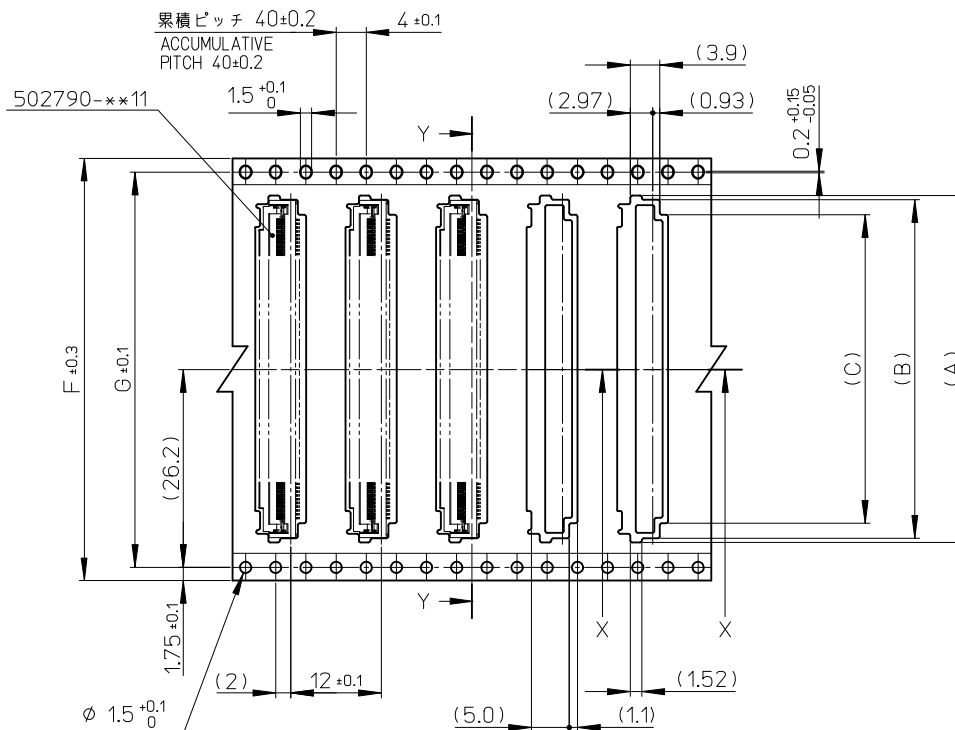

56	52.4	56	61.4	57.4	40.9	44.9	46	502790-8091	80
	52.4	56	61.4	57.4	32.9	36.9	38	502790-6491	64
	52.4	56	61.4	57.4	30.9	34.9	36	502790-6091	60
44	40.4	44	49.4	45.4	25.9	29.9	31	502790-5091	50
	40.4	44	49.4	45.4	20.9	24.9	26	502790-4091	40
32	28.4	32	37.4	33.4	15.9	19.9	21	502790-3091	30
キャリアテープ幅 CARRIER TAPE WIDTH	G	F	E	D	C	B	A	製品番号 MATERIAL NO.	極数 CIRCUIT

SEE SHEET 1 OF 2 EC NO: J2009-2322 DRWN:MTAKASAKI 2009/04/20 CHKD:MHAYASHI 2009/04/20 APPR:NUKITA 2009/04/21	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE --	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
		10 UNDER	± ---	DRAWN BY YTAKAYASU	DATE 2007/11/05	TITLE 0.5 FPC CONN ZIF E/O 2 CONTACTS TYPE EMBSTP PACKAGE (H=2.5)  MOLEX INCORPORATED		
		10 OVER 30 UNDER	± ---	CHECKED BY KTAKAHASHI	DATE 2007/11/05			
		30 OVER	± ---	APPROVED BY HHIRATA	DATE 2007/11/05			
		ANGULAR ± --- °		MATERIAL NO. 502790-**91				
	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9