



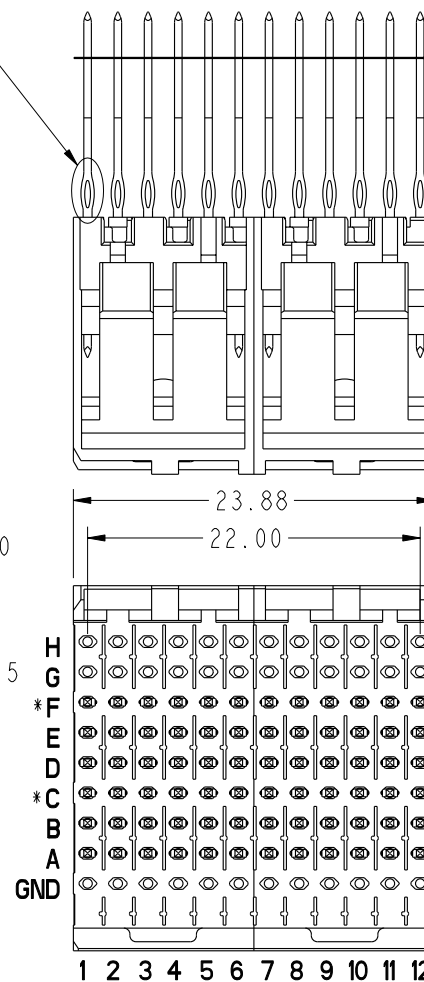

PRODUCT NUMBER	CONTACT AREA PLATING MEETS:
84965-102ZZZ	TELCORDIA CO
84965-102ZZZLF	TELCORDIA CO
84965-302ZZZ	CUSTOMER SPECIAL
84965-302ZZZLF	CUSTOMER SPECIAL
84965-502ZZZ	TELCORDIA UE
84965-502ZZZLF	TELCORDIA UE
84965-902ZZZ	TELCORDIA CO
84965-902ZZZLF	TELCORDIA CO

EYE OF NEEDLE PRESS FIT SECTION
BABY-H PRESS FIT SECTION

DETAIL A
SCALE 4:1
SEE NOTE 14

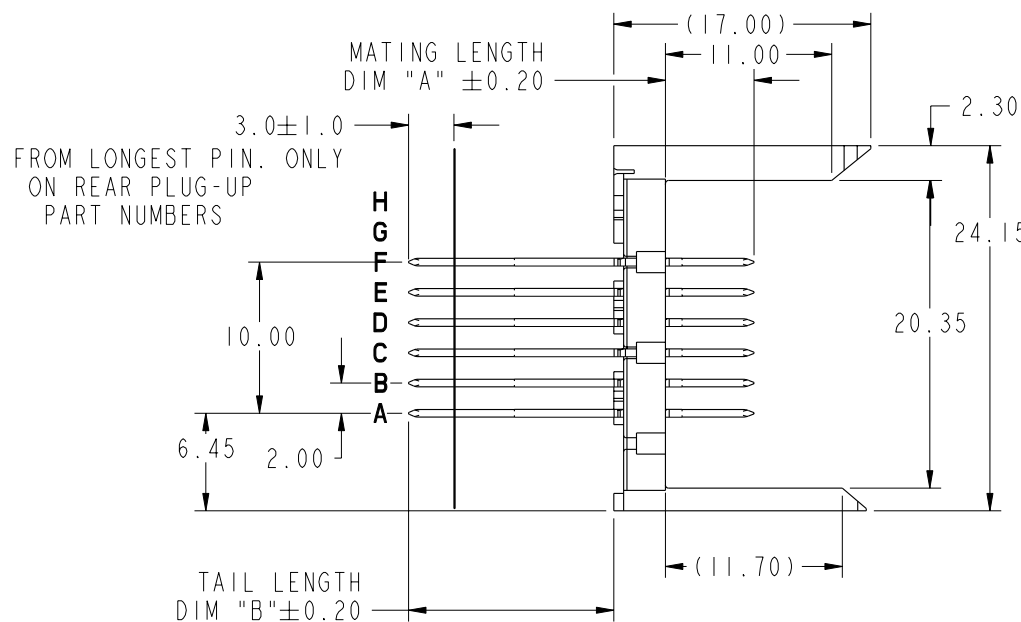

mat'l code SEE NOTE 3				tolerances unless otherwise specified		CUSTOMER		FCI	
ltr	ecr no.	dr	date	linear	0.X ±0.3	COPY		www.fciconnect.com	
L	V06-0569	DCH	2006-06-12	linear	0.XX ±0.13	projection		title	
M	V07-0170	DCH	2007-03-28	linear	.XXX ±.051	MM		VERTICAL SIGNAL HDR 8 ROW	
N	V08-0030	HTB	2008-01-22	angles	0° ±2°	scale		P.F. 96 POS. SELECT LOAD EXT.	
P	V08-0066	LP	2008-03-24	dr	E. KROPER. 2001-01-15	A		product family	
-	-	-	-	enrg	J. VOLSTORF 2001-01-15	size		METRAL	
J	V04-0397	DAI	2004-05-18	chr	J. VOLSTORF 2001-01-15	dwg no		code	
K	V05-0955	LP	2005-11-09	appd	J. VOLSTORF 2001-01-15	A		213	
sheet index		revision sheet		P	P	P	P	1 of 5	
1		2		3	4	5			

Pro/E

cage code 22526

PDM: Rev:P

STATUS: Released

Printed: May 13, 2011



PIN NO.	DIM A MATING LENGTH	DIM B TAIL LENGTH	PCB THICKNESS RANGE ACCOMMODATED BY PIN'S TAIL LENGTH
			ROWS A,B,C,D,E,F,G&H
01*	5.00	4.30	1.60 MIN
54		11.55	1.60 - 3.15
22		12.20	2.95 - 3.80
30		12.95	2.95 - 4.55
05		13.70	2.95 - 5.30
35		14.45	3.05 - 6.05
48		15.20	3.80 - 6.80
40		15.70	4.30 - 7.30
65		16.40	5.00 - 8.00
09		17.10	5.70 - 8.70
02*	5.75	4.30	1.60 MIN
55		11.55	1.60 - 3.15
44		12.20	2.95 - 3.80
31		12.95	2.95 - 4.55
06		13.70	2.95 - 5.30
36		14.45	3.05 - 6.05
49		15.20	3.80 - 6.80
25		15.70	4.30 - 7.30
66		16.40	5.00 - 8.00
10		17.10	5.70 - 8.70
03*	6.50	4.30	1.60 MIN
56		11.55	1.60 - 3.15
45		12.20	2.95 - 3.80
32		12.95	2.95 - 4.55
07		13.70	2.95 - 5.30
37		14.45	3.05 - 6.05
50		15.20	3.80 - 6.80
41		15.70	4.30 - 7.30
24		16.40	5.00 - 8.00
11		17.10	5.70 - 8.70

* STUB PINS - NO REAR PLUG-UP



PIN NO.	DIM A MATING LENGTH	DIM B TAIL LENGTH	PCB THICKNESS RANGE ACCOMMODATED BY PIN'S TAIL LENGTH
			ROWS A,B,C,D,E,F,G&H
04*	7.25	4.30	1.60 MIN
57		11.55	1.60 - 3.15
46		12.20	2.95 - 3.80
33		12.95	2.95 - 4.55
08		13.70	2.95 - 5.30
38		14.45	3.05 - 6.05
51		15.20	3.80 - 6.80
42		15.70	4.30 - 7.30
67		16.40	5.00 - 8.00
12		17.10	5.70 - 8.70
19*	8.00	4.30	1.60 MIN
58		11.55	1.60 - 3.15
47		12.20	2.95 - 3.80
34		12.95	2.95 - 4.55
20		13.70	2.95 - 5.30
39		14.45	3.05 - 6.05
52		15.20	3.80 - 6.80
43		15.70	4.30 - 7.30
68		16.40	5.00 - 8.00
21		17.10	5.70 - 8.70

mat'l code SEE NOTE 3				tolerances unless otherwise specified		CUSTOMER		FCI www.fciconnect.com	
ltr	ecn no.	dr	date	linear	0.X ±0.3	projection 	COPY	title VERTICAL SIGNAL HDR 8 ROW P.F. 96 POS. SELECT LOAD EXT.	
P					0.XX ±0.13				
					.XXX ±.051				
				angles	0° ±2°	MM ←→ scale 1:1	product family METRAL	code 213	sheet 2 of 5
				dr	E. KROPER. 2001-01-15				
				enrg	J. VOLSTORF 2001-01-15				
				chr	J. VOLSTORF 2001-01-15				
				appd	J. VOLSTORF 2001-01-15				
sheet index	revision sheet								




PRODUCT NUMBER

SEE SHEET 1

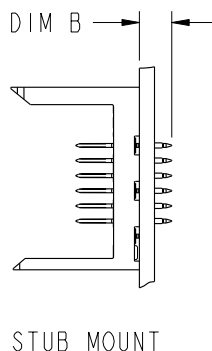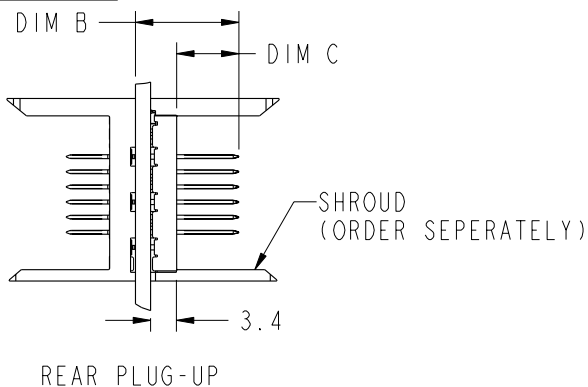

PRESS-FIT HOLES	OPTION 1
HOLE DIAMETER AFTER PLATING	Ø 0.65-0.80
DRILLED HOLE	Ø 0.81-0.86 (Ø 0.85 DRILL)
COPPER PLATING	0.025 MIN
SnPb PLATING	0.005-0.015

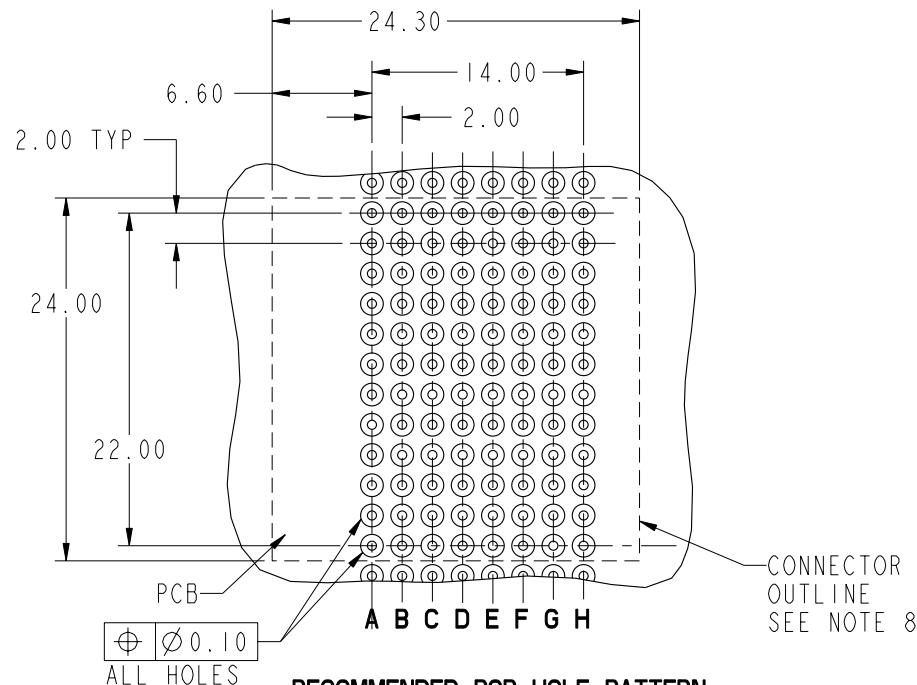

RECOMMENDED PCB HOLE PATTERN
(COMPONENT SIDE)
SEE PRINT 58351 FOR
ADDITIONAL PCB INFORMATION

mat'l code SEE NOTE 3				tolerances unless otherwise specified		CUSTOMER		FCI www.fciconnect.com	
ltr	ecr no.	dr	date	linear	0.X ± 0.3	projection	COPY	title	VERTICAL SIGNAL HDR 8 ROW P.F. 96 POS. SELECT LOAD EXT.
P					0.XX ± 0.13				
					.XXX ± .051				
				angles	0° ± 2°	MM scale 1:1	product family size A	METRAL dwg no 84965	code 213 sheet 3
				dr	E. KROPER. 2001-01-15				
				enr	J. VOLSTORF 2001-01-15				
				chr	J. VOLSTORF 2001-01-15				
				appd	J. VOLSTORF 2001-01-15				
sheet index	revision sheet								

Pro/E

cage code 22526

PDM: Rev:P

STATUS: Released Printed: May 13, 2011



PRODUCT NUMBER

SEE SHEET 1

NOTES:

1. SEE APPLICATION SPECIFICATION GS-20-010 FOR INFORMATION ON AVAILABLE TOOLING, CIRCUIT BOARD DESIGN CONSIDERATIONS, REPAIR PROCEDURES AND PRODUCT OFFERINGS.
2. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS AND TOLERANCES ARE IN ACCORDANCE WITH ASME Y14.5M, 1994
3. HOUSING MATERIAL: LIQUID CRYSTAL POLYMER, 30% GLASS FILLED, FLAME RETARDANT PER UL 94-V0. PIN MATERIAL: PHOSPHOR BRONZE
4. PLATING ON CONTACT AREAS PER PERFORMANCE LEVELS SHOWN IN TABLE ON SHEET 1. PLATING ON "LF" TAILS IS Sn ONLY. PLATING ON ALL OTHER TAILS IS SnPb.
5. DIMENSIONAL RESTRICTIONS OF PINS IN HEADERS.
DIM A : 5.0mm MIN, 8.0mm MAX FOR ROWS A-H
DIM C : 5.0mm MIN, 8.0mm MAX FOR ROWS A-H
6. THE MIN PCB THICKNESS FOR REAR PLUG-UP APPLICATIONS IS 1.6mm
7. USE SHROUD 98173-102 FOR REAR PLUG-UP APPLICATIONS.
8. THE 'CONNECTOR OUTLINE' IS THE MIN OUTLINE REQUIRED. TO DETERMINE THE OUTLINE NECESSARY TO PERMIT THE VARIOUS TYPES OF REPAIR OPERATIONS, SEE APPLICATION SPECIFICATION GS-20-010.

9. CURRENT RATING : 1 AMP PER PIN
10. TEMPERATURE RANGE : -55°C TO +105°C
11. P/N 84965-X02ZZZLF



12. PRODUCTS WHERE THE PART NUMBER ENDS IN "LF" MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008. ALL PRODUCTS WILL WITHSTAND EXPOSURE TO 260°C FOR 60 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
13. FOR LEAD FREE PART NUMBERS ADD "LF" SUFFIX. EXAMPLE: 84965-X02ZZZLF
14. PIN TYPE IS AT THE MANUFACTURERS OPTION AND CAN BE EITHER BABY-H OR EYE OF THE NEEDLE STYLE

mat'l code SEE NOTE 3				tolerances unless otherwise specified		CUSTOMER		 www.fciconnect.com			
ltr	ecr no.	dr	date	linear	0.X ±0.3		projection 	title VERTICAL SIGNAL HDR 8 ROW P.F. 96 POS. SELECT LOAD EXT			
P					0.XX ±0.13						
					.XXX ±.051						
				angles	0° ±2°		 MM scale 1:1	product family METRAL		code	
				dr	E. KROPER.	2001-01-15		size	dwg no	213	
				enrg	J. VOLSTORF	2001-01-15					
				chr	J. VOLSTORF	2001-01-15					
				appd	J. VOLSTORF	2001-01-15					
sheet index	revision sheet									sheet 5	

cage code 22526

Pro/E

3

4

PDM: Rev:P

STATUS: Released

Printed: May 13, 2011

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9