EVALUATION KIT AVAILABLE

MAX44250/MAX44251/MAX44252

20V, Ultra-Precision, Low-Noise Op Amps

General Description

The MAX44250/MAX44251/MAX44252 are 20V, ultra-precision, low-noise, low-drift amplifiers that offer near-zero DC offset and drift through the use of patented auto-correlating zeroing techniques. This method constantly measures and compensates the input offset, eliminating drift over time and temperature and the effect of 1/f noise. These single, dual, and quad devices feature rail-to-rail outputs, operate from a single 2.7V to 20V supply, and consume only 1.15mA per channel, while providing 5.9nV/√Hz input- referred voltage noise. The ICs are unity-gain stable with a gain-bandwidth product of 10MHz.

With excellent specifications such as offset voltage of 6µV (max), drift of 19nV/°C (max), and 123nV$_{P-P}$ noise in 0.1Hz to 10Hz, the ICs are ideally suited for applications requiring ultra-low noise and DC precision such as interfacing with pressure sensors, strain gauges, precision weight scales, and medical instrumentation.

The ICs are available in 5-pin SOT23, 8-pin SOT23, 8-pin µMAX®, and 14-pin SO packages and are rated over the -40°C to +125°C temperature range.

***Ordering Information* appears at end of data sheet.**

***Functional Diagrams* appear at end of data sheet.**

For related parts and recommended products to use with this part, refer to **www.maximintegated.com/MAX44250.related**.

Benefits and Features

- **2.7V to 20V Power-Supply Range**
- **Integrated EMI Filter**
- **6µV Input Offset Voltage (max) at Room Temperature**
- **TCV$_{OS}$ of 19nV/°C (max)**
- **Low 5.9nV/√Hz Input-Referred Voltage Noise**
- **123nV$_{P-P}$ in 0.1Hz to 10Hz**
- **Fast 400ns Settling Time**
- **10MHz Gain-Bandwidth Product**
- **Rail-to-Rail Output**
- **High Accuracy Enables Precision Signal Chain Acquisition**

Applications

Strain Gauges
Pressure Transducers
Medical Instrumentation
Precision Instrumentation
Load Cell and Bridge Transducer Amplification

Typical Operating Circuit

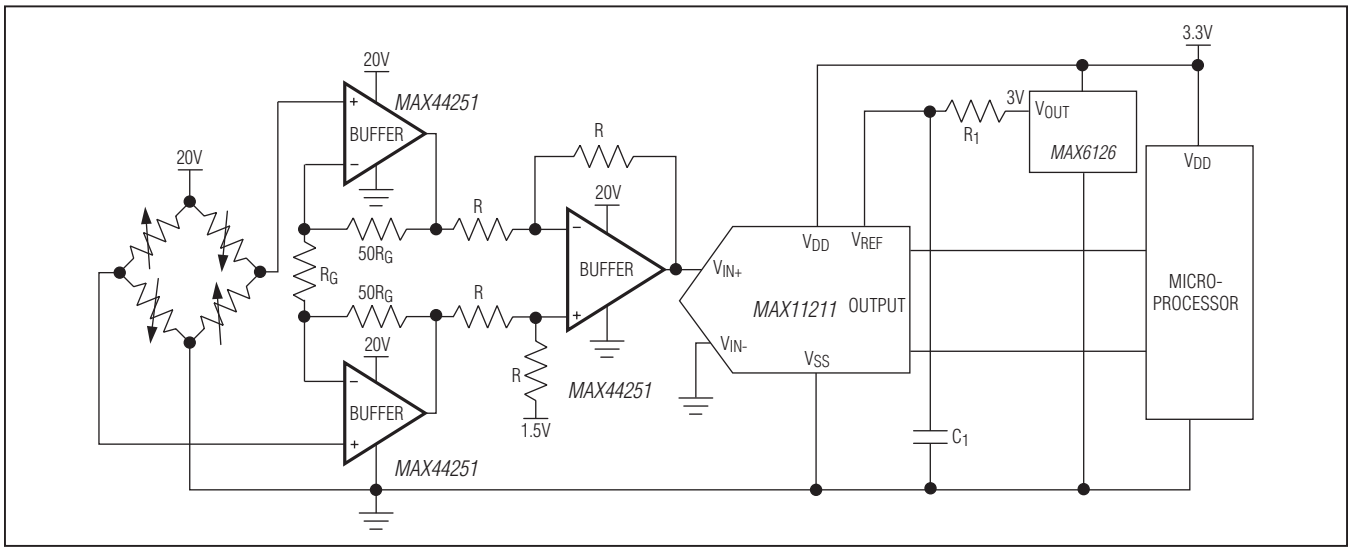

µMAX is a registered trademark of Maxim Integrated Products, Inc.

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim's website at www.maximintegrated.com.

19-6000; Rev 2; 8/12

ABSOLUTE MAXIMUM RATINGS

Supply Voltage (V_{DD} to V_{SS}).....-0.3V to +22V
All Other Pins.....(V_{SS} - 0.3V) to (V_{DD} + 0.3V)
Short-Circuit Duration to Either Supply Rail 1s
Continuous Input Current (any pin)..... ±20mA
Differential Input Voltage..... ±6V
Maximum Power Dissipation (T_A = +70°C)
5-Pin SOT23 (derate 3.1mW/°C above +70°C).....246.7mW
8-Pin SOT23 (derate 9.1mW/°C above +70°C) 727mW
µMAX (derate 4.5 mW/°C above +70°C) 362mW
SO (derate 8.3 mW/°C above +70°C).....666.7mW
Operating Temperature Range ..... -40°C to +125°C
Junction Temperature .....+150°C
Storage Temperature Range..... -65°C to +150°C
Lead Temperature (soldering, 10s) ..... +300°C
Soldering Temperature (reflow) ..... +260°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

PACKAGE THERMAL CHARACTERISTICS (Note 1)

5-Pin SOT23
Junction-to-Ambient Thermal Resistance (θ_{JA}) .... 324.3°C/W
Junction-to-Case Thermal Resistance (θ_{JC}) .....82°C/W
8-Pin SOT23
Junction-to-Ambient Thermal Resistance (θ_{JA}) ..... 196°C/W
Junction-to-Case Thermal Resistance (θ_{JC}) .....70°C/W
µMAX
Junction-to-Ambient Thermal Resistance (θ_{JA}) .....221°C/W
Junction-to-Case Thermal Resistance (θ_{JC}) .....42°C/W
SO
Junction-to-Ambient Thermal Resistance (θ_{JA}) .....120°C/W
Junction-to-Case Thermal Resistance (θ_{JC}) .....37°C/W

Note 1: Package thermal resistances were obtained using the method described in JEDEC specification JESD51-7, using a four-layer board. For detailed information on package thermal considerations, refer to **www.maximintegrated.com/thermal-tutorial.**

ELECTRICAL CHARACTERISTICS

(**V_{DD} = 10V**, V_{SS} = 0V, V_{IN+} = V_{IN-} = V_{DD}/2, R_L = 10kΩ to V_{DD}/2, T_A = -40°C to +125°C, unless otherwise noted. Typical values are at T_A = +25°C.) (Note 2)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
POWER SUPPLY							
Supply Voltage Range	V_{DD}	Guaranteed by PSRR		2.7		20	V
Power-Supply Rejection Ratio (Note 3)	PSRR	V_{DD} = 2.7V to 20V, V_{CM} = 0V		140	145		dB
Quiescent Current per Amplifier (MAX44250)	I_{DD}	R_L = ∞	T_A = +25°C		1.22	1.7	mA
			-40°C < T_A < +125°C			1.85	
Quiescent Current per Amplifier (MAX44251/MAX44252)	I_{DD}	R_L = ∞	T_A = +25°C		1.15	1.55	mA
			-40°C < T_A < +125°C			1.75	
Power-Up Time	t_{ON}				25		µs
DC SPECIFICATIONS							
Input Common-Mode Range	V_{CM}	Guaranteed by CMRR test		V_{SS} - 0.05		V_{DD} - 1.5	V
Common-Mode Rejection Ratio (Note 3)	CMRR	T_A = +25°C, V_{CM} = -0.05V to (V_{DD} - 1.5V)		133	140		dB
		-40°C < T_A < +125°C		130			
Input Offset Voltage (MAX44250) (Note 3)	V_{OS}	T_A = +25°C			3	9	µV

ELECTRICAL CHARACTERISTICS (continued)

(**V_{DD} = 10V**, V_{SS} = 0V, V_{IN+} = V_{IN-} = V_{DD}/2, R_L = 10kΩ to V_{DD}/2, T_A = -40°C to +125°C, unless otherwise noted. Typical values are at T_A = +25°C.) (Note 2)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Input Offset Voltage (MAX44251/MAX44252)(Note 3)	V_{OS}	T_A = +25°C			3	6	µV
		-40°C < T_A < +125°C				7	
Input Offset Voltage Drift (MAX44250) (Note 3)	TC V_{OS}				5	26	nV/°C
Input Offset Voltage Drift (MAX44251/MAX44252)(Note 3)	TC V_{OS}				5	19	nV/°C
Input Bias Current (MAX44250) (Note 3)	I_B	T_A = +25°C			200	1400	pA
Input Bias Current (MAX44251/MAX44252)(Note 3)	I_B	T_A = +25°C			200	1300	pA
		-40°C < T_A < +125°C				2400	
Input Offset Current (Note 3)	I_{OS}				400		pA
Open-Loop Gain (Note 3)	A_{VOL}	250mV ≤ V_{OUT} ≤ V_{DD} - 250mV, R_L = 10kΩ to V_{DD}/2	T_A = +25°C	145	154		dB
			-40°C < T_A < +125°C	136			
Output Short-Circuit Current		To V_{DD} or V_{SS}	Noncontinuous		96		mA
Output Voltage Low (MAX44250)	V_{OL}	V_{OUT} - V_{SS}	R_L = 10kΩ to V_{DD}/2		12	26	mV
			R_L = 2kΩ to V_{DD}/2		45	92	
Output Voltage Low (MAX44251/MAX44252)	V_{OL}	V_{OUT} - V_{SS}	R_L = 10kΩ to V_{DD}/2		12	25	mV
			R_L = 2kΩ to V_{DD}/2		45	85	
Output Voltage High (MAX44250)	V_{OH}	V_{DD} - V_{OUT}	R_L = 10kΩ to V_{DD}/2		18	40	mV
			R_L = 2kΩ to V_{DD}/2		71	148	
Output Voltage High (MAX44251/MAX44252)	V_{OH}	V_{DD} - V_{OUT}	R_L = 10kΩ to V_{DD}/2		18	37	mV
			R_L = 2kΩ to V_{DD}/2		71	135	
AC SPECIFICATIONS							
Input Voltage-Noise Density	e_N	f = 1kHz			5.9		nV/√Hz
Input Voltage Noise		0.1Hz < f < 10Hz			123		nV_{P-P}
Input Current-Noise Density	i_N	f = 1kHz			0.6		pA/√Hz
Input Capacitance	C_{IN}				2		pF
Gain-Bandwidth Product	GBW				10		MHz
Phase Margin	PM	C_L = 20pF			60		Degrees
Slew Rate	SR	A_V = 1V/V, V_{OUT} = $2V_{P-P}$			8		V/µs
Capacitive Loading	C_L	No sustained oscillation, A_V = 1V/V			500		pF
Total Harmonic Distortion	THD	V_{OUT} = $2V_{P-P}$, A_V = +1V/V, R_L = 10kΩ to V_{DD}/2	f = 1kHz		-124		dB
			f = 20kHz		-119		
Settling Time		To 0.01%, V_{OUT} = 2V step, A_V = -1V/V			400		ns

ELECTRICAL CHARACTERISTICS

(**V_{DD} = 3.3V**, V_{SS} = 0V, V_{IN+} = V_{IN-} = V_{DD}/2, R_L = 10kΩ to V_{DD}/2, T_A = -40°C to +125°C, unless otherwise noted. Typical values are at T_A = +25°C.) (Note 2)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
POWER SUPPLY							
Quiescent Current Per Amplifier (MAX44250)	I_{DD}	R_L = ∞	T_A = +25°C		1.17	1.65	mA
			-40°C < T_A < +125°C			1.80	
Quiescent Current Per Amplifier (MAX44251/MAX44252))	I_{DD}	R_L = ∞	T_A = +25°C		1.1	1.5	mA
			-40°C < T_A < +125°C			1.65	
Power-Up Time	t_{ON}				25		µs
DC SPECIFICATIONS							
Input Common-Mode Range	V_{CM}	Guaranteed by CMRR test		V_{SS} - 0.05		V_{DD} - 1.5	V
Common-Mode Rejection Ratio (Note 3)	CMRR	T_A = +25°C, V_{CM} = -0.05V to (V_{DD} - 1.5V)		120	129		dB
		-40°C < T_A < +125°C		117			
Input Offset Voltage (MAX44250)(Note 3)	V_{OS}				3	8.5	µV
Input Offset Voltage (MAX44251/MAX44252)(Note 3)	V_{OS}	T_A = +25°C			3	5.5	µV
		-40°C < T_A < +125°C				6.5	
Input Offset Voltage Drift (MAX44250)(Note 3)	TC V_{OS}				8	25	nV/°C
Input Offset Voltage Drift (MAX44251/MAX44252)(Note 3)	TC V_{OS}				8	18	nV/°C
Input Bias Current (MAX44250)(Note 3)	I_B				200	1450	pA
Input Bias Current (MAX44251/MAX44252)(Note 3)	I_B	T_A = +25°C			200	1100	pA
		-40°C < T_A < +125°C				1200	
Input Offset Current (Note 3)	I_{OS}				400		pA
Open-Loop Gain (Note 3)	A_{VOL}	250mV ≤ V_{OUT} ≤ V_{DD} - 250mV, R_L = 10kΩ to V_{DD}/2	T_A = +25°C	136	151		dB
			-40°C < T_A < +125°C	133			
Output Short-Circuit Current		To V_{DD} or V_{SS}	Noncontinuous		58		mA
Output Voltage Low (MAX44250)	V_{OL}	V_{OUT} - V_{SS}	R_L = 10kΩ to V_{DD}/2		5	26	mV
			R_L = 2kΩ to V_{DD}/2		17	46	
Output Voltage Low (MAX44251/MAX44252)	V_{OL}	V_{OUT} - V_{SS}	R_L = 10kΩ to V_{DD}/2		5	22	mV
			R_L = 2kΩ to V_{DD}/2		17	42	
Output Voltage High	V_{OH}	V_{DD} - V_{OUT}	R_L = 10kΩ to V_{DD}/2		9	22	mV
			R_L = 2kΩ to V_{DD}/2		29	52	

ELECTRICAL CHARACTERISTICS (continued)

(**V_{DD} = 3.3V**, V_{SS} = 0V, V_{IN+} = V_{IN-} = V_{DD}/2, R_L = 10kΩ to V_{DD}/2, T_A = -40°C to +125°C, unless otherwise noted. Typical values are at T_A = +25°C.) (Note 2)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
AC SPECIFICATIONS							
Input Voltage-Noise Density	e_N	f = 1kHz			6.2		nV/√Hz
Input Voltage Noise		0.1Hz < f < 10Hz			123		nV_{P-P}
Input Current-Noise Density	i_N	f = 1kHz			0.3		pA/√Hz
Input Capacitance	C_{IN}				2		pF
Gain-Bandwidth Product	GBW				10		MHz
Phase Margin	PM	C_L = 20pF			60		Degrees
Slew Rate	SR	A_V = 1V/V, V_{OUT} = $1V_{P-P}$, 10% to 90%			5		V/µs
Capacitive Loading	C_L	No sustained oscillation, A_V = 1V/V			500		pF
Total Harmonic Distortion	THD	V_{OUT} = $1V_{P-P}$, A_V = +1V/V, V_{CM} = V_{DD}/4, R_L = 10kΩ to V_{DD}/2	f = 1kHz		-124		dB
			f = 20kHz		-100		
Settling Time		To 0.01%, V_{OUT} = 1V step, A_V = -1V/V			200		ns

Note 2: All devices are 100% production tested at T_A = +25°C. Temperature limits are guaranteed by design.
Note 3: Guaranteed by design.

Typical Operating Characteristics

(V_{DD} = 10V, V_{SS} = 0V, outputs have R_L = 10kΩ to V_{DD}/2. T_A = +25°C, unless otherwise specified.)

OFFSET VOLTAGE HISTOGRAM

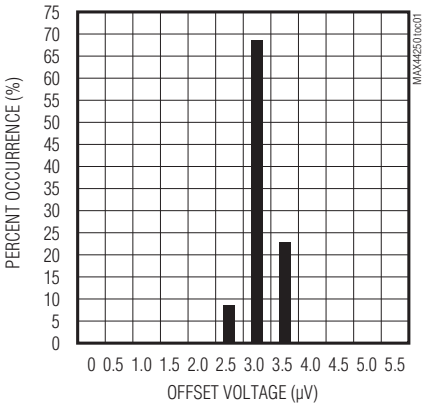

INPUT OFFSET VOLTAGE DRIFT HISTOGRAM

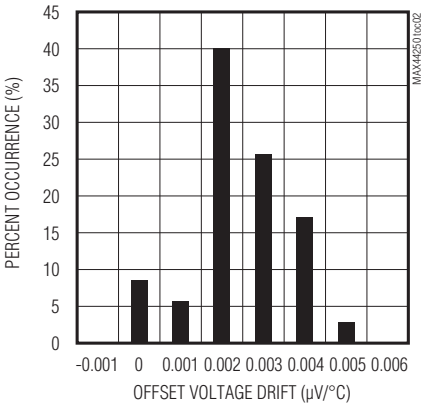

SUPPLY CURRENT vs. SUPPLY VOLTAGE

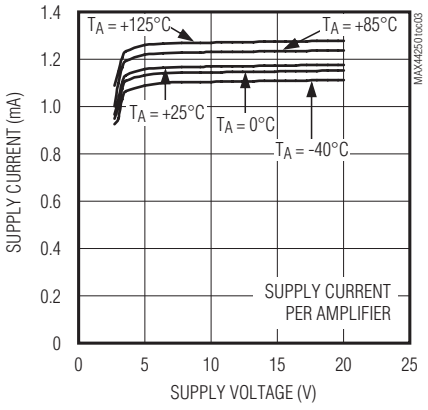

Typical Operating Characteristics (continued)

(V_{DD} = 10V, V_{SS} = 0V, outputs have R_L = 10kΩ to $V_{DD}/2$. T_A = +25°C, unless otherwise specified.)

SUPPLY CURRENT vs. TEMPERATURE

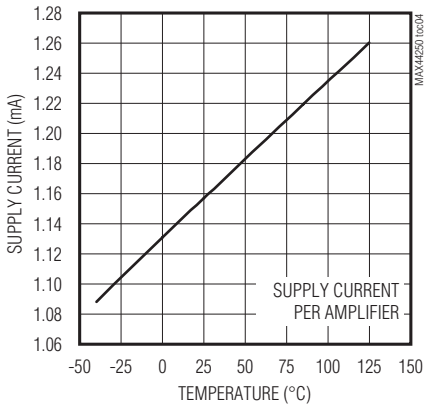

INPUT OFFSET VOLTAGE vs. INPUT COMMON MODE

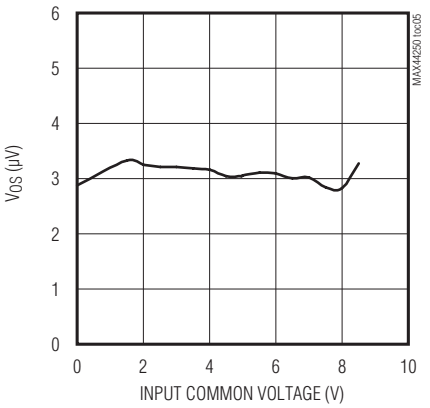

INPUT OFFSET VOLTAGE vs. TEMPERATURE

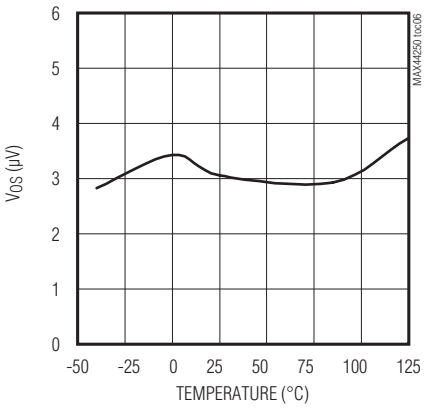

INPUT BIAS CURRENT vs. COMMON-MODE VOLTAGE

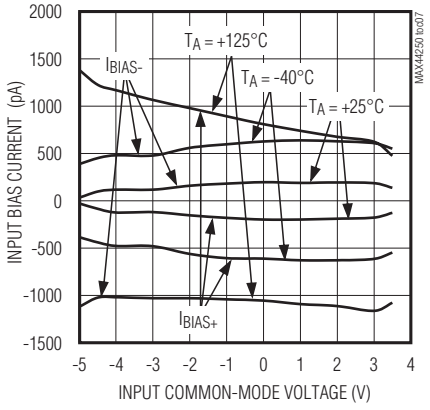

INPUT BIAS CURRENT vs. TEMPERATURE

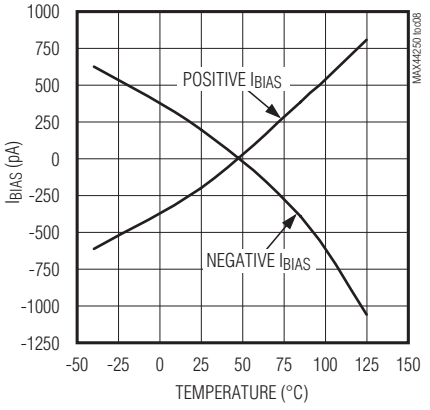

COMMON-MODE REJECTION RATIO vs. FREQUENCY

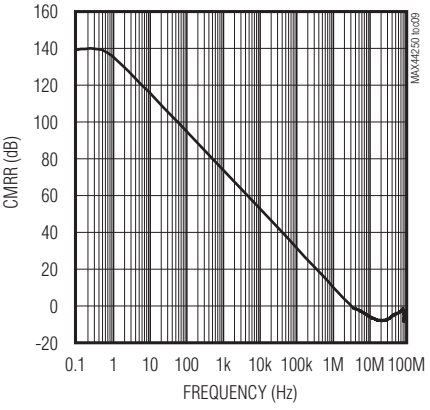

Typical Operating Characteristics (continued)

(V_{DD} = 10V, V_{SS} = 0V, outputs have R_L = 10kΩ to V_{DD}/2. T_A = +25°C, unless otherwise specified.)

OUTPUT VOLTAGE HIGH vs. OUTPUT SOURCE CURRENT (V_{DD} - V_{OH})

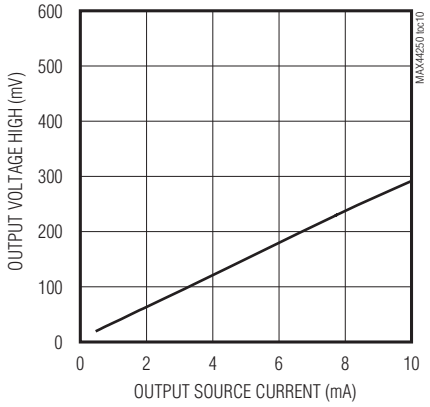

OUTPUT VOLTAGE LOW vs. OUTPUT SINK CURRENT

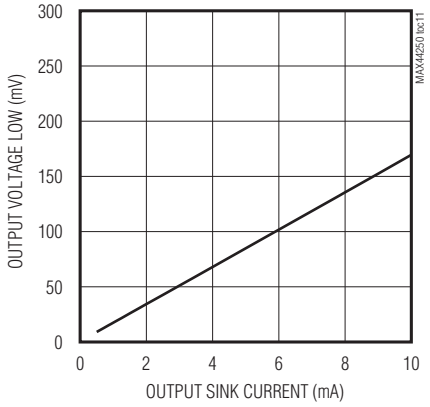

OUTPUT VOLTAGE SWING HIGH vs. TEMPERATURE

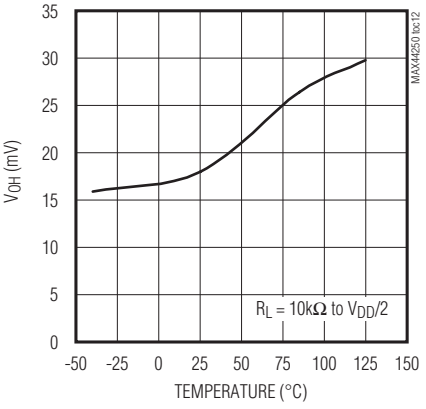

OUTPUT VOLTAGE SWING LOW vs. TEMPERATURE

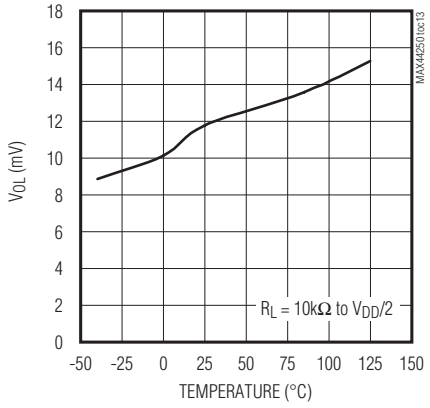

OPEN-LOOP GAIN vs. FREQUENCY

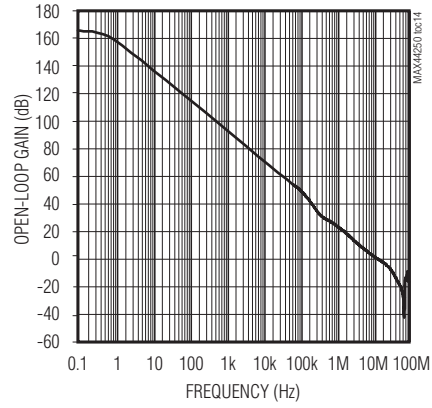

INPUT VOLTAGE NOISE vs. FREQUENCY

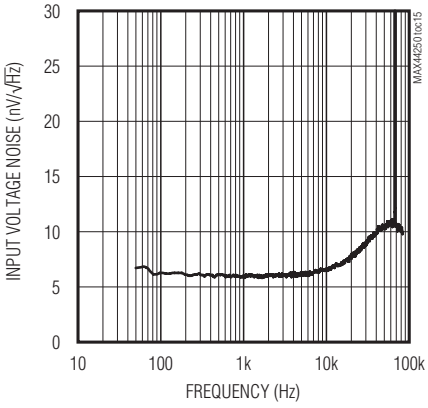

INPUT VOLTAGE 0.1Hz TO 10Hz NOISE

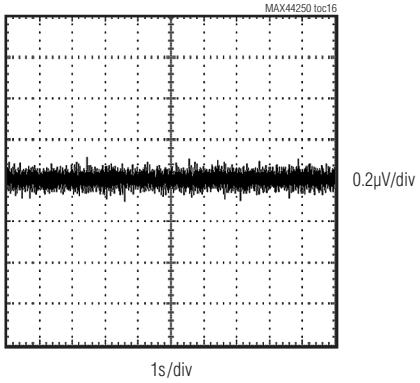

INPUT CURRENT NOISE vs. FREQUENCY

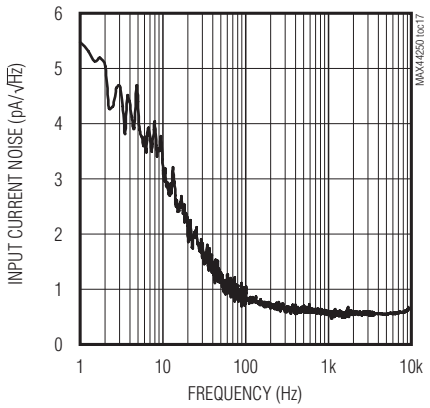

SMALL-SIGNAL RESPONSE

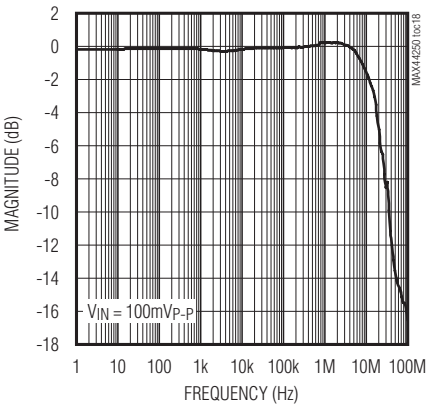

Typical Operating Characteristics (continued)

(V_{DD} = 10V, V_{SS} = 0V, outputs have R_L = 10kΩ to $V_{DD}/2$. T_A = +25°C, unless otherwise specified.)

LARGE-SIGNAL RESPONSE

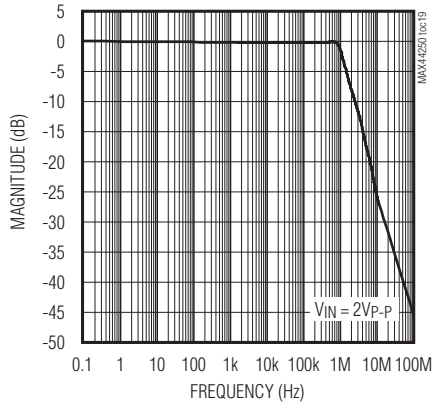

SMALL-SIGNAL STEP RESPONSE vs. TIME

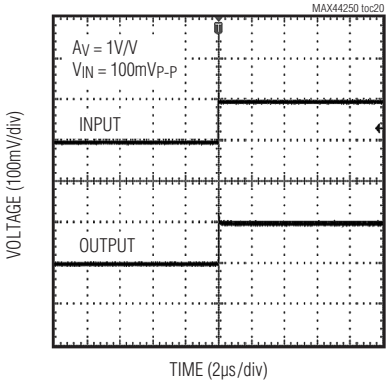

LARGE-SIGNAL STEP RESPONSE vs. TIME

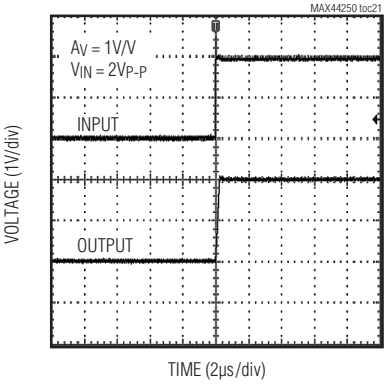

POWER-UP TIME

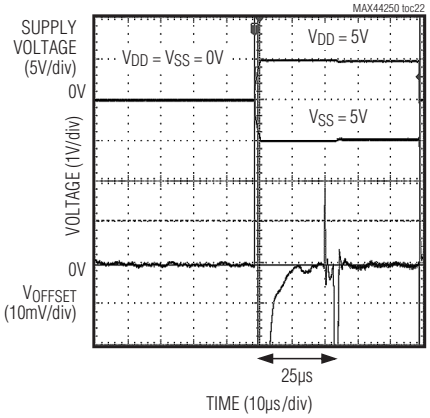

TOTAL HARMONIC DISTORTION vs. FREQUENCY

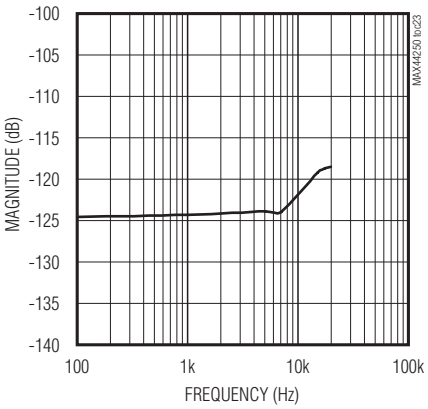

TOTAL HARMONIC DISTORTION vs. INPUT VOLTAGE

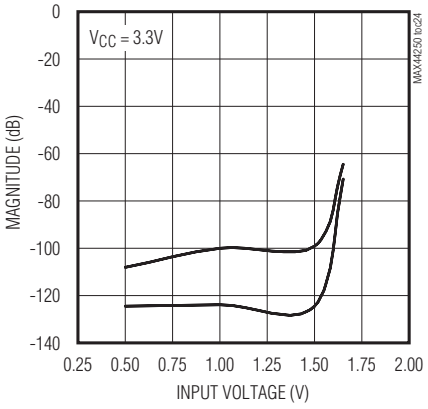

STABILITY vs. CAPACITIVE AND RESISTIVE LOAD IN PARALLEL WITH C_L

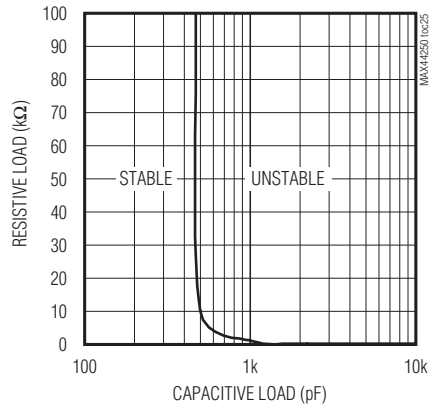

STABILITY vs. CAPACITIVE AND R_{ISO} IN SERIES WITH C_{LOAD}

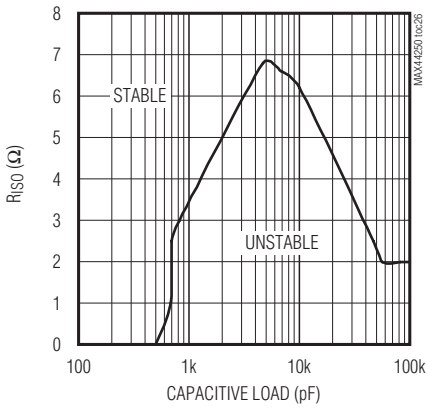

MAX44251 EMIRR

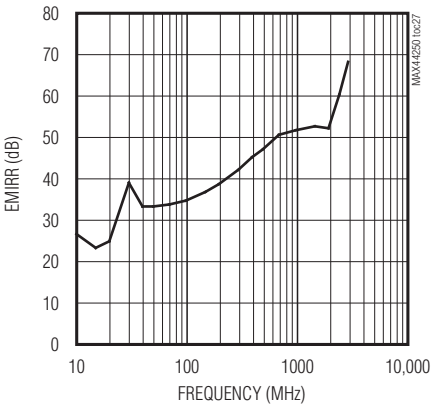

Pin Configurations

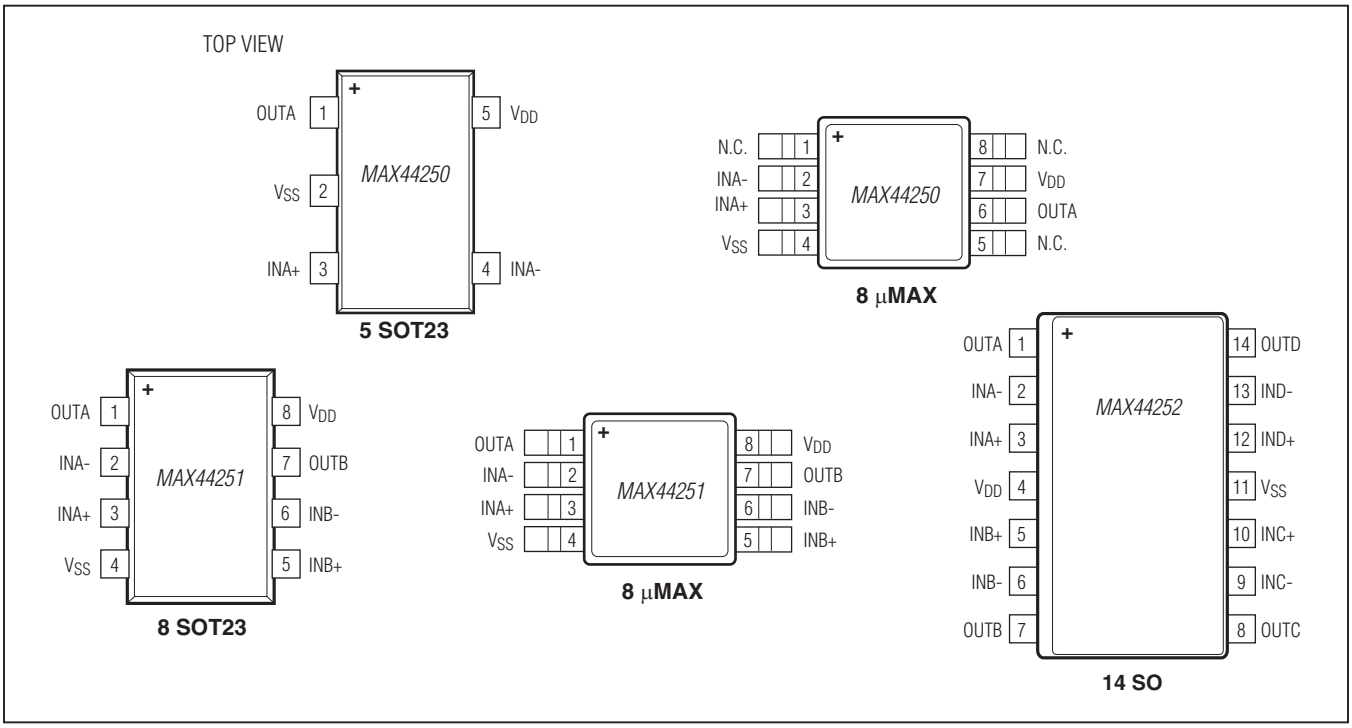

Pin Description

PIN					NAME	FUNCTION
MAX44250		MAX44251		MAX44252		
5 SOT23	8 µMAX	8 SOT23	8 µMAX	14 SO		
1	6	1	1	1	OUTA	Channel A Output
4	2	2	2	2	INA-	Channel A Negative Input
3	3	3	3	3	INA+	Channel A Positive Input
2	4	4	4	11	V_{SS}	Negative Supply Voltage
—	—	5	5	5	INB+	Channel B Positive Input
—	—	6	6	6	INB-	Channel B Negative Input
—	—	7	7	7	OUTB	Channel B Output
5	7	8	8	4	V_{DD}	Positive Supply Voltage
—	—	—	—	8	OUTC	Channel C Output
—	—	—	—	9	INC-	Channel C Negative Input
—	—	—	—	10	INC+	Channel C Positive Input
—	—	—	—	12	IND+	Channel D Positive Input
—	—	—	—	13	IND-	Channel D Negative Input
—	—	—	—	14	OUTD	Channel D Output
—	1, 5, 8	—	—	—	N.C.	No Connection

Detailed Description

The MAX44250/MAX44251/MAX44252 are high-precision amplifiers that have less than 3µV of typical input-referred offset and low flicker noise. These characteristics are achieved through an autozeroing technique that samples and finds repeating patterns of signal to cancel the input offset voltage and 1/f noise of the amplifier.

Autozero

The ICs feature an autozero circuit that allows the devices to achieve less than 6µV (max) of input offset voltage at room temperature and eliminate the 1/f noise.

Noise Suppression

Flicker noise, inherent in all active devices, is inversely proportional to frequency presented. Charges at the oxide-silicon interface that are trapped-and-released by MOSFET oxide occurs at low frequency more often. For this reason, flicker noise is also called 1/f noise.

Electromagnetic interference (EMI) noise occurs at higher frequency that results in malfunction or degradation of electrical equipment.

The ICs have an input EMI filter to avoid the output getting affected by radio frequency interference. The EMI filter composed of passive devices presents significant higher impedance to higher frequency.

High Supply Voltage Range

The ICs feature 1.15mA current consumption per channel and a voltage supply range from either 2.7V to 20V single supply or ±1.35V to ±10V split supply.

Applications Information

The ICs are ultra-high-precision operational amplifiers with a high supply voltage range designed for load cell, medical instrumentation and precision instrument applications.

These devices are also designed to interface with pressure transducers and are ideal for precision weight scale application as shown in Figure 1.

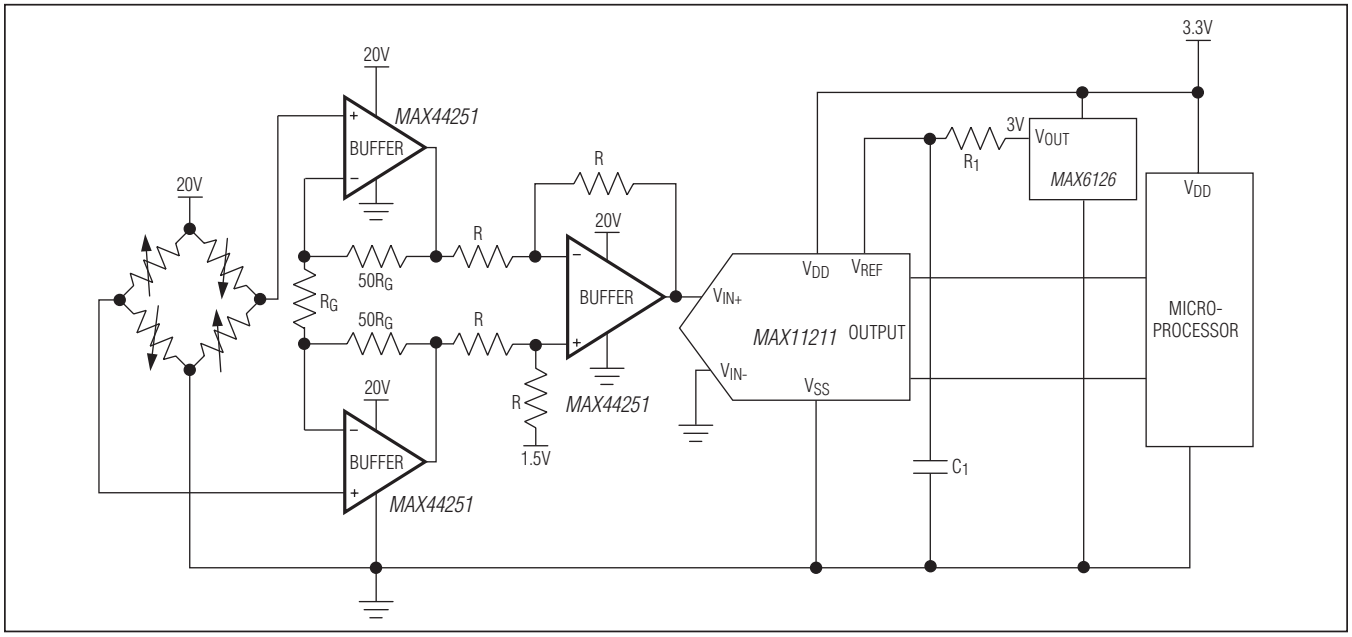

Figure 1. Weight Scale Application Circuit

ADC Buffer Amplifier

The MAX44250/MAX44251/MAX44252's low input offset voltage, low noise, and fast settling time make these amplifiers ideal for ADC buffers. Weigh scales are one application that often require a low-noise, high-voltage amplifier in front of an ADC. Figure 1 details an example of a load cell and amplifier driven from the same ±10V supplies, along with the MAX11211 18-bit delta sigma ADC. Load cells produce a very small voltage change at their outputs, therefore driving the excitation source with a higher voltage produces a wider dynamic range that can be measured at the ADC inputs.

The MAX11211 ADC operates from a single 2.7V to 3.6V analog supply, offers 18-bit noise-free resolution and 0.86mW power dissipation. The MAX11211 also offers > 100dB rejection at 50Hz and 60Hz. This ADC is part of a family of 16-, 18-, 20-, and 24-bit delta sigma ADCs with high precision and < 1mW power dissipation.

The MAX44250/MAX44251/MAX44252's low input offset voltage and low noise allow a gain circuit prior to the MAX11211 without losing any dynamic range at the ADC.

Error Budget Example

When using the ICs as an ADC buffer in strain gauge application, the temperature drift should be taken into consideration to determine maximum input signal. A typical strain gauge has sensitivity specification of just 2mV/V at rated out load. This means that when the strain gauge load cell is powered with 10V, the full-scale output voltage is 20mV. In this application, both offset voltage and drift are critical parameters that directly affect the accuracy of measurement. Even though offset voltage could be calibrated out, its drift over temperature is still a problem.

The ICs, with a typical offset drift of 5nV/°C, guarantee that the drift over a 10°C range is only 50nV. Setting this equal to 0.5 LSB in a 18-bit system yields a full-scale range of 13mV. With a single 10V supply, an acceptable closed-loop gain of 770V/V provides sufficient gain while maintaining headroom.

Precision Low-Side Current Sensing

The ICs' autozero feature produces ultra-low offset voltage and drift, making them ideal for precision current-sensing applications. Figure 2 shows the ICs in a low-side current-sense configuration. This circuit produces an accurate output voltage, V_{OUT} equal to I_{LOAD} x R_{SENSE} x (1 + R_2/R_1).

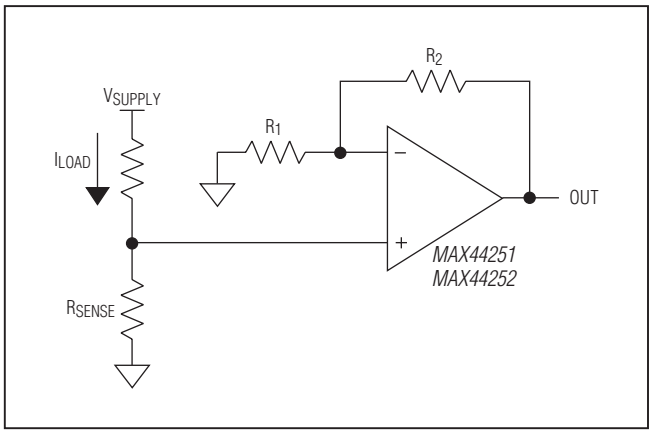

Figure 2. Low-Side Current Sensing

20V, Ultra-Precision, Low-Noise Op Amps

Functional Diagrams

TOP VIEW



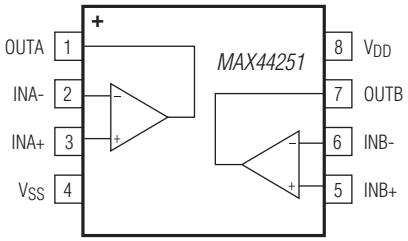

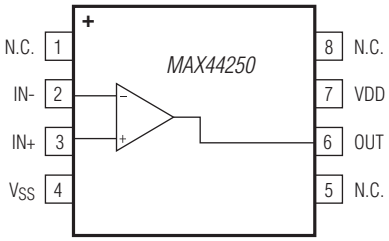

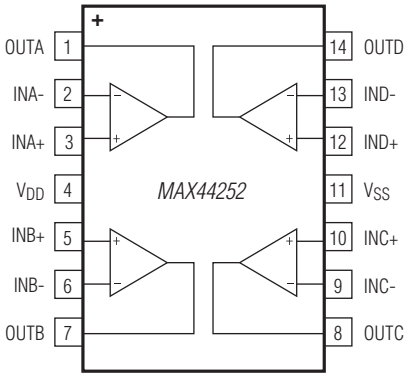

Chip Information

PROCESS: BiCMOS

Ordering Information

PART	TEMP RANGE	PIN-PACKAGE	TOP MARK
MAX44250AUK+	-40°C to +125°C	5 SOT23	AFMA
MAX44250AUA+	-40°C to +125°C	8 µMAX	—
MAX44251AKA+	-40°C to +125°C	8 SOT23	AERC
MAX44251AUA+	-40°C to +125°C	8 µMAX	—
MAX44252ASD+	-40°C to +125°C	14 SO	—

+Denotes a lead(Pb)-free/RoHS-compliant package.

Package Information

For the latest package outline information and land patterns (footprints), go to **www.maximintegrated.com/packages**. Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

PACKAGE TYPE	PACKAGE CODE	OUTLINE NO.	LAND PATTERN
5 SOT23	U5+1	21-0057	90-0174
8 SOT23	K8+5	21-0078	90-0176
8 µMAX	U8+1	21-0036	90-0092
14 SO	S14M+5	21-0041	90-0096

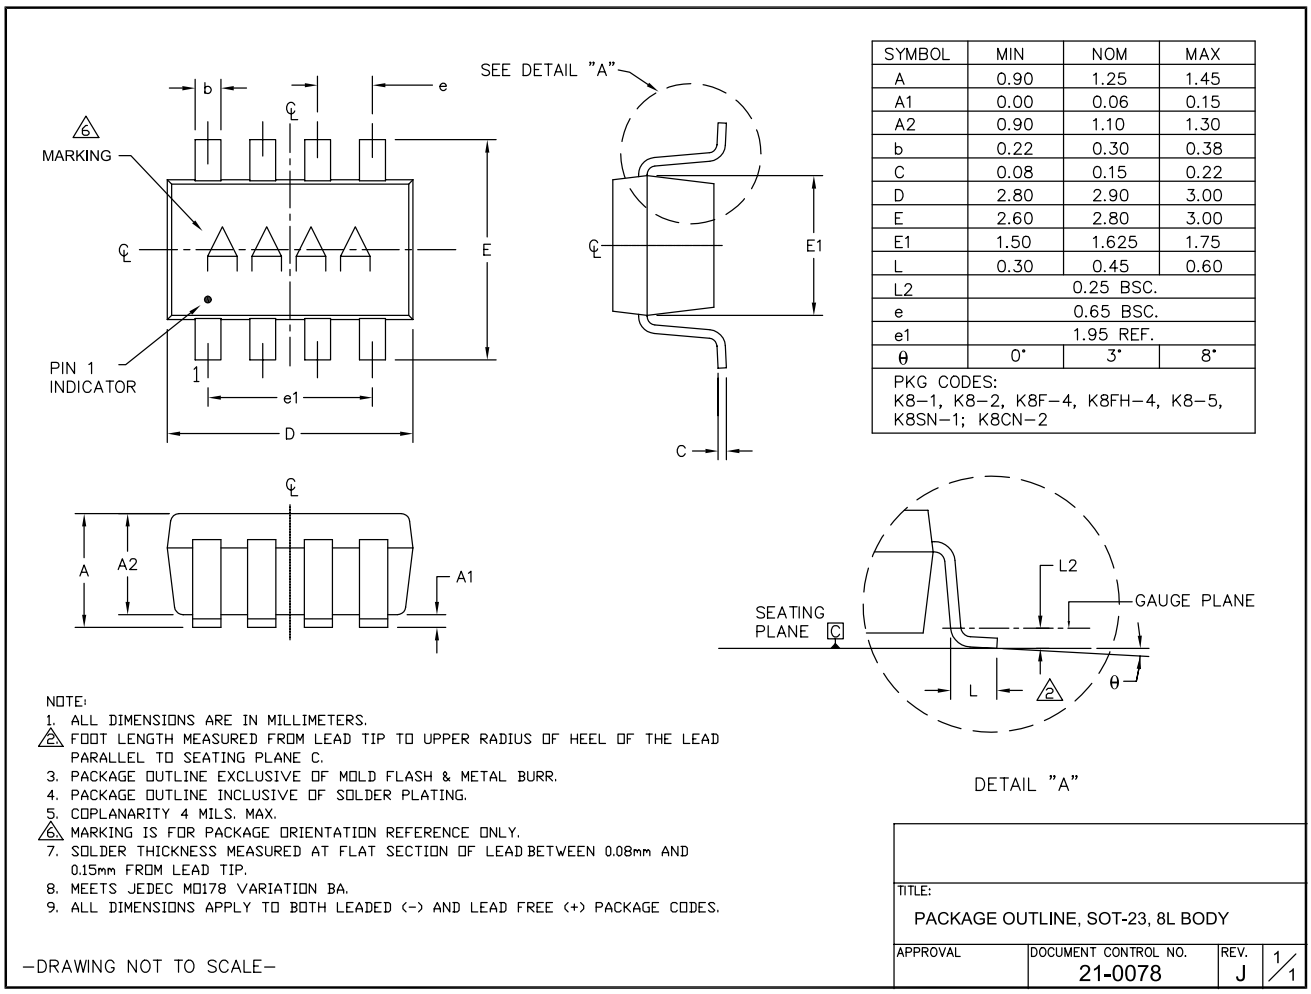

SYMBOL	MIN	NOM	MAX
A	0.90	1.25	1.45
A1	0.00	0.06	0.15
A2	0.90	1.10	1.30
b	0.22	0.30	0.38
C	0.08	0.15	0.22
D	2.80	2.90	3.00
E	2.60	2.80	3.00
E1	1.50	1.625	1.75
L	0.30	0.45	0.60
L2	0.25 BSC.		
e	0.65 BSC.		
e1	1.95 REF.		
θ	0°	3°	8°

PKG CODES:
K8-1, K8-2, K8F-4, K8FH-4, K8-5, K8SN-1; K8CN-2

NOTE:
1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. FOOT LENGTH MEASURED FROM LEAD TIP TO UPPER RADIUS OF HEEL OF THE LEAD PARALLEL TO SEATING PLANE C.
3. PACKAGE OUTLINE EXCLUSIVE OF MOLD FLASH & METAL BURR.
4. PACKAGE OUTLINE INCLUSIVE OF SOLDER PLATING.
5. COPLANARITY 4 MILS. MAX.
6. MARKING IS FOR PACKAGE ORIENTATION REFERENCE ONLY.
7. SOLDER THICKNESS MEASURED AT FLAT SECTION OF LEAD BETWEEN 0.08mm AND 0.15mm FROM LEAD TIP.
8. MEETS JEDEC MO178 VARIATION BA.
9. ALL DIMENSIONS APPLY TO BOTH LEADED (-) AND LEAD FREE (+) PACKAGE CODES.

-DRAWING NOT TO SCALE-

TITLE: PACKAGE OUTLINE, SOT-23, 8L BODY			
APPROVAL	DOCUMENT CONTROL NO. 21-0078	REV. J	1/1

Package Information (continued)

For the latest package outline information and land patterns (footprints), go to **www.maximintegrated.com/packages**. Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

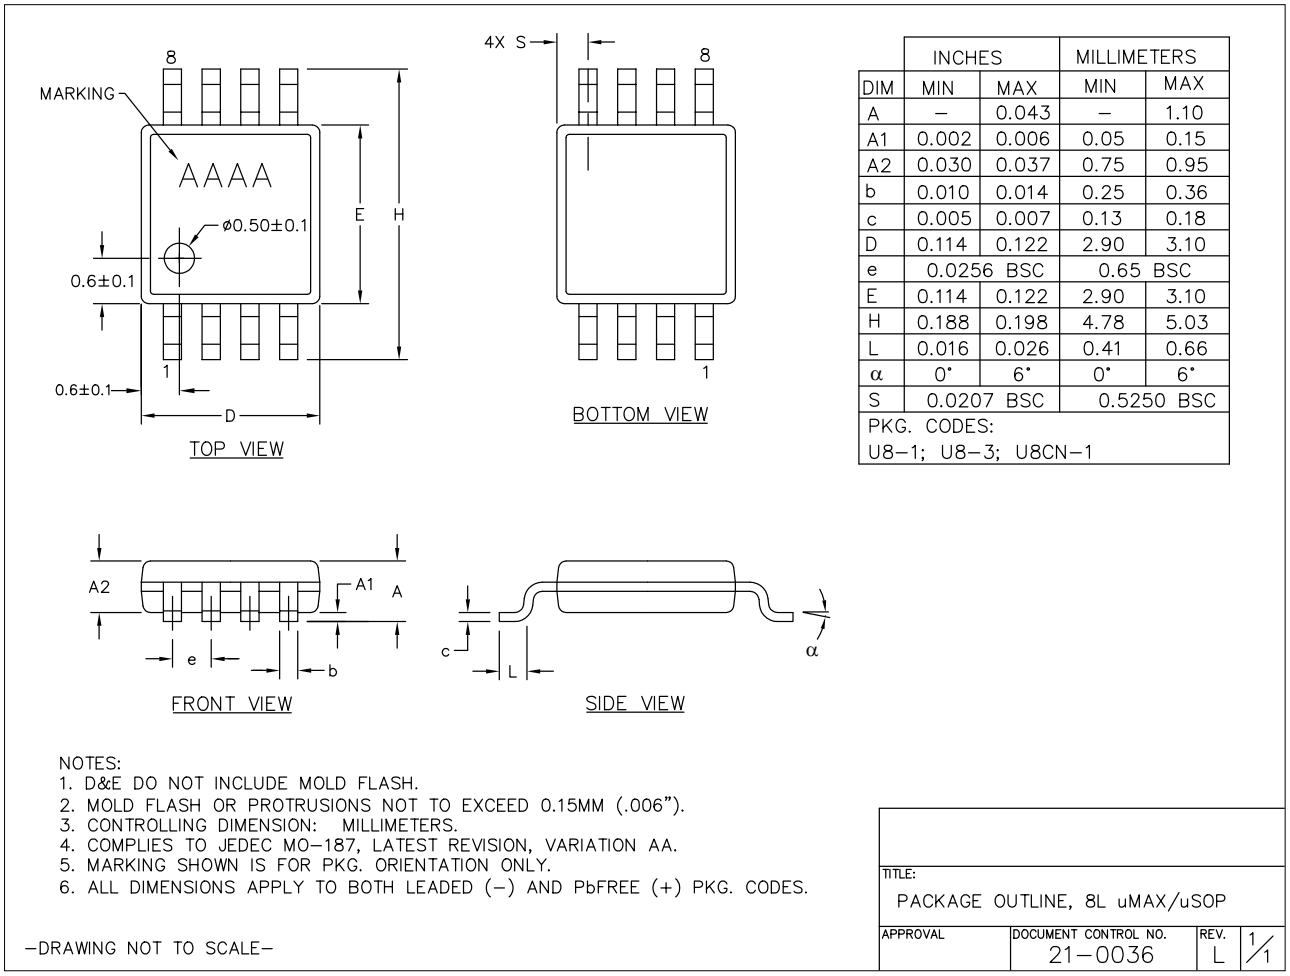

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	–	0.043	–	1.10
A1	0.002	0.006	0.05	0.15
A2	0.030	0.037	0.75	0.95
b	0.010	0.014	0.25	0.36
c	0.005	0.007	0.13	0.18
D	0.114	0.122	2.90	3.10
e	0.0256 BSC		0.65 BSC	
E	0.114	0.122	2.90	3.10
H	0.188	0.198	4.78	5.03
L	0.016	0.026	0.41	0.66
α	0°	6°	0°	6°
S	0.0207 BSC		0.5250 BSC	
PKG. CODES: U8–1; U8–3; U8CN–1				

NOTES:
1. D&E DO NOT INCLUDE MOLD FLASH.
2. MOLD FLASH OR PROTRUSIONS NOT TO EXCEED 0.15MM (.006").
3. CONTROLLING DIMENSION: MILLIMETERS.
4. COMPLIES TO JEDEC MO–187, LATEST REVISION, VARIATION AA.
5. MARKING SHOWN IS FOR PKG. ORIENTATION ONLY.
6. ALL DIMENSIONS APPLY TO BOTH LEADED (–) AND PbFREE (+) PKG. CODES.

–DRAWING NOT TO SCALE–

TITLE: PACKAGE OUTLINE, 8L uMAX/uSOP			
APPROVAL	DOCUMENT CONTROL NO. 21–0036	REV. L	1/1

Package Information (continued)

For the latest package outline information and land patterns (footprints), go to **www.maximintegrated.com/packages**. Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

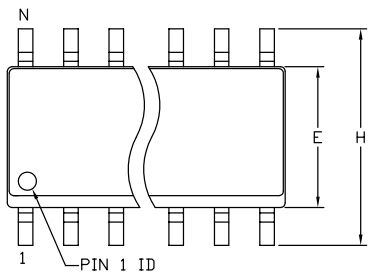

TOP VIEW



END VIEW

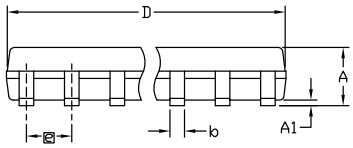

SIDE VIEW

COMMON DIMENSIONS				
SYMBOL	INCHES		MM	
	MIN.	MAX.	MIN.	MAX.
A	.053	.069	1.35	1.75
A1	.004	.010	0.10	0.25
b	.014	.019	0.35	0.49
c	.007	.010	0.19	0.25
E	.150	.157	3.80	4.00
e	.050 BSC		1.27 BSC	
H	.228	.244	5.80	6.20
L	.016	.050	0.40	1.27
α	0°	8°	0°	8°

VARIATION A				
SYMBOL	INCHES		MM	
	MIN.	MAX.	MIN.	MAX.
D	.189	.197	4.80	5.00
N	8			
MS012	AA			
PKG. CODE	S8-2, S8-4, S8-5, S8-6F, S8-7F, S8-8F, S8-10F, S8-11F, S8-16F			

VARIATION B				
SYMBOL	INCHES		MM	
	MIN.	MAX.	MIN.	MAX.
D	.337	.344	8.55	8.75
N	14			
MS012	AB			
PKG. CODE	S14-1, S14-4, S14-5, S14-6; S14M-4, S14M-5, S14M-6, S14M-7			

VARIATION C				
SYMBOL	INCHES		MM	
	MIN.	MAX.	MIN.	MAX.
D	.386	.394	9.80	10.00
N	16			
MS012	AC			
PKG. CODE	S16-1, S16-3, S16-5, S16-6, S16-8, S16-7F, S16-9F, S16-10F; S16M-3, S16M-6			

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
2. MATERIAL MUST COMPLY WITH BANNED AND RESTRICTED SUBSTANCES SPEC # 10-0131.
3. DIMENSIONS D AND E DO NOT INCLUDE MOLD PROTRUSION.
   ALLOWABLE MOLD PROTRUSION IS 0.15 MM (.006") PER SIDE.
4. LEADS TO BE COPLANAR WITHIN 0.10mm (.004").
5. MEETS JEDEC MS012
6. ALL DIMENSIONS APPLY TO BOTH LEADED (-) AND PbFREE (+) PKG. CODES.

-DRAWING NOT TO SCALE-

TITLE: PACKAGE OUTLINE, 8L, 14L, 16L SOIC .150 INCH			
APPROVAL	DOCUMENT CONTROL NO. 21-0041	REV. C	1/1

Package Information (continued)

For the latest package outline information and land patterns (footprints), go to **www.maximintegrated.com/packages**. Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

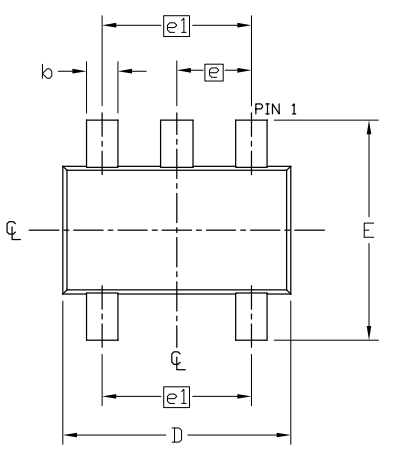

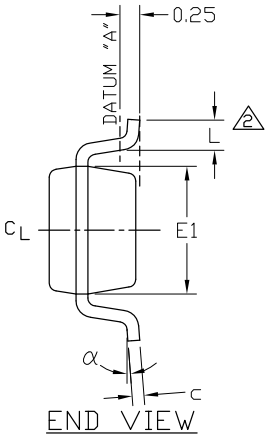

SYMBOL	MIN	NOM	MAX
A	0.90	1.25	1.45
A1	0.00	0.05	0.15
A2	0.90	1.10	1.30
b	0.35	0.40	0.50
c	0.08	0.15	0.20
D	2.80	2.90	3.00
E	2.60	2.80	3.00
E1	1.50	1.625	1.75
L	0.35	0.45	0.60
L1	0.60 REF		
e	0.95 BSC.		
e1	1.90 BSC.		
α	0°	2.5°	8°

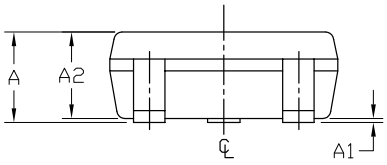

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.
2. FOOT LENGTH MEASURED AT INTERCEPT POINT BETWEEN DATUM A & LEAD SURFACE.
3. PACKAGE OUTLINE EXCLUSIVE OF MOLD FLASH & METAL BURR. MOLD FLASH, PROTRUSION OR METAL BURR SHOULD NOT EXCEED 0.25 MM.
4. MEETS JEDEC MO178, VARIATION AA.
5. LEADS TO BE COPLANAR WITHIN 0.10 mm.
6. SOLDER THICKNESS MEASURED AT FLAT SECTION OF LEAD BETWEEN 0.08mm AND 0.15mm FROM LEAD TIP.
7. MATERIAL MUST COMPLY WITH BANNED AND RESTRICTED SUBSTANCES SPEC # 10-0131.
8. ALL DIMENSIONS APPLY TO BOTH LEADED (-) AND LEAD FREE (+) PACKAGE CODES.
9. PKG CODES: U5-1, U5-2

TITLE: PACKAGE OUTLINE, 5L SOT23			
APPROVAL	DOCUMENT CONTROL NO. 21-0057	REV. G	1/1

-DRAWING NOT TO SCALE-

Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	10/11	Initial release	—
1	12/11	Released the MAX44252 and updated the *Typical Operating Characteristics*.	5, 6, 11
2	8/12	Added the MAX44250 to the data sheet, added MAX44251 EMIRR graph to *Typical Operating Characteristics*, and revised Figure 2.	1–16

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.

© 2012 Maxim Integrated The Maxim logo and Maxim Integrated are trademarks of Maxim Integrated Products, Inc.

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001
Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:
moschip.ru
moschip.ru_4
moschip.ru_6
moschip.ru_9