





Both 1 Form A and 1 Form B contacts incorporated in a compact DIP8-pin with low on-resistance

PhotoMOS®

HE 1 Form A & 1 Form B (AQW654)

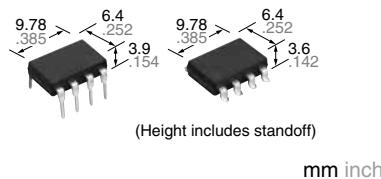

RoHS compliant

FEATURES

- Applicable for 1 Form A and 1 Form B use as well as two independent 1 Form A and 1 Form B use**
- Controls low-level analog signals**
PhotoMOS feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.
- High sensitivity and low on-resistance**
Can control max. 0.16 A load current with 5 mA input current. Low on-resistance of max. 11 Ω. (in case of using only 1 channel)
- Low-level off state leakage current of max. 1 μA**

TYPICAL APPLICATIONS

- High-speed inspection machines
- Data communication equipment
- Telephone equipment
- Sensing equipment

TYPES

| Output rating* | Output rating* | | Package | Part No. | | | Packing quantity | | |
|----------------|----------------|--------------|----------|-----------------------|------------------------|-----------------------------|------------------|--|--|
| | | | | Through hole terminal | Surface-mount terminal | | | | |
| | Load voltage | Load current | | Tube packing style | | Tape and reel packing style | Tube | Tape and reel | |
| AC/DC dual use | 400 V | 120 mA | DIP8-pin | AQW654 | AQW654A | AQW654AX | AQW654AZ | 1 tube contains: 50 pcs. 1 batch contains: 500 pcs. | |
| 1,000 pcs | | | | | | | | | |

*Indicate the peak AC and DC values.

Note: The surface mount terminal indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


| Item | | Symbol | AQW654(A) | Remarks |
|-------------------------|-------------------------|-------------------|-----------------------------|--|
| Input | LED forward current | I _F | 50 mA | |
| | LED reverse voltage | V _R | 5 V | |
| | Peak forward current | I _{FP} | 1 A | f = 100 Hz, Duty factor = 0.1% |
| | Power dissipation | P _{in} | 75 mW | |
| Output | Load voltage (peak AC) | V _L | 400 V | |
| | Continuous load current | I _L | 0.12A (0.16 A) | Peak AC, DC (): in case of using only 1 channel) |
| | Peak load current | I _{peak} | 0.36 A | 100 ms (1 shot), V _L = DC |
| | Power dissipation | P _{out} | 800 mW | |
| Total power dissipation | | P _T | 850 mW | |
| I/O isolation voltage | | V _{iso} | 1,500 Vrms | |
| Ambient temperature | Operating | T _{opr} | -40 to +85°C -40 to +185°F | (Non-icing at low temperatures) |
| | Storage | T _{stg} | -40 to +100°C -40 to +212°F | |

HE 1 Form A & 1 Form B (AQW654)

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

| Item | | | Symbol | AQW654(A) | Condition |
|--------------------------|----------------------------------|---------|---------------------------------------|--|---|
| Input | LED operate current | Typical | I_{Fon} (N.O.) I_{Foff} (N.C.) | 0.9 mA | $I_L = \text{Max.}$ |
| | | Maximum | | 3 mA | |
| | LED reverse current | Minimum | I_{Foff} (N.O.) I_{Fon} (N.C.) | 0.4 mA | $I_L = \text{Max.}$ |
| | | Typical | | 0.8 mA | |
| Output | LED dropout voltage | Typical | V_F | 1.25 V (1.14 V at $I_F = 5 \text{ mA}$) | $I_F = 50 \text{ mA}$ |
| | | Maximum | | 1.5 V | |
| | On resistance | Typical | R_{on} | 11 Ω | $I_F = 5 \text{ mA (N.O.)}$ $I_F = 0 \text{ mA (N.C.)}$ $I_L = \text{Max.}$ Within 1 s |
| | | Maximum | | 16 Ω | |
| Transfer characteristics | Off state leakage current | Maximum | I_{Leak} | 1 μA | $I_F = 0 \text{ mA (N.O.)}$ $I_F = 5 \text{ mA (N.C.)}$ $V_L = \text{Max.}$ |
| | Operate time* | Typical | T_{on} (N.O.) T_{off} (N.C.) | 0.8 ms (N.O.) 1.2 ms (N.C.) | $I_F = 0 \text{ mA} \rightarrow 5 \text{ mA}$ $I_L = \text{Max.}$ |
| | | Maximum | | 2 ms | |
| | Reverse time* | Typical | T_{off} (N.O.) T_{on} (N.C.) | 0.04 ms (N.O.) 0.36 ms (N.C.) | $I_F = 5 \text{ mA} \rightarrow 0 \text{ mA}$ $I_L = \text{Max.}$ |
| | | Maximum | | 1 ms | |
| | I/O capacitance | Typical | C_{iso} | 0.8 pF | $f = 1 \text{ MHz}$ $V_B = 0 \text{ V}$ |
| | | Maximum | | 1.5 pF | |
| | Initial I/O isolation resistance | Minimum | R_{iso} | 1,000 MΩ | 500 V DC |

*Operate/Reverse time

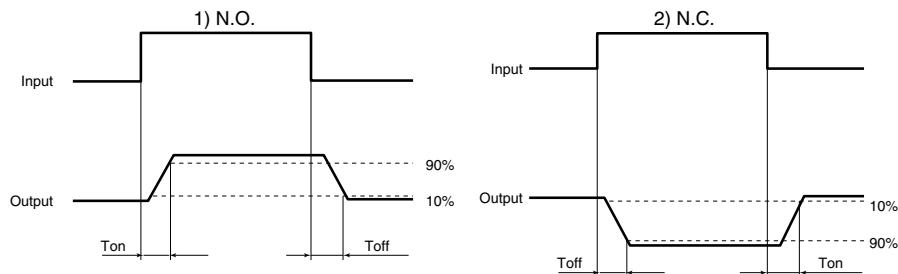

3. Recommended operating conditions (Ambient temperature: 25°C 77°F)

Please use under recommended operating conditions to obtain expected characteristics.

| Item | Symbol | Number of used channels | Min. | Max. | Unit |
|-------------|-------------------------|-------------------------|------|--------------|------|
| LED current | I_F | 1ch 2ch | 5 | 30 | mA |
| AQW654(A) | Load voltage (Peak AC) | | — | 320 | V |
| | Continuous load current | | — | 0.16 0.12 | A |

■ These products are not designed for automotive use.


If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

REFERENCE DATA

1. Load current vs. ambient temperature characteristics


Allowable ambient temperature: -40 to $+85^\circ\text{C}$
 -40 to $+185^\circ\text{F}$

When using 2 channels

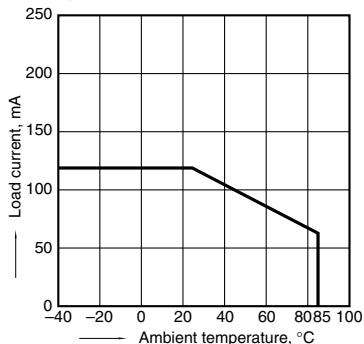


2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 5 and 6, 7 and 8; LED current: 5 mA; Load voltage: 400 V (DC); Continuous load current: 120 mA (DC)

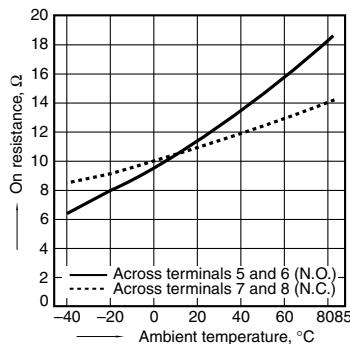


3. Operate time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: 400 V (DC); Continuous load current: 120 mA (DC)

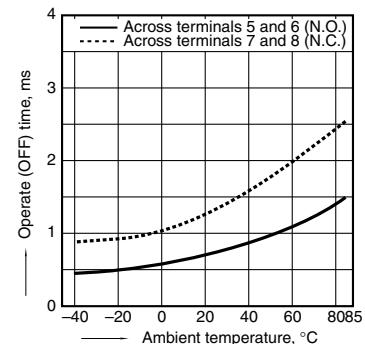


4. Reverse time vs. ambient temperature characteristics

LED current: 5 mA;
Load voltage: 400 V (DC);
Continuous load current: 120 mA (DC)

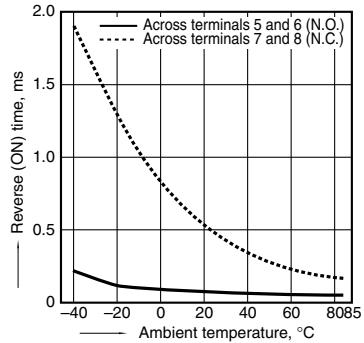


5. LED operate current vs. ambient temperature characteristics

Load voltage: 400 V (DC);
Continuous load current: 120 mA (DC)

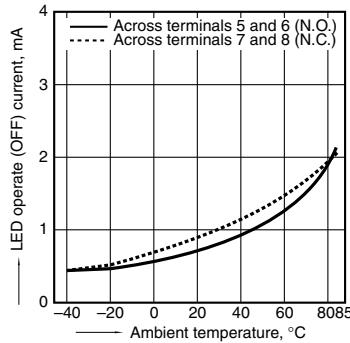


6. LED reverse current vs. ambient temperature characteristics

Load voltage: 400 V (DC);
Continuous load current: 120 mA (DC)

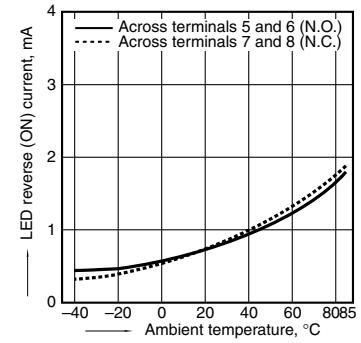


7. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 50 mA

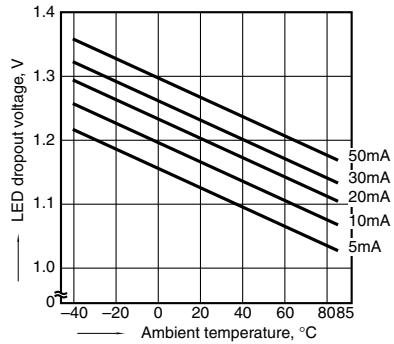


8. Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 5 and 6, 7 and 8; Ambient temperature: 25°C 77°F

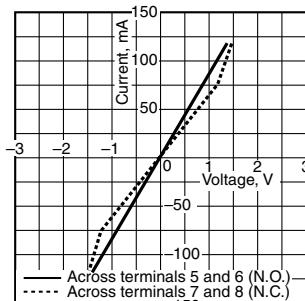


9. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8; Ambient temperature: 25°C 77°F

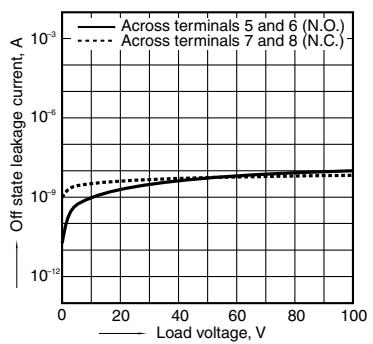


10. Operate time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Load voltage: 400 V (DC); Continuous load current:
120 mA (DC); Ambient temperature: 25°C 77°F

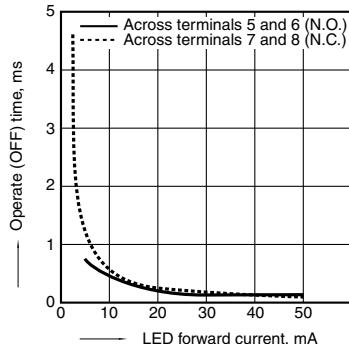


11. Reverse time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Load voltage: 400 V (DC); Continuous load current:
120 mA (DC); Ambient temperature: 25°C 77°F

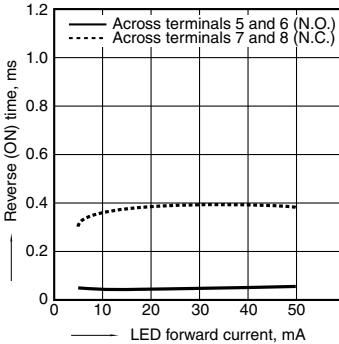

12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Frequency: 1 MHz;
Ambient temperature: 25°C 77°F

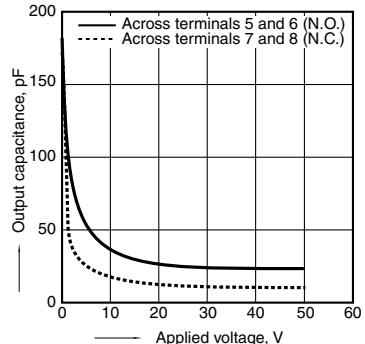

"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.

*Recognized in Japan, the United States, all member states of European Union and other countries.

Please contact

Panasonic Corporation

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadomashi, Osaka 571-8506, Japan
industrial.panasonic.com/ac/e/

Panasonic®

©Panasonic Corporation 2017

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Panasonic:](#)

[AQW654A](#)

Данный компонент на территории Российской Федерации**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru
moschip.ru_4

moschip.ru_6
moschip.ru_9