

## Type 4X Polyester Junction Box (Solid and Clear Cover) *PJU Series*

Lift-Off Cover with Screws



### Application

- Designed for use as instrument enclosures, electric, hydraulic or pneumatic control housings, electrical junction boxes or terminal wiring enclosures.
- Provides outstanding insulation and protection where equipment may be hosed down or be very wet.
- Ideal in applications with high temperatures or highly corrosive environments.

### Standards

- UL 508 Type 1, 2, 3, 4, 4X, 12 and 13
- CSA Type 1, 2, 3, 4, 4X, 12 and 13
- Complies with
  - NEMA Type 1, 2, 3, 4, 4X, 12 and 13
  - IEC 60529, IP66

### Construction


- Molded fiberglass polyester enclosure with matching cover is easily punched, cut, or drilled.
- Enhanced UV inhibitors protect against outdoor weathering.
- Standard JIC sizes under 18" x 16".
- Threaded brass inserts are provided for optional inner panel or terminal kit mounting. Mounting hardware is included.
- Cover fastened with captive stainless steel screws in threaded brass inserts.
- Enclosure available with clear Polycarbonate cover to 16" x 14".
- Captive oil resistant gasket provides a positive seal.
- Available with Polycarbonate flange or foot mount brackets for multi-directional mounting.
- Operating temperatures between 130°C and -40°C (266°F to -40°F).
- Impact index of 6.78J (5 ft/lb).
- For corrosion resistance information, please refer to table in the Technical Information section.

### Finish


- Fiberglass polyester material has a gray finish.
- Optional inner panels are available in white powder coated finished steel or unfinished aluminum, or Fiberglass.

### Accessories


- [Additional Inner Panels](#)
- [Terminal Kit Assemblies](#)
- [Swing Panels](#)

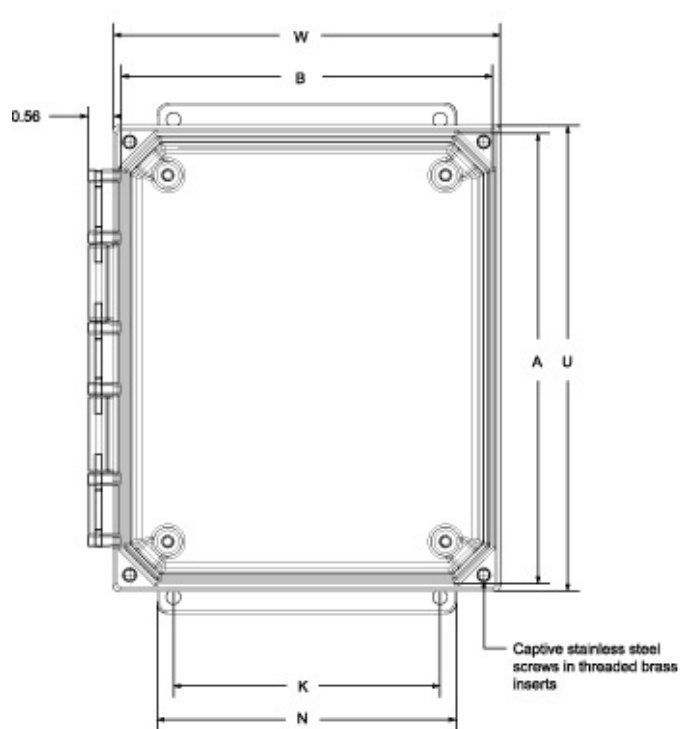


**Front View**

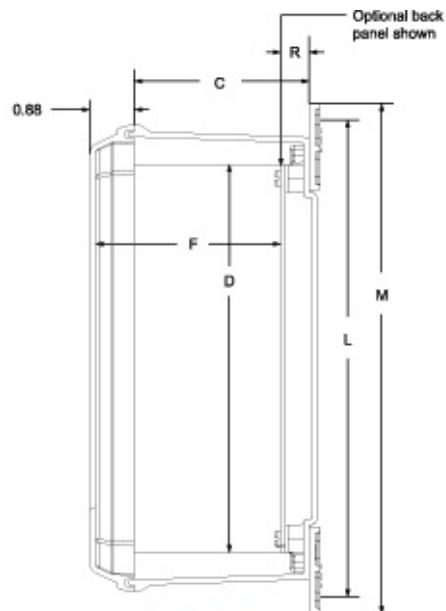

**Side View**

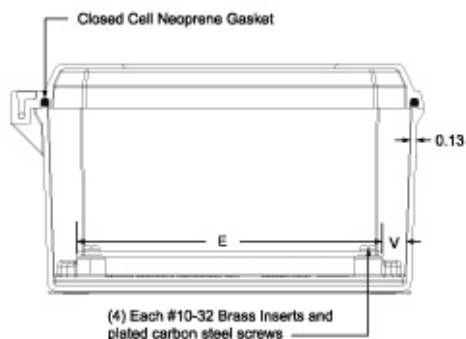

**End View**

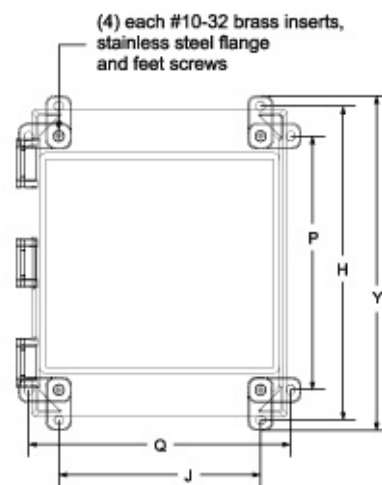

**Rear View**

| Lift-Off<br>Cover Flange<br>Part No. | Lift-Off<br>Cover Feet<br>Part No. | Overall Dimensions |       |       | Panel Size |       |       | Center |       | Flange Mounting Centers |       |       |
|--------------------------------------|------------------------------------|--------------------|-------|-------|------------|-------|-------|--------|-------|-------------------------|-------|-------|
|                                      |                                    | A                  | B     | C     | D          | E     | F     | S      | Z     | L                       | K     | M     |
| PJU664F <sup>1</sup>                 | PJU664 <sup>1</sup>                | 6.05               | 6.27  | 4.13  | 4.88       | 4.88  | 4.11  | 4.25   | 4.25  | 6.88 / 6.75             | 4.05  | 7.62  |
| PJU864F <sup>1</sup>                 | PJU864 <sup>1</sup>                | 8.05               | 6.27  | 4.13  | 6.75       | 4.88  | 4.11  | 6.25   | 4.25  | 8.88 / 8.75             | 4.00  | 9.62  |
| PJU1084F <sup>1</sup>                | PJU1084 <sup>1</sup>               | 10.05              | 8.27  | 4.13  | 8.75       | 6.88  | 4.11  | 10.25  | 6.25  | 10.75                   | 6.00  | 11.50 |
| PJU12106F <sup>1</sup>               | PJU12106 <sup>1</sup>              | 12.05              | 10.27 | 6.13  | 10.75      | 8.88  | 6.11  | 10.25  | 8.25  | 12.75                   | 8.00  | 13.50 |
| PJU14126F <sup>1</sup>               | PJU14126 <sup>1</sup>              | 14.05              | 12.27 | 6.13  | 12.75      | 10.88 | 6.11  | 12.25  | 10.25 | 14.75 / 14.62           | 10.00 | 15.37 |
| PJU16148F                            | PJU16148                           | 16.05              | 14.27 | 8.13  | 14.75      | 12.88 | 8.11  | 14.25  | 12.25 | 16.75                   | 12.00 | 17.50 |
| PJU181610F                           | PJU181610                          | 18.30              | 16.52 | 10.13 | 16.88      | 14.88 | 10.11 | 16.25  | 14.25 | 18.88 / 18.76           | 12.00 | 20.12 |
| PJU201610F                           | PJU201610                          | 20.50              | 16.27 | 10.13 | 18.44      | 14.44 | 10.11 | 17.81  | 13.81 | 21.25                   | 10.00 | 21.50 |

| Lift-Off Clear<br>Cover Flange<br>Part No. | Lift-Off Clear<br>Cover Feet<br>Part No. |       |       |       |       |       |       |       |       |      |      | Opt. Panel<br>Part No. | Ship Wt.<br>(lbs) |
|--------------------------------------------|------------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|------|------|------------------------|-------------------|
|                                            |                                          | N     | H     | J     | P     | Q     | U     | W     | Y     | R    | V    |                        |                   |
| PJU664CCF <sup>1</sup>                     | PJU664CC <sup>1</sup>                    | 4.80  | 6.75  | 4.91  | 4.69  | 6.97  | 6.50  | 6.72  | 7.47  | 0.70 | 0.52 | 14R0505                | 4                 |
| PJU864CCF <sup>1</sup>                     | PJU864CC <sup>1</sup>                    | 4.75  | 8.75  | 4.91  | 6.69  | 6.97  | 8.50  | 6.72  | 9.46  | 0.70 | 0.62 | 14R0705                | 4                 |
| PJU1084CCF <sup>1</sup>                    | PJU1084CC <sup>1</sup>                   | 6.75  | 10.75 | 6.91  | 8.69  | 8.97  | 10.50 | 8.72  | 11.47 | 0.70 | 0.53 | 14R0907                | 6                 |
| PJU12106CCF <sup>1</sup>                   | PJU12106CC <sup>1</sup>                  | 8.75  | 12.70 | 8.82  | 10.64 | 10.88 | 12.50 | 10.72 | 13.47 | 0.68 | 0.44 | 14R1109                | 6                 |
| PJU14126CCF <sup>1</sup>                   | PJU14126CC <sup>1</sup>                  | 10.75 | 14.70 | 10.82 | 12.64 | 12.88 | 14.50 | 12.72 | 15.37 | 0.70 | 0.46 | 14R1311                | 8                 |

|                    |                   |       |       |       |       |       |       |       |       |      |      |                |    |
|--------------------|-------------------|-------|-------|-------|-------|-------|-------|-------|-------|------|------|----------------|----|
| <b>PJU16148CCF</b> | <b>PJU16148CC</b> | 12.75 | 16.91 | 11.47 | 13.50 | 14.88 | 16.50 | 14.72 | 17.50 | 0.70 | 0.40 | <b>14R1513</b> | 11 |
| -                  | -                 | 12.75 | 19.16 | 13.72 | 15.75 | 17.13 | 18.75 | 16.97 | 19.89 | 0.70 | 0.45 | <b>P1868</b>   | 12 |
| -                  | -                 | 12.75 | 20.53 | 13.16 | 17.13 | 16.56 | 20.50 | 16.72 | 21.28 | 0.70 | 0.50 | <b>P2068</b>   | 17 |

*Data subject to change without notice.*

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9