

● **Description**

The eTape sensor is a solid state, continuous (multi-level) fluid level sensor for measuring levels in water, non-corrosive water based liquids and dry fluids (powders). The eTape sensor is manufactured using printed electronic technologies which employ additive direct printing processes to produce functional circuits.

● **Theory of Operation**

The eTape sensor's envelope is compressed by hydrostatic pressure of the fluid in which it is immersed resulting in a change in resistance which corresponds to the distance from the top of the sensor to the fluid surface. The eTape sensor provides a resistive output that is inversely proportional to the level of the liquid: the lower the liquid level, the higher the output resistance; the higher the liquid level, the lower the output resistance.

● **Specifications**

Part Number	PN-12110215TC-8	PN-12110215TC-12	PN-12110215TC-24	PN-12110215TC-32
Nominal Length	8-inch	12-inch	24-inch	32-inch
Sensor Length	10.2" (259 mm)	14.2" (361 mm)	26.0" (660 mm)	34.2" (869 mm)
Active Length	8.4" (213 mm)	12.4" (315 mm)	24.34" (618 mm)	32.4" (823 mm)
Sensor Output	400-1500Ω ±20%	400-2000Ω ±20%	400-4000Ω ±20%	400-5000Ω ±20%
Ref Resistance	1500Ω ±20%	2000Ω ±20%	4000Ω ±20%	5000Ω ±20%

Thickness: 0.015" (0.381mm)

Width: 1.0" (25.4 mm)

Actuation Depth: Nominal 1" (25.4 mm)

Resolution: < 0.01" (0.25 mm)

Resistance Gradient: 150Ω /inch (60Ω/cm)


Connector: Male Crimpflex Pins

Power Rating: 0.5 Watts (VMax = 10V)

Temperature Range: 15°F - 150°F (-9°C - 65°C)


● **Sensor Output**

The eTape can be modeled as a variable resistor. The typical output characteristics of the eTape sensor are show in the figure below:

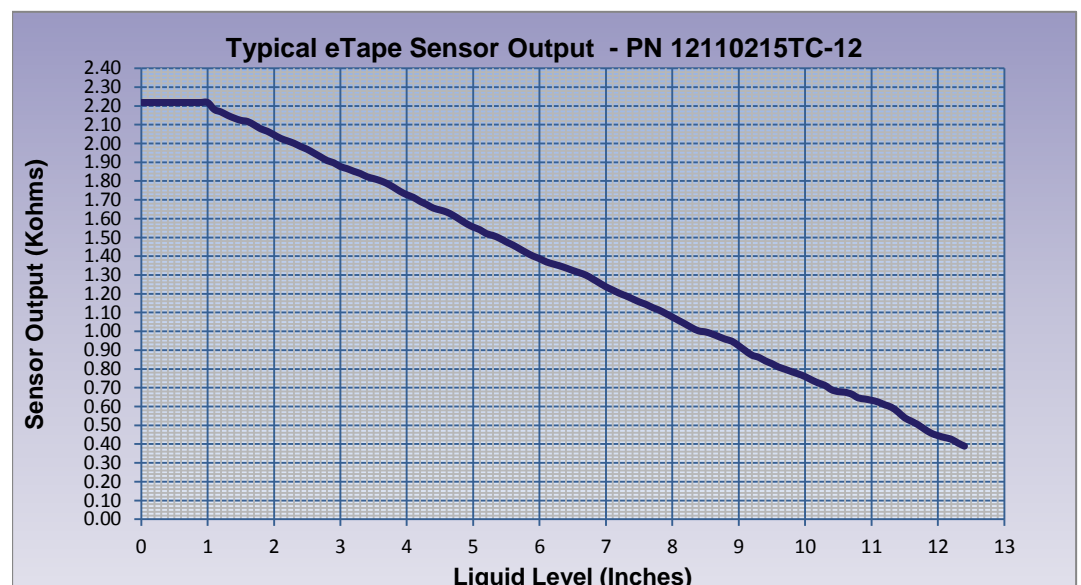


• Connection and Installation

Connect to the eTape by attaching a 4 pin connector with pre-soldered wires to the Crimpflex pins. Do not solder directly to the Crimpflex pins. The inner two pins (pins 2 and 3) are the sensor output (R_{sense}). The outer pins (pins 1 and 4) are the reference resistor (R_{ref}) which can be used for temperature compensation. Suspend the eTape sensor in the fluid to be measured. To work properly the sensor must remain straight and must not be bent vertically or longitudinally. For best results install the sensor inside a section of 1-inch diameter PVC pipe. Double sided adhesive tape may be applied to the upper back portion of the sensor to suspend the sensor in the container to be measured. However, the liquid must be allowed to interact freely with both sides of the sensor. The vent hole located above the max line allows the eTape to equilibrate with atmospheric pressure. The vent hole is fitted with a hydrophobic filter membrane to prevent the eTape from being swamped if inadvertently submerged.

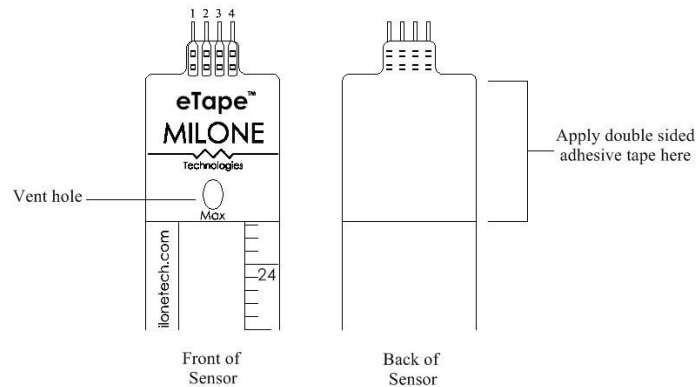


• Sample Circuits


Simple Voltage Divider




Wheatstone Bridge



Differential Op-Amp



Voltage Dividers and Microcontroller



• Custom Applications

The eTape sensor can be manufactured in custom lengths to fit any application. Contact Milone Technologies if you have an application that requires specific length, configuration or output characteristics.

• Technical Support

If you require technical support for the eTape liquid level sensor, please contact our technical support department by email at: techsupport@milonetech.com.

Innovative Fluid Sensing

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9