

# PERFORMANCE PLASTIC PACKAGE ULTRA MINIATURE PURE SILICON™ CLOCK OSCILLATORS

ASDMP Series

Moisture Sensitivity Level – MSL 1



RoHS/RoHS II compliant

ASDMP



2.5 x 2.0 x 0.85 mm

## FEATURES:

- Ultra Miniature Pure Silicon™ Clock Oscillator
- High Performance MEMS Technology by Discera
- Low Power Consumption for high speed communication
- Exceptional Stability Over Temp. at -40 to +85°C, ±15ppm
- Extended Automotive Grade Temp. stability at -55 to +125°C, ±25ppm
- MIL-STD-883 shock and vibration compliant
- Durable QFN Plastic Compact Packaging
- Standby or Disable Tri-state function
- Low jitter (Period jitter RMS and Phase jitter RMS)
- High power supply noise reduction, -50dBc

## APPLICATIONS:

- Storage Area Networks (SATA, SAS, Fiber Channel)
- Passive Optical Networks (EPON, 10G-EPON, GPON, 10G-PON)
- Ethernet (1G, 10GBASE-T, KR/LR/SR, FCoE)
- PCI Express
- Display port

## STANDARD SPECIFICATIONS:

### Common Key Electrical Specifications – CMOS, LVPECL, LVDS, and HCSL

| Parameters                           |        | Minimum                                                                  | Typical | Maximum  | Units | Notes                              |
|--------------------------------------|--------|--------------------------------------------------------------------------|---------|----------|-------|------------------------------------|
| Frequency Range                      | CMOS   | 2.3000*                                                                  |         | 170.0000 | MHz   | Commercial, Industrial temp. range |
|                                      | CMOS   | 2.3000*                                                                  |         | 100.0000 |       | Automotive temp range -55 ~ +125°C |
|                                      | LVPECL | 2.3000*                                                                  |         | 460.0000 |       | Commercial, Industrial temp. range |
|                                      | LVDS   | 2.3000*                                                                  |         | 460.0000 |       | Commercial, Industrial temp range  |
|                                      | HCSL   | 2.3000*                                                                  |         | 460.0000 |       | Commercial, Industrial temp. range |
| Operating Temperature                |        | -20                                                                      |         | +70      | °C    | See options                        |
| Storage Temperature                  |        | -55                                                                      |         | +150     | °C    |                                    |
| Overall Frequency Stability          |        | -50                                                                      |         | +50      | ppm   | See options                        |
| Supply Voltage (Vdd)                 |        | +2.25                                                                    |         | +3.6     | V     |                                    |
| Startup Time                         |        |                                                                          |         | 5        | ms    |                                    |
| Enable Time                          |        |                                                                          |         | 20       | ns    | STD (Tri-state)                    |
|                                      |        |                                                                          |         | 5        | ms    | PD option (Power Down)             |
| Disable Time                         |        |                                                                          |         | 5        | ns    |                                    |
| Disable Current                      |        |                                                                          | 20      | 22       | mA    | STD (Tri-state)                    |
|                                      |        |                                                                          |         | 0.095    |       | PD option (Power Down)             |
| Tri-state Function (Standby/Disable) |        | "1" (VIH ≥ 0.75*Vdd) or Open: Oscillation<br>"0" (VIL < 0.25*Vdd) : Hi Z |         |          | V     | 40kΩ pull-up resistor embedded     |
| Aging                                |        | -5.0                                                                     |         | +5.0     | ppm   | First year                         |

\* For 2.3000MHz ≤ F0 ≤ 9.9999MHz, 6-8 weeks lead-time applies

### Key Electrical Specifications – CMOS

| Parameters                                 |                 | Minimum             | Typical | Maximum             | Units | Notes                 |
|--------------------------------------------|-----------------|---------------------|---------|---------------------|-------|-----------------------|
| Supply Current (I <sub>dd</sub> )          |                 |                     | 31      | 35                  | mA    | CL=15pF, 125MHz       |
| Output Logic Level                         | V <sub>OH</sub> | 0.9*V <sub>dd</sub> |         |                     | V     | I=±6mA                |
|                                            | V <sub>OL</sub> |                     |         | 0.1*V <sub>dd</sub> | V     |                       |
| Rise Time                                  | Tr              |                     | 1.1     | 2.0                 | ns    | CL=15pF               |
| Fall Time                                  | Tf              |                     | 1.3     | 2.0                 | ns    | 20% to 80%            |
| Duty Cycle                                 |                 | 45                  |         | 55                  | %     |                       |
| Integrated Phase Jitter (J <sub>PH</sub> ) |                 |                     | 0.30    | 2                   | ps    | 200kHz ~ 20MHz@125MHz |
|                                            |                 |                     | 0.38    | 2                   |       | 100kHz ~ 20MHz@125MHz |
|                                            |                 |                     | 1.70    | 2                   |       | 12kHz ~ 20MHz@125MHz  |
| Period Jitter RMS (J <sub>PER</sub> )      |                 |                     | 3.0     |                     | ps    |                       |

ABRACON IS  
ISO 9001:2008  
CERTIFIED



2 Faraday, Suite# B | Irvine | CA 92618 Revised: 04.30.15  
Ph. 949.546.8000 | Fax. 949.546.8001

Visit [www.abracon.com](http://www.abracon.com) for Terms and Conditions of Sale

# PERFORMANCE PLASTIC PACKAGE ULTRA MINIATURE PURE SILICON™ CLOCK OSCILLATORS

ASDMP Series



RoHS/RoHS II compliant

ASDMP



2.5 x 2.0 x 0.85 mm

## Key Electrical Specifications – LVPECL

| Parameters                             |          | Minimum       | Typical | Maximum       | Units | Notes                         |
|----------------------------------------|----------|---------------|---------|---------------|-------|-------------------------------|
| Supply Current ( $I_{dd}$ )            |          |               | 56.5    | 58            | mA    | RL=50Ω                        |
| Output Logic Level                     | $V_{OH}$ | $V_{dd}-1.08$ |         |               | V     | RL=50Ω                        |
|                                        | $V_{OL}$ |               |         | $V_{dd}-1.55$ | V     |                               |
| Peak to Peak Output Swing ( $V_{pp}$ ) |          |               | 800     |               | mV    | Single ended                  |
| Rise Time                              | $T_r$    |               | 250     |               | ps    | RL=50Ω , CL=0pF<br>20% to 80% |
| Fall Time                              | $T_f$    |               | 250     |               |       |                               |
| Duty Cycle                             |          | 48            |         | 52            | %     | Differential                  |
| Integrated Phase Jitter ( $J_{PH}$ )   |          |               | 0.25    | 2             | ps    | 200kHz ~ 20MHz<br>@156.25MHz  |
|                                        |          |               | 0.38    | 2             |       | 100kHz ~ 20MHz<br>@156.25MHz  |
|                                        |          |               | 1.70    | 2             |       | 12kHz ~ 20MHz<br>@156.25MHz   |
| Period Jitter RMS ( $J_{PER}$ )        |          |               | 2.5     |               | ps    |                               |

## Key Electrical Specifications – LVDS

| Parameters                               |       | Minimum | Typical | Maximum | Units | Notes                         |
|------------------------------------------|-------|---------|---------|---------|-------|-------------------------------|
| Supply Current ( $I_{dd}$ )              |       |         | 29      | 32      | mA    | RL=100Ω                       |
| Output Offset Voltage ( $V_{OS}$ )       |       | 1.125   |         | 1.4     | V     | RL=100Ω differential          |
| Delta Offset Voltage ( $\Delta V_{OS}$ ) |       |         |         | 50      | mV    |                               |
| Peak to Peak Output Swing ( $V_{pp}$ )   |       |         | 350     |         | mV    | Single ended                  |
| Rise Time                                | $T_r$ |         | 200     |         | ps    | RL=50Ω , CL=2pF<br>20% to 80% |
| Fall Time                                | $T_f$ |         | 200     |         |       |                               |
| Duty Cycle                               |       | 48      |         | 52      | %     | Differential                  |
| Integrated Phase Jitter ( $J_{PH}$ )     |       |         | 0.28    | 2       | ps    | 200kHz ~ 20MHz<br>@156.25MHz  |
|                                          |       |         | 0.40    | 2       |       | 100kHz ~ 20MHz<br>@156.25MHz  |
|                                          |       |         | 1.70    | 2       |       | 12kHz ~ 20MHz<br>@156.25MHz   |
| Period Jitter RMS ( $J_{PER}$ )          |       |         | 2.5     |         | ps    |                               |

## Key Electrical Specifications – HCSL

| Parameters                             |          | Minimum | Typical | Maximum | Units | Notes                         |
|----------------------------------------|----------|---------|---------|---------|-------|-------------------------------|
| Supply Current ( $I_{dd}$ )            |          |         | 40      | 42      | mA    | RL=50Ω                        |
| Output Logic Level                     | $V_{OH}$ | 0.725   |         |         | V     | RL=50Ω                        |
|                                        | $V_{OL}$ |         |         | 0.1     | V     |                               |
| Peak to Peak Output Swing ( $V_{pp}$ ) |          |         | 750     |         | mV    | Single ended                  |
| Rise Time                              | $T_r$    | 200     |         | 400     | ps    | RL=50Ω , CL=2pF<br>20% to 80% |
| Fall Time                              | $T_f$    | 200     |         | 400     |       |                               |
| Duty Cycle                             |          | 48      |         | 52      | %     | Differential                  |
| Integrated Phase Jitter ( $J_{PH}$ )   |          |         | 0.25    | 2       | ps    | 200kHz ~ 20MHz<br>@156.25MHz  |
|                                        |          |         | 0.37    | 2       |       | 100kHz ~ 20MHz<br>@156.25MHz  |
|                                        |          |         | 1.70    | 2       |       | 12kHz ~ 20MHz<br>@156.25MHz   |
| Period Jitter RMS ( $J_{PER}$ )        |          |         | 2.5     |         | ps    |                               |

ABRACON IS  
ISO 9001:2008  
CERTIFIED



2 Faraday, Suite# B | Irvine | CA 92618 Revised: 04.30.15  
Ph. 949.546.8000 | Fax. 949.546.8001  
Visit [www.abracon.com](http://www.abracon.com) for Terms and Conditions of Sale

# PERFORMANCE PLASTIC PACKAGE ULTRA MINIATURE PURE SILICON™ CLOCK OSCILLATORS

ASDMP Series



RoHS/RoHS II compliant

ASDMP



2.5 x 2.0 x 0.85 mm

## Absolute Maximum Ratings

| Item            | Minimum | Maximum      | Unit | Condition |
|-----------------|---------|--------------|------|-----------|
| Supply Voltage  | -0.3    | +4.0         | V    |           |
| Input Voltage   | -0.3    | $V_{dd}+0.3$ | V    |           |
| Junction Temp.  |         | +150         | °C   |           |
| Storage Temp.   | -55     | +150         | °C   |           |
| Soldering Temp. |         | +260         | °C   | 40sec max |
| ESD             |         |              | V    |           |
| HBM             |         | 4,000        |      |           |
| MM              |         | 400          |      |           |
| CDM             |         | 1,500        |      |           |

## PART IDENTIFICATIONS:

### Programmed Orders (Quantity > 1,000pcs)

ASDMP  -  MHz -  -  -

| Output Type |
|-------------|
| C: CMOS     |
| LP: LVPECL  |
| LV: LVDS    |
| HC: HCSL    |

| Frequency in MHz                                         |
|----------------------------------------------------------|
| e.g. 156.2500 MHz<br>(Maximum 4 digits<br>after decimal) |

| Operating Temp.      |
|----------------------|
| Blank: -20°C ~ +70°C |
| L: -40°C ~ +85°C     |
| X: -40°C ~ +105°C    |
| Z**: -55°C ~ +125°C  |

| Overall Freq. Stability |
|-------------------------|
| Blank: ±50ppm           |
| Y: ±10ppm*              |
| R: ±25 ppm              |

| Tri-state (Pin 1) |
|-------------------|
| Blank: Tri-state  |
| PD: Power Down    |

| Packaging                           |
|-------------------------------------|
| Blank***: Tube<br>(140pcs / Tube)   |
| T: Tape & Reel<br>(1kpcs / reel)    |
| T3: Tape & Reel<br>(3kpcs / reel)   |
| T5: Tape & Reel<br>(5kpcs / reel)   |
| T10: Tape & Reel<br>(10kpcs / reel) |

\* Temp option L, X or -20°C ~ +70°C, only

\*\* CMOS output only

\*\*\* For Quick turn-around programmable orders < 1000pcs: Due to the immediate availability of stock and the qty of the order, the parts may be delivered as BULK: Cut Tape, Loose parts in Antistatic Bag or in Tube(s). The MOQ per the series will still apply for Tube packaging.

### Un-Programmed Orders

Blank un-programmed oscillators and our low cost portable programmer are available for quick turn engineering requirements.

Please call ABRACON or visit MEMSpeed Pro II site <http://www.abracon.com/memspeedpro/MEMSpeedProFlyerII.pdf> for more information.

ASDMP  - BLANK -  -  -

| Output Type |
|-------------|
| C: CMOS     |
| LP: LVPECL  |
| LV: LVDS    |
| HC: HCSL    |

| Operating Temp.      |
|----------------------|
| Blank: -20°C ~ +70°C |
| L: -40°C ~ +85°C     |
| X: -40°C ~ +105°C    |
| Z**: -55°C ~ +125°C  |

| Overall Freq. Stability |
|-------------------------|
| Blank: ±50ppm           |
| Y: ±10ppm*              |
| R: ±25 ppm              |

| Tri-state (Pin 1) |
|-------------------|
| Blank: Tri-state  |
| PD: Power Down    |

| Packaging                        |
|----------------------------------|
| Blank: Tube (140pcs / Tube)      |
| T: Tape & Reel (1kpcs / reel)    |
| T3: Tape & Reel (3kpcs / reel)   |
| T5: Tape & Reel (5kpcs / reel)   |
| T10: Tape & Reel (10kpcs / reel) |

\* Temp option L, X or -20°C ~ +70°C, only

\*\* CMOS output only

# PERFORMANCE PLASTIC PACKAGE ULTRA MINIATURE PURE SILICON™ CLOCK OSCILLATORS

ASDMP Series




RoHS/RoHS II compliant

ASDMP




2.5 x 2.0 x 0.85 mm


## CMOS OUTPUT:

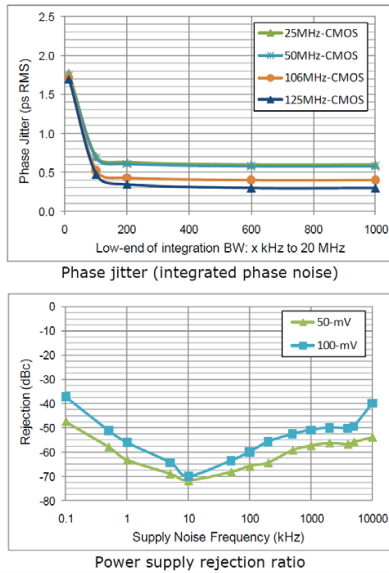


## TEST CIRCUIT:

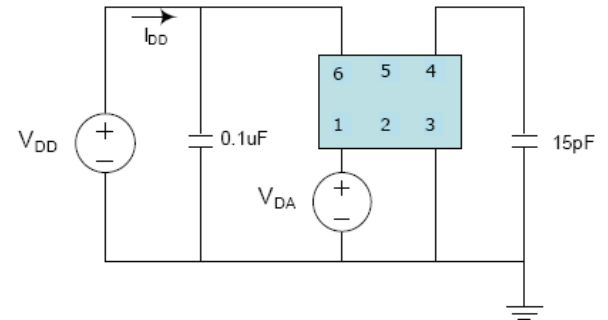


## LVPECL OUTPUT:

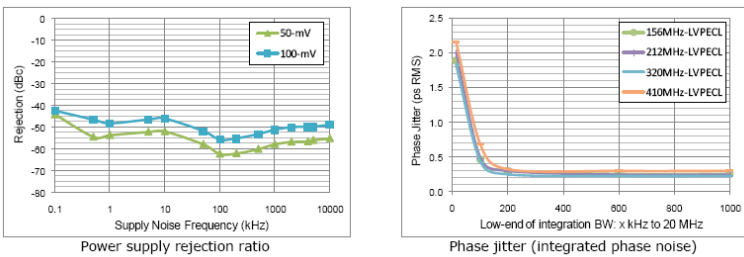


## TEST CIRCUIT:

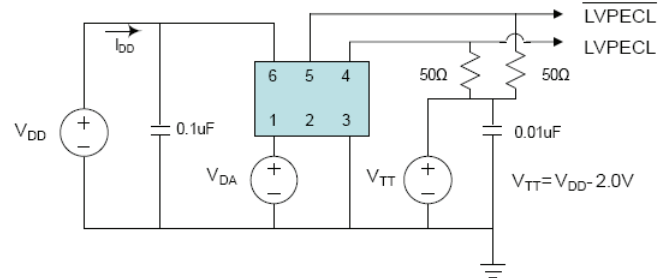

## LVDS OUTPUT:

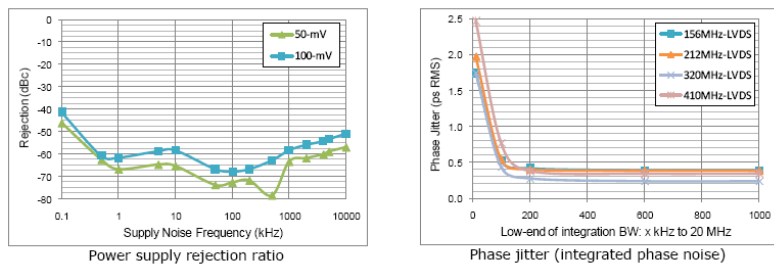

## TEST CIRCUIT:

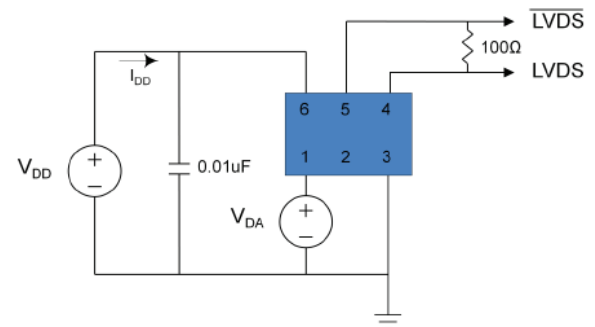

ABRACON IS  
ISO 9001:2008  
CERTIFIED

**ABRACON** LLC  
The Power of Linking Together

2 Faraday, Suite# B | Irvine | CA 92618 Revised: 04.30.15  
Ph. 949.546.8000 | Fax. 949.546.8001

Visit [www.abracon.com](http://www.abracon.com) for Terms and Conditions of Sale

# PERFORMANCE PLASTIC PACKAGE ULTRA MINIATURE PURE SILICON™ CLOCK OSCILLATORS

ASDMP Series





RoHS/RoHS II compliant

ASDMP




2.5 x 2.0 x 0.85 mm

## HCSL OUTPUT:

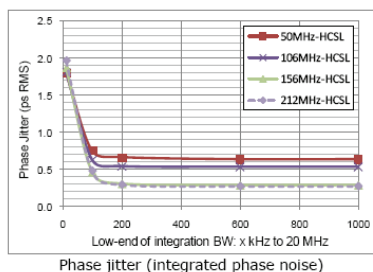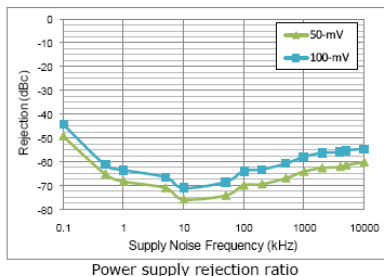


## TEST CIRCUIT:

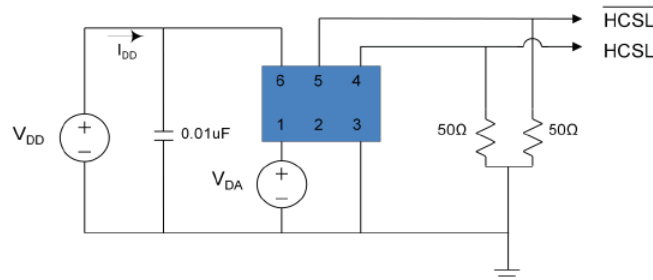


## OUTLINE DRAWING:

2.5±0.05 [0.098±0.002]




2.0±0.05 [0.079±0.002]



0.85±0.05 [0.033±0.002]

0.825 [0.032]

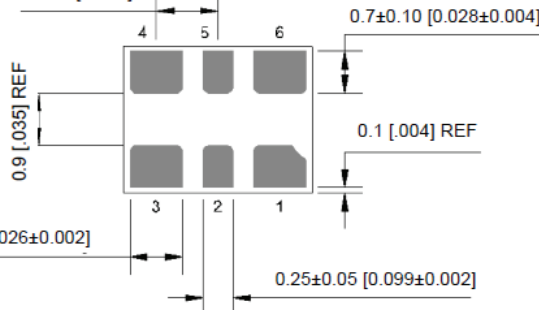


0.9 [0.035] REF


0.7±0.10 [0.028±0.004]

0.1 [0.004] REF

0.25±0.05 [0.009±0.002]

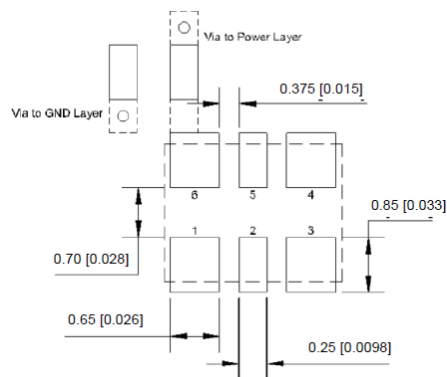

Recommended Land Pattern for LVPECL, LVDS, HCSL

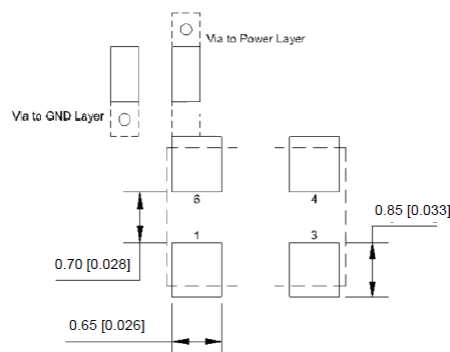

Recommended Land Pattern for CMOS

| Pin # | Function                                 |
|-------|------------------------------------------|
| 1     | Tri-state                                |
| 2     | NC                                       |
| 3     | GND                                      |
| 4     | Output                                   |
| 5     | NC (CMOS)<br>Output (LVPECL, LVDS, HCSL) |
| 6     | Vdd                                      |

Note: Recommend using an approximately 0.01uF bypass capacitor between PIN 6 and 3.

Dimensions: mm (inches)

ABRACON IS  
ISO 9001:2008  
CERTIFIED

**ABRACON** LLC  
The Power of Linking Together

2 Faraday, Suite# B | Irvine | CA 92618 Revised: 04.30.15

Ph. 949.546.8000 | Fax. 949.546.8001

Visit [www.abracon.com](http://www.abracon.com) for Terms and Conditions of Sale

# PERFORMANCE PLASTIC PACKAGE ULTRA MINIATURE PURE SILICON™ CLOCK OSCILLATORS

ASDMP Series




RoHS/RoHS II compliant

ASDMP



2.5 x 2.0 x 0.85 mm


## REFLOW PROFILE:

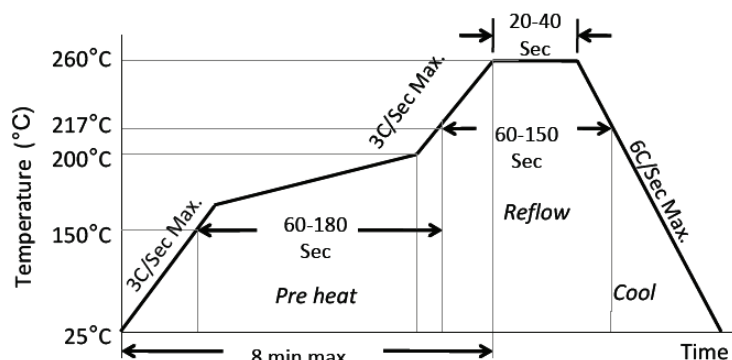


|                                   |              |
|-----------------------------------|--------------|
| Ramp-Up Rate (200°C to Peak Temp) | 3°C/Sec Max. |
| Preheat Time 150°C to 200°C       | 60-180 Sec   |
| Time maintained above 217°C       | 60-150 Sec   |
| Peak Temperature                  | 255-260°C    |
| Time within 5°C of actual Peak    | 20-40 Sec    |
| Ramp-Down Rate                    | 6°C/Sec Max. |
| Time 25°C to Peak Temperature     | 8 min Max.   |

## TAPE & REEL:

T= 1,000pcs/reel (D=180mm)  
T3= 3,000pcs/reel (D=180mm)  
T5= 5,000pcs/reel (D=330mm)  
T10= 10,000pcs/reel (D=330mm)

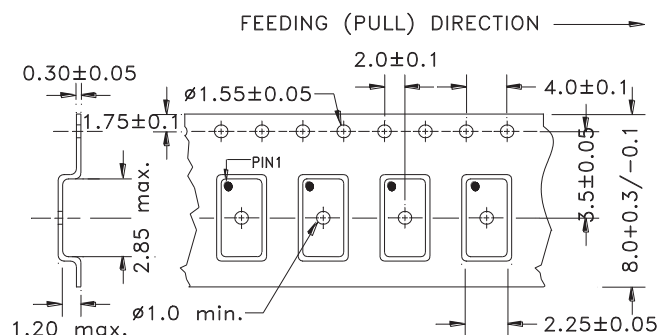

Tube: 140 pcs/tube

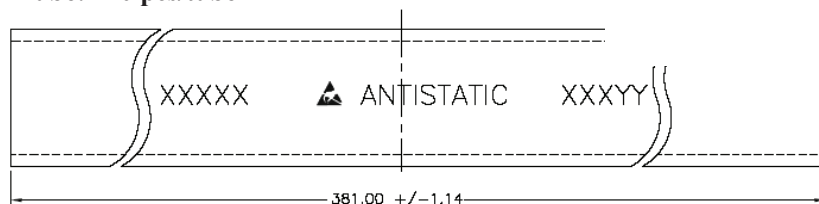

Unit orientation in tube:



Dimensions: mm

**ATTENTION:** Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS  
ISO 9001:2008  
CERTIFIED

**ABRACON**  
The Power of Linking Together

2 Faraday, Suite# B | Irvine | CA 92618 Revised: 04.30.15  
Ph. 949.546.8000 | Fax. 949.546.8001  
Visit [www.abracon.com](http://www.abracon.com) for Terms and Conditions of Sale

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9