EA Series

Stainless Steel Pressure Sensors

EA and EAF Models

FEATURES

- Amplified output which eliminates the cost of external amplifiers
- Large choice of pressure ranges to meet a variety of application needs
- Rugged, lightweight Valox case
- Microprocessor compatible 1 Vdc to 6 Vdc or 1 kHz to 6 kHz span
- Manifold mounting for ease of installation

TYPICAL APPLICATIONS

- Agricultural sprayers and dusters
- Air conditioning and refrigeration
- Engine controls and monitors
- Environmental control systems
- Compressors
- Hydraulic controls
- Pneumatic controls
- Process control equipment
- **Robotics**
- **Transmissions**
- Water management



The EA manifold mount is designed for OEM uses requiring high output and corrosion resistance. It has operated through millions of pressure cycles without damage and is well-suited for the high cycle rates found in automatic equipment, robots, and hydraulic systems.

The EA has been approved by Underwriters Laboratories as a component in float and pressure operated motor controllers (file #E93356). Its pressure port, amplifier, and voltage supply regulator are packaged in a Valox case. A mating electrical connector is included with this low price transducer.

The EAF version outputs a low frequency signal which is ideal for electrically noisy environments as well as applications requiring long distance signal transmission or an interface to a microprocessor. The output signal is a frequency modulated square wave set from 1 kHz to 6 kHz.



WARNING

PERSONAL INJURY

DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

WARNING

MISUSE OF DOCUMENTATION

- The information presented in this product sheet is for reference only. Do not use this document as a product installation guide.
- Complete installation, operation, and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.

Stainless Steel Pressure Sensors

EA Series

SPECIFICATIONS


SPECIFICATIONS		
Pressure Ranges		
	0 to 6.0, 15.0, 25.0 50.0,	0 to 500, 1000, 2000
	100, 200 and 300 psig	and 5000 psig
Physical		
Proof Pressure	2 X rated range	1.5 X rated range
Burst Pressure	10 X rated range	5 X rated range
Material in contact with media	Brazed assembly of 300 series stainless steel	
Shock Resistance	50 g peak [5 milliseconds]	
Vibration Resistance	Meets MIL-STD 810C, Fig. 514-4, Curve AK, Time Schedule II, Random Vibration Test [Overall g rms = 20.7 minimum]	
Weight	Less than 3.0 oz [85.0 gm] with connector	
Electrical	Voltage	Frequency
Span	5.0 ± 0.1 Vdc [1.0 Vdc to 6.0 Vdc]	5 ± 0.1 kHz [1 kHz to 6 kHz]
Excitation Voltage	8.0 Vdc to 24.0 Vdc	10.0 Vdc to 20.0 Vdc
Null Offset	1.0 ± 0.15 Vdc	1.0 ± 0.15 kHz
Supply Current (nominal)	15.0 mA	20.0 mA
Output Current Source	10.0 mA	N/A
(nominal) Sink	5.0 mA	8.0 mA
Reverse Polarity Protection	No	
Insulation Resistance	Greater than 1000 megohms at 25.0 Vdc	
Electrical Connection	Automotive type Valox with crimp pins (supplied with sensor)	
Performance		
Accuracy	± 1.0% span from best fit straight line including effects of non-linearity,	
	hysteresis, repeatability	
Operating	-55 °C to 100 °C [-67 °F to 212 °F]	
Temperature Range		
Compensated	-1 $^{\circ}$ C to 85 $^{\circ}$ C [30 $^{\circ}$ F to 185 $^{\circ}$ F]	
Temperature Range		
Thermal Effect on Zero	Less than $\pm 1\%$ span within any 55 °C [100 °F] range within the	
	compensated temperature range	
Thermal Effect on Span	Less than $\pm 1\%$ within any 55 °C [100 °F] range within the compensated temperature range	

Note: All specifications are measured at 25 °C [77 °F] and at rated excitation unless otherwise specified.

Stainless Steel Pressure Sensors

EA Series

HOW TO ORDER

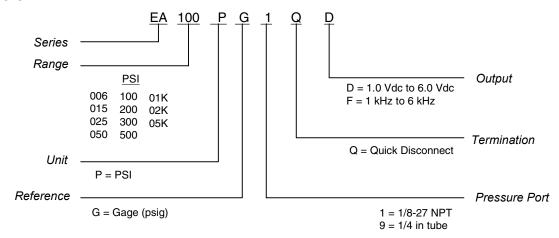


Note: Not all combinations are available. Minimum quantity orders apply. Contact Honeywell for more details

Stainless Steel Pressure Sensors

EA Series

DIMENSIONS (for reference only) mm (in)

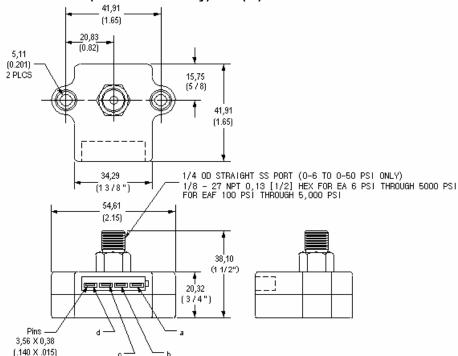

PIN CONNECTIONS

Pins	Voltage Output	Frequency Output
a	+ Excitation	+ Excitation
b	Signal Out	Signal Out
С	N/A	Enable
d	Ground	Ground

WARRANTY/REMEDY

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Contact your local sales office for warranty information. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace without charge those items it finds defective. The foregoing is Buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

For application assistance, current specifications, or name of the nearest Authorized Distributor, contact a nearby sales office. Or call:

1-800-537-6945 USA

1-800-737-3360 Canada

1-815-235-6847 International

FAX

1-815-235-6545 USA

INTERNET

www.honeywell.com/sensing info.sc@honeywell.com

Honeywell

ПОСТАВКА ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

многоканальный

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru_6 moschip.ru 4 moschip.ru 9