



QPC1006

0.15 – 2.8 GHz High Power GaN SP3T Switch

Product Overview


Qorvo's QPC1006 is a Single-Pole, Triple-Throw (SP3T) switch fabricated on Qorvo's QGaN25 0.25um GaN on SiC production process.

Operating from 0.15 to 2.8 GHz, the QPC1006 typically supports 50 W input power handling at control voltages of 0/-40 V for both CW and pulsed RF operations. This switch maintains low insertion loss less than 1.0 dB and greater than 30 dB isolation, making it ideal for high power switching applications across both defense and commercial platforms.

QPC1006 is offered in a 4 x 4 mm plastic overmolded QFN package.

Lead-free and RoHS compliant

Evaluation Boards are available upon request.




4mm x 4mm 24 Lead OVM QFN

Key Features

- SP3T
- Frequency Range: 0.15 to 2.8 GHz
- Input Power: 50 W
- Insertion Loss: < 1.0 dB
- Isolation: >30 dB Typical
- Switching Speed: 50 ns
- Control Voltages: 0 V/-40 V
- Package Dimensions: 4 x 4 x 0.85 mm

Performance is typical across frequency. Please reference electrical specification table and data plots for more details.

Functional Block Diagram

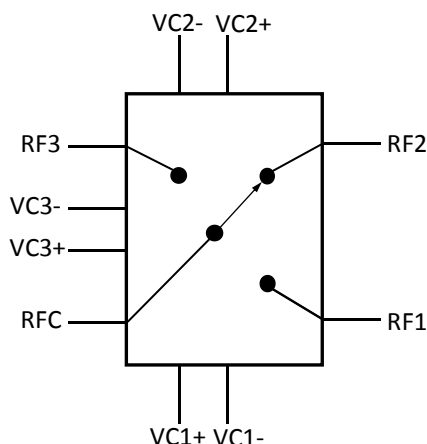

Applications

- Commercial and Military Radar
- Communications
- Electronic Warfare
- Test Instrumentation
- General Purpose

Ordering Information

Part No.	ECCN	Description
QPC1006	EAR99	0.15–2.8 GHz High Power GaN SP3T Switch
QPC1006EVB		Evaluation Board

Absolute Maximum Ratings

Parameter	Rating
Control Voltage (V_C)	-50 V
Control Current (I_C)	3 mA
Power Dissipation ⁽¹⁾	14 W
RF Input Power, CW, 50 Ω , T = 25 °C	60 W
Channel Temperature, T_{CH}	275 °C
Mounting Temperature (30 sec)	260 °C
Storage Temperature	-40 to 150 °C

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability.

Notes:

- 1) This is a total loss of which 4 W is mismatched loss and 3 W is dissipated in the passive structures.

Recommended Operating Conditions

Parameter	Min	Typ	Max	Units
V_{C1+}/V_{C1-}		0/-40		V
V_{C2+}/V_{C2-}		-40/0		V
V_{C3+}/V_{C3-}		-40/0		V
Channel Temp., T_{CH}		≤ 225		°C

Electrical specifications are measured at specified test conditions. Specifications are not guaranteed over all recommended operating conditions.






Electrical Specifications

Test conditions unless otherwise noted: 25 °C, $V_{C1+}/V_{C1-} = 0\text{ V}/-40\text{ V}$, $V_{C2+}/V_{C2-} = -40\text{ V}/0\text{ V}$, $V_{C3+}/V_{C3-} = -40\text{ V}/0\text{ V}$.
See Logic table on page 13.

Parameter		Min	Typ	Max	Units
Operational Frequency Range		0.15	–	2.8	GHz
Insertion Loss (On-State)	Frequency = 0.15 GHz		0.30	–	dB
	Frequency = 1.0 GHz		0.43	–	
	Frequency = 2.8 GHz		1.0	–	
Input Return Loss (On-State) Common Port RL	Frequency = 0.15 GHz		35	–	dB
	Frequency = 1.0 GHz		33	–	
	Frequency = 2.8 GHz		12.5	–	
Output Return Loss (On-State) Switched Port RL	Frequency = 0.15 GHz		34.5	–	dB
	Frequency = 1.0 GHz		32	–	
	Frequency = 2.8 GHz		13	–	
Isolation (Off-State)	Frequency = 0.15 GHz		57	–	dB
	Frequency = 1.0 GHz		40	–	
	Frequency = 2.8 GHz		30	–	
Output Return Loss Isolated Port	Frequency = 0.15 GHz		2.3	–	dB
	Frequency = 1.0 GHz		2.4	–	
	Frequency = 2.8 GHz		2.0	–	
Insertion Loss @ $P_{IN} = 47\text{ dBm}$ (Pulsed RF) $PW = 100\mu\text{s}$; $DC = 10\%$	Frequency = 0.15 GHz		0.32		dB
	Frequency = 1.0 GHz		0.45		
	Frequency = 2.8 GHz		1.0		
Insertion Loss @ $P_{IN} = 47\text{ dBm}$ (CW)	Frequency = 0.15 GHz		0.37		dB
	Frequency = 1.0 GHz		0.55		
	Frequency = 2.8 GHz		1.2		
Input Power ($P_{0.1dB}$)			47		dBm
Control Voltage			-40	-50	V
Total Supply Current			<3		mA
Switching Speed			50		nS
Insertion Loss Temperature Coefficient		–	-0.0015	–	dB/°C






Performance Plots – Small Signal

Notes: RFC = Port1; RF1 = Port 2; RF2 = Port 3; RF3 = Port4. See Logic table on Page 13 for Voltage controls

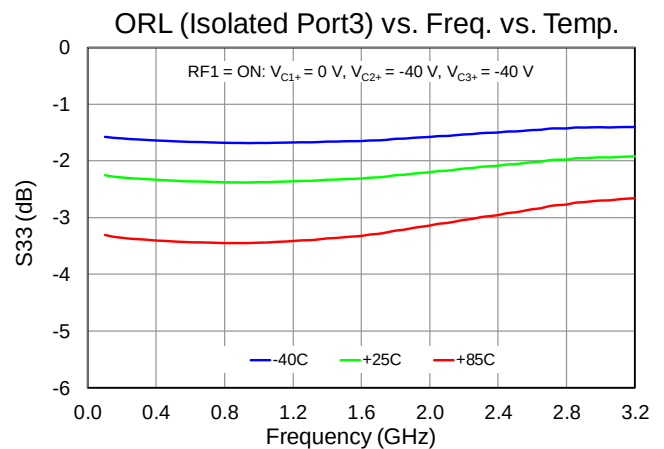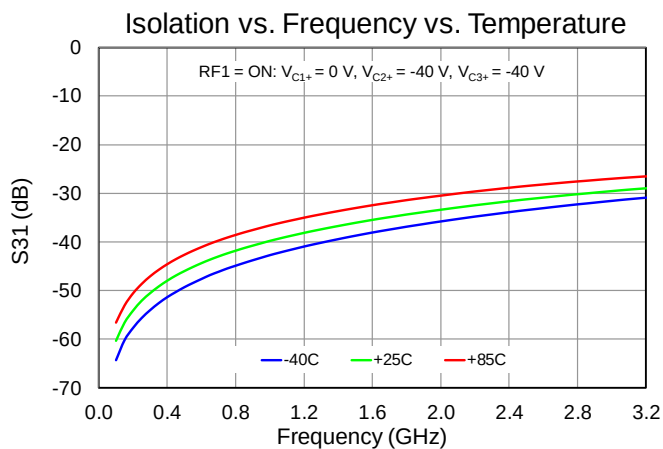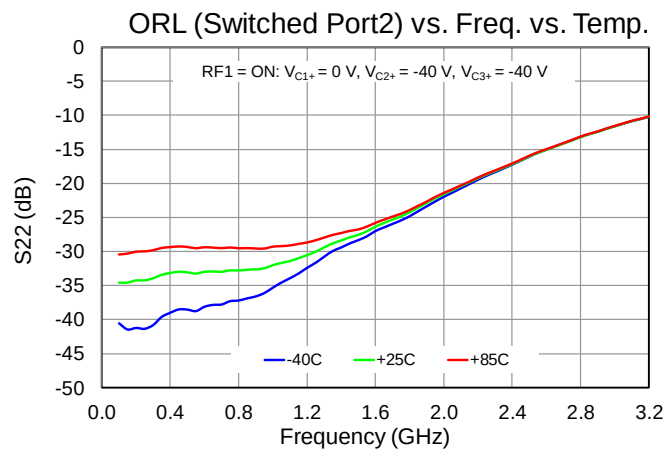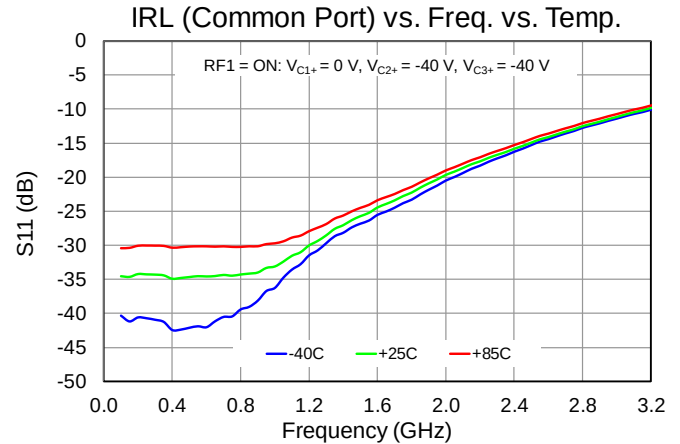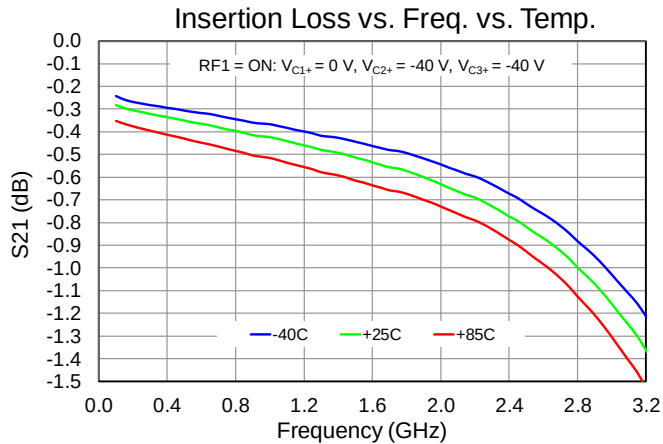







Performance Plots – Small Signal

Notes: RFC = Port1; RF1 = Port 2; RF2 = Port 3; RF3 = Port4. See Logic table on Page 13 for Voltage controls

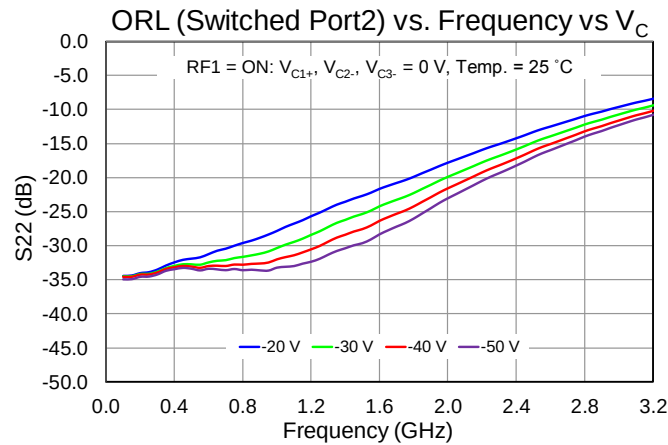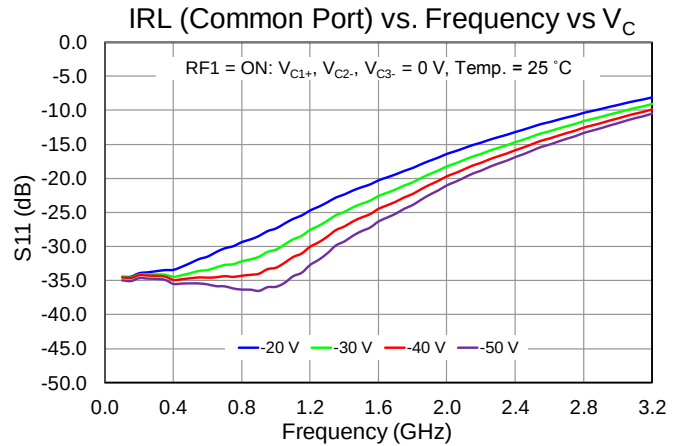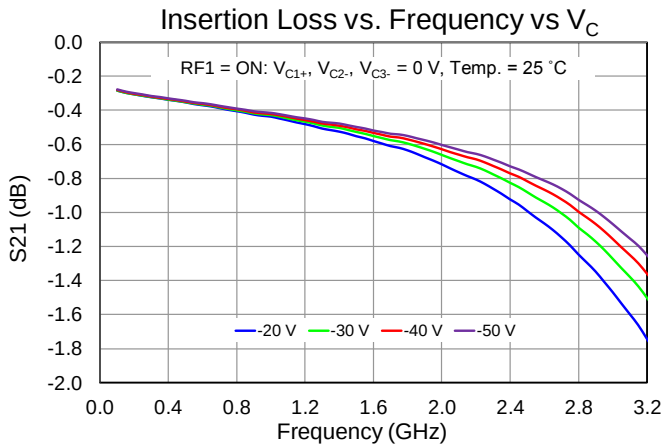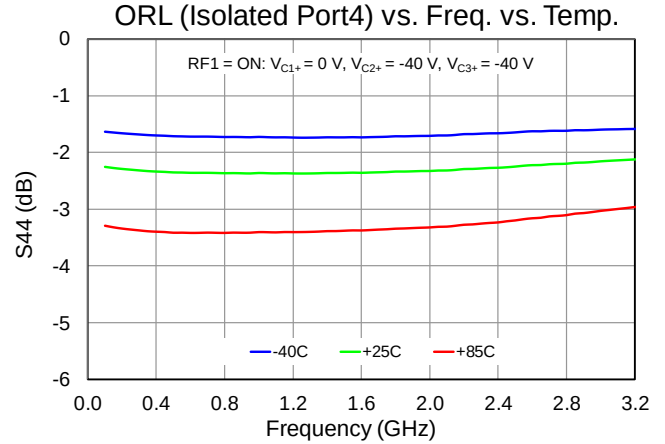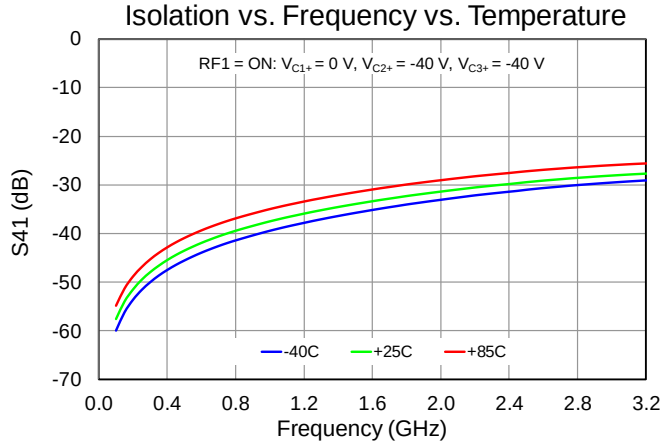







Performance Plots – Small Signal

Notes: RFC = Port1; RF1 = Port 2; RF2 = Port 3; RF3 = Port4. See Logic table on Page 13 for Voltage controls

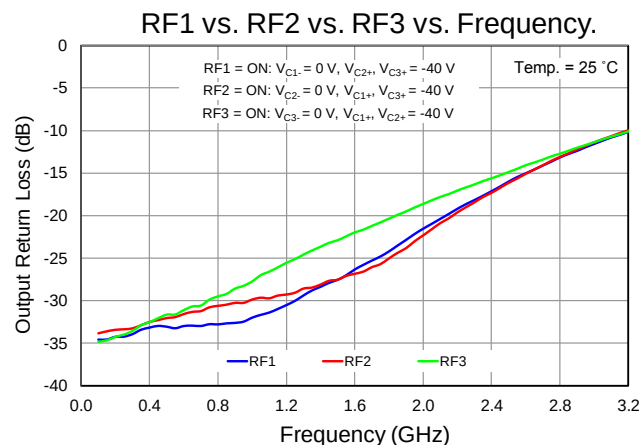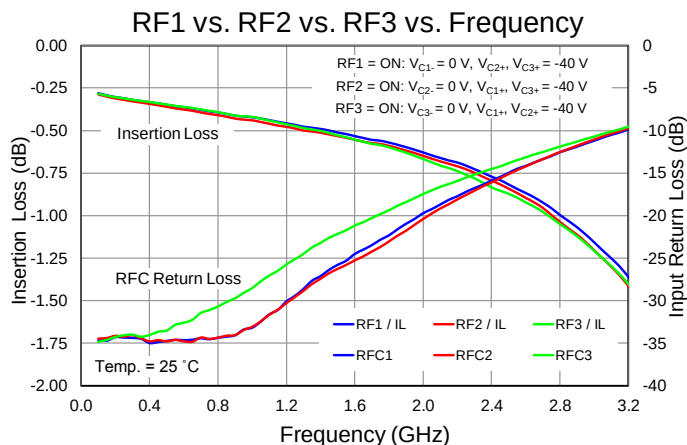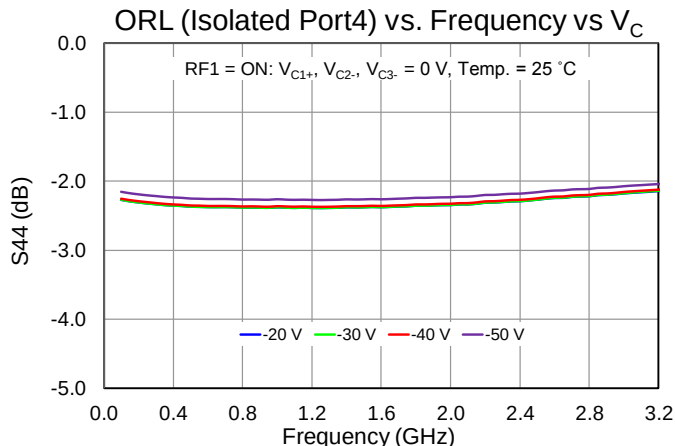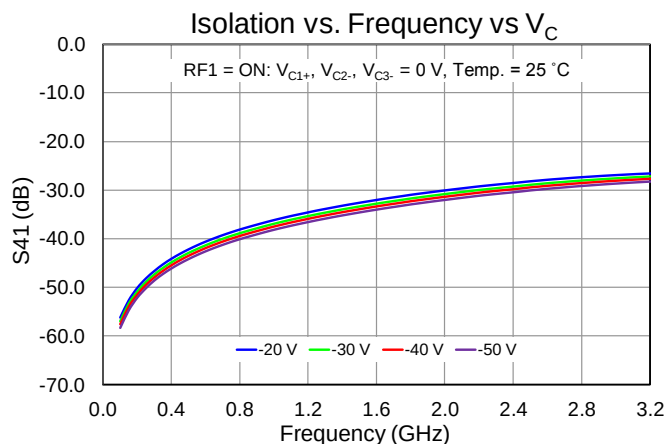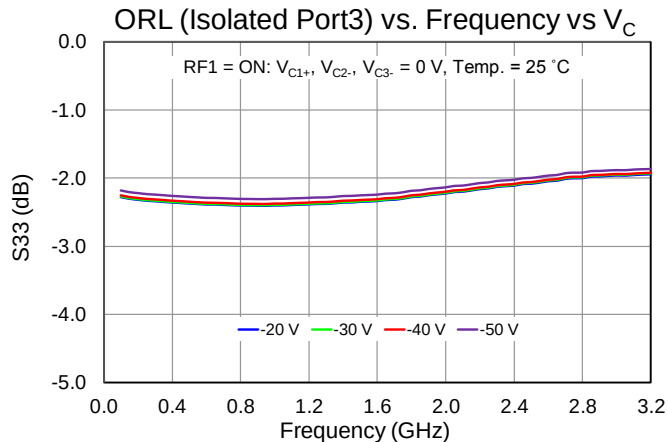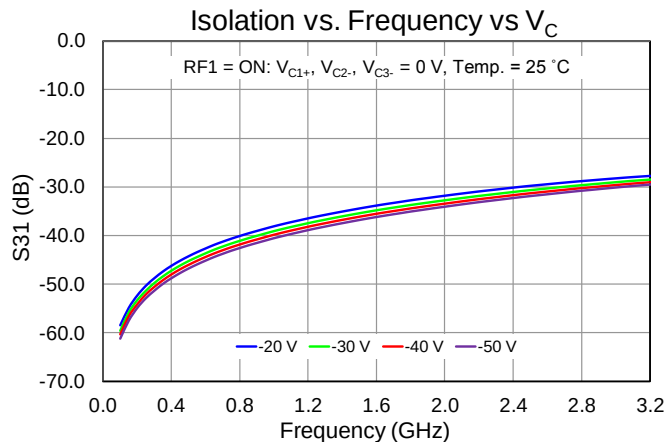






Performance Plots – Compression (Pulsed)

Notes: RFC = Port1; RF1 = Port 2; RF2 = Port 3; RF3 = Port4. See Logic table on Page 13 for Voltage controls

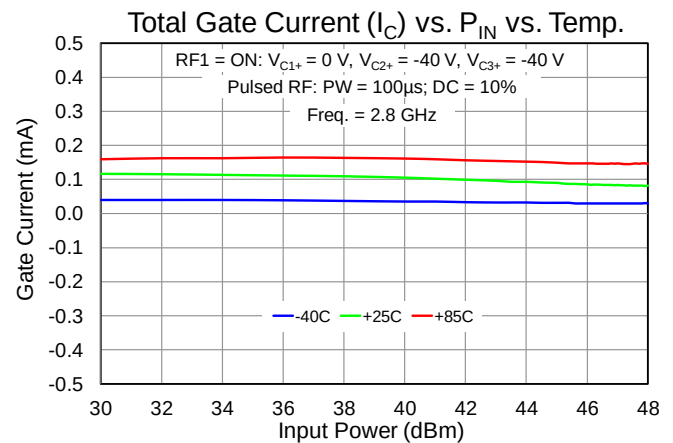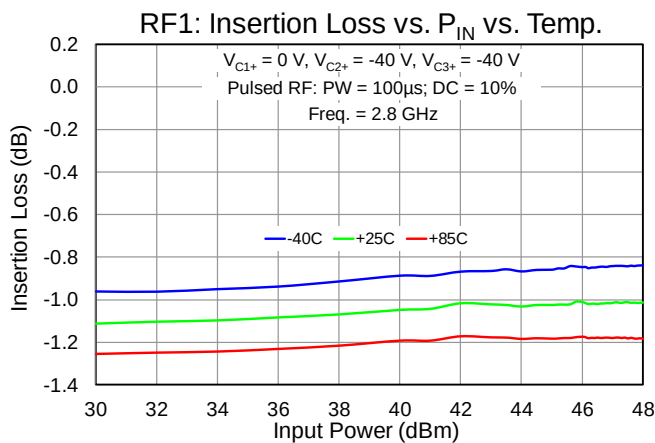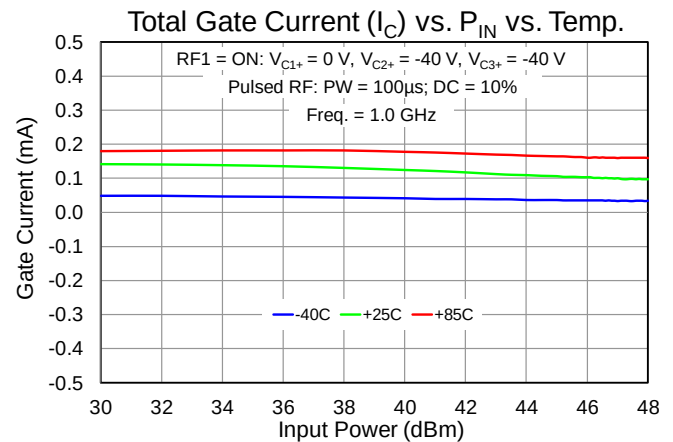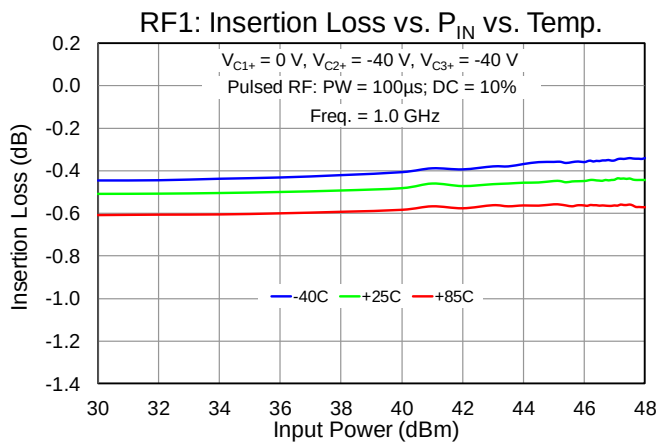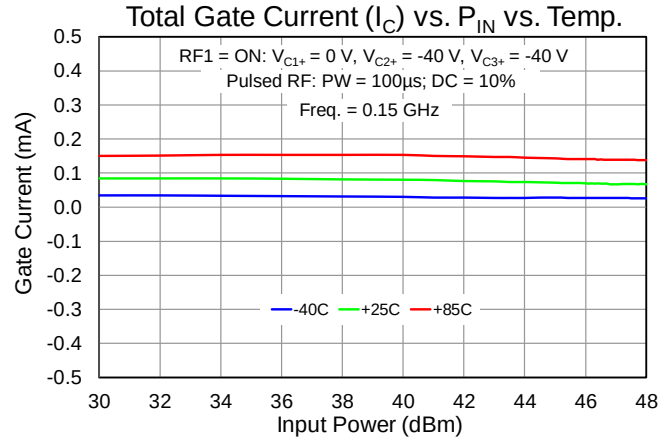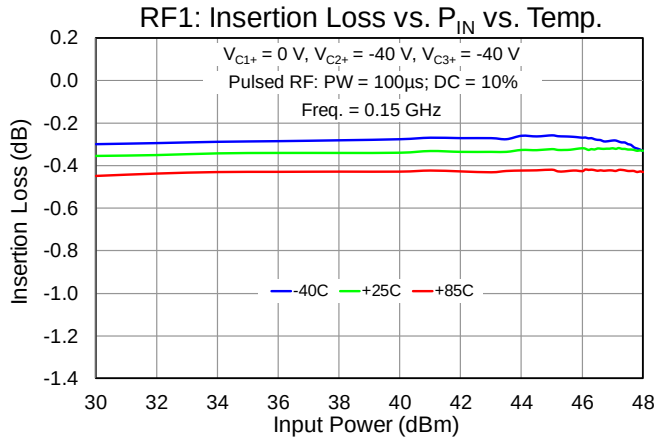







Performance Plots – Compression (Pulsed)

Notes: RFC = Port1; RF1 = Port 2; RF2 = Port 3; RF3 = Port4. See Logic table on Page 13 for Voltage controls

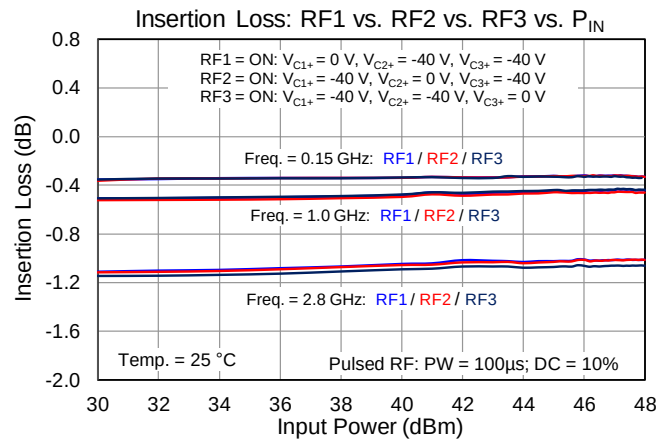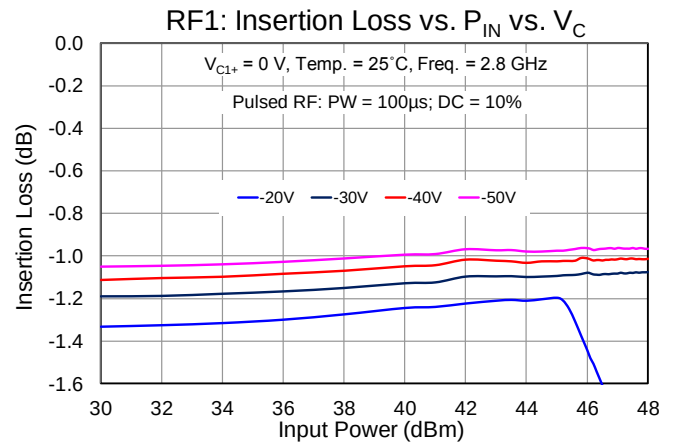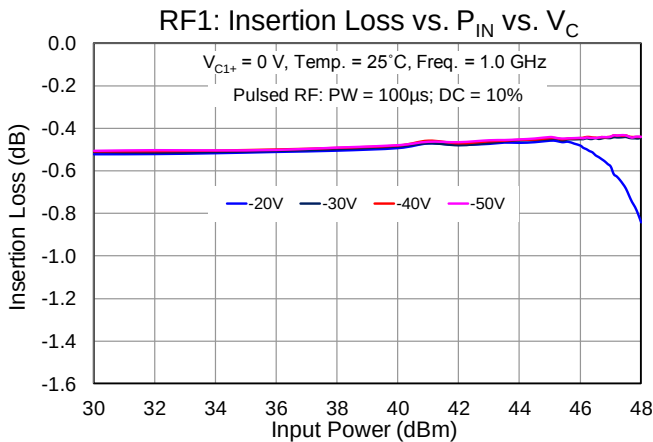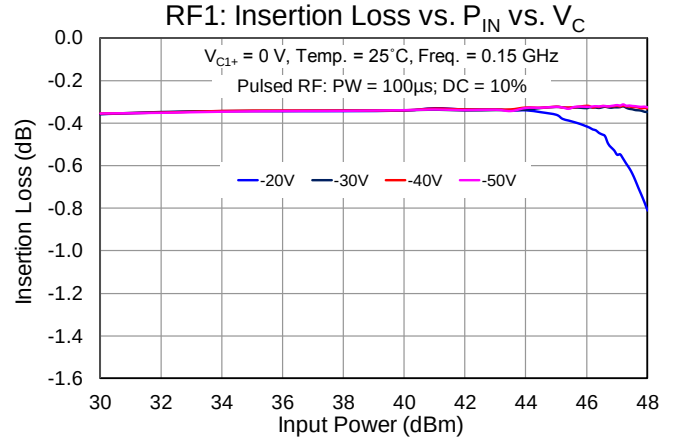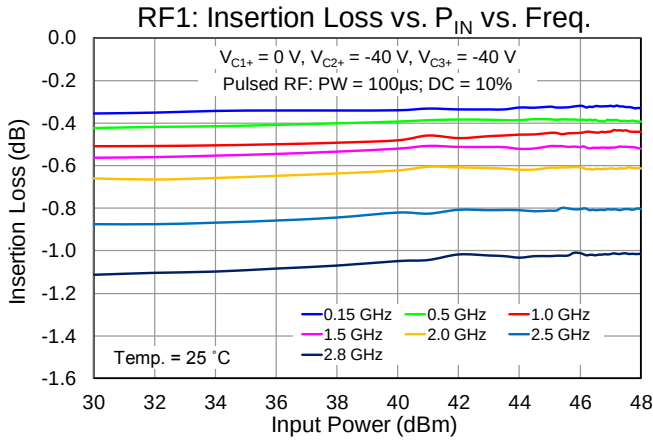






Performance Plots – Compression (CW)

Notes: RFC = Port1; RF1 = Port 2; RF2 = Port 3; RF3 = Port4. See Logic table on Page 13 for Voltage controls

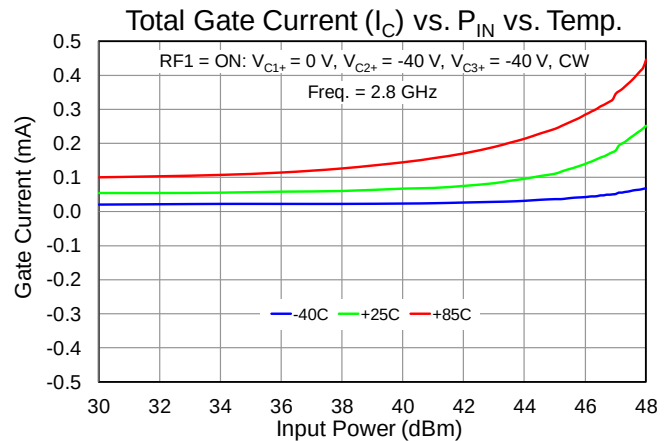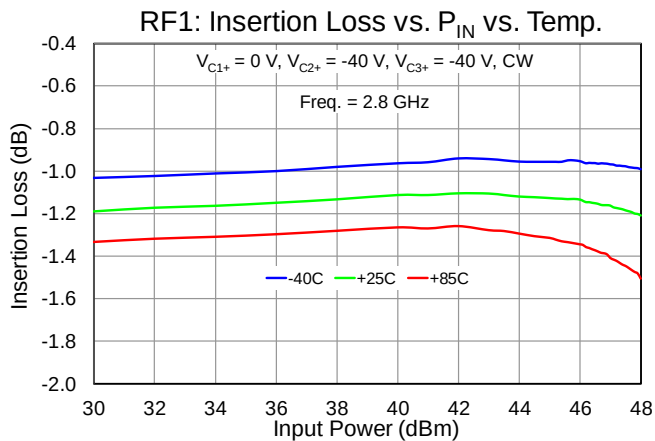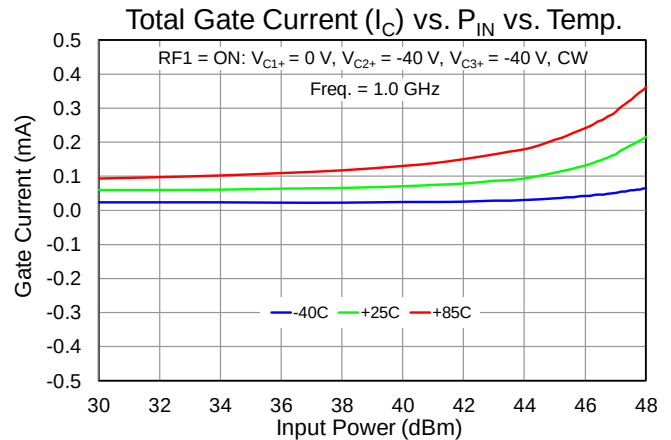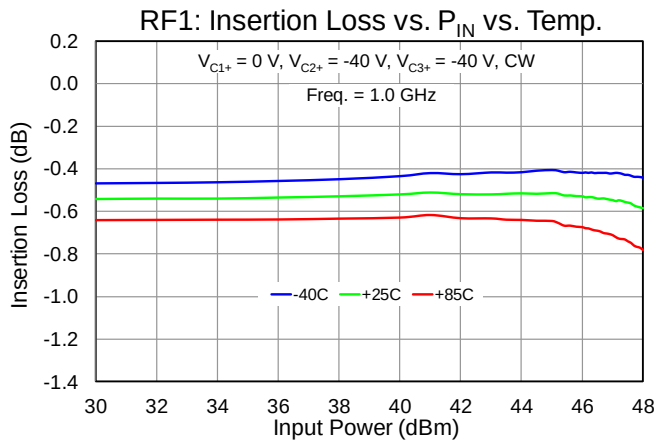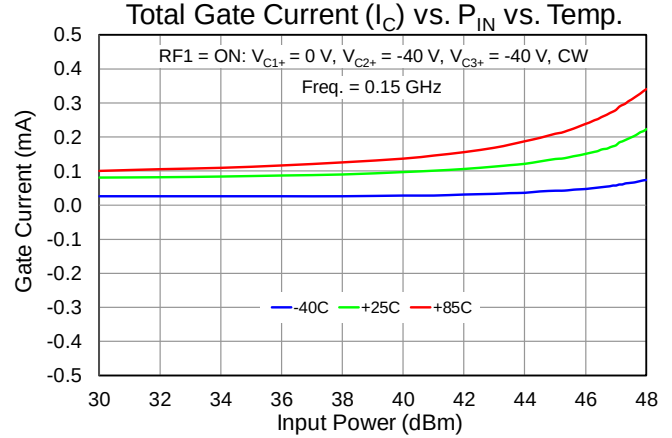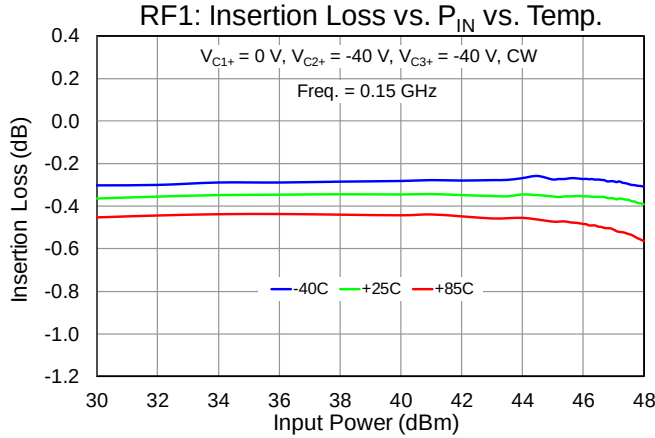




Performance Plots – Compression (CW)

Notes: RFC = Port1; RF1 = Port 2; RF2 = Port 3; RF3 = Port4. See Logic table on Page 13 for Voltage controls

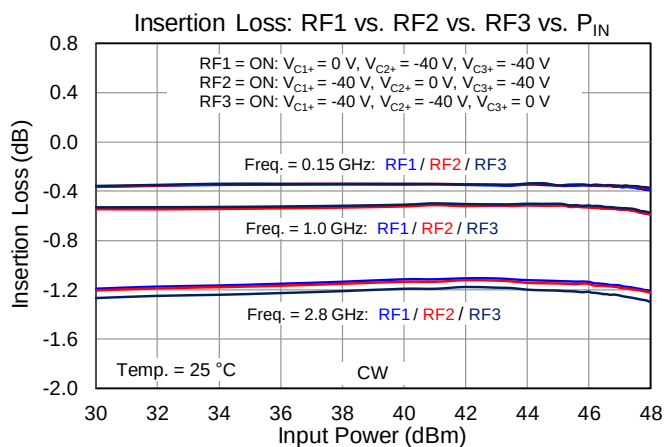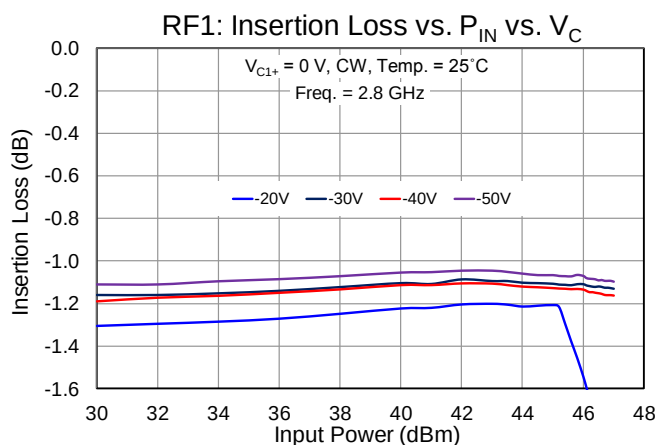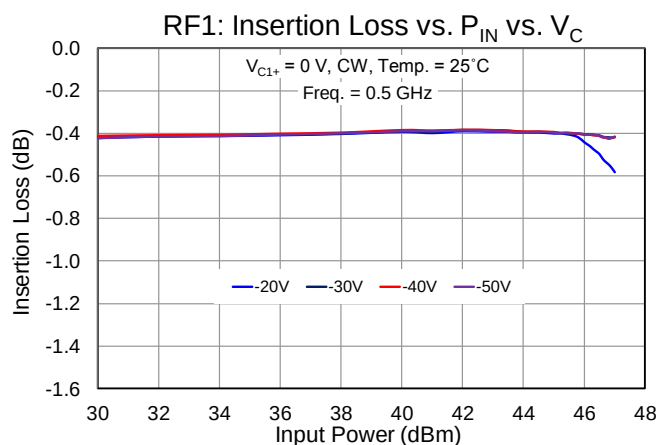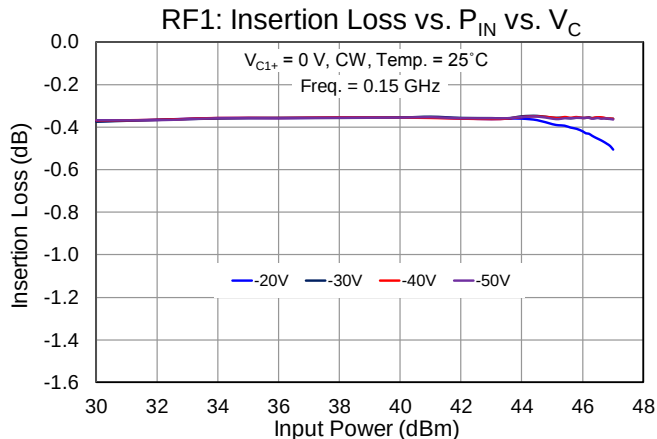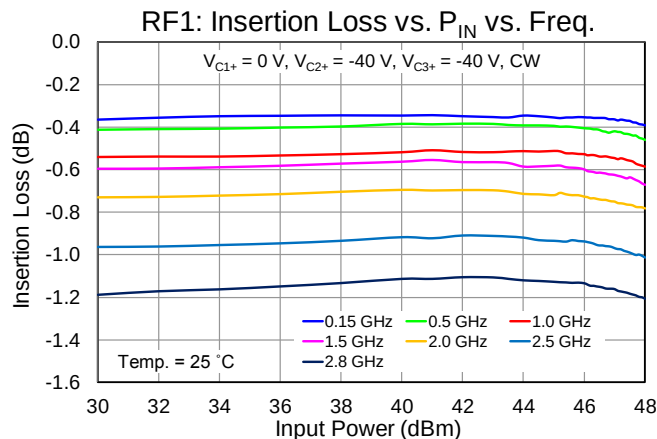

Performance Plots – Linearity

Notes: RFC = Port1; RF1 = Port 2; RF2 = Port 3; RF3 = Port4. See Logic table on Page 15 for Voltage controls

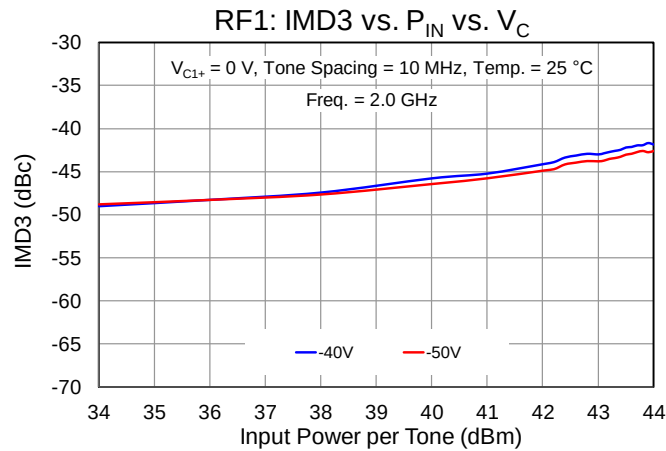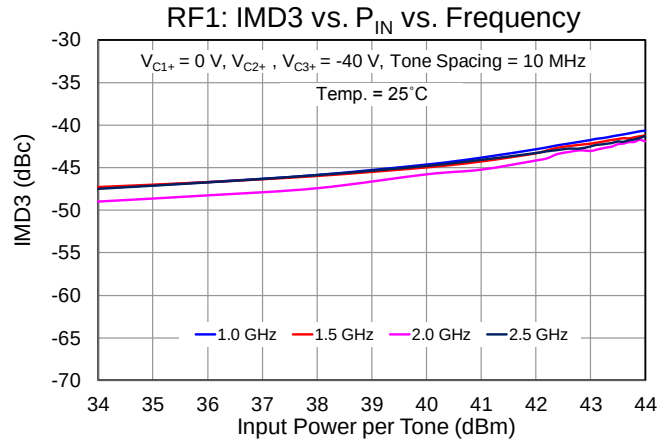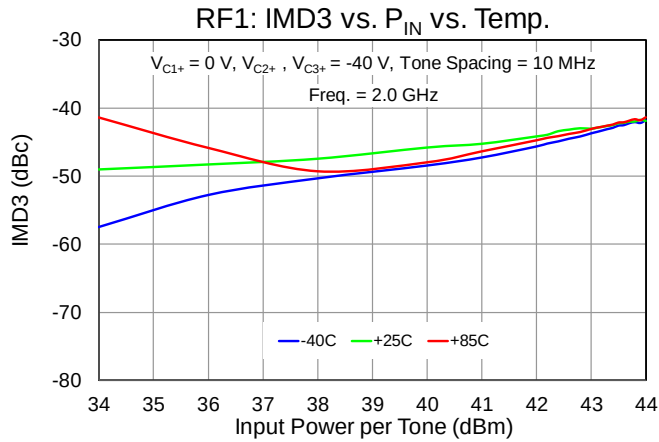

Thermal and Reliability Information


Parameter	Test Conditions	Value	Units
Thermal Resistance (θ_{JC}) ⁽¹⁾		7.93	°C/W
Channel Temperature (T_{CH}) ⁽¹⁾	$T_{BASE} = 85\text{ °C}$, $V_{C1+} = 0\text{ V}$, $V_{C2+} = -40\text{ V}$, $V_{C3+} = -40\text{ V}$ Freq. = 2.8 GHz, $P_{IN} = 50\text{ W}$, P_{DISS} ⁽²⁾ = 5.8 W, CW	131	°C
Median Lifetime (T_M)		1.57×10^{10}	Hrs

Notes:


1. Measured to the back of the package.
2. This is a total P_{DISS} in the FETs.

Median Lifetime and Channel Temperature

Test Conditions: $V_D = +40\text{ V}$; Failure Criteria = 10% reduction in I_{D_MAX} during DC Life Testing

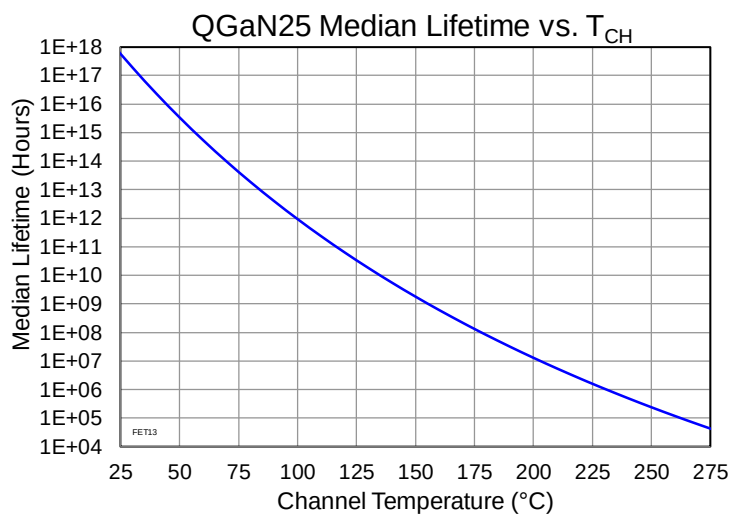

Application Circuit

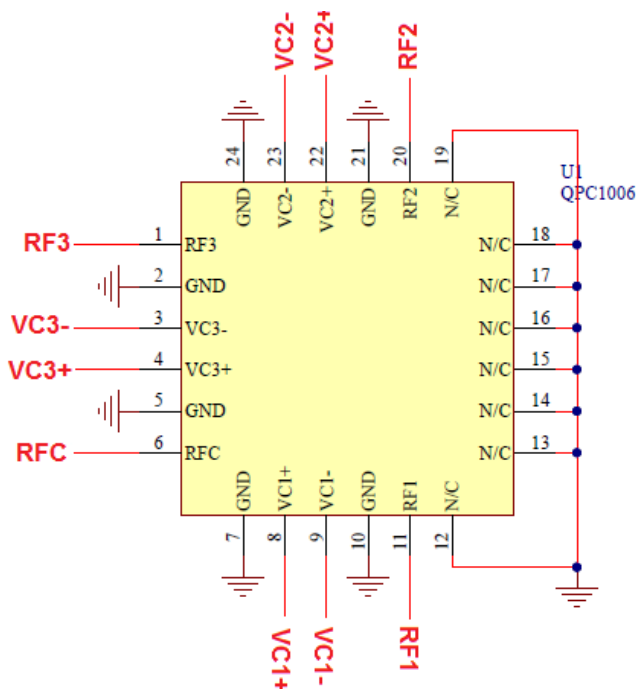

Notes:

1. This switch can be configured as a Single Pole, Single Throw (SPST) by terminating two unused RF switched ports with a 50 Ohm load.
2. External components are not required.

Bias Up Procedure

1. V_{C1+} or V_{C2+} or V_{C3+} set to 0 V (see Logic Table for RF Path)
2. V_{C1-} or V_{C2-} or V_{C3-} set to -40 V (see Logic Table for RF Path)
3. Apply RF signal to RF Input

Bias Up Down


1. Turn off RF supply
2. Turn V_{C1-} or V_{C2-} or V_{C3-} to 0 V
3. Turn V_{C1+} or V_{C2+} or V_{C3+} to 0 V

Logic Table (SP3T Truth Table)

RF Path	State	V_{C1+}	V_{C1-}	V_{C2+}	V_{C2-}	V_{C3+}	V_{C3-}
RFC to RF1 ON	On-State (Insertion Loss), RF2 & RF3 = OFF	H	L	L	H	L	H
RFC to RF2 ON	On-State (Insertion Loss), RF1 & RF3 = OFF	L	H	H	L	L	H
RFC to RF3 ON	On-State (Insertion Loss), RF1 & RF2 = OFF	L	H	L	H	H	L

- VC High (H) = 0 V
- VC Low (L) = -20, -30, -40 or -50 V


Evaluation Board (EVB) Assembly Layout.

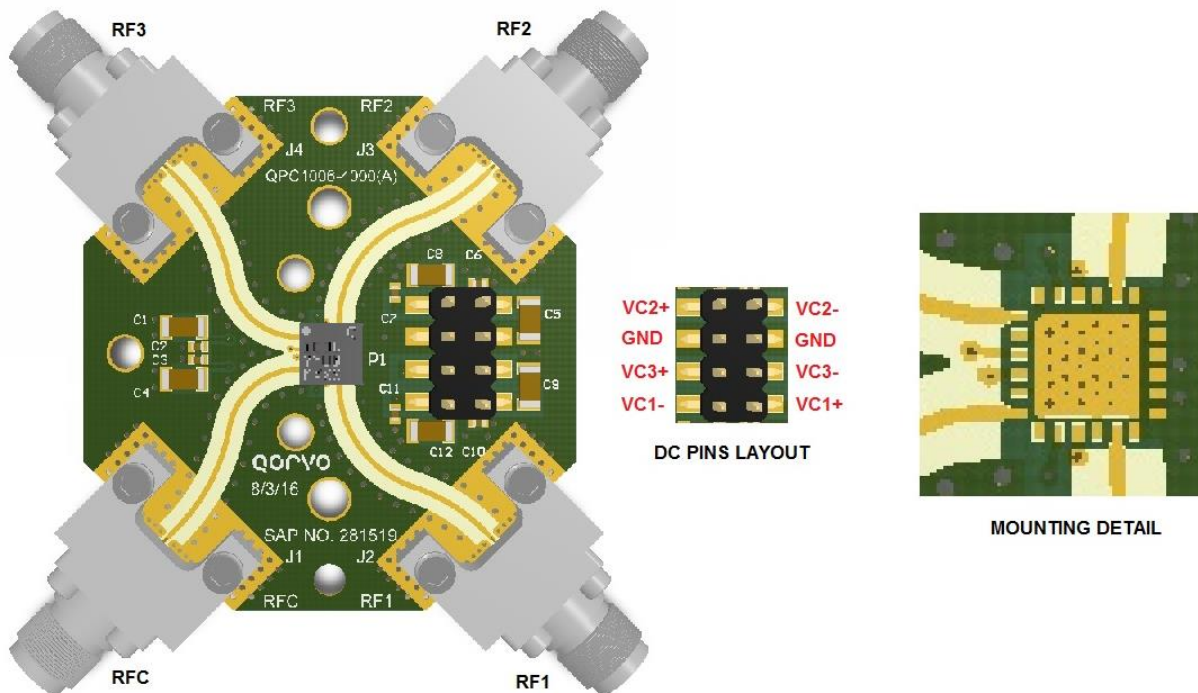

Notes:

1. This switch can be configured as a Single Pole, Single Throw (SPST) by terminating one unused RF switched port with a 50 Ohm load.
2. See Logic Table on page 13 for biasing the voltage controls.
3. External components are not required

Mechanical Information

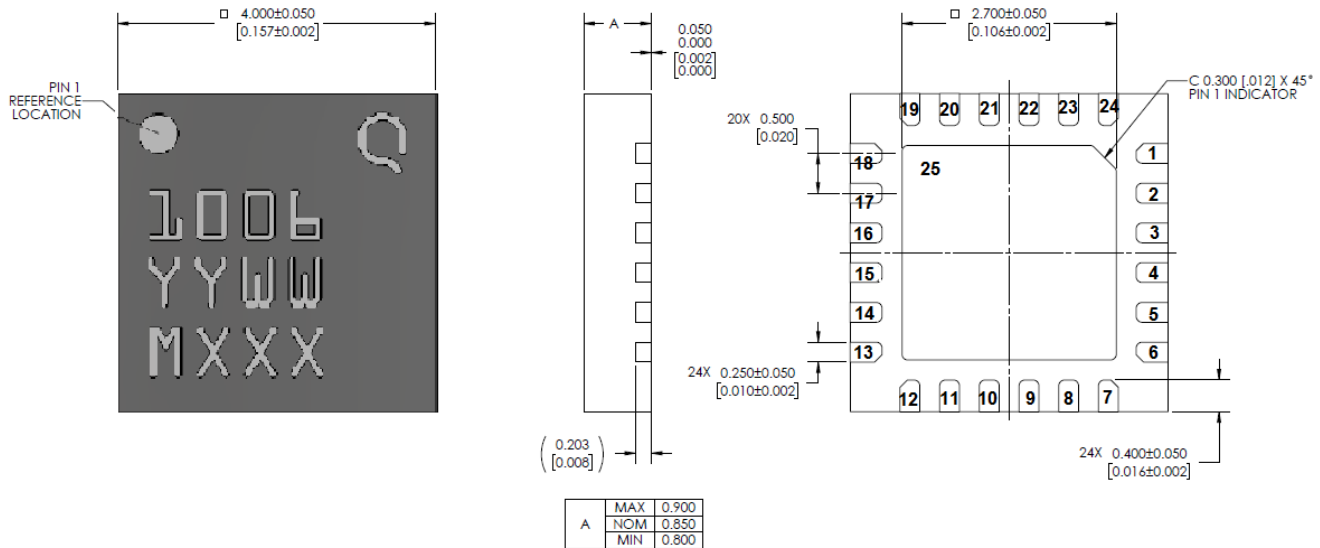

Units: millimeters

Tolerances: unless specified

x.xx = ± 0.25

x.xxx = ± 0.100

Materials:

Base: Laminate

Packaged Exposed Metallization is gold plated

Marking:

QPC1006: Part number

YY: Part Assembly year


WW: Part Assembly week

MXXX: Batch ID

Pin Description

Pad No.	Symbol	Description
1	RF3	RF switched port 3; matched to 50 Ω ; DC coupled
2, 5, 7, 10, 21, 24	GND	Ground. Connected to GND paddle (pin 25); should be grounded on PCB to improve isolation
3	V _{C3-}	Control voltage #3; External components are not required
4	V _{C3+}	Control voltage #3; External components are not required
6	RFC	RF common port; matched to 50 Ω ; DC coupled
8	V _{C1+}	Control voltage #1; External components are not required
9	V _{C1-}	Control voltage #1; External components are not required
11	RF1	RF switched port 1; matched to 50 Ω ; DC coupled
12 - 19	N/C	Not connected internally. Recommended to be grounded at EVB level
20	RF2	RF switched port 2; matched to 50 Ω ; DC coupled
22	V _{C2+}	Control voltage #2; External components are not required
23	V _{C2-}	Control voltage #2; External components are not required
25	GND	Backside Paddle. Multiple vias should be employed to minimize inductance and thermal resistance.

Recommended Soldering Profile

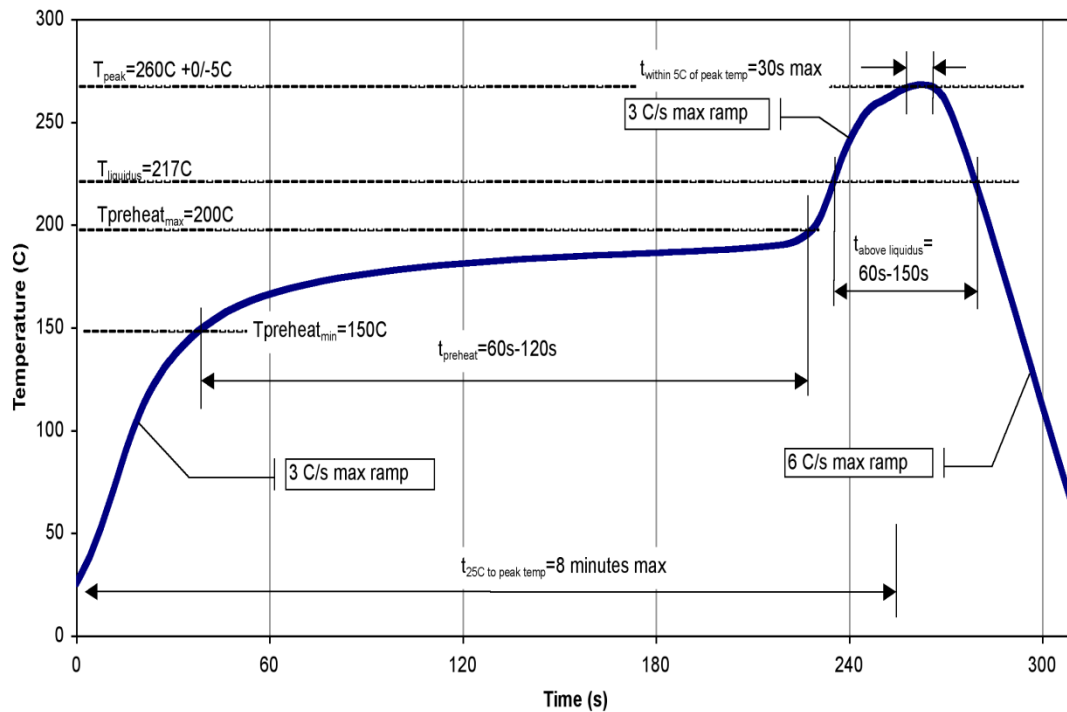

Handling Precautions

Parameter	Rating	Standard
ESD – Human Body Model (HBM)	1A	ESDA / JEDEC JS-001-2012
ESD – Charged Device Model (CDM)	TBD	ESDA / JEDEC JS-002-2014
MSL – Convection Reflow 260 °C	TBD	JEDEC standard IPC/JEDEC J-STD-020



Caution!
ESD-Sensitive Device

Solderability

Compatible with the latest version of J-STD-020, Lead-free solder, 260 °C

RoHS Compliance

This part is compliant with 2011/65/EU RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment) as amended by Directive 2015/863/EU.

This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C₁₅H₁₂Br₄O₂) Free
- PFOS Free
- SVHC Free



Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations:

Web: www.qorvo.com

Tel: 1-844-890-8163

Email: customer.support@qorvo.com

For technical questions and application information: Email: appsupport@qorvo.com

Important Notice

The information contained herein is believed to be reliable; however, Qorvo makes no warranties regarding the information contained herein and assumes no responsibility or liability whatsoever for the use of the information contained herein. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for Qorvo products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. **THIS INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND QORVO HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

Without limiting the generality of the foregoing, Qorvo products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Copyright 2016 © Qorvo, Inc. | Qorvo is a registered trademark of Qorvo, Inc.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9