



## Technical Data Sheet

### Chip LED with Right Angle Lens

#### 12-21SURC/S530-XX/TR8

#### Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS complaint version.



#### Descriptions

- The 12-21 SMD taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications etc.




#### Applications

- Automotive: backlighting in dashboard and switch.
- Telecommunication: Indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.
- Indoor signboard use.



#### Device Selection Guide

| Part No.              | Chip     |               | Lens Color  |
|-----------------------|----------|---------------|-------------|
|                       | Material | Emitted Color |             |
| 12-21SURC/S530-XX/TR8 | AlGaInP  | Brilliant Red | Water Clear |

## Package Outline Dimensions

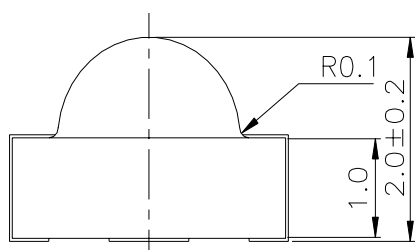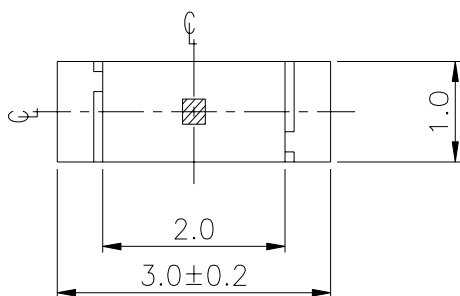

For reflow soldering (propose)

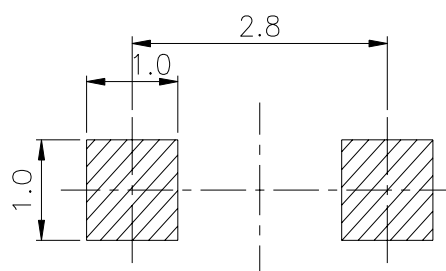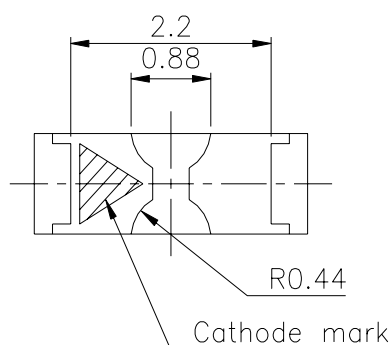

**Note:** The tolerances unless mentioned is  $\pm 0.1\text{mm}$ , Unit = mm

**12-21SURC/S530-XX/TR8****Absolute Maximum Ratings (Ta=25℃)**

| Parameter                                 | Symbol          | Rating                                                                    | Unit |
|-------------------------------------------|-----------------|---------------------------------------------------------------------------|------|
| Reverse Voltage                           | V <sub>R</sub>  | 5                                                                         | V    |
| Forward Current                           | I <sub>F</sub>  | 25                                                                        | mA   |
| Operating Temperature                     | Topr            | -40 ~ +85                                                                 | ℃    |
| Storage Temperature                       | Tstg            | -40 ~ +90                                                                 | ℃    |
| Electrostatic Discharge(HBM)              | ESD             | 2000                                                                      | V    |
| Power Dissipation                         | P <sub>d</sub>  | 60                                                                        | mW   |
| Peak Forward Current<br>(Duty 1/10 @1KHz) | I <sub>FP</sub> | 60                                                                        | mA   |
| Soldering Temperature                     | Tsol            | Reflow Soldering : 260 ℃ for 10 sec.<br>Hand Soldering : 350 ℃ for 3 sec. |      |

**12-21SURC/S530-XX/TR8**
**Electro-Optical Characteristics (Ta=25°C)**







| Parameter                    | Symbol         | *Chip Rank | Min.  | Typ.  | Max.  | Unit | Condition            |
|------------------------------|----------------|------------|-------|-------|-------|------|----------------------|
| Luminous Intensity           | I <sub>v</sub> | A2         | 19    | 47    | ----- | mcd  | I <sub>F</sub> =20mA |
|                              |                | A3         | 45    | 68    | ----- |      |                      |
|                              |                | A4         | 62    | 92    | ----- |      |                      |
|                              |                | A5         | 75    | 115   | ----- |      |                      |
|                              |                | A6         | 90    | 139   | ----- |      |                      |
| Viewing Angle                | 2 θ 1/2        | -----      | ----- | 120   | ----- | deg  |                      |
| Peak Wavelength              | λ <sub>p</sub> | -----      | ----- | 632   | ----- | nm   |                      |
| Dominant Wavelength          | λ <sub>d</sub> | -----      | ----- | 624   | ----- | nm   |                      |
| Spectrum Radiation Bandwidth | △ λ            | -----      | ----- | 20    | ----- | nm   |                      |
| Forward Voltage              | V <sub>F</sub> | -----      | ----- | 2.0   | 2.4   | V    |                      |
| Reverse Current              | I <sub>R</sub> | -----      | ----- | ----- | 10    | μ A  | V <sub>R</sub> =5V   |

**\*12-21SURC/S530-XX/TR8**



**Chip Rank**

## Typical Electro-Optical Characteristics Curves

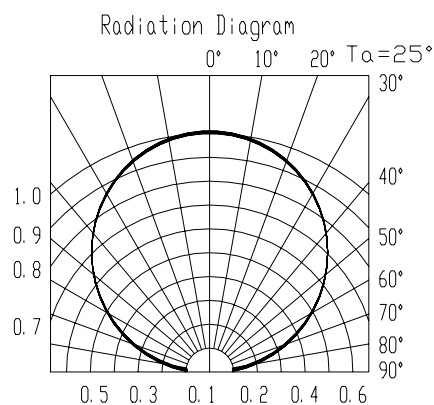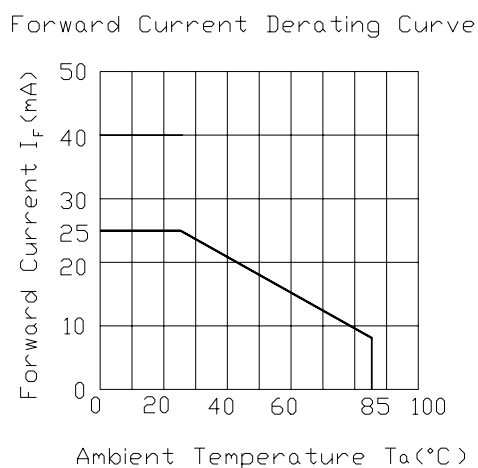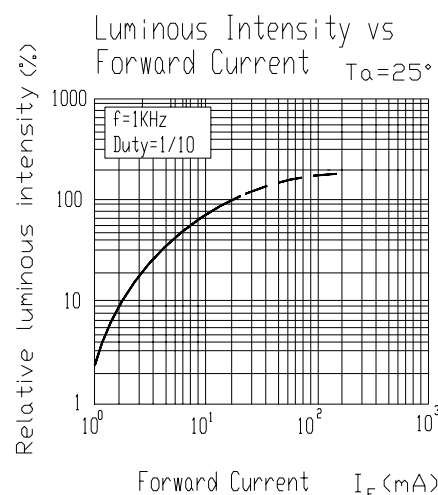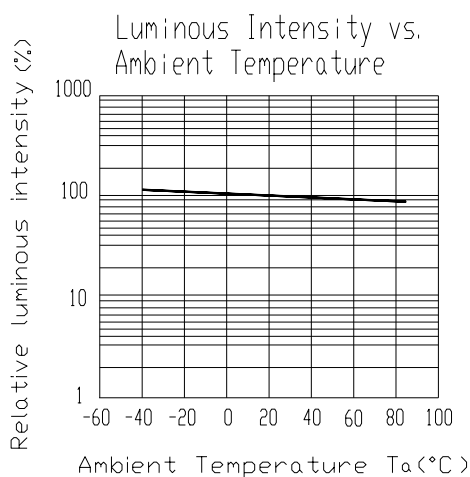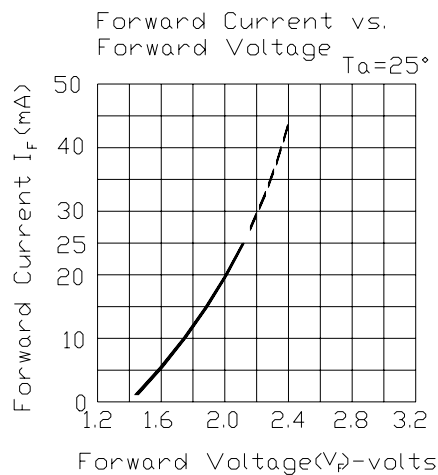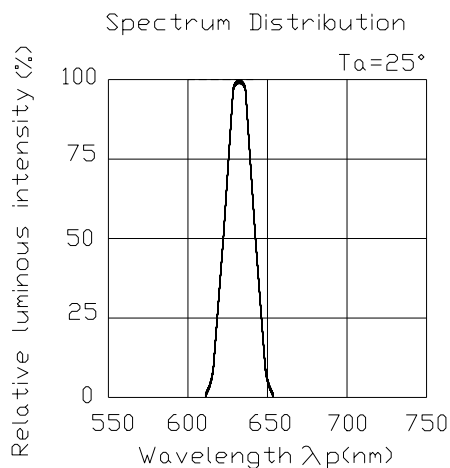


## 12-21SURC/S530-XX/TR8

### Label explanation


**CAT: Luminous Intensity Rank**

**HUE: Dom. Wavelength Rank**

**REF: Forward Voltage Rank**

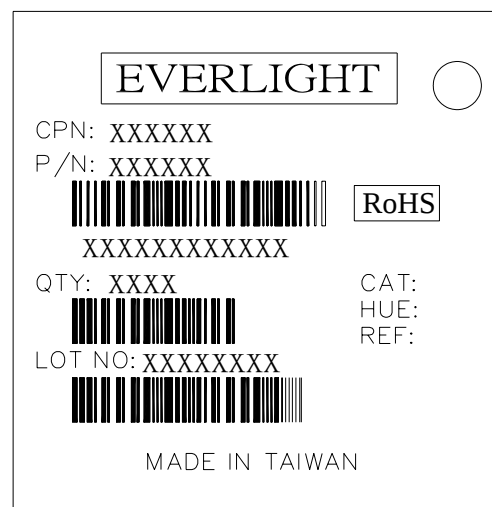


### Reel Dimensions

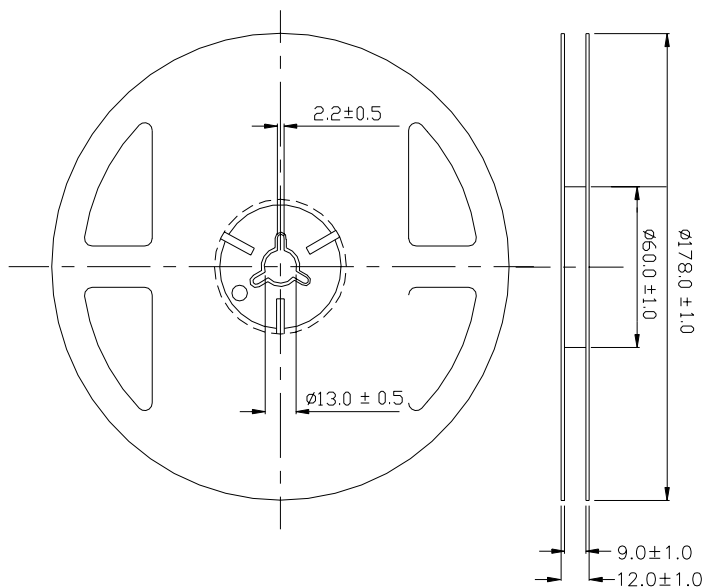

**Note:** The tolerances unless mentioned is  $\pm 0.1\text{mm}$ , Unit = mm


# 12-21SURC/S530-XX/TR8

**Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel**

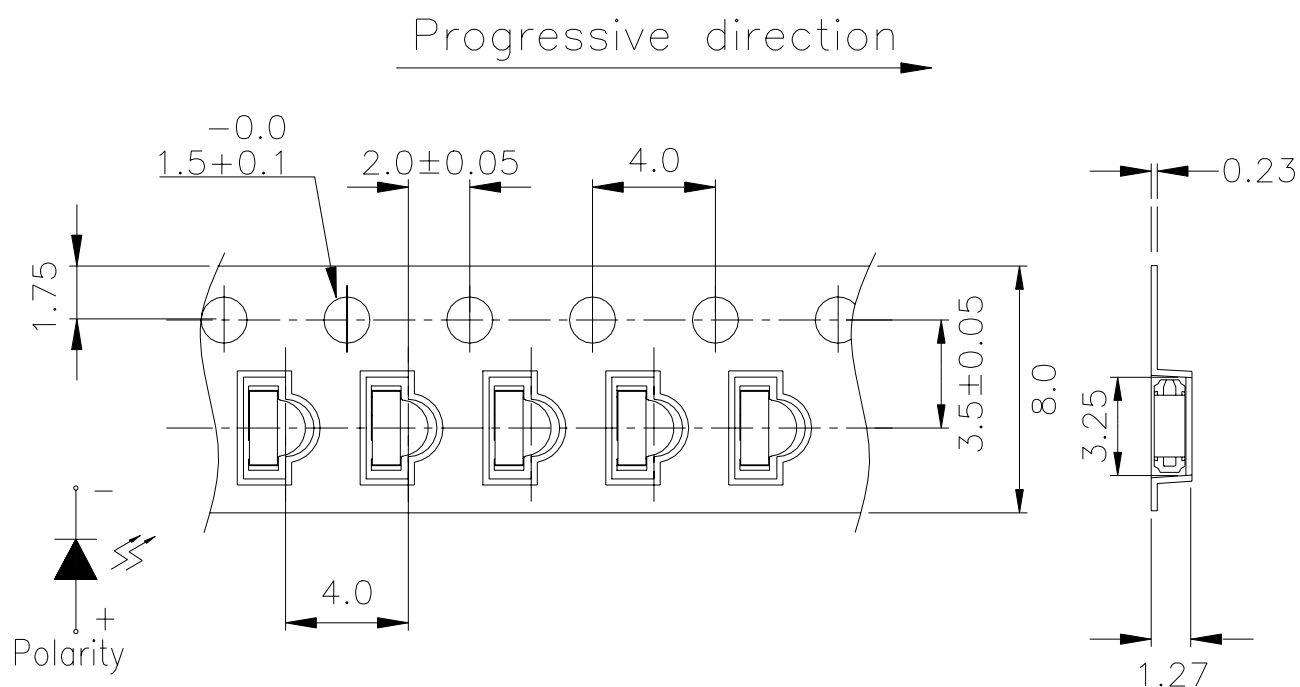

**Note:** The tolerances unless mentioned is  $\pm 0.1\text{mm}$  ,Unit = mm

## Moisture Resistant Packaging

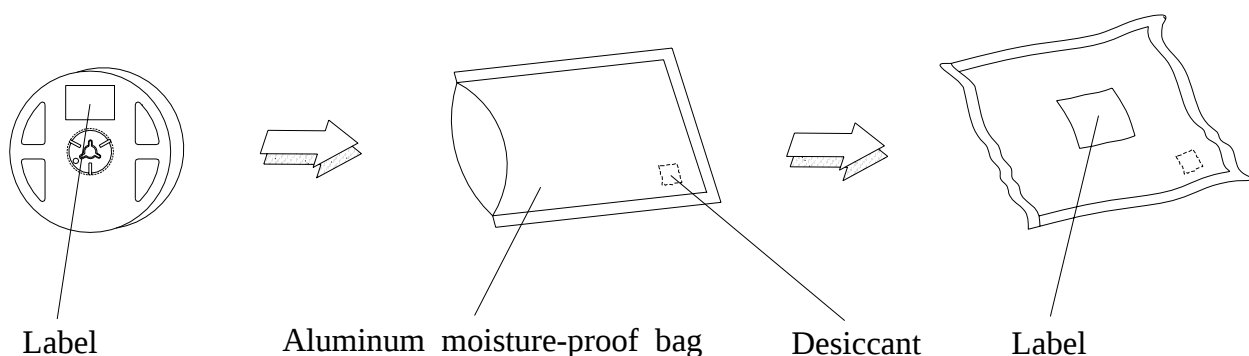

**Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level : 90%

LTPD : 10%

| No. | Items                            | Test Condition                                 | Test Hours/Cycles | Sample Size | Ac/Re |
|-----|----------------------------------|------------------------------------------------|-------------------|-------------|-------|
| 1   | Reflow Soldering                 | Temp. : 260°C±5°C<br>Min. 5sec.                | 6 Min.            | 22 PCS.     | 0/1   |
| 2   | Temperature Cycle                | H : +100°C 15min<br>∫ 5 min<br>L : -40°C 15min | 300 Cycles        | 22 PCS.     | 0/1   |
| 3   | Thermal Shock                    | H : +100°C 5min<br>∫ 10 sec<br>L : -10°C 5min  | 300 Cycles        | 22 PCS.     | 0/1   |
| 4   | High Temperature Storage         | Temp. : 100°C                                  | 1000 Hrs.         | 22 PCS.     | 0/1   |
| 5   | Low Temperature Storage          | Temp. : -40°C                                  | 1000 Hrs.         | 22 PCS.     | 0/1   |
| 6   | DC Operating Life                | I <sub>F</sub> = 20 mA                         | 1000 Hrs.         | 22 PCS.     | 0/1   |
| 7   | High Temperature / High Humidity | 85°C / 85%RH                                   | 1000 Hrs.         | 22 PCS.     | 0/1   |

**Precautions For Use****1. Over-current-proof**

Customer must apply resistors for protection , otherwise slight voltage shift will cause big current change ( Burn out will happen ).

**2. Storage**

2.1 Do not open moisture proof bag before the products are ready to use.

2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.


2.3 The LEDs should be used within a year.

2.4 After opening the package, the LEDs should be kept at 30°C or less and 60%RH or less.

2.5 The LEDs should be used within 168 hours (7 days) after opening the package.

2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : 60±5°C for 24 hours.

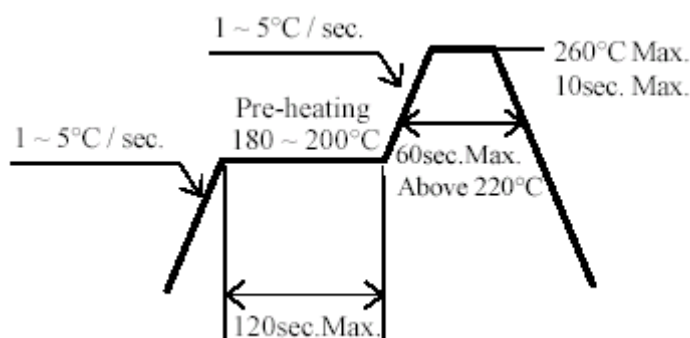**3. Soldering Condition****3.1 Pb-free solder temperature profile**

3.2 Reflow soldering should not be done more than two times.

3.3 When soldering, do not put stress on the LEDs during heating.


3.4 After soldering, do not warp the circuit board.

**12-21SURC/S530-XX/TR8****4.Soldering Iron**

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

**5.Repairing**

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

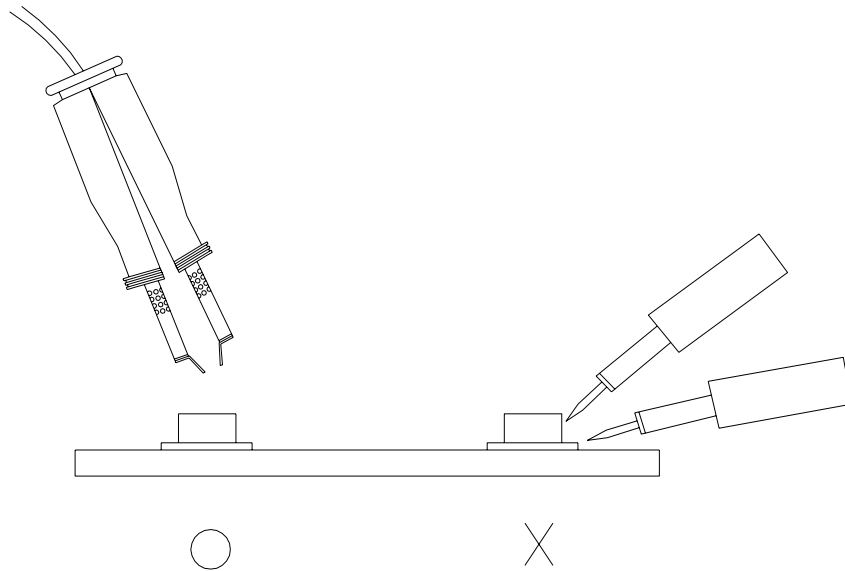**EVERLIGHT ELECTRONICS CO., LTD.**

Office: No 25, Lane 76, Sec 3, Chung Yang Rd,  
Tucheng, Taipei 236, Taiwan, R.O.C

Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

<http://www.everlight.com>

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9