

# NL17SG126


## Bus Buffer with 3-State Output

The NL17SG126 MiniGate™ is an advanced high-speed CMOS Bus Buffer with 3-State Output in ultra-small footprint.


The NL17SG126 input structures provides protection when voltages up to 4.6 V are applied.

### Features


- Wide Operating  $V_{CC}$  Range: 0.9 V to 3.6 V
- High Speed:  $t_{PD} = 2.3$  ns (Typ) at  $V_{CC} = 3.0$  V,  $C_L = 15$  pF
- Low Power Dissipation:  $I_{CC} = 0.5$   $\mu$ A (Max) at  $T_A = 25^\circ$ C
- 4.6 V Overvoltage Tolerant (OVT) Input Pins
- Ultra-Small Packages
- These are Pb-Free and Halide-Free Devices

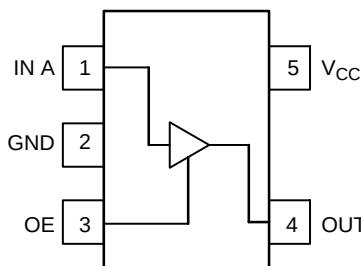


**Figure 1. SOT-953**  
(Top Thru View)

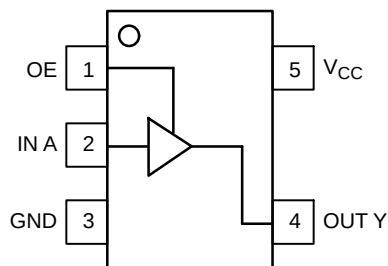

**Figure 2. SC-88A**  
(Top View)



**Figure 3. UDFN6**  
(Top View)



**Figure 4. Logic Symbol**



**ON Semiconductor®**


<http://onsemi.com>

### MARKING DIAGRAMS




**SOT-953**  
**CASE 527AE**

J = Specific Device Code  
(J with 90 degree clockwise rotation)  
M = Month Code



**UDFN6**  
**1.0 x 1.0**  
**CASE 517BX**




**UDFN6**  
**1.45 x 1.0**  
**CASE 517AQ**



**SC-88A**  
**DF SUFFIX**  
**CASE 419A**

M = Date Code\*  
▪ = Pb-Free Package



(Note: Microdot may be in either location)

\*Date Code orientation and/or position may vary depending upon manufacturing location.

### PIN ASSIGNMENT

|   | SOT-953         | SC-88A          | UDFN6           |
|---|-----------------|-----------------|-----------------|
| 1 | IN A            | OE              | OE              |
| 2 | GND             | IN A            | IN A            |
| 3 | OE              | GND             | GND             |
| 4 | OUT Y           | OUT Y           | OUT Y           |
| 5 | V <sub>CC</sub> | V <sub>CC</sub> | NC              |
| 6 |                 |                 | V <sub>CC</sub> |

### FUNCTION TABLE

| A Input | OE Input | Y Output |
|---------|----------|----------|
| X       | L        | Z        |
| L       | H        | L        |
| H       | H        | H        |

### ORDERING INFORMATION

See detailed ordering and shipping information on page 7 of this data sheet.

# NL17SG126

## MAXIMUM RATINGS

| Symbol        | Parameter                                                                    | Value                  | Unit |
|---------------|------------------------------------------------------------------------------|------------------------|------|
| $V_{CC}$      | DC Supply Voltage                                                            | -0.5 to +5.5           | V    |
| $V_{IN}$      | DC Input Voltage                                                             | -0.5 to +4.6           | V    |
| $V_{OUT}$     | DC Output Voltage                                                            | -0.5 to $V_{CC} + 0.5$ | V    |
| $I_{IK}$      | DC Input Diode Current<br>$V_{IN} < GND$                                     | -20                    | mA   |
| $I_{OK}$      | DC Output Diode Current<br>$V_{OUT} < GND$                                   | -20                    | mA   |
| $I_{OUT}$     | DC Output Source/Sink Current                                                | $\pm 20$               | mA   |
| $I_{CC}$      | DC Supply Current per Supply Pin                                             | $\pm 20$               | mA   |
| $I_{GND}$     | DC Ground Current per Ground Pin                                             | $\pm 20$               | mA   |
| $T_{STG}$     | Storage Temperature Range                                                    | -65 to +150            | °C   |
| $T_L$         | Lead Temperature, 1 mm from Case for 10 Seconds                              | 260                    | °C   |
| $T_J$         | Junction Temperature Under Bias                                              | +150                   | °C   |
| MSL           | Moisture Sensitivity                                                         | Level 1                |      |
| $F_R$         | Flammability Rating<br>Oxygen Index: 28 to 34                                | UL 94 V-0 @ 0.125 in   |      |
| $V_{ESD}$     | ESD Withstand Voltage<br>Human Body Model (Note 2)<br>Machine Model (Note 3) | >2000<br>>100          | V    |
| $I_{LATCHUP}$ | Latchup Performance<br>Above $V_{CC}$ and Below GND at 125°C (Note 4)        | $\pm 100$              | mA   |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Measured with minimum pad spacing on an FR4 board, using 10 mm-by-1 inch, 2-ounce copper trace with no air flow.
2. Tested to EIA/JESD22-A114-A.
3. Tested to EIA/JESD22-A115-A.
4. Tested to EIA/JESD78.

## RECOMMENDED OPERATING CONDITIONS

| Symbol                | Characteristics                                                                    | Min        | Max             | Unit |
|-----------------------|------------------------------------------------------------------------------------|------------|-----------------|------|
| $V_{CC}$              | Positive DC Supply Voltage                                                         | 0.9        | 3.6             | V    |
| $V_{IN}$              | Digital Input Voltage                                                              | 0.0        | 3.6             | V    |
| $V_{OUT}$             | Output Voltage<br>Output at High or Low State<br>Power-Down Mode ( $V_{CC} = 0$ V) | 0.0<br>0.0 | $V_{CC}$<br>3.6 | V    |
| $T_A$                 | Operating Temperature Range                                                        | -55        | +125            | °C   |
| $\Delta t / \Delta V$ | Input Transition Rise or Fall Rate<br>$V_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$   | 0          | 10              | ns/V |

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

DC ELECTRICAL CHARACTERISTICS

| Symbol          | Parameter                      | Conditions                                                                            | V <sub>CC</sub> (V)       | T <sub>A</sub> = 25°C |                       | T <sub>A</sub> = -55°C to +125°C |                       | Unit |
|-----------------|--------------------------------|---------------------------------------------------------------------------------------|---------------------------|-----------------------|-----------------------|----------------------------------|-----------------------|------|
|                 |                                |                                                                                       |                           | Min                   | Max                   | Min                              | Max                   |      |
| V <sub>IH</sub> | High-Level Input Voltage       |                                                                                       | 0.9                       | V <sub>CC</sub>       |                       | V <sub>CC</sub>                  |                       | V    |
|                 |                                |                                                                                       | 1.1 to 1.3                | 0.7xV <sub>CC</sub>   |                       | 0.7xV <sub>CC</sub>              |                       |      |
|                 |                                |                                                                                       | 1.4 to 1.6                | 0.65xV <sub>CC</sub>  |                       | 0.65xV <sub>CC</sub>             |                       |      |
|                 |                                |                                                                                       | 1.65 to 1.95              | 0.65xV <sub>CC</sub>  |                       | 0.65xV <sub>CC</sub>             |                       |      |
|                 |                                |                                                                                       | 2.3 to 2.7                | 1.7                   |                       | 1.7                              |                       |      |
|                 |                                |                                                                                       | 3.0 to 3.6                | 2.0                   |                       | 2.0                              |                       |      |
| V <sub>IL</sub> | Low-Level Input Voltage        |                                                                                       | 0.9                       |                       | GND                   |                                  | GND                   | V    |
|                 |                                |                                                                                       | 1.1 to 1.3                |                       | 0.3xV <sub>CC</sub>   |                                  | 0.3xV <sub>CC</sub>   |      |
|                 |                                |                                                                                       | 1.4 to 1.6                |                       | 0.35xV <sub>CC</sub>  |                                  | 0.35xV <sub>CC</sub>  |      |
|                 |                                |                                                                                       | 1.65 to 1.95              |                       | 0.35xV <sub>CC</sub>  |                                  | 0.35xV <sub>CC</sub>  |      |
|                 |                                |                                                                                       | 2.3 to 2.7                |                       | 0.7                   |                                  | 0.7                   |      |
|                 |                                |                                                                                       | 3.0 to 3.6                |                       | 0.8                   |                                  | 0.8                   |      |
| V <sub>OH</sub> | High-Level Output Voltage      | V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub>                                  | I <sub>OH</sub> = -20 µA  | 0.9                   | 0.75                  |                                  | 0.75                  | V    |
|                 |                                |                                                                                       | I <sub>OH</sub> = -0.3 mA | 1.1 to 1.3            | 0.75xV <sub>CC</sub>  |                                  | 0.75xV <sub>CC</sub>  |      |
|                 |                                |                                                                                       | I <sub>OH</sub> = -1.7 mA | 1.4 to 1.6            | 0.75xV <sub>CC</sub>  |                                  | 0.75xV <sub>CC</sub>  |      |
|                 |                                |                                                                                       | I <sub>OH</sub> = -3.0 mA | 1.65 to 1.95          | V <sub>CC</sub> -0.45 |                                  | V <sub>CC</sub> -0.45 |      |
|                 |                                |                                                                                       | I <sub>OH</sub> = -4.0 mA | 2.3 to 2.7            | 2.07                  |                                  | 2.07                  |      |
|                 |                                |                                                                                       | I <sub>OH</sub> = -8.0 mA | 3.0 to 3.6            | 2.75                  |                                  | 2.75                  |      |
| V <sub>OL</sub> | Low-Level Output Voltage       | V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub>                                  | I <sub>OL</sub> = 20 µA   | 0.9                   |                       | 0.1                              | 0.1                   | V    |
|                 |                                |                                                                                       | I <sub>OL</sub> = 0.3 mA  | 1.1 to 1.3            |                       | 0.25xV <sub>CC</sub>             | 0.25xV <sub>CC</sub>  |      |
|                 |                                |                                                                                       | I <sub>OL</sub> = 1.7 mA  | 1.4 to 1.6            |                       | 0.25xV <sub>CC</sub>             | 0.25xV <sub>CC</sub>  |      |
|                 |                                |                                                                                       | I <sub>OL</sub> = 3.0 mA  | 1.65 to 1.95          |                       | 0.45                             | 0.45                  |      |
|                 |                                |                                                                                       | I <sub>OL</sub> = 4.0 mA  | 2.3 to 2.7            |                       | 0.4                              | 0.4                   |      |
|                 |                                |                                                                                       | I <sub>OL</sub> = 8.0 mA  | 3.0 to 3.6            |                       | 0.4                              | 0.4                   |      |
| I <sub>IN</sub> | Input Leakage Current          | 0 ≤ V <sub>IN</sub> ≤ 3.6 V                                                           | 0 to 3.6                  |                       | ±0.1                  |                                  | ±1.0                  | µA   |
| I <sub>CC</sub> | Quiescent Supply Current       | V <sub>IN</sub> = V <sub>CC</sub> or GND                                              | 3.6                       |                       | 1.0                   |                                  | 10.0                  | µA   |
| I <sub>OZ</sub> | 3-State Output Leakage Current | V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub><br>V <sub>OUT</sub> = 0 to 3.6 V | 0.9 to 3.6                |                       | 1.0                   |                                  | 10.0                  | µA   |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

# NL17SG126

## AC ELECTRICAL CHARACTERISTICS (Input $t_r = t_f = 3.0$ ns)

| Symbol                   | Parameter                      | Test Condition                           | $V_{CC}$ (V)         | $T_A = 25^\circ\text{C}$ |      |      | $T_A = -55^\circ\text{C to } +125^\circ\text{C}$ |      | Unit |
|--------------------------|--------------------------------|------------------------------------------|----------------------|--------------------------|------|------|--------------------------------------------------|------|------|
|                          |                                |                                          |                      | Min                      | Typ  | Max  | Min                                              | Max  |      |
| $t_{PLH}$ ,<br>$t_{PHL}$ | Propagation Delay,<br>A to Y   | $C_L = 10$ pF,<br>$R_L = 1$ M $\Omega$   | 0.9                  | –                        | 11.3 | 13.6 | –                                                | 15.9 | ns   |
|                          |                                |                                          | 1.1 to 1.3           | –                        | 8.3  | 10.4 | –                                                | 12.8 |      |
|                          |                                |                                          | 1.4 to 1.6           | –                        | 5.0  | 8.5  | –                                                | 10.0 |      |
|                          |                                |                                          | 1.65 to 1.95         | –                        | 4.0  | 6.2  | –                                                | 6.7  |      |
|                          |                                |                                          | 2.3 to 2.7           | –                        | 2.6  | 3.9  | –                                                | 4.4  |      |
|                          |                                |                                          | 3.0 to 3.6           | –                        | 2.1  | 3.1  | –                                                | 3.7  |      |
|                          |                                | $C_L = 15$ pF,<br>$R_L = 1$ M $\Omega$   | 0.9                  | –                        | 12.6 | 14.7 | –                                                | 17.0 | ns   |
|                          |                                |                                          | 1.1 to 1.3           | –                        | 9.6  | 11.5 | –                                                | 15.2 |      |
|                          |                                |                                          | 1.4 to 1.6           | –                        | 5.6  | 9.3  | –                                                | 11.2 |      |
|                          |                                |                                          | 1.65 to 1.95         | –                        | 4.5  | 6.9  | –                                                | 7.1  |      |
|                          |                                |                                          | 2.3 to 2.7           | –                        | 2.9  | 4.4  | –                                                | 5.0  |      |
|                          |                                |                                          | 3.0 to 3.6           | –                        | 2.4  | 3.4  | –                                                | 3.9  |      |
|                          |                                | $C_L = 30$ pF,<br>$R_L = 1$ M $\Omega$   | 0.9                  | –                        | 14.5 | 16.3 | –                                                | 19.6 | ns   |
|                          |                                |                                          | 1.1 to 1.3           | –                        | 11.3 | 13.6 | –                                                | 17.5 |      |
|                          |                                |                                          | 1.4 to 1.6           | –                        | 8.2  | 13.1 | –                                                | 15.9 |      |
|                          |                                |                                          | 1.65 to 1.95         | –                        | 6    | 9.2  | –                                                | 9.6  |      |
|                          |                                |                                          | 2.3 to 2.7           | –                        | 4    | 5.7  | –                                                | 6.1  |      |
|                          |                                |                                          | 3.0 to 3.6           | –                        | 3.3  | 4.4  | –                                                | 4.8  |      |
| $t_{PZH}$ ,<br>$t_{PZL}$ | Output Enable Time,<br>OE to Y | $C_L = 10$ pF;<br>$R_L = 100$ k $\Omega$ |                      |                          |      |      |                                                  |      | ns   |
|                          |                                |                                          | 0.9                  | –                        | 11.0 | 13.3 | –                                                | 15.8 |      |
|                          |                                |                                          | $R_L = 5$ k $\Omega$ | 1.1 to 1.3               | –    | 8.4  | 10.9                                             | –    |      |
|                          |                                |                                          | $R_L = 5$ k $\Omega$ | 1.4 to 1.6               | –    | 5.3  | 7.8                                              | –    |      |
|                          |                                |                                          | $R_L = 5$ k $\Omega$ | 1.65 to 1.95             | –    | 3.9  | 5.5                                              | –    |      |
|                          |                                |                                          | $R_L = 5$ k $\Omega$ | 2.3 to 2.7               | –    | 2.5  | 3.5                                              | –    |      |
|                          |                                |                                          | $R_L = 5$ k $\Omega$ | 3.0 to 3.6               | –    | 2.1  | 2.7                                              | –    |      |
|                          |                                | $C_L = 15$ pF;<br>$R_L = 100$ k $\Omega$ |                      |                          |      |      |                                                  |      | ns   |
|                          |                                |                                          | 0.9                  | –                        | 12.0 | 14.8 | –                                                | 17.0 |      |
|                          |                                |                                          | $R_L = 5$ k $\Omega$ | 1.1 to 1.3               | –    | 9.0  | 11.7                                             | –    |      |
|                          |                                |                                          | $R_L = 5$ k $\Omega$ | 1.4 to 1.6               | –    | 5.9  | 8.9                                              | –    |      |
|                          |                                |                                          | $R_L = 5$ k $\Omega$ | 1.65 to 1.95             | –    | 4.4  | 6.3                                              | –    |      |
|                          |                                |                                          | $R_L = 5$ k $\Omega$ | 2.3 to 2.7               | –    | 2.9  | 3.9                                              | –    |      |
|                          |                                |                                          | $R_L = 5$ k $\Omega$ | 3.0 to 3.6               | –    | 2.3  | 3                                                | –    |      |
|                          |                                | $C_L = 30$ pF;<br>$R_L = 100$ k $\Omega$ |                      |                          |      |      |                                                  |      | ns   |
|                          |                                |                                          | 0.9                  | –                        | 13.0 | 15.2 | –                                                | 18.3 |      |
|                          |                                |                                          | $R_L = 5$ k $\Omega$ | 1.1 to 1.3               | –    | 10.0 | 13.1                                             | –    |      |
|                          |                                |                                          | $R_L = 5$ k $\Omega$ | 1.4 to 1.6               | –    | 8.3  | 12.2                                             | –    |      |
|                          |                                |                                          | $R_L = 5$ k $\Omega$ | 1.65 to 1.95             | –    | 6.1  | 8.6                                              | –    |      |
|                          |                                |                                          | $R_L = 5$ k $\Omega$ | 2.3 to 2.7               | –    | 3.8  | 5                                                | –    |      |
|                          |                                |                                          | $R_L = 5$ k $\Omega$ | 3.0 to 3.6               | –    | 2.9  | 3.8                                              | –    |      |

# NL17SG126

## AC ELECTRICAL CHARACTERISTICS (Input $t_r = t_f = 3.0$ ns) (continued)

| Symbol                                 | Parameter                                 | Test Condition          | V <sub>CC</sub> (V) | T <sub>A</sub> = 25 °C |       |      | T <sub>A</sub> =<br>-55°C to +125°C |      | Unit |
|----------------------------------------|-------------------------------------------|-------------------------|---------------------|------------------------|-------|------|-------------------------------------|------|------|
|                                        |                                           |                         |                     | Min                    | Typ   | Max  | Min                                 | Max  |      |
| t <sub>PHZ</sub> ,<br>t <sub>PLZ</sub> | Output Disable Time,<br>OE to Y           | C <sub>L</sub> = 10 pF; |                     |                        |       |      |                                     |      | ns   |
|                                        |                                           | R <sub>L</sub> = 100 kΩ | 0.9                 | –                      | 100.4 | –    | –                                   | –    |      |
|                                        |                                           | R <sub>L</sub> = 5 kΩ   | 1.1 to 1.3          | –                      | 9.1   | 14.4 | –                                   | 22.4 |      |
|                                        |                                           | R <sub>L</sub> = 5 kΩ   | 1.4 to 1.6          | –                      | 7.1   | 9.1  | –                                   | 10.4 |      |
|                                        |                                           | R <sub>L</sub> = 5 kΩ   | 1.65 to 1.95        | –                      | 6.5   | 8.3  | –                                   | 9    |      |
|                                        |                                           | R <sub>L</sub> = 5 kΩ   | 2.3 to 2.7          | –                      | 5.8   | 7.3  | –                                   | 8.8  |      |
|                                        |                                           | R <sub>L</sub> = 5 kΩ   | 3.0 to 3.6          | –                      | 5.4   | 6.9  | –                                   | 7.6  |      |
|                                        |                                           | C <sub>L</sub> = 15 pF; |                     |                        |       |      |                                     |      | ns   |
|                                        |                                           | R <sub>L</sub> = 100 kΩ | 0.9                 | –                      | 122.2 | –    | –                                   | –    |      |
|                                        |                                           | R <sub>L</sub> = 5 kΩ   | 1.1 to 1.3          | –                      | 9.8   | 15.3 | –                                   | 25.1 |      |
|                                        |                                           | R <sub>L</sub> = 5 kΩ   | 1.4 to 1.6          | –                      | 7.8   | 9.8  | –                                   | 11.3 |      |
|                                        |                                           | R <sub>L</sub> = 5 kΩ   | 1.65 to 1.95        | –                      | 7.2   | 9.2  | –                                   | 10.6 |      |
|                                        |                                           | R <sub>L</sub> = 5 kΩ   | 2.3 to 2.7          | –                      | 7     | 8.2  | –                                   | 10.3 |      |
|                                        |                                           | R <sub>L</sub> = 5 kΩ   | 3.0 to 3.6          | –                      | 6.6   | 7.7  | –                                   | 9.5  |      |
|                                        |                                           | C <sub>L</sub> = 30 pF; |                     |                        |       |      |                                     |      | ns   |
|                                        |                                           | R <sub>L</sub> = 100 kΩ | 0.9                 | –                      | 217.1 | –    | –                                   | –    |      |
|                                        |                                           | R <sub>L</sub> = 5 kΩ   | 1.1 to 1.3          | –                      | 13.2  | 19.6 | –                                   | 31.9 |      |
|                                        |                                           | R <sub>L</sub> = 5 kΩ   | 1.4 to 1.6          | –                      | 12.2  | 13.5 | –                                   | 14.9 |      |
|                                        |                                           | R <sub>L</sub> = 5 kΩ   | 1.65 to 1.95        | –                      | 11.4  | 12.7 | –                                   | 13.9 |      |
|                                        |                                           | R <sub>L</sub> = 5 kΩ   | 2.3 to 2.7          | –                      | 11.3  | 12.2 | –                                   | 13.5 |      |
|                                        |                                           | R <sub>L</sub> = 5 kΩ   | 3.0 to 3.6          | –                      | 10.2  | 11.5 | –                                   | 12.9 |      |
| C <sub>IN</sub>                        | Input Capacitance                         |                         | 0 to 3.6            |                        | 3     | –    | –                                   | –    | pF   |
| C <sub>O</sub>                         | Output Capacitance                        | V <sub>O</sub> = GND    | 0                   |                        | 3     | –    | –                                   | –    | pF   |
| C <sub>PD</sub>                        | Power Dissipation<br>Capacitance (Note 5) | f = 10 MHz              | 0.9 to 3.6          | –                      | 4     | –    | –                                   | –    | pF   |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

5. C<sub>PD</sub> is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load. Average operating current can be obtained by the equation:  $I_{CC(OPR)} = C_{PD} \cdot V_{CC} \cdot f_{in} + I_{CC}$ . C<sub>PD</sub> is used to determine the no-load dynamic power consumption;  $P_D = C_{PD} \cdot V_{CC}^2 \cdot f_{in} + I_{CC} \cdot V_{CC}$ .

# NL17SG126

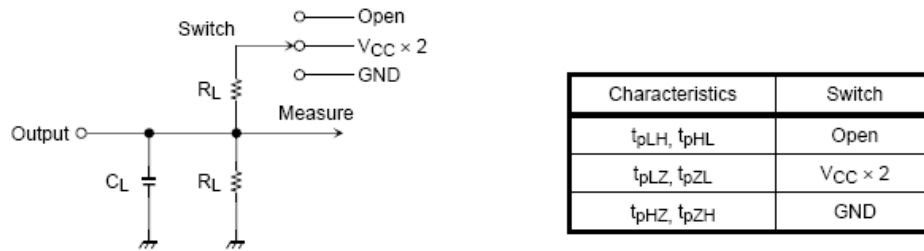


Figure 5. Test Circuit

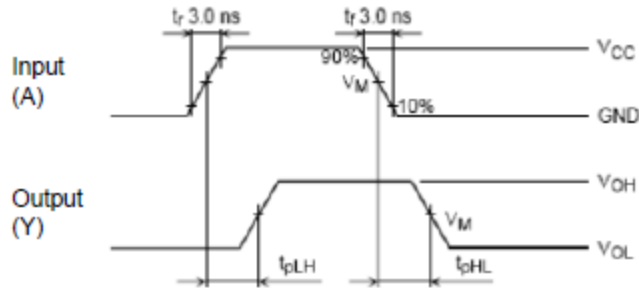


Figure 6.  $t_{pLH}$ ,  $t_{pHL}$  Waveforms

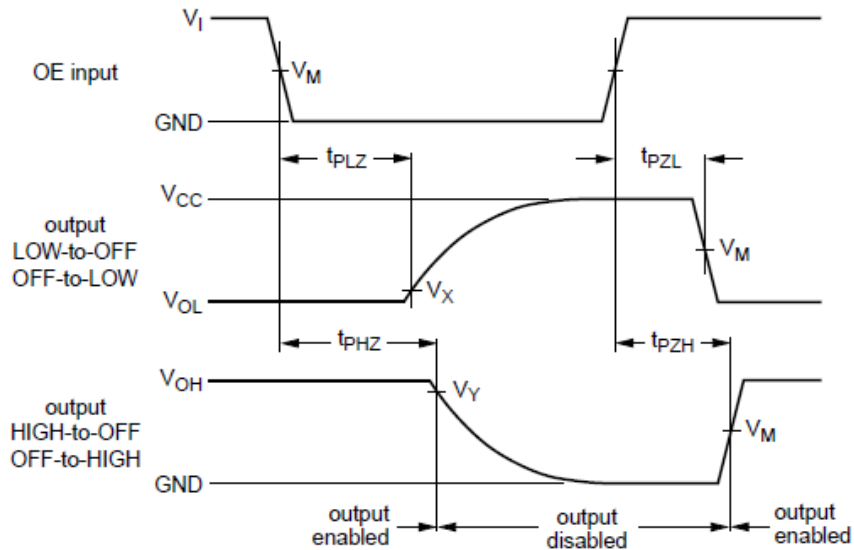


Figure 7.  $t_{pLZ}$ ,  $t_{pHZ}$ ,  $t_{pZH}$ ,  $t_{pZL}$  Waveforms

| Unit  | $V_{CC}$                 |                           |                           |                          |                          |                          |
|-------|--------------------------|---------------------------|---------------------------|--------------------------|--------------------------|--------------------------|
|       | $3.3 \pm 0.3 \text{ V}$  | $2.5 \pm 0.2 \text{ V}$   | $1.8 \pm 0.15 \text{ V}$  | $1.5 \pm 0.1 \text{ V}$  | $1.2 \pm 0.1 \text{ V}$  | $0.9 \text{ V}$          |
| $V_M$ | $V_{CC} / 2$             | $V_{CC} / 2$              | $V_{CC} / 2$              | $V_{CC} / 2$             | $V_{CC} / 2$             | $V_{CC} / 2$             |
| $V_X$ | $V_{OL} + 0.3 \text{ V}$ | $V_{OL} + 0.15 \text{ V}$ | $V_{OL} + 0.1 \text{ V}$  | $V_{OL} + 0.1 \text{ V}$ | $V_{OL} + 0.1 \text{ V}$ | $V_{OL} + 0.1 \text{ V}$ |
| $V_Y$ | $V_{OH} - 0.3 \text{ V}$ | $V_{OH} - 0.15 \text{ V}$ | $V_{OH} - 0.15 \text{ V}$ | $V_{OH} - 0.1 \text{ V}$ | $V_{OH} - 0.1 \text{ V}$ | $V_{OH} - 0.1 \text{ V}$ |

## NL17SG126

### ORDERING INFORMATION

| Device           | Package                      | Shipping <sup>†</sup> |
|------------------|------------------------------|-----------------------|
| NL17SG126P5T5G   | SOT-953<br>(Pb-Free)         | 8000 / Tape & Reel    |
| NL17SG126P5T6G   | SOT-953<br>(Pb-Free)         | 8000 / Tape & Reel    |
| NL17SG126DFT2G   | SC-88A<br>(Pb-Free)          | 3000 / Tape & Reel    |
| NL17SG126AMUTCG* | UDFN6 1.45x1 mm<br>(Pb-Free) | 3000 / Tape & Reel    |
| NL17SG126CMUTCG* | UDFN6 1x1 mm<br>(Pb-Free)    | 3000 / Tape & Reel    |



<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

\*In Development

# NL17SG126

## PACKAGE DIMENSIONS

**SOT-953**  
CASE 527AE  
ISSUE E

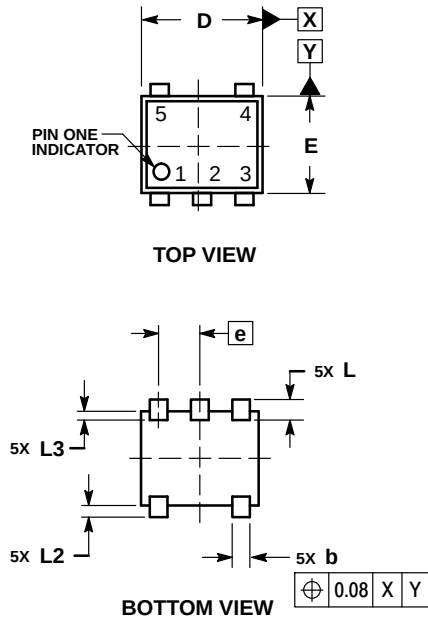


### NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF THE BASE MATERIAL.
4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.

| DIM | MILLIMETERS |      |      |
|-----|-------------|------|------|
|     | MIN         | NOM  | MAX  |
| A   | 0.34        | 0.37 | 0.40 |
| b   | 0.10        | 0.15 | 0.20 |
| C   | 0.07        | 0.12 | 0.17 |
| D   | 0.95        | 1.00 | 1.05 |
| E   | 0.75        | 0.80 | 0.85 |
| e   | 0.35 BSC    |      |      |
| He  | 0.95        | 1.00 | 1.05 |
| L   | 0.175 REF   |      |      |
| L2  | 0.05        | 0.10 | 0.15 |
| L3  | ---         | ---  | 0.15 |

### SOLDERING FOOTPRINT\*

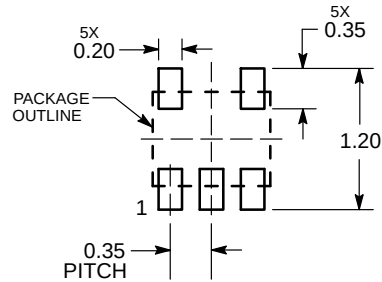

DIMENSIONS: MILLIMETERS


\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.



# NL17SG126

## PACKAGE DIMENSIONS

UDFN6 1.0x1.0, 0.35P  
CASE 517BX  
ISSUE O

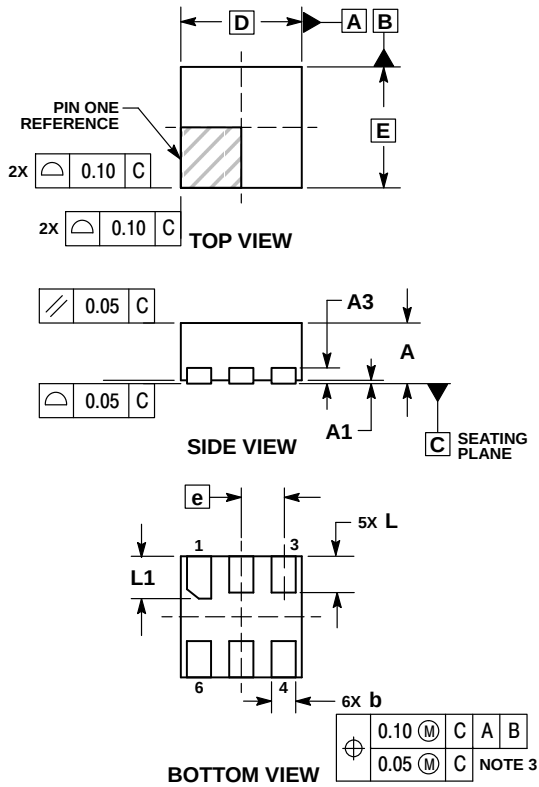


### NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DIMENSION b APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.15 AND 0.20 MM FROM TERMINAL TIP.
4. PACKAGE DIMENSIONS EXCLUSIVE OF BURRS AND MOLD FLASH.

| MILLIMETERS |      |      |
|-------------|------|------|
| DIM         | MIN  | MAX  |
| A           | 0.45 | 0.55 |
| A1          | 0.00 | 0.05 |
| A3          | 0.13 | REF  |
| b           | 0.12 | 0.22 |
| D           | 1.00 | BSC  |
| E           | 1.00 | BSC  |
| e           | 0.35 | BSC  |
| L           | 0.25 | 0.35 |
| L1          | 0.30 | 0.40 |

### RECOMMENDED SOLDERING FOOTPRINT\*



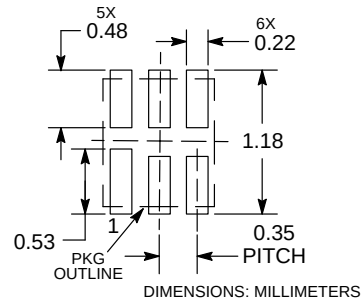


\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# NL17SG126

## PACKAGE DIMENSIONS

UDFN6 1.45x1.0, 0.5P  
CASE 517AQ  
ISSUE O

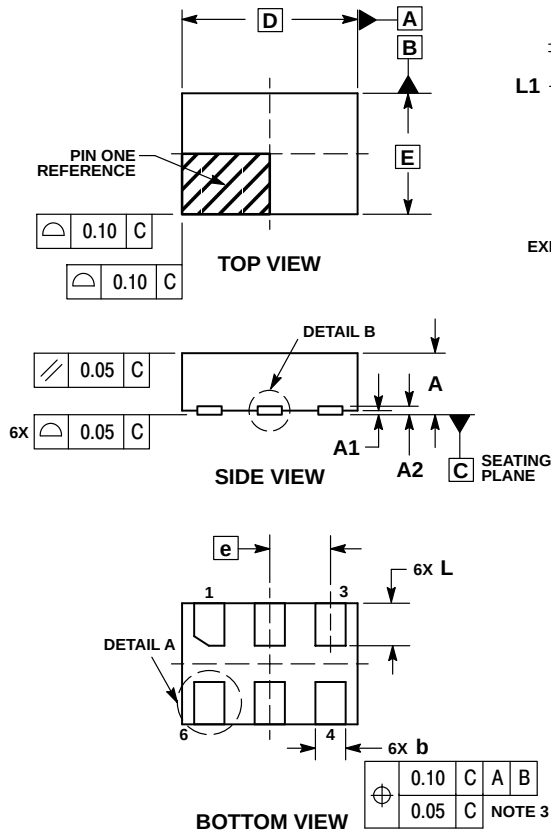


### NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DIMENSION b APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.15 AND 0.30 mm FROM THE TERMINAL TIP.

| MILLIMETERS |          |      |
|-------------|----------|------|
| DIM         | MIN      | MAX  |
| A           | 0.45     | 0.55 |
| A1          | 0.00     | 0.05 |
| A2          | 0.07 REF |      |
| b           | 0.20     | 0.30 |
| D           | 1.45 BSC |      |
| E           | 1.00 BSC |      |
| e           | 0.50 BSC |      |
| L           | 0.30     | 0.40 |
| L1          | —        | 0.15 |

### MOUNTING FOOTPRINT





DIMENSIONS: MILLIMETERS

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# NL17SG126

## PACKAGE DIMENSIONS

### SC-88A (SC-70-5/SOT-353) CASE 419A-02 ISSUE L

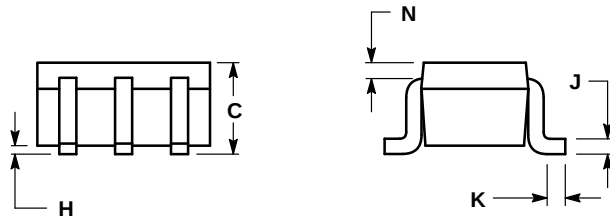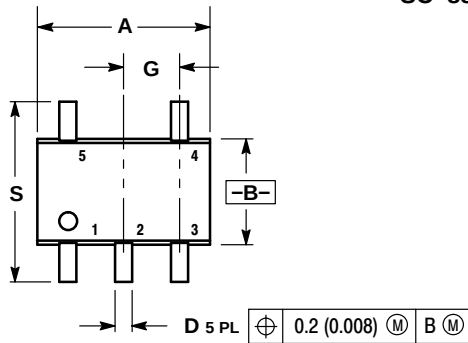


#### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. 419A-01 OBSOLETE. NEW STANDARD 419A-02.
4. DIMENSIONS A AND B DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.

| DIM | INCHES    |       | MILLIMETERS |      |
|-----|-----------|-------|-------------|------|
|     | MIN       | MAX   | MIN         | MAX  |
| A   | 0.071     | 0.087 | 1.80        | 2.20 |
| B   | 0.045     | 0.053 | 1.15        | 1.35 |
| C   | 0.031     | 0.043 | 0.80        | 1.10 |
| D   | 0.004     | 0.012 | 0.10        | 0.30 |
| G   | 0.026 BSC |       | 0.65 BSC    |      |
| H   | ---       | 0.004 | ---         | 0.10 |
| J   | 0.004     | 0.010 | 0.10        | 0.25 |
| K   | 0.004     | 0.012 | 0.10        | 0.30 |
| N   | 0.008 REF |       | 0.20 REF    |      |
| S   | 0.079     | 0.087 | 2.00        | 2.20 |

### SOLDER FOOTPRINT\*

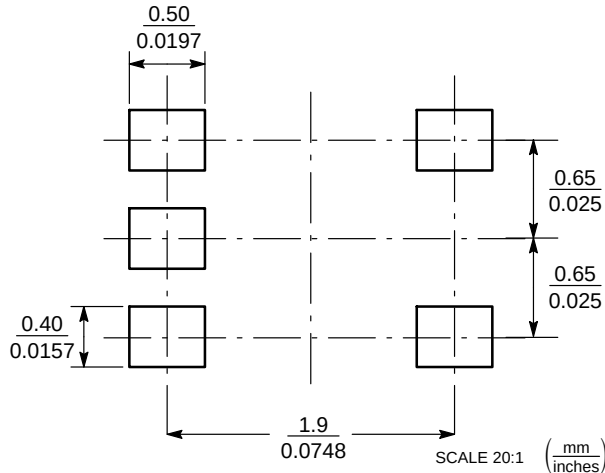

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

MiniGate is a trademark of Semiconductor Components Industries, LLC (SCILLC) or its subsidiaries in the United States and/or other countries.

ON Semiconductor and the  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC) or its subsidiaries in the United States and/or other countries. SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marketing.pdf](http://www.onsemi.com/site/pdf/Patent-Marketing.pdf). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

N. American Technical Support: 800-282-9855 Toll Free  
USA/Canada  
Europe, Middle East and Africa Technical Support:  
Phone: 421 33 790 2910  
Japan Customer Focus Center  
Phone: 81-3-5817-1050

ON Semiconductor Website: [www.onsemi.com](http://www.onsemi.com)

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9