

DESCRIPTION

Demonstration circuits 1424A-A and 1424A-B feature the LT3581 in Boost/Inverting Regulator configurations. The Boost is designed to convert a 5V to 10V input source to 12V at 900mA, and the Inverter a 5V to 12V to -12V at 750mA. DC1424A-A is designed to survive output short circuit events with the external MOSFET installed at the output as default. The demo board includes an option to install the MOSFET at the input side. Install Q1 and R1 on the back of the board and refer to Figure 4 for other instructions. DC1424A-B can easily be converted into a SEPIC Converter by swapping L2 and D2 from their respective locations as shown in Figure 5. The LT3581 includes a 42V Master and Slave switch combination with 3.3A total current and can be used in many configurations such

as Boost, SEPIC, CUK and Flyback. It has a 2.5V to 22V operating input range, UVLO, soft-start, programmable switching frequency and many other popular features. The LT3581 is suitable for many applications, such as Local Bias Supplies, VFD, TFT-LCD Supplies and Automotive Engine Control Power. The LT3581 datasheet gives a complete description of the part, its operation and application information. The datasheet must be read in conjunction with this quick start guide for working on or modifying the demo circuit 1424A.

Design files for this circuit board are available. Call the LTC factory.

LT is a trademark of Linear Technology Corporation

PERFORMANCE SUMMARY DC1424A-A

Specifications are at TA = 25°C

SYMBOL	PARAMETER FOR BOOST CONVERTER	CONDITIONS	MIN	TYP	MAX	UNITS
V _{IN}	Input Supply Range		5		10	V
V _{OUT}	Output Voltage Accuracy	V _{IN} = 5V to 10V, I _{LOAD} = 900mA	11.60	12	12.30	V
Efficiency		V _{IN} = 5V, I _{LOAD} = 900mA		88		%
Ripple		V _{IN} = 5V, I _{LOAD} = 900mA		100		mV
F _s	Switching Frequency			1.2		MHz

PERFORMANCE SUMMARY 1424A-B

Specifications are at TA = 25°C

SYMBOL	PARAMETER FOR CUK CONVERTER	CONDITIONS	MIN	TYP	MAX	UNITS
V _{IN}	Input Supply Range		5		12	V
V _{OUT}	Output Voltage Accuracy	V _{IN} = 5V to -12V, I _{LOAD} = 750mA	-11.60	-11.9	-12.30	V
Efficiency		V _{IN} = 5V, I _{LOAD} = 750mA		81		%
Ripple		V _{IN} = 5V, I _{LOAD} = 750mA		20		mV
F _s	Switching Frequency			1.2		MHz

QUICK START PROCEDURE

Demonstration circuit 1424A-A and 1424A-B is easy to set up to evaluate the performance of the LT3581. Refer to Figures 1 and 2 for proper measurement equipment setup and follow the procedure below:

When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across the Vin or Vout and GND terminals. See Figure 2 for proper scope probe technique.

1. Place jumper in the following position:

JP1 On

2. With power off, connect the input power supply to Vin and GND.

Apply 5V to input.

Check for the proper output voltages.

NOTE. If there is no output, temporarily disconnect the load to make sure that the load is not set too high.

Once the proper output voltage is established, adjust the load within the operating range and observe the output voltage regulation, ripple voltage, efficiency and other parameters.

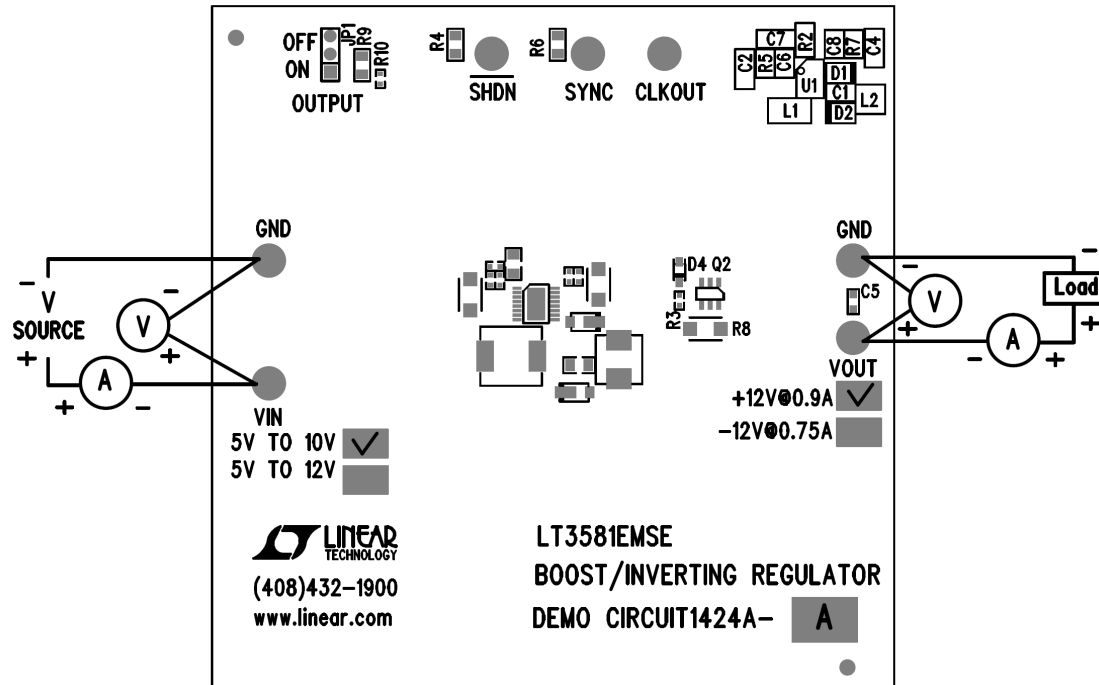


Figure 1. DC1424A-A Proper Equipment Setup

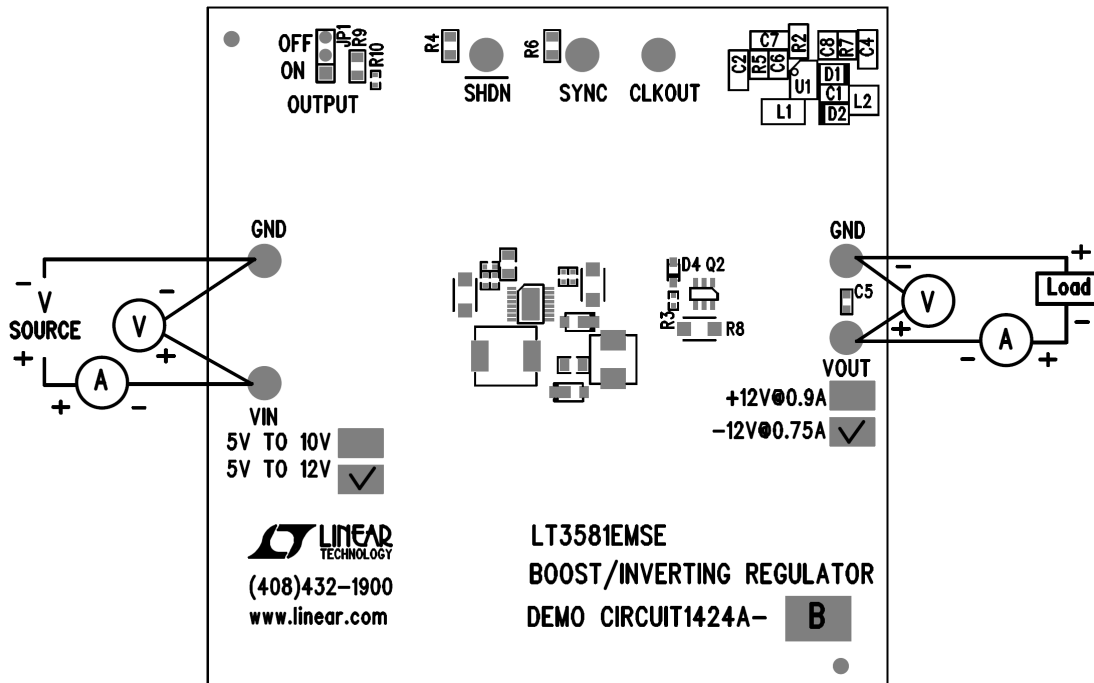


Figure 2. DC1424A-B Proper Equipment Setup

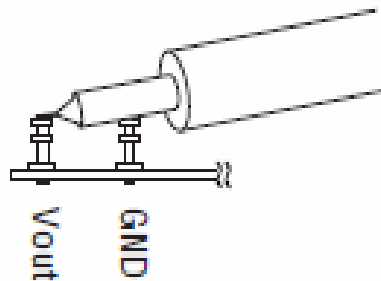


Figure 3. Proper Input/Output Ripple Measurement Technique

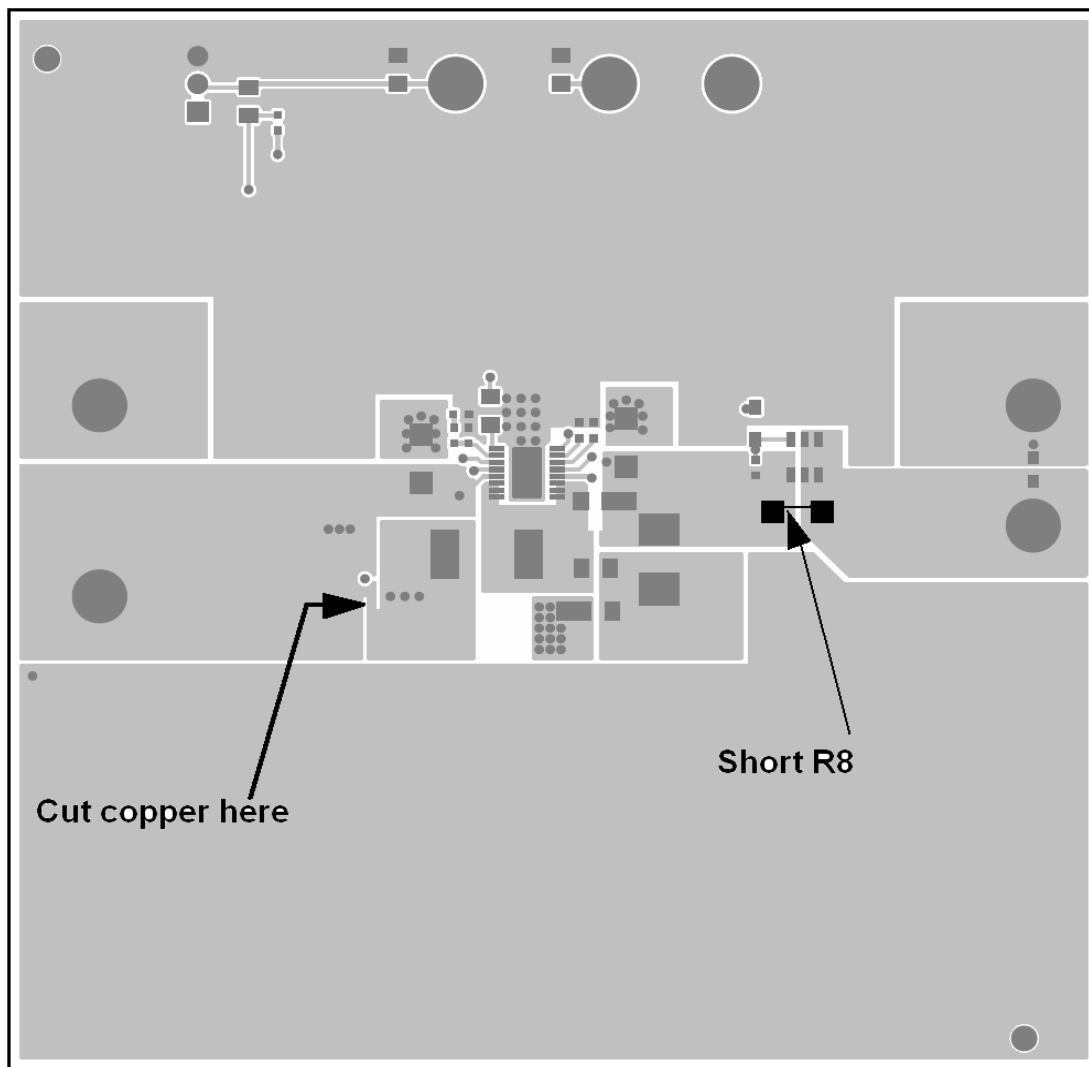


Figure 4. Using Disconnect MOSFET at the Input Side


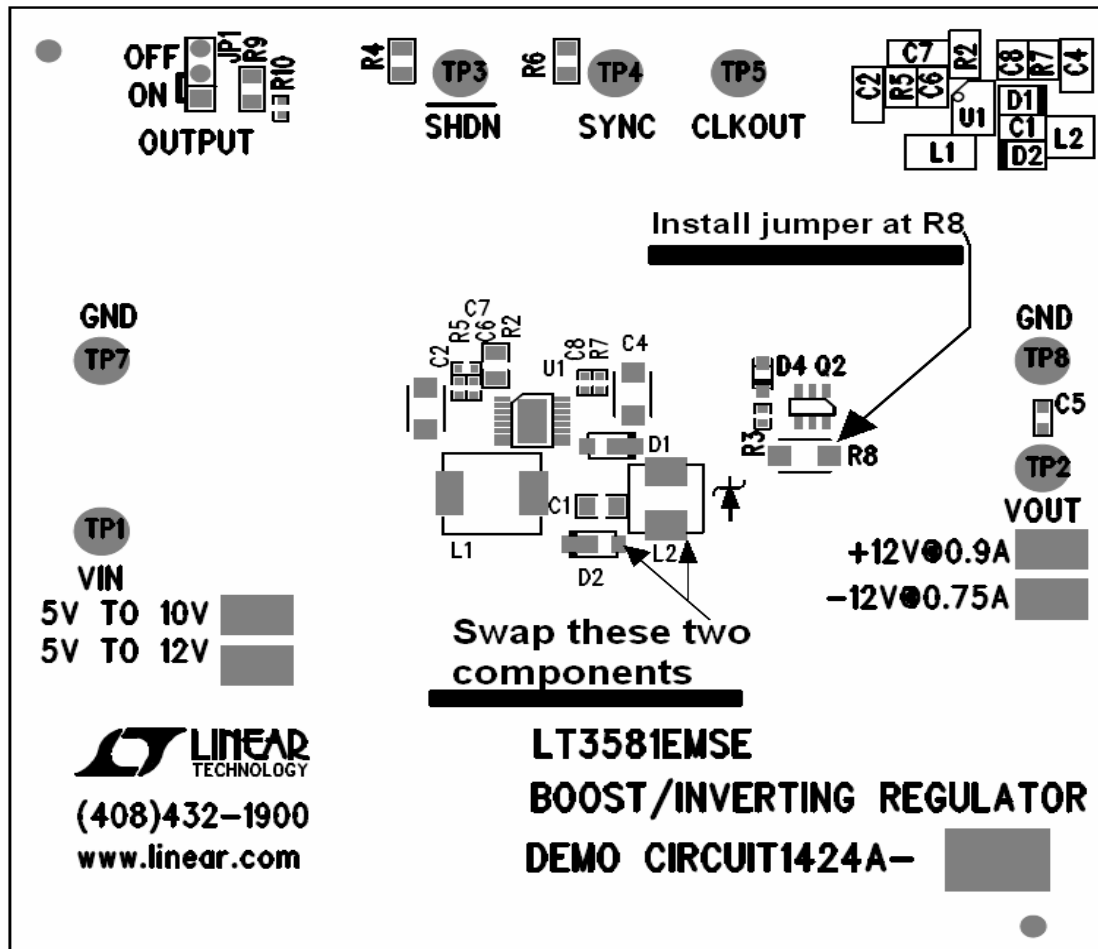


Figure 5. SEPIC Conversion Instructions

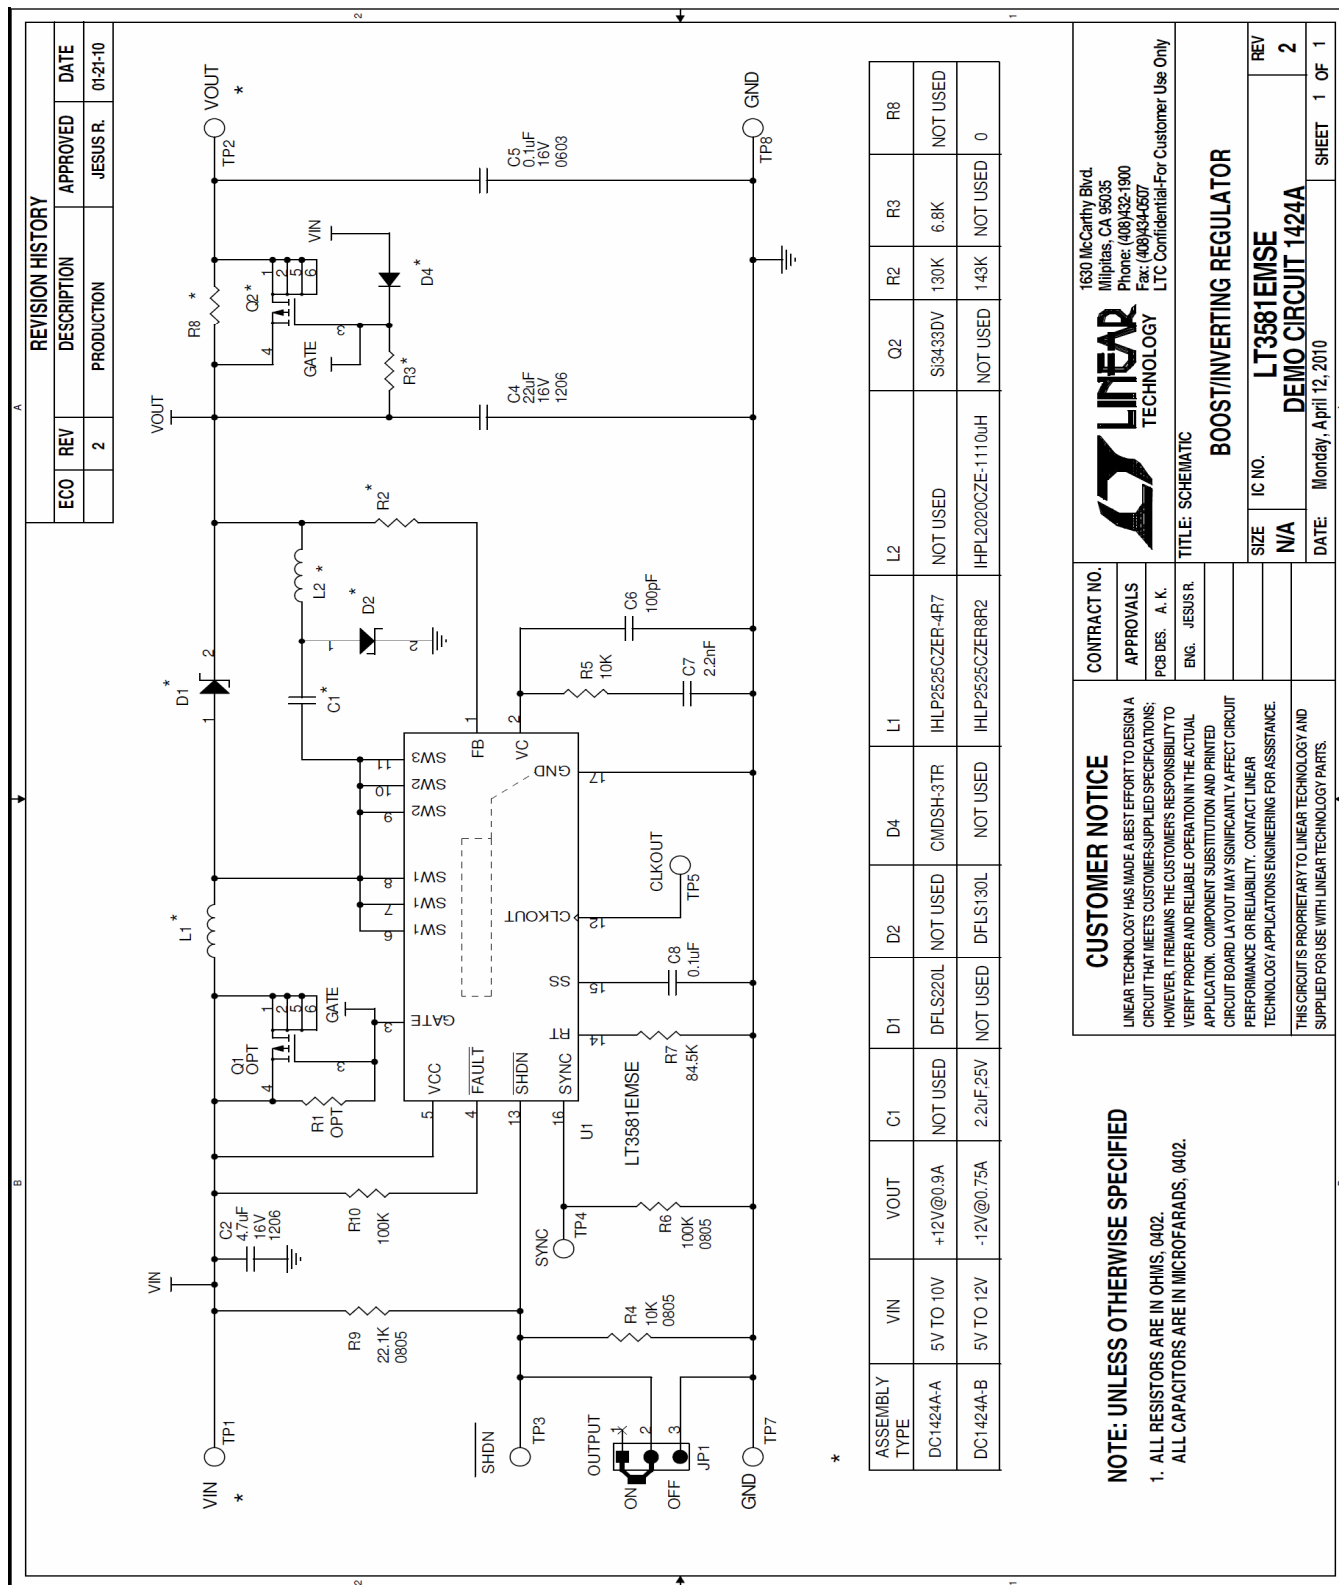

CUSTOMER NOTICE

LINEAR TECHNOLOGY HAS MADE A BEST EFFORT TO DESIGN A CIRCUIT THAT MEETS CUSTOMER-SUPPLIED SPECIFICATIONS; HOWEVER, IT REMAINS THE CUSTOMER'S RESPONSIBILITY TO VERIFY PROPER AND RELIABLE OPERATION IN THE ACTUAL APPLICATION. COMPONENT SUBSTITUTION AND PRINTED CIRCUIT BOARD LAYOUT MAY SIGNIFICANTLY AFFECT CIRCUIT PERFORMANCE OR RELIABILITY. CONTACT LINEAR TECHNOLOGY APPLICATIONS ENGINEERING FOR ASSISTANCE.

THIS CIRCUIT IS PROPRIETARY TO LINEAR TECHNOLOGY AND SUPPLIED FOR USE WITH LINEAR TECHNOLOGY PARTS.



1630 McCarthy Blvd.
Milpitas, CA 95035
Phone: (408)432-1900
Fax: (408)434-0507
LTC Confidential-For Customer Use Only

BOOST/INVERTING REGULATOR

TITLE: SCHEMATIC

SIZE	IC NO.	REV
N/A	LT3581EMSE	2

DATE: Monday, April 12, 2010

SHEET 1 OF 1

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9