

## MAX6161–MAX6168

## Precision, Micropower, Low-Dropout, High-Output-Current, SO-8 Voltage References

### General Description

The MAX6161–MAX6168 are precision, low-dropout, micropower voltage references. These three-terminal devices operate with an input voltage range from ( $V_{OUT} + 200\text{mV}$ ) to 12.6V and are available with output voltage options of 1.25V, 1.8V, 2.048V, 2.5V, 3V, 4.096V, 4.5V, and 5V. They feature a proprietary curvature-correction circuit and laser-trimmed thin-film resistors that result in a very low temperature coefficient of 5ppm/°C (max) and an initial accuracy of  $\pm 2\text{mV}$  (max). Specifications apply to the extended temperature range ( $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ ).

The MAX6161–MAX6168 typically draw only 100 $\mu\text{A}$  of supply current and can source 5mA (4mA for MAX6161) or sink 2mA of load current. Unlike conventional shunt-mode (two-terminal) references that waste supply current and require an external resistor, these devices offer a supply current that is virtually independent of the supply voltage (8 $\mu\text{A}/\text{V}$  variation) and do not require an external resistor. Additionally, the internally compensated devices do not require an external compensation capacitor. Eliminating the external compensation capacitor saves valuable board area in space-critical applications. A low-dropout voltage and a supply-independent, ultra-low supply current make these devices ideal for battery-operated, high-performance, low-voltage systems.

The MAX6161–MAX6168 are available in 8-pin SO packages.

### Benefits and Features


- $\pm 2\text{mV}$  (max) Initial Accuracy
- 5ppm/°C (max) Temperature Coefficient
- 5mA Source Current at 0.9mV/mA
- 2mA Sink Current at 2.5mV/mA
- Stable with 1 $\mu\text{F}$  Capacitive Loads
- No External Capacitor Required
- 100 $\mu\text{A}$  (typ) Quiescent Supply Current
- 200mV (max) Dropout at 1mA Load Current
- Output Voltage Options: 1.25V, 1.8V, 2.048V, 2.5V, 3V, 4.096V, 4.5V, 5V

### Applications

- Analog-to-Digital Converters (ADCs)
- Portable Battery-Powered Systems
- Notebook Computers
- PDAs, GPS, DMMs
- Cellular Phones
- Precision +3V/+5V Systems

*Ordering Information, Typical Operating Circuit, and Selector Guide appear at end of data sheet.*

### Pin Configuration

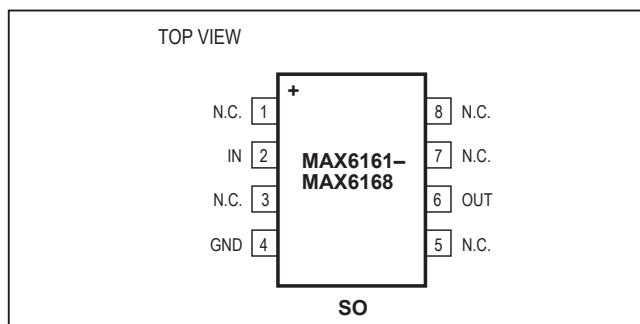

## Absolute Maximum Ratings

Voltages Referenced to GND

IN ..... -0.3 to +13.5V

OUT ..... -0.3V to ( $V_{IN} + 0.3V$ )

Output Short-Circuit Duration to GND or IN ( $V_{IN} \leq 6V$ ) .... Continuous

Output Short-Circuit Duration to GND or IN ( $V_{IN} > 6V$ ) ..... 60s

Continuous Power Dissipation ( $T_A = +70^\circ\text{C}$ )

8-Pin SO (derate 5.88mW/ $^\circ\text{C}$  above  $+70^\circ\text{C}$ ) ..... 471mW

Operating Temperature Range .....  $-40^\circ\text{C}$  to  $+85^\circ\text{C}$

Storage Temperature Range .....  $-65^\circ\text{C}$  to  $+150^\circ\text{C}$

Lead Temperature (soldering, 10s) .....  $+300^\circ\text{C}$

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## Electrical Characteristics—MAX6161 ( $V_{OUT} = 1.25V$ )

( $V_{IN} = +5V$ ,  $I_{OUT} = 0$ ,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise specified. Typical values are at  $T_A = +25^\circ\text{C}$ .) (Note 1)

| PARAMETER                                       | SYMBOL                            | CONDITIONS                                                | MIN   | TYP   | MAX   | UNITS                 |
|-------------------------------------------------|-----------------------------------|-----------------------------------------------------------|-------|-------|-------|-----------------------|
| Output Voltage                                  | $V_{OUT}$                         | $T_A = +25^\circ\text{C}$                                 | 1.248 | 1.250 | 1.252 | V                     |
|                                                 |                                   | MAX6161A                                                  |       |       |       |                       |
|                                                 |                                   | MAX6161B                                                  | 1.246 | 1.250 | 1.254 |                       |
| Output Voltage Temperature Coefficient (Note 2) | $TCV_{OUT}$                       | MAX6161A                                                  |       | 4     | 10    | ppm/ $^\circ\text{C}$ |
|                                                 |                                   | MAX6161B                                                  |       | 6     | 15    |                       |
| Line Regulation                                 | $\Delta V_{OUT} / \Delta V_{IN}$  | $2.5V \leq V_{IN} \leq 12.6V$                             |       | 12    | 150   | $\mu\text{V/V}$       |
| Load Regulation                                 | $\Delta V_{OUT} / \Delta I_{OUT}$ | Sourcing: $0 \leq I_{OUT} \leq 4\text{mA}$                |       | 0.5   | 0.9   | mV/mA                 |
|                                                 |                                   | Sinking: $-2\text{mA} \leq I_{OUT} \leq 0$                |       | 1.3   | 2.5   |                       |
| OUT Short-Circuit Current                       | $I_{SC}$                          | Short to GND                                              |       | 110   |       | mA                    |
|                                                 |                                   | Short to IN                                               |       | 25    |       |                       |
| Long-Term Stability                             | $\Delta V_{OUT} / \text{time}$    | 1000hr at $+25^\circ\text{C}$                             |       | 115   |       | ppm/1000hr            |
| Output Voltage Hysteresis (Note 3)              | $\Delta V_{OUT} / \text{cycle}$   |                                                           |       | 125   |       | ppm                   |
| <b>DYNAMIC CHARACTERISTICS</b>                  |                                   |                                                           |       |       |       |                       |
| Noise Voltage                                   | $e_{OUT}$                         | $f = 0.1\text{Hz to } 10\text{Hz}$                        |       | 20    |       | $\mu\text{Vp-p}$      |
|                                                 |                                   | $f = 10\text{Hz to } 10\text{kHz}$                        |       | 15    |       | $\mu\text{VRMS}$      |
| Ripple Rejection                                | $V_{OUT}/V_{IN}$                  | $V_{IN} = +5V \pm 100\text{mV}$ , $f = 120\text{Hz}$      |       | 80    |       | dB                    |
| Turn-On Settling Time                           | $t_R$                             | $V_{OUT}$ to 0.1% of final value, $C_{OUT} = 50\text{pF}$ |       | 50    |       | $\mu\text{s}$         |
| <b>INPUT CHARACTERISTICS</b>                    |                                   |                                                           |       |       |       |                       |
| Supply Voltage Range                            | $V_{IN}$                          | Guaranteed by line-regulation test                        | 2.5   |       | 12.6  | V                     |
| Quiescent Supply Current                        | $I_{IN}$                          |                                                           |       | 125   | 150   | $\mu\text{A}$         |
| Change in Supply Current                        | $\Delta I_{IN}/\Delta V_{IN}$     | $2.5V \leq V_{IN} \leq 12.6V$                             |       | 3.2   | 8.0   | $\mu\text{A/V}$       |

**Electrical Characteristics—MAX6168 ( $V_{OUT} = 1.800V$ )**(V<sub>IN</sub> = +5V, I<sub>OUT</sub> = 0, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise specified. Typical values are at T<sub>A</sub> = +25°C.) (Note 1)

| PARAMETER                                       | SYMBOL                               | CONDITIONS                                                       |          | MIN   | TYP   | MAX   | UNITS             |
|-------------------------------------------------|--------------------------------------|------------------------------------------------------------------|----------|-------|-------|-------|-------------------|
| Output Voltage                                  | V <sub>OUT</sub>                     | T <sub>A</sub> = +25°C                                           | MAX6168A | 1.798 | 1.800 | 1.802 | V                 |
|                                                 |                                      |                                                                  | MAX6168B | 1.795 | 1.800 | 1.805 |                   |
| Output Voltage Temperature Coefficient (Note 2) | TCV <sub>OUT</sub>                   | MAX6168A                                                         |          | 2     |       | 5     | ppm/°C            |
|                                                 |                                      | MAX6168B                                                         |          | 4     |       | 10    |                   |
| Line Regulation                                 | ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>  | 2.5V ≤ V <sub>IN</sub> ≤ 12.6V                                   |          | 42    |       | 200   | μV/V              |
| Load Regulation                                 | ΔV <sub>OUT</sub> /ΔI <sub>OUT</sub> | Sourcing: 0 ≤ I <sub>OUT</sub> ≤ 5mA                             |          | 0.5   |       | 0.9   | mV/mA             |
|                                                 |                                      | Sinking: -2mA ≤ I <sub>OUT</sub> ≤ 0                             |          | 1.5   |       | 4     |                   |
| OUT Short-Circuit Current                       | I <sub>SC</sub>                      | Short to GND                                                     |          | 110   |       |       | mA                |
|                                                 |                                      | Short to IN                                                      |          | 25    |       |       |                   |
| Long-Term Stability                             | ΔV <sub>OUT</sub> /time              | 1000hr at +25°C                                                  |          | 80    |       |       | ppm/1000hr        |
| Output Voltage Hysteresis (Note 3)              | ΔV <sub>OUT</sub> /cycle             |                                                                  |          | 125   |       |       | ppm               |
| DYNAMIC CHARACTERISTICS                         |                                      |                                                                  |          |       |       |       |                   |
| Noise Voltage                                   | e <sub>OUT</sub>                     | f = 0.1Hz to 10Hz                                                |          | 22    |       |       | μVp-p             |
|                                                 |                                      | f = 10Hz to 10kHz                                                |          | 25    |       |       | μV <sub>RMS</sub> |
| Ripple Rejection                                | ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>  | V <sub>IN</sub> = +5V ±100mV, f = 120Hz                          |          | 78    |       |       | dB                |
| Turn-On Settling Time                           | t <sub>R</sub>                       | V <sub>OUT</sub> to 0.1% of final value, C <sub>OUT</sub> = 50pF |          | 100   |       |       | μs                |
| INPUT CHARACTERISTICS                           |                                      |                                                                  |          |       |       |       |                   |
| Supply Voltage Range                            | V <sub>IN</sub>                      | Guaranteed by line-regulation test                               |          | 2.5   |       | 12.6  | V                 |
| Quiescent Supply Current                        | I <sub>IN</sub>                      |                                                                  |          | 100   |       | 120   | μA                |
| Change in Supply Current                        | ΔI <sub>IN</sub> /ΔV <sub>IN</sub>   | 2.5V ≤ V <sub>IN</sub> ≤ 12.6V                                   |          | 3.4   |       | 8.0   | μA/V              |

**Electrical Characteristics—MAX6162 ( $V_{OUT} = 2.048V$ )**(V<sub>IN</sub> = +5V, I<sub>OUT</sub> = 0, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise specified. Typical values are at T<sub>A</sub> = +25°C.) (Note 1)

| PARAMETER                                       | SYMBOL                               | CONDITIONS                                                       |          | MIN   | TYP   | MAX   | UNITS             |
|-------------------------------------------------|--------------------------------------|------------------------------------------------------------------|----------|-------|-------|-------|-------------------|
| Output Voltage                                  | V <sub>OUT</sub>                     | T <sub>A</sub> = +25°C                                           | MAX6162A | 2.046 | 2.048 | 2.050 | V                 |
|                                                 |                                      |                                                                  | MAX6162B | 2.043 | 2.048 | 2.053 |                   |
| Output Voltage Temperature Coefficient (Note 2) | TCV <sub>OUT</sub>                   | MAX6162A                                                         |          | 2     |       | 5     | ppm/°C            |
|                                                 |                                      | MAX6162B                                                         |          | 4     |       | 10    |                   |
| Line Regulation                                 | ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>  | 2.5V ≤ V <sub>IN</sub> ≤ 12.6V                                   |          | 42    |       | 250   | μV/V              |
| Load Regulation                                 | ΔV <sub>OUT</sub> /ΔI <sub>OUT</sub> | Sourcing: 0 ≤ I <sub>OUT</sub> ≤ 5mA                             |          | 0.5   |       | 0.9   | mV/mA             |
|                                                 |                                      | Sinking: -2mA ≤ I <sub>OUT</sub> ≤ 0                             |          | 1.5   |       | 4     |                   |
| OUT Short-Circuit Current                       | I <sub>SC</sub>                      | Short to GND                                                     |          | 110   |       |       | mA                |
|                                                 |                                      | Short to IN                                                      |          | 25    |       |       |                   |
| Long-Term Stability                             | ΔV <sub>OUT</sub> /time              | 1000hr at +25°C                                                  |          | 80    |       |       | ppm/1000hr        |
| Output Voltage Hysteresis (Note 3)              | ΔV <sub>OUT</sub> /cycle             |                                                                  |          | 125   |       |       | ppm               |
| DYNAMIC CHARACTERISTICS                         |                                      |                                                                  |          |       |       |       |                   |
| Noise Voltage                                   | e <sub>OUT</sub>                     | f = 0.1Hz to 10Hz                                                |          | 22    |       |       | μVp-p             |
|                                                 |                                      | f = 10Hz to 10kHz                                                |          | 25    |       |       | μV <sub>RMS</sub> |
| Ripple Rejection                                | V <sub>OUT</sub> /V <sub>IN</sub>    | V <sub>IN</sub> = 5V ±100mV, f = 120Hz                           |          | 78    |       |       | dB                |
| Turn-On Settling Time                           | t <sub>R</sub>                       | V <sub>OUT</sub> to 0.1% of final value, C <sub>OUT</sub> = 50pF |          | 100   |       |       | μs                |
| INPUT CHARACTERISTICS                           |                                      |                                                                  |          |       |       |       |                   |
| Supply Voltage Range                            | V <sub>IN</sub>                      | Guaranteed by line-regulation test                               |          | 2.5   |       | 12.6  | V                 |
| Quiescent Supply Current                        | I <sub>IN</sub>                      |                                                                  |          |       | 100   | 120   | μA                |
| Change in Supply Current                        | ΔI <sub>IN</sub> /ΔV <sub>IN</sub>   | 2.5V ≤ V <sub>IN</sub> ≤ 12.6V                                   |          |       | 3.4   | 8.0   | μA/V              |

**Electrical Characteristics—MAX6166 ( $V_{OUT} = 2.500V$ )**(V<sub>IN</sub> = +5V, I<sub>OUT</sub> = 0, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise specified. Typical values are at T<sub>A</sub> = +25°C.) (Note 1)

| PARAMETER                                       | SYMBOL                               | CONDITIONS                                                       |          | MIN                    | TYP   | MAX   | UNITS             |
|-------------------------------------------------|--------------------------------------|------------------------------------------------------------------|----------|------------------------|-------|-------|-------------------|
| Output Voltage                                  | V <sub>OUT</sub>                     | T <sub>A</sub> = +25°C                                           | MAX6166A | 2.498                  | 2.500 | 2.502 | V                 |
|                                                 |                                      |                                                                  | MAX6166B | 2.495                  | 2.500 | 2.505 |                   |
| Output Voltage Temperature Coefficient (Note 2) | TCV <sub>OUT</sub>                   | MAX6166A                                                         |          | 2                      |       | 5     | ppm/°C            |
|                                                 |                                      | MAX6166B                                                         |          | 4                      |       | 10    |                   |
| Dropout Voltage (Note 4)                        | V <sub>IN</sub> - V <sub>OUT</sub>   | I <sub>OUT</sub> = 1mA                                           |          | 50                     |       | 200   | mV                |
| Line Regulation                                 | ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>  | V <sub>OUT</sub> + 0.2V ≤ V <sub>IN</sub> ≤ 12.6V                |          | 60                     |       | 250   | μV/V              |
| Load Regulation                                 | ΔV <sub>OUT</sub> /ΔI <sub>OUT</sub> | Sourcing: 0 ≤ I <sub>OUT</sub> ≤ 5mA                             |          | 0.5                    |       | 0.9   | mV/mA             |
|                                                 |                                      | Sinking: -2mA ≤ I <sub>OUT</sub> ≤ 0                             |          | 1.6                    |       | 5     |                   |
| OUT Short-Circuit Current                       | I <sub>SC</sub>                      | Short to GND                                                     |          | 110                    |       |       | mA                |
|                                                 |                                      | Short to IN                                                      |          | 25                     |       |       |                   |
| Long-Term Stability                             | ΔV <sub>OUT</sub> /time              | 1000hr at +25°C                                                  |          | 80                     |       |       | ppm/1000hr        |
| Output Voltage Hysteresis (Note 3)              | ΔV <sub>OUT</sub> /cycle             |                                                                  |          | 125                    |       |       | ppm               |
| DYNAMIC CHARACTERISTICS                         |                                      |                                                                  |          |                        |       |       |                   |
| Noise Voltage                                   | e <sub>OUT</sub>                     | f = 0.1Hz to 10Hz                                                |          | 27                     |       |       | μVp-p             |
|                                                 |                                      | f = 10Hz to 10kHz                                                |          | 30                     |       |       | μV <sub>RMS</sub> |
| Ripple Rejection                                | V <sub>OUT</sub> /V <sub>IN</sub>    | V <sub>IN</sub> = 5V ±100mV, f = 120Hz                           |          | 76                     |       |       | dB                |
| Turn-On Settling Time                           | t <sub>R</sub>                       | V <sub>OUT</sub> to 0.1% of final value, C <sub>OUT</sub> = 50pF |          | 115                    |       |       | μs                |
| INPUT CHARACTERISTICS                           |                                      |                                                                  |          |                        |       |       |                   |
| Supply Voltage Range                            | V <sub>IN</sub>                      | Guaranteed by line-regulation test                               |          | V <sub>OUT</sub> + 0.2 |       | 12.6  | V                 |
| Quiescent Supply Current                        | I <sub>IN</sub>                      |                                                                  |          | 100                    |       | 120   | μA                |
| Change in Supply Current                        | ΔI <sub>IN</sub> /ΔV <sub>IN</sub>   | V <sub>OUT</sub> + 0.2V ≤ V <sub>IN</sub> ≤ 12.6V                |          | 3.2                    |       | 8.0   | μA/V              |

**Electrical Characteristics—MAX6163 ( $V_{OUT} = 3.000V$ )**(V<sub>IN</sub> = +5V, I<sub>OUT</sub> = 0, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise specified. Typical values are at T<sub>A</sub> = +25°C.) (Note 1)

| PARAMETER                                       | SYMBOL                                  | CONDITIONS                                                       |          | MIN   | TYP                    | MAX   | UNITS             |
|-------------------------------------------------|-----------------------------------------|------------------------------------------------------------------|----------|-------|------------------------|-------|-------------------|
| Output Voltage                                  | V <sub>OUT</sub>                        | T <sub>A</sub> = +25°C                                           | MAX6163A | 2.998 | 3.000                  | 3.002 | V                 |
|                                                 |                                         |                                                                  | MAX6163B | 2.995 | 3.000                  | 3.005 |                   |
| Output Voltage Temperature Coefficient (Note 2) | TCV <sub>OUT</sub>                      | MAX6163A                                                         |          |       | 2                      | 5     | ppm/°C            |
|                                                 |                                         | MAX6163B                                                         |          |       | 4                      | 10    |                   |
| Dropout Voltage (Note 4)                        | V <sub>IN</sub> - V <sub>OUT</sub>      | I <sub>OUT</sub> = 1mA                                           |          |       | 50                     | 200   | mV                |
| Line Regulation                                 | $\frac{\Delta V_{OUT}}{\Delta V_{IN}}$  | V <sub>OUT</sub> + 0.2V ≤ V <sub>IN</sub> ≤ 12.6V                |          |       | 83                     | 300   | μV/V              |
| Load Regulation                                 | $\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$ | Sourcing: 0 ≤ I <sub>OUT</sub> ≤ 5mA                             |          |       | 0.5                    | 0.9   | mV/mA             |
|                                                 |                                         | Sinking: -2mA ≤ I <sub>OUT</sub> ≤ 0                             |          |       | 1.8                    | 5     |                   |
| OUT Short-Circuit Current                       | I <sub>SC</sub>                         | Short to GND                                                     |          |       | 110                    |       | mA                |
|                                                 |                                         | Short to IN                                                      |          |       | 25                     |       |                   |
| Long-Term Stability                             | $\frac{\Delta V_{OUT}}{\text{time}}$    | 1000hr at +25°C                                                  |          |       | 80                     |       | ppm/1000hr        |
| Output Voltage Hysteresis (Note 3)              | $\frac{\Delta V_{OUT}}{\text{cycle}}$   |                                                                  |          |       | 125                    |       | ppm               |
| <b>DYNAMIC CHARACTERISTICS</b>                  |                                         |                                                                  |          |       |                        |       |                   |
| Noise Voltage                                   | e <sub>OUT</sub>                        | f = 0.1Hz to 10Hz                                                |          |       | 35                     |       | μVp-p             |
|                                                 |                                         | f = 10Hz to 10kHz                                                |          |       | 40                     |       | μV <sub>RMS</sub> |
| Ripple Rejection                                | V <sub>OUT</sub> /V <sub>IN</sub>       | V <sub>IN</sub> = 5V ±100mV, f = 120Hz                           |          |       | 76                     |       | dB                |
| Turn-On Settling Time                           | t <sub>R</sub>                          | V <sub>OUT</sub> to 0.1% of final value, C <sub>OUT</sub> = 50pF |          |       | 115                    |       | μs                |
| <b>INPUT CHARACTERISTICS</b>                    |                                         |                                                                  |          |       |                        |       |                   |
| Supply Voltage Range                            | V <sub>IN</sub>                         | Guaranteed by line-regulation test                               |          |       | V <sub>OUT</sub> + 0.2 | 12.6  | V                 |
| Quiescent Supply Current                        | I <sub>IN</sub>                         |                                                                  |          |       | 100                    | 120   | μA                |
| Change in Supply Current                        | ΔI <sub>IN</sub> /ΔV <sub>IN</sub>      | V <sub>OUT</sub> + 0.2V ≤ V <sub>IN</sub> ≤ 12.6V                |          |       | 3.2                    | 8.0   | μA/V              |

**Electrical Characteristics—MAX6164 ( $V_{OUT} = 4.096V$ )**(V<sub>IN</sub> = +5V, I<sub>OUT</sub> = 0, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise specified. Typical values are at T<sub>A</sub> = +25°C.) (Note 1)

| PARAMETER                                       | SYMBOL                               | CONDITIONS                                                       |          | MIN                    | TYP   | MAX   | UNITS             |
|-------------------------------------------------|--------------------------------------|------------------------------------------------------------------|----------|------------------------|-------|-------|-------------------|
| Output Voltage                                  | V <sub>OUT</sub>                     | T <sub>A</sub> = +25°C                                           | MAX6164A | 4.094                  | 4.096 | 4.098 | V                 |
|                                                 |                                      |                                                                  | MAX6164B | 4.091                  | 4.096 | 4.101 |                   |
| Output Voltage Temperature Coefficient (Note 2) | TCV <sub>OUT</sub>                   | MAX6164A                                                         |          | 2                      |       | 5     | ppm/°C            |
|                                                 |                                      | MAX6164B                                                         |          | 4                      |       | 10    |                   |
| Dropout Voltage (Note 4)                        | V <sub>IN</sub> - V <sub>OUT</sub>   | I <sub>OUT</sub> = 1mA                                           |          | 50                     |       | 200   | mV                |
| Line Regulation                                 | ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>  | V <sub>OUT</sub> + 0.2V ≤ V <sub>IN</sub> ≤ 12.6V                |          | 140                    |       | 300   | μV/V              |
| Load Regulation                                 | ΔV <sub>OUT</sub> /ΔI <sub>OUT</sub> | Sourcing: 0 ≤ I <sub>OUT</sub> ≤ 5mA                             |          | 0.6                    |       | 0.9   | mV/mA             |
|                                                 |                                      | Sinking: -2mA ≤ I <sub>OUT</sub> ≤ 0                             |          | 2.0                    |       | 7.0   |                   |
| OUT Short-Circuit Current                       | I <sub>SC</sub>                      | Short to GND                                                     |          | 110                    |       |       | mA                |
|                                                 |                                      | Short to IN                                                      |          | 25                     |       |       |                   |
| Long-Term Stability                             | ΔV <sub>OUT</sub> /time              | 1000hr at +25°C                                                  |          | 80                     |       |       | ppm/1000hr        |
| Output Voltage Hysteresis (Note 3)              | ΔV <sub>OUT</sub> /cycle             |                                                                  |          | 125                    |       |       | ppm               |
| DYNAMIC CHARACTERISTICS                         |                                      |                                                                  |          |                        |       |       |                   |
| Noise Voltage                                   | e <sub>OUT</sub>                     | f = 0.1Hz to 10Hz                                                |          | 50                     |       |       | μVp-p             |
|                                                 |                                      | f = 10Hz to 10kHz                                                |          | 50                     |       |       | μV <sub>RMS</sub> |
| Ripple Rejection                                | V <sub>OUT</sub> /V <sub>IN</sub>    | V <sub>IN</sub> = 5V ±100mV, f = 120Hz                           |          | 72                     |       |       | dB                |
| Turn-On Settling Time                           | t <sub>R</sub>                       | V <sub>OUT</sub> to 0.1% of final value, C <sub>OUT</sub> = 50pF |          | 190                    |       |       | μs                |
| INPUT CHARACTERISTICS                           |                                      |                                                                  |          |                        |       |       |                   |
| Supply Voltage Range                            | V <sub>IN</sub>                      | Guaranteed by line-regulation test                               |          | V <sub>OUT</sub> + 0.2 |       | 12.6  | V                 |
| Quiescent Supply Current                        | I <sub>IN</sub>                      |                                                                  |          | 100                    |       | 120   | μA                |
| Change in Supply Current                        | ΔI <sub>IN</sub> /ΔV <sub>IN</sub>   | V <sub>OUT</sub> + 0.2V ≤ V <sub>IN</sub> ≤ 12.6V                |          | 3.2                    |       | 8.0   | μA/V              |

**Electrical Characteristics—MAX6167 ( $V_{OUT} = 4.500V$ )**(V<sub>IN</sub> = +5V, I<sub>OUT</sub> = 0, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise specified. Typical values are at T<sub>A</sub> = +25°C.) (Note 1)

| PARAMETER                                       | SYMBOL                               | CONDITIONS                                                       |          | MIN                    | TYP   | MAX   | UNITS             |
|-------------------------------------------------|--------------------------------------|------------------------------------------------------------------|----------|------------------------|-------|-------|-------------------|
| Output Voltage                                  | V <sub>OUT</sub>                     | T <sub>A</sub> = +25°C                                           | MAX6167A | 4.498                  | 4.500 | 4.502 | V                 |
|                                                 |                                      |                                                                  | MAX6167B | 4.495                  | 4.500 | 4.505 |                   |
| Output Voltage Temperature Coefficient (Note 2) | TCV <sub>OUT</sub>                   | MAX6167A                                                         |          | 2                      |       | 5     | ppm/°C            |
|                                                 |                                      | MAX6167B                                                         |          | 4                      |       | 10    |                   |
| Dropout Voltage (Note 4)                        | V <sub>IN</sub> - V <sub>OUT</sub>   | I <sub>OUT</sub> = 1mA                                           |          | 50                     |       | 200   | mV                |
| Line Regulation                                 | ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>  | V <sub>OUT</sub> + 0.2V ≤ V <sub>IN</sub> ≤ 12.6V                |          | 160                    |       | 450   | μV/V              |
| Load Regulation                                 | ΔV <sub>OUT</sub> /ΔI <sub>OUT</sub> | Sourcing: 0 ≤ I <sub>OUT</sub> ≤ 5mA                             |          | 0.6                    |       | 0.9   | mV/mA             |
|                                                 |                                      | Sinking: -2mA ≤ I <sub>OUT</sub> ≤ 0                             |          | 2.3                    |       | 8.0   |                   |
| OUT Short-Circuit Current                       | I <sub>SC</sub>                      | Short to GND                                                     |          | 110                    |       |       | mA                |
|                                                 |                                      | Short to IN                                                      |          | 25                     |       |       |                   |
| Long-Term Stability                             | ΔV <sub>OUT</sub> /time              | 1000hr at +25°C                                                  |          | 80                     |       |       | ppm/1000hr        |
| Output Voltage Hysteresis (Note 3)              | ΔV <sub>OUT</sub> /cycle             |                                                                  |          | 125                    |       |       | ppm               |
| DYNAMIC CHARACTERISTICS                         |                                      |                                                                  |          |                        |       |       |                   |
| Noise Voltage                                   | e <sub>OUT</sub>                     | f = 0.1Hz to 10Hz                                                |          | 55                     |       |       | μVp-p             |
|                                                 |                                      | f = 10Hz to 10kHz                                                |          | 55                     |       |       | μV <sub>RMS</sub> |
| Ripple Rejection                                | V <sub>OUT</sub> /V <sub>IN</sub>    | V <sub>IN</sub> = 5V ±100mV, f = 120Hz                           |          | 70                     |       |       | dB                |
| Turn-On Settling Time                           | t <sub>R</sub>                       | V <sub>OUT</sub> to 0.1% of final value, C <sub>OUT</sub> = 50pF |          | 230                    |       |       | μs                |
| INPUT CHARACTERISTICS                           |                                      |                                                                  |          |                        |       |       |                   |
| Supply Voltage Range                            | V <sub>IN</sub>                      | Guaranteed by line-regulation test                               |          | V <sub>OUT</sub> + 0.2 |       | 12.6  | V                 |
| Quiescent Supply Current                        | I <sub>IN</sub>                      |                                                                  |          | 100                    |       | 120   | μA                |
| Change in Supply Current                        | ΔI <sub>IN</sub> /ΔV <sub>IN</sub>   | V <sub>OUT</sub> + 0.2V ≤ V <sub>IN</sub> ≤ 12.6V                |          | 3.1                    |       | 8.0   | μA/V              |










**Electrical Characteristics—MAX6165 ( $V_{OUT} = 5.000V$ )**(V<sub>IN</sub> = +5V, I<sub>OUT</sub> = 0, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise specified. Typical values are at T<sub>A</sub> = +25°C.) (Note 1)

| PARAMETER                                       | SYMBOL                               | CONDITIONS                                                       |          | MIN                    | TYP   | MAX   | UNITS             |
|-------------------------------------------------|--------------------------------------|------------------------------------------------------------------|----------|------------------------|-------|-------|-------------------|
| Output Voltage                                  | V <sub>OUT</sub>                     | T <sub>A</sub> = +25°C                                           | MAX6165A | 4.998                  | 5.000 | 5.002 | V                 |
|                                                 |                                      |                                                                  | MAX6165B | 4.995                  | 5.000 | 5.005 |                   |
| Output Voltage Temperature Coefficient (Note 2) | TCV <sub>OUT</sub>                   | MAX6165A                                                         |          | 2                      |       | 5     | ppm/°C            |
|                                                 |                                      | MAX6165B                                                         |          | 4                      |       | 10    |                   |
| Dropout Voltage (Note 4)                        | V <sub>IN</sub> - V <sub>OUT</sub>   | I <sub>OUT</sub> = 1mA                                           |          | 50                     |       | 200   | mV                |
| Line Regulation                                 | ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>  | V <sub>OUT</sub> + 0.2V ≤ V <sub>IN</sub> ≤ 12.6V                |          | 180                    |       | 400   | μV/V              |
| Load Regulation                                 | ΔV <sub>OUT</sub> /ΔI <sub>OUT</sub> | Sourcing: 0 ≤ I <sub>OUT</sub> ≤ 5mA                             |          | 0.6                    |       | 0.9   | mV/mA             |
|                                                 |                                      | Sinking: -2mA ≤ I <sub>OUT</sub> ≤ 0                             |          | 2.4                    |       | 8.0   |                   |
| OUT Short-Circuit Current                       | I <sub>SC</sub>                      | Short to GND                                                     |          | 110                    |       |       | mA                |
|                                                 |                                      | Short to IN                                                      |          | 25                     |       |       |                   |
| Long-Term Stability                             | ΔV <sub>OUT</sub> /time              | 1000hr at +25°C                                                  |          | 80                     |       |       | ppm/1000hr        |
| Output Voltage Hysteresis (Note 3)              | ΔV <sub>OUT</sub> /cycle             |                                                                  |          | 125                    |       |       | ppm               |
| DYNAMIC CHARACTERISTICS                         |                                      |                                                                  |          |                        |       |       |                   |
| Noise Voltage                                   | e <sub>OUT</sub>                     | f = 0.1Hz to 10Hz                                                |          | 60                     |       |       | μVp-p             |
|                                                 |                                      | f = 10Hz to 10kHz                                                |          | 60                     |       |       | μV <sub>RMS</sub> |
| Ripple Rejection                                | V <sub>OUT</sub> /V <sub>IN</sub>    | V <sub>IN</sub> = 5.5V ±100mV, f = 120Hz                         |          | 65                     |       |       | dB                |
| Turn-On Settling Time                           | t <sub>R</sub>                       | V <sub>OUT</sub> to 0.1% of final value, C <sub>OUT</sub> = 50pF |          | 300                    |       |       | μs                |
| INPUT CHARACTERISTICS                           |                                      |                                                                  |          |                        |       |       |                   |
| Supply Voltage Range                            | V <sub>IN</sub>                      | Guaranteed by line-regulation test                               |          | V <sub>OUT</sub> + 0.2 |       | 12.6  | V                 |
| Quiescent Supply Current                        | I <sub>IN</sub>                      |                                                                  |          | 100                    |       | 120   | μA                |
| Change in Supply Current                        | ΔI <sub>IN</sub> /ΔV <sub>IN</sub>   | V <sub>OUT</sub> + 0.2V ≤ V <sub>IN</sub> ≤ 12.6V                |          | 3.1                    |       | 8.0   | μA/V              |


**Note 1:** 100% production tested at T<sub>A</sub> = +25°C. Guaranteed by design for T<sub>A</sub> = -40°C to +85°C.**Note 2:** Temperature Coefficient is specified by the "box" method; i.e., the maximum ΔV<sub>OUT</sub> is divided by the maximum ΔT.**Note 3:** Thermal Hysteresis is defined as the change in T<sub>A</sub> = +25°C output voltage before and after temperature cycling of the device (from T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>). Initial measurement at T<sub>A</sub> = +25°C is followed by temperature cycling the device to T<sub>A</sub> = +85°C then to T<sub>A</sub> = -40°C, and another measurement at T<sub>A</sub> = +25°C is compared to the original measurement at T<sub>A</sub> = +25°C.**Note 4:** Dropout voltage is the minimum input voltage at which V<sub>OUT</sub> changes ≤ 0.2% from V<sub>OUT</sub> at V<sub>IN</sub> = 5.0V (V<sub>IN</sub> = 5.5V for MAX6165).

## Typical Operating Characteristics







( $V_{IN} = +5V$  for MAX6161–MAX6168,  $V_{IN} = +5.5V$  for MAX6165,  $I_{OUT} = 0$ ,  $T_A = +25^\circ C$ , unless otherwise noted.) (Note 5)

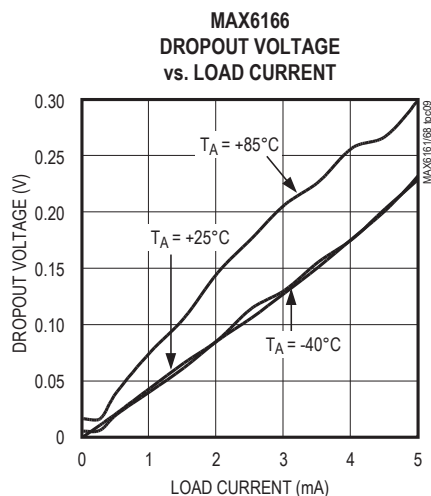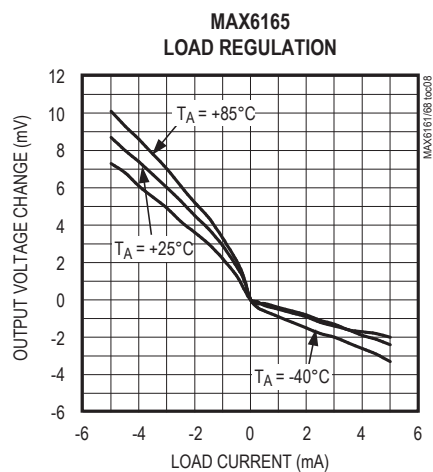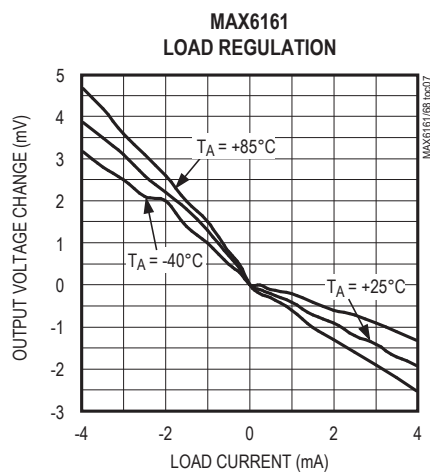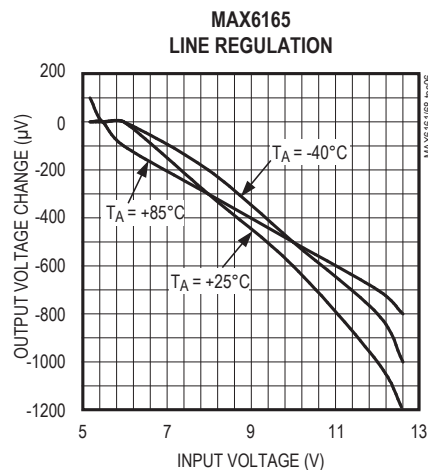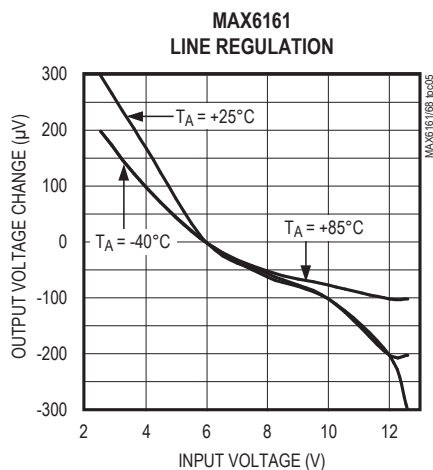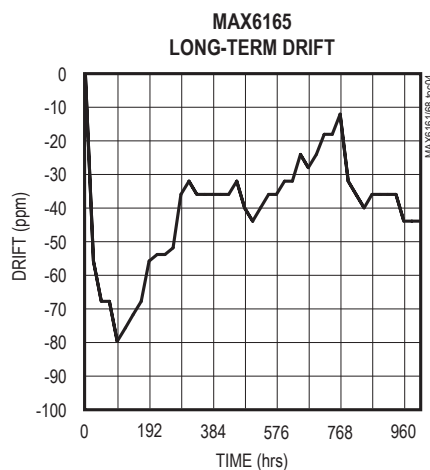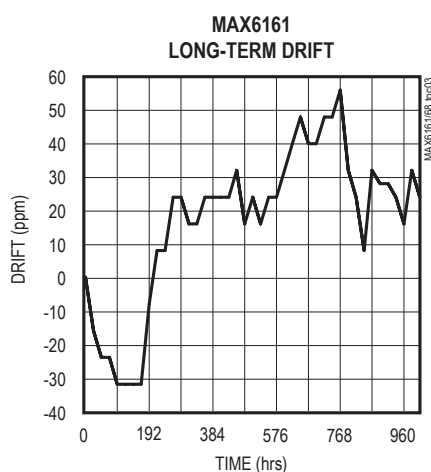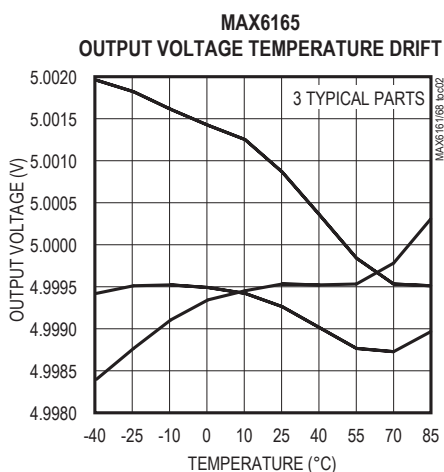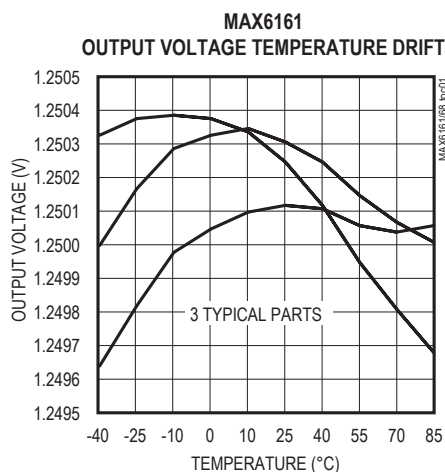







## Typical Operating Characteristics (continued)

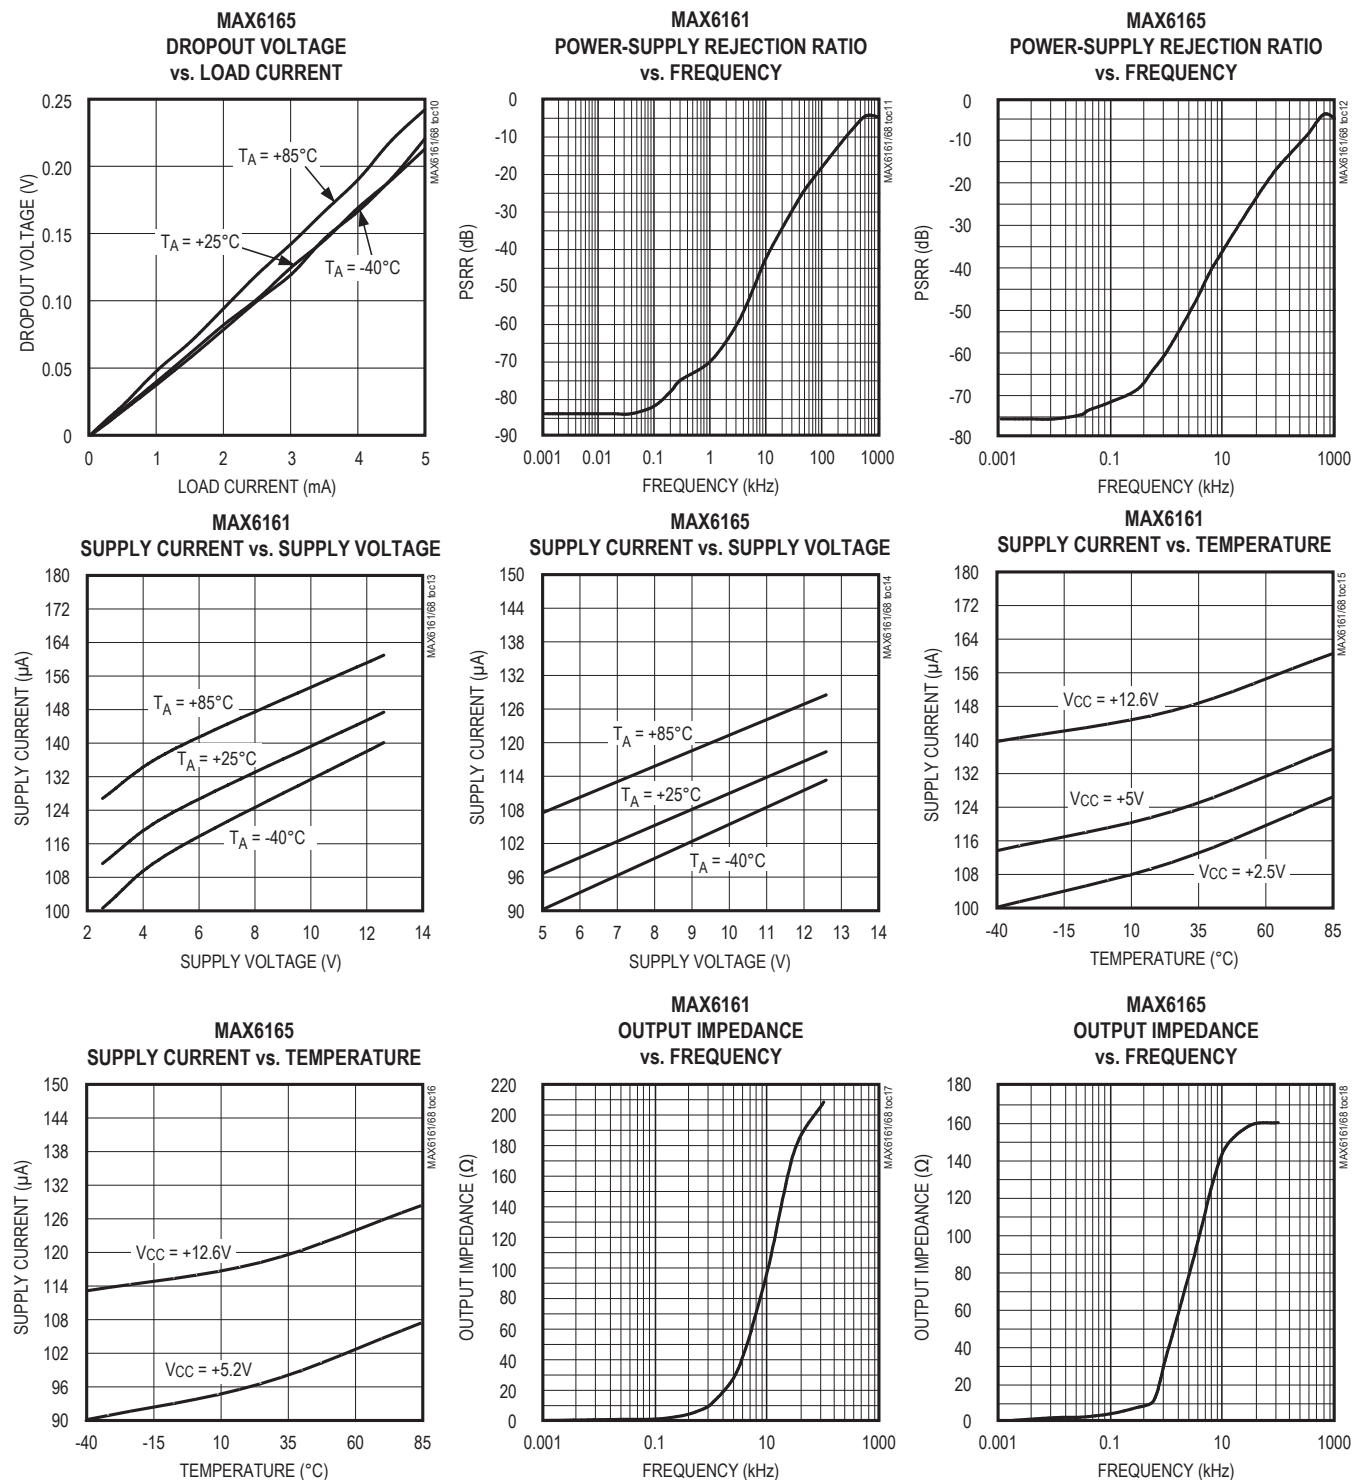(V<sub>IN</sub> = +5V for MAX6161–MAX6168, V<sub>IN</sub> = +5.5V for MAX6165, I<sub>OUT</sub> = 0, T<sub>A</sub> = +25°C, unless otherwise noted.) (Note 5)

## Typical Operating Characteristics (continued)

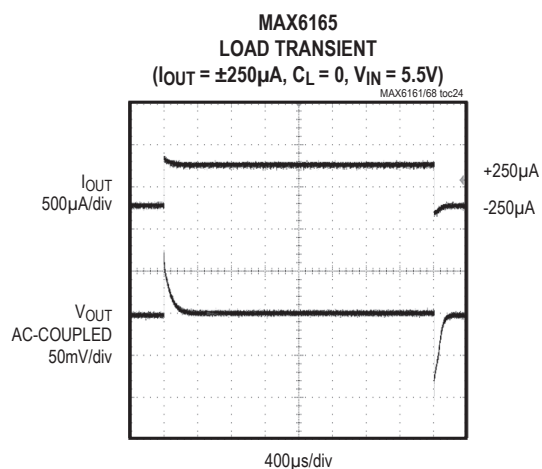
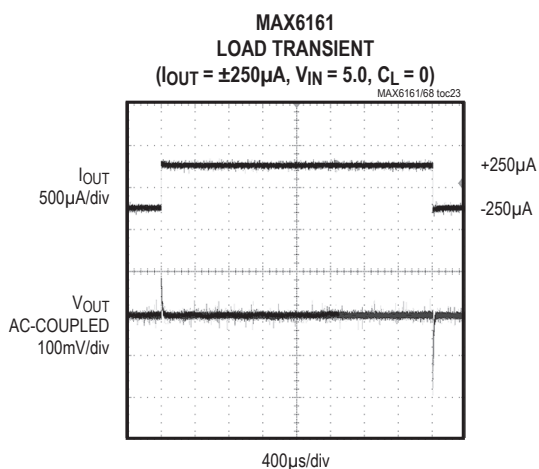
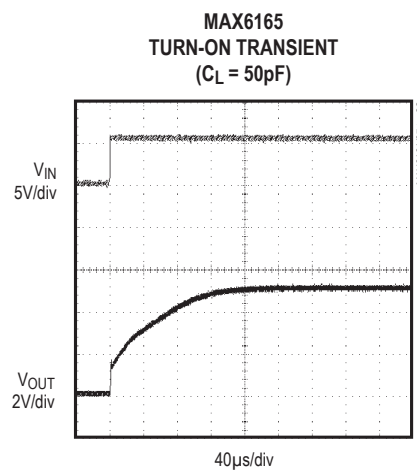
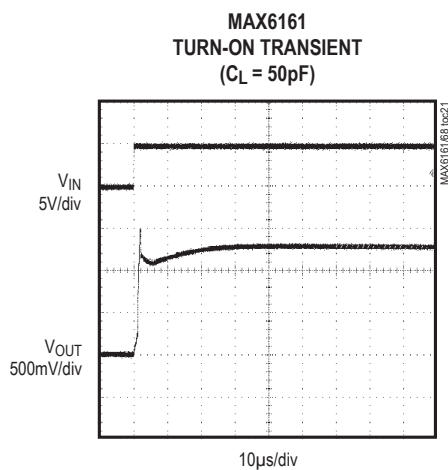
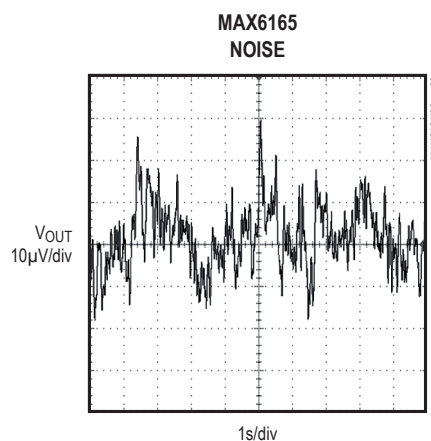
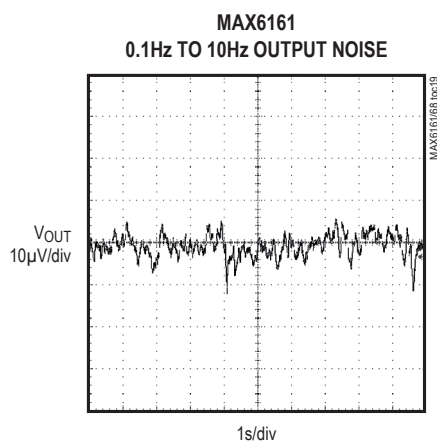
(V<sub>IN</sub> = +5V for MAX6161–MAX6168, V<sub>IN</sub> = +5.5V for MAX6165, I<sub>OUT</sub> = 0, T<sub>A</sub> = +25°C, unless otherwise noted.) (Note 5)

## Typical Operating Characteristics (continued)

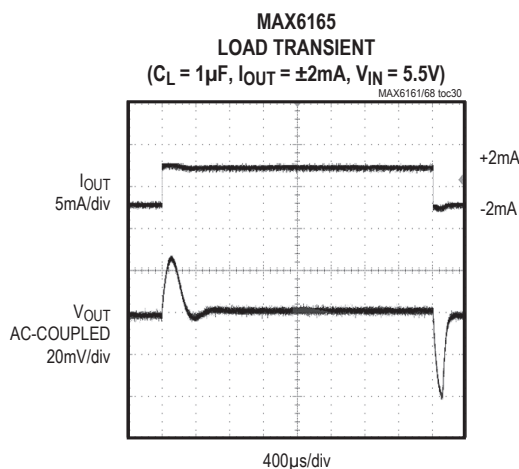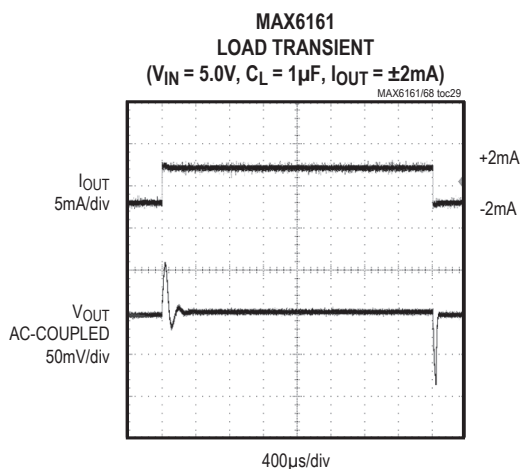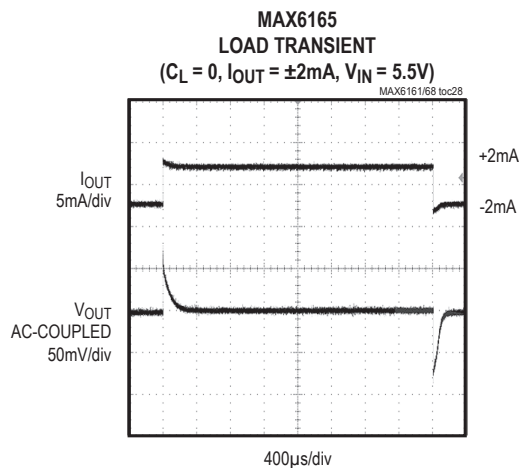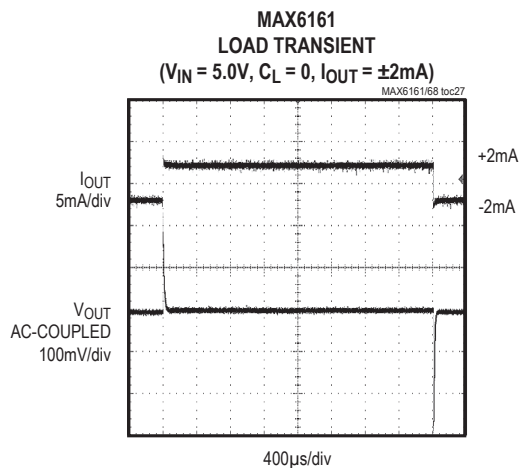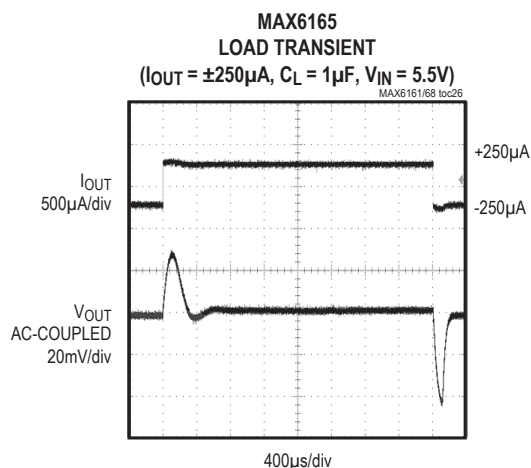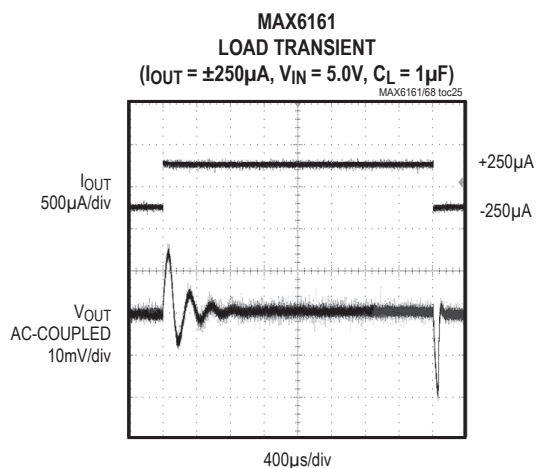(V<sub>IN</sub> = +5V for MAX6161–MAX6168, V<sub>IN</sub> = +5.5V for MAX6165, I<sub>OUT</sub> = 0, T<sub>A</sub> = +25°C, unless otherwise noted.) (Note 5)

## Typical Operating Characteristics (continued)

( $V_{IN} = +5V$  for MAX6161–MAX6168,  $V_{IN} = +5.5V$  for MAX6165,  $I_{OUT} = 0$ ,  $T_A = +25^\circ C$ , unless otherwise noted.) (Note 5)

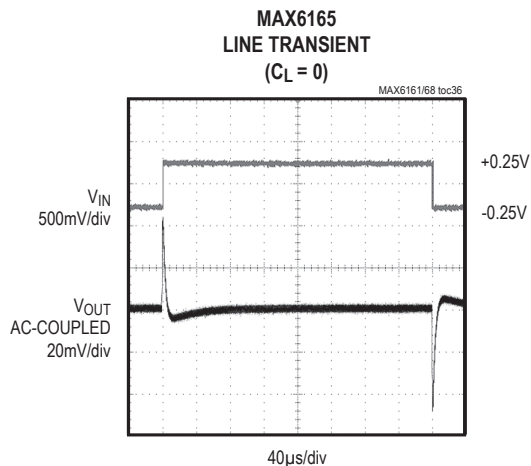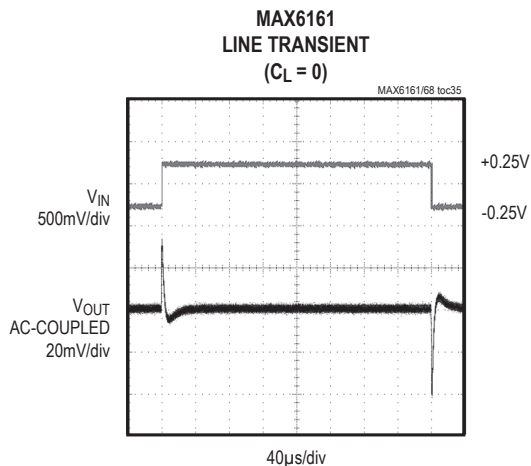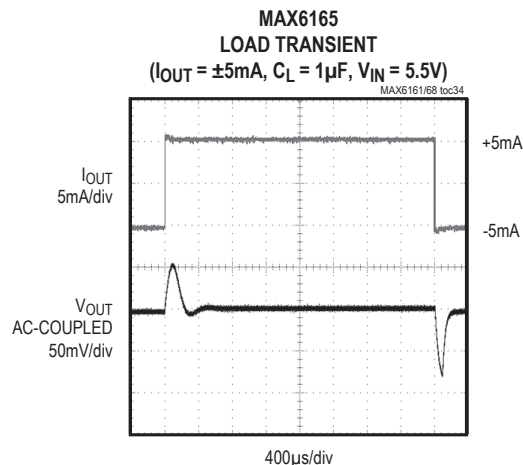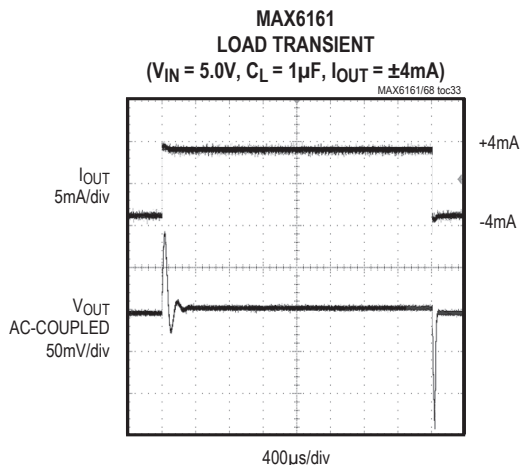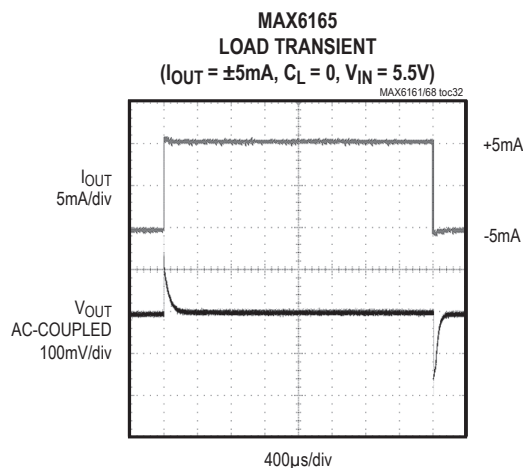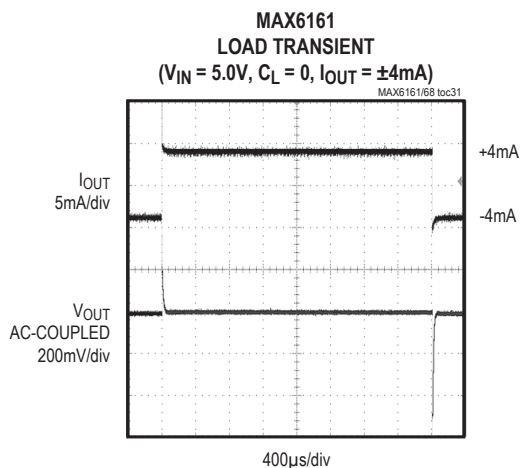

**Note 5:** Many of the *Typical Operating Characteristics* of the MAX6161 family are extremely similar. The extremes of these characteristics are found in the MAX6161 (1.25V output) and the MAX6165 (5.0V output). The *Typical Operating Characteristics* of the remainder of the MAX6161 family typically lie between these two extremes and can be estimated based on their output voltages.

## Pin Description

| PIN           | NAME | FUNCTION                                 |
|---------------|------|------------------------------------------|
| 1, 3, 5, 7, 8 | N.C. | No Connection. Not internally connected. |
| 2             | IN   | Input Voltage                            |
| 4             | GND  | Ground                                   |
| 6             | OUT  | Reference Output                         |

## Applications Information

### Input Bypassing

For the best line-transient performance, decouple the input with a 0.1μF ceramic capacitor as shown in the *Typical Operating Circuit*. Locate the capacitor as close to IN as possible. When transient performance is less important, no capacitor is necessary.

### Output/Load Capacitance

Devices in the MAX6161 family do not require an output capacitor for frequency stability. In applications where the load or the supply can experience step changes, an output capacitor of at least 0.1μF will reduce the amount of overshoot (undershoot) and improve the circuit's transient response. Many applications do not require an external capacitor, and the MAX6161 family can offer a significant advantage in applications when board space is critical.

### Supply Current

The quiescent supply current of the series-mode MAX6161 family is typically 100μA and is virtually independent of the supply voltage, with only an 8μA/V (max) variation with supply voltage. Unlike series references, shunt-mode references operate with a series resistor connected to the power supply. The quiescent current of a shunt-mode reference is thus a function of the input voltage. Additionally, shunt-mode references have to be biased at the maximum expected load current, even if the load current is not present at the time. In the MAX6161 family, the load current is drawn from the input voltage only when required, so supply current is not wasted and efficiency is maximized at all input voltages. This improved efficiency reduces power dissipation and extends battery life.

When the supply voltage is below the minimum specified input voltage (as during turn-on), the devices can draw up to 400μA beyond the nominal supply current. The input voltage source must be capable of providing this current to ensure reliable turn-on.


### Output Voltage Hysteresis

Output voltage hysteresis is the change in the input voltage at  $T_A = +25^\circ\text{C}$  before and after the device is cycled over its entire operating temperature range. Hysteresis is caused by differential package stress appearing across the bandgap core transistors. The typical temperature hysteresis value is 125ppm.

### Turn-On Time

These devices typically turn on and settle to within 0.1% of their final value in 50μs to 300μs, depending on the output voltage (see electrical table of part used). The turn-on time can increase up to 1.5ms with the device operating at the minimum dropout voltage and the maximum load.

## Typical Operating Circuit

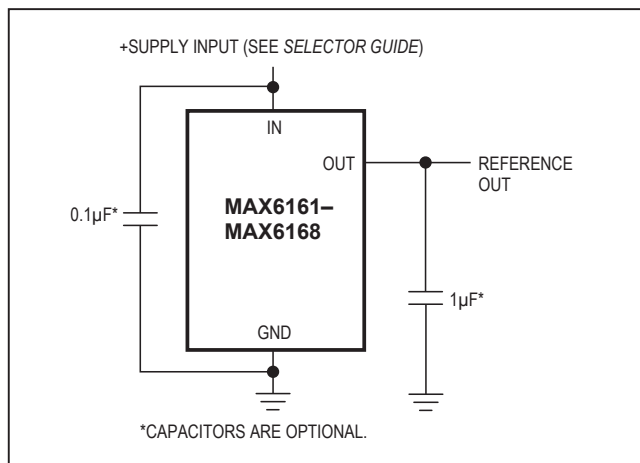

## Chip Information

TRANSISTOR COUNT: 117

PROCESS: BiCMOS

## Selector Guide

| PART     | OUTPUT VOLTAGE (V) | INITIAL ACCURACY (mV) | TEMPERATURE COEFFICIENT (ppm/°C) |
|----------|--------------------|-----------------------|----------------------------------|
| MAX6161A | 1.250              | ±2                    | 10                               |
| MAX6161B | 1.250              | ±4                    | 15                               |
| MAX6168A | 1.800              | ±2                    | 5                                |
| MAX6168B | 1.800              | ±5                    | 10                               |
| MAX6162A | 2.048              | ±2                    | 5                                |
| MAX6162B | 2.048              | ±5                    | 10                               |
| MAX6166A | 2.500              | ±2                    | 5                                |
| MAX6166B | 2.500              | ±5                    | 10                               |
| MAX6163A | 3.000              | ±2                    | 5                                |
| MAX6163B | 3.000              | ±5                    | 10                               |
| MAX6164A | 4.096              | ±2                    | 5                                |
| MAX6164B | 4.096              | ±5                    | 10                               |
| MAX6167A | 4.500              | ±2                    | 5                                |
| MAX6167B | 4.500              | ±5                    | 10                               |
| MAX6165A | 5.000              | ±2                    | 5                                |
| MAX6165B | 5.000              | ±5                    | 10                               |

## Ordering Information

| PART*        | TEMP RANGE     | PIN-PACKAGE | OUTPUT VOLTAGE (V) |
|--------------|----------------|-------------|--------------------|
| MAX6161_ESA+ | -40°C to +85°C | 8 SO        | 1.250              |
| MAX6162_ESA+ | -40°C to +85°C | 8 SO        | 2.048              |
| MAX6163_ESA+ | -40°C to +85°C | 8 SO        | 3.000              |
| MAX6164_ESA+ | -40°C to +85°C | 8 SO        | 4.096              |
| MAX6165_ESA+ | -40°C to +85°C | 8 SO        | 5.000              |
| MAX6166_ESA+ | -40°C to +85°C | 8 SO        | 2.500              |
| MAX6167_ESA+ | -40°C to +85°C | 8 SO        | 4.500              |
| MAX6168_ESA+ | -40°C to +85°C | 8 SO        | 1.800              |

+Denotes a lead(Pb)-free package/RoHS-compliant package.

\*Insert the code for the desired initial accuracy and temperature coefficient (from the Selector Guide) in the blank to complete the part number.

**Note:** For leaded version, contact factory.

## Package Information

For the latest package outline information and land patterns (footprints), go to [www.maximintegrated.com/packages](http://www.maximintegrated.com/packages). Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

| PACKAGE TYPE | PACKAGE CODE | OUTLINE NO.             | LAND PATTERN NO.        |
|--------------|--------------|-------------------------|-------------------------|
| 8 SO         | S8+2         | <a href="#">21-0041</a> | <a href="#">90-0096</a> |

## Revision History

| REVISION<br>NUMBER | REVISION<br>DATE | DESCRIPTION                                               | PAGES<br>CHANGED |
|--------------------|------------------|-----------------------------------------------------------|------------------|
| 4                  | 12/08            | Updated part numbers in <i>Ordering Information</i> table | 1                |

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at [www.maximintegrated.com](http://www.maximintegrated.com).

*Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.*

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9