

High Precision Bulk Metal® Foil Molded Surface Mount Resistor with TCR down to $\pm 2 \text{ ppm}/^\circ\text{C}$, Flexible Terminations, and Load Life Stability of $\pm 0.005 \%$ (50 ppm)



Any value at any tolerance available within resistance range

INTRODUCTION

The SMRxD is a precision molded surface mountable resistor offering all the elements of precision; including low TCR, tight tolerance, long term stability, low noise, low thermal EMF, and non-measurable voltage coefficient. It utilizes the Bulk Metal® Foil technology for the resistive element with its inherent low and predictable TCR and long term stability. This surface mountable product affords similar performance to the time tested S series molded through-hole product.

The flexible terminations of this product also reduce stress transference from the PCB to the resistor.

Voltage division with tight tracking $< 3 \text{ ppm}/^\circ\text{C}$ can be achieved with 2 randomly selected units even with a large ratio between the two values.

Our Application Engineering Department is available to advise and make recommendations. For non-standard technical requirements and special applications, please contact us.

TABLE 1 - THE SMRxD SERIES IS LISTED IN THE FOLLOWING DSCC SPECIFICATIONS

| MODEL | DSCC | MIL SPEC |
|-------|-------|---------------|
| SMR1D | 06020 | MIL-PRF-55182 |
| SMR3D | 06021 | MIL-PRF-55182 |

TABLE 2 - TOLERANCE AND TCR VERSUS RESISTANCE VALUE
(- 55 °C to + 125 °C, + 25 °C ref.)

| VALUE | STANDARD TOLERANCE ¹⁾ | TYPICAL TCR AND MAX. SPREAD ¹⁾ (ppm/°C) |
|------------------------------|----------------------------------|--|
| 50 Ω to 80 k Ω | $\pm 0.01 \%$ | $\pm 2 \pm 3$ |
| 20 Ω to $< 50 \Omega$ | $\pm 0.02 \%$ | $\pm 2 \pm 4$ |
| 10 Ω to $< 20 \Omega$ | $\pm 0.05 \%$ | $\pm 2 \pm 6$ |
| 5 Ω to $< 10 \Omega$ | $\pm 0.1 \%$ | $\pm 2 \pm 8$ |

Note

1. Tighter performances are available

* Pb containing terminations are not RoHS compliant, exemptions may apply

FEATURES

- Temperature coefficient of resistance (TCR): $\pm 2 \text{ ppm}/^\circ\text{C}$ typical (- 55 °C to + 125 °C, + 25 °C ref.)
- Tolerance: to $\pm 0.01 \%$
- Flexible terminations ensure minimal stress transference from the PCB due to a difference in thermal coefficient of expansions (TCE)
- Electrostatic discharge (ESD) above 25 000 V
- Load life stability: $\pm 0.005 \%$ (70 °C, 2000 h at rated power)
- Resistance range: 5 Ω to 80 k Ω (for higher and lower values, please contact us)
- Power rating: to 600 mW at 70 °C
- Non inductive, non capacitive design
- Current noise: - 40 dB
- Voltage coefficient: $< 0.1 \text{ ppm}/\text{V}$
- Non inductive: $< 0.08 \mu\text{H}$
- Non hot spot design
- Terminal finishes available: lead (Pb)-free tin/lead alloy
- Matched sets with TCR tracking are available upon request
- Any value available within resistance range (e.g. 1K234)
- Prototype samples available from 48 h. For more information, please contact foil@vishaypg.com
- For better performances please review SMRxDZ datasheet



Available
RoHS*
COMPLIANT

APPLICATIONS

- Military, airborne and space
- Precision amplifiers
- High precision instrumentation
- Medical
- Automatic test equipment (ATE)
- Industrial
- Audio (high end stereo equipment)
- EB application
- Pulse application
- Measurement instrumentation



FIGURE 1 - POWER DERATING CURVE

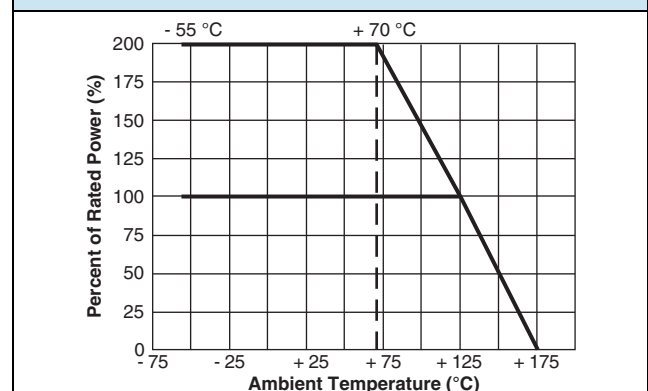


TABLE 3 - PERFORMANCE SPECIFICATIONS

| TEST | CONDITIONS | | | | MAXIMUM LIMIT ¹⁾ | |
|----------------------------------|---|--|---|---|--|--|
| | SMR1D | | SMR3D | | SMR1D | SMR3D |
| Resistance Range | | | | | 5 Ω to 33 kΩ | 5 Ω to 80 kΩ |
| Rated Power | 5 Ω to 10 kΩ 0.250 W at 70 °C 0.125 W at 125 °C | 10 kΩ to 33 kΩ 0.160 W at 70 °C 0.08 W at 125 °C | 5 Ω to 30 kΩ 0.6 W at 70 °C 0.3 W at 125 °C | 30 kΩ to 80 kΩ 0.4 W at 70 °C 0.2 W at 125 °C | see figure 1 | |
| Maximum Working Voltage | | | | | 73 V | 180 V |
| Maximum Operating Temperature | + 175 °C (see figure 1) | | | | | |
| Working Temperature Range | - 55 °C to + 125 °C (MIL range) | | | | | |
| Thermal Shock | - 65 °C to + 150 °C; 30 min; 5 cycles | | | | ± 0.01 % (100 ppm) | |
| Short Time Overload | 6.25 x rated power; 5 s | | | | ± 0.01 % (100 ppm) | |
| Low Temperature Storage | 24 h at - 65 °C | | | | ± 0.01 % (100 ppm) | |
| Low Temperature Operation | 45 min, rated power at - 65 °C | | | | ± 0.01 % (100 ppm) | |
| Dielectric Withstanding Voltage | atmospheric pressure; AC 200 V; 1 min | | | | ± 0.01 % (100 ppm) | |
| Insulation Resistance (MΩ) | DC 100 V; 1 min | | | | over 10 000 | |
| Resistance to Soldering Heat (%) | 260 °C; 10 s | | | | ± 0.02 %, ± 0.01 % typical | |
| Moisture Resistance | + 65 °C to - 10 °C; 90 % to 98 % RH; rated power; 240 h | | | | ± 0.02 % (200 ppm) | |
| Shock | 100 G; sawtooth | | | | ± 0.01 % (100 ppm) | |
| Vibration, High Frequency | 10 ~ 2000 ~ 10 Hz; 20 G; Y, Z each 4 h | | | | ± 0.01 % (100 ppm) | |
| Load Life Stability (2000 h) | 0.04 W at + 70 °C 0.25 W at + 70 °C 0.125 W at + 125 °C | | 0.1 W at + 70 °C 0.6 W at + 70 °C 0.3 W at + 125 °C | | Typical 0.005 % 0.02 % 0.02 % | Typical 0.005 % 0.015 % 0.015 % |
| High Temperature Exposure | 175 °C; no load 2000 h | | | | ± 0.05 % (500 ppm) | |
| Weight | | | | | 0.1143 g | 0.244 g |
| Packaging | bulk (loose) or tape and reel, per EIA-481-1 | | | | | |

Note


1. As shown + 0.01 Ω to allow for measurement error at low values

FIGURE 2 - DIMENSIONS in inches (millimeters)



| MODEL | L | W | H | P | TW | TH (minimum) |
|-------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|-----------------|
| SMR1D | 0.236 ± 0.012 (5.99 ± 0.30) | 0.126 ± 0.012 (3.20 ± 0.30) | 0.098 ± 0.012 (2.49 ± 0.30) | 0.051 ± 0.012 (1.30 ± 0.30) | 0.087 ± 0.004 (2.21 ± 0.10) | 0.039 (0.99) |
| SMR3D | 0.287 ± 0.012 (7.29 ± 0.30) | 0.170 ± 0.012 (4.32 ± 0.30) | 0.110 ± 0.012 (2.79 ± 0.30) | 0.051 ± 0.012 (1.30 ± 0.30) | 0.095 ± 0.004 (2.41 ± 0.10) | 0.039 (0.99) |

FIGURE 3 - RECOMMENDED MOUNTING PAD GEOMETRIES in inches (millimeters)

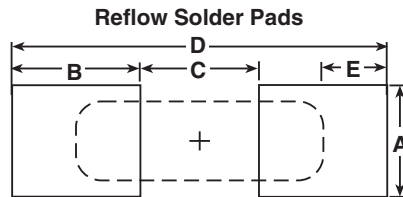

| MODEL | METHOD | A MIN. | B REF | C REF | D ± 0.04 (± 1.02) | E REF |
|-------|--------|-----------------|-----------------|-----------------|----------------------|-----------------|
| SMR1D | Reflow | 0.110 (2.79) | 0.106 (2.69) | 0.124 (3.15) | 0.337 (8.55) | 0.050 (1.27) |
| SMR3D | Reflow | 0.118 (3.00) | 0.106 (2.69) | 0.175 (4.45) | 0.388 (9.86) | 0.050 (1.27) |

Per IPC-SM-782 Rev. A

FIGURE 4 - TRIMMING TO VALUES
(conceptual illustration)



FIGURE 5 - TYPICAL TCR CURVE
(for more details, see table 2)



Note: The TCR values for < 80 Ω are influenced by the termination composition and the result in deviation from this curve

TABLE 4 - GLOBAL PART NUMBER INFORMATION

NEW GLOBAL PART NUMBER: Y112110K0000T9R (preferred part number format)



FOR EXAMPLE: ABOVE GLOBAL ORDER Y1121 10K0000 T 9 R:

TYPE: SMR1D
 VALUE: 10.0 $k\Omega$
 ABSOLUTE TOLERANCE: $\pm 0.01\%$
 TERMINATION: lead (Pb)-free
 PACKAGING: tape and reel

HISTORICAL PART NUMBER: SMR1D 10K000 TCR2 T S T (will continue to be used)

| SMR1D | 10K000 | TCR2 | T | S | T |
|----------------|----------------|--------------------|---|------------------------------------|------------------------------------|
| MODEL | OHMIC VALUE | TCR CHARACTERISTIC | RESISTANCE TOLERANCE | TERMINATION | PACKAGING |
| SMR1D SMR3D | 10.0 $k\Omega$ | | T = $\pm 0.01\%$ Q = $\pm 0.02\%$ A = $\pm 0.05\%$ B = $\pm 0.1\%$ C = $\pm 0.25\%$ D = $\pm 0.5\%$ F = $\pm 1.0\%$ | S = lead (Pb)-free B = tin/lead | B = bulk pack T = tape and reel |

Note

* For non-standard requests, please contact application engineering.

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

Vishay Precision Group makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, Vishay Precision Group disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on Vishay Precision Group's knowledge of typical requirements that are often placed on Vishay Precision Group products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9