



### ■ Features :

- Universal AC input / Full range (up to 295VAC)
- Built-in active PFC function
- Constant current design
- Protections: Short circuit / Over temperature
- Cooling by free air convection
- Fully isolated plastic case
- Class 2 Power Unit
- Class II power unit, no FG
- IP42 design
- Suitable for LED related fixture or appliance (such as LED Decoration or Advertisement devices)
- 100% full load burn-in test
- Low cost
- High reliability
- Suitable for dry / damp locations
- 3 years warranty


### SPECIFICATION




MODEL	PLD-25-350	PLD-25-700	PLD-25-1050	PLD-25-1400	
OUTPUT	<b>RATED CURRENT</b>	350mA	700mA	1050mA	1400mA
	<b>OPERATING VOLTAGE RANGE</b>	40 ~ 58V	24 ~ 36V	16 ~ 24V	12 ~ 18V
	<b>CURRENT ACCURACY</b>	±5.0%			
	<b>RATED POWER</b>	20.3W	25.2W	25.2W	25.2W
	<b>RIPPLE &amp; NOISE (max.) Note.1</b>	4.6Vp-p	2.7Vp-p	2.2Vp-p	2Vp-p
	<b>NO LOAD OUTPUT VOLTAGE (max.)</b>	60V	50V	35V	25V
	<b>SETUP TIME</b>	500ms / 230VAC 2000ms / 115VAC at full load			
INPUT	<b>VOLTAGE RANGE</b>	90 ~ 295VAC 127 ~ 417VDC			
	<b>FREQUENCY RANGE</b>	47 ~ 63Hz			
	<b>POWER FACTOR (Typ.)</b>	PF>0.98/115VAC, PF>0.92/230VAC, PF>0.91/277VAC at full load (Please refer to "Power Factor Characteristic" curve)			
	<b>TOTAL HARMONIC DISTORTION</b>	THD< 20% when output loading≥70% at 115VAC/230VAC input and output loading≥80% at 277VAC input			
	<b>EFFICIENCY (Typ.)</b>	85%	86%	85%	84%
	<b>AC CURRENT (Typ.)</b>	0.6A/115VAC 0.3A/230VAC		0.2A/277VAC	
	<b>INRUSH CURRENT(Typ.)</b>	COLD START 25A(twidth=75μs measured at 50% Ipeak) at 230VAC			
	<b>MAX. No. of PSUs on 16A CIRCUIT BREAKER</b>	72 units (circuit breaker of type B) / 80 units (circuit breaker of type C) at 230VAC			
	<b>LEAKAGE CURRENT</b>	<0.5mA / 240VAC			
PROTECTION	<b>SHORT CIRCUIT</b>	Hiccup mode, recovers automatically after fault condition is removed.			
	<b>OVER TEMPERATURE</b>	Shut down o/p voltage, re-power on to recover			
ENVIRONMENT	<b>WORKING TEMP.</b>	-30 ~ +60°C (Refer to "Derating Curve")			
	<b>WORKING HUMIDITY</b>	20 ~ 95% RH non-condensing			
	<b>STORAGE TEMP., HUMIDITY</b>	-40 ~ +80°C, 10 ~ 95% RH			
	<b>TEMP. COEFFICIENT</b>	±0.03%/°C (0 ~ 50°C)			
	<b>VIBRATION</b>	10 ~ 500Hz, 2G 12min./1cycle, period for 72min. each along X, Y, Z axes			
SAFETY & EMC	<b>SAFETY STANDARDS</b>	UL8750, CSAC22.2 No. 250.0-08, ENEC EN 61347-1, EN 61347-2-13 independent, EN 62384, EAC TP TC 004, IP42 approved ; design refer to UL60950-1, TUV EN60950-1			
	<b>WITHSTAND VOLTAGE</b>	I/P-O/P:3.75KVAC			
	<b>ISOLATION RESISTANCE</b>	I/P-O/P:100M Ohms / 500VDC / 25°C/ 70% RH			
	<b>EMC EMISSION</b>	Compliance to EN55015, EN61000-3-2 Class C (≤75% load) ; EN61000-3-3, FCC part 18 non-consumer equipment, EAC TP TC 020			
	<b>EMC IMMUNITY</b>	Compliance to EN61000-4-2,3,4,5,6,8,11, EN55024,EN61547, light industry level, criteria A, EAC TP TC 020			
OTHERS	<b>MTBF</b>	968.6Khrs min. MIL-HDBK-217F (25°C)			
	<b>DIMENSION</b>	84*57*29.5mm (L*W*H)			
	<b>PACKING</b>	0.19Kg; 72pcs/14.7Kg/0.75CUFT			
NOTE	<ol style="list-style-type: none"> <li>1. Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf &amp; 47uf parallel capacitor.</li> <li>2. Direct connecting to LEDs is suggested, but is not suitable for using additional drivers.</li> <li>3. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED power supply can only be used behind a switch without permanently connected to the mains.</li> <li>4. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).</li> <li>5. For any application note and IP water proof function installation caution, please refer our user manual before using. <a href="https://www.meanwell.com/Upload/PDF/LED_EN.pdf">https://www.meanwell.com/Upload/PDF/LED_EN.pdf</a></li> </ol>				

**Mechanical Specification**


Case No.PCD16A Unit:mm

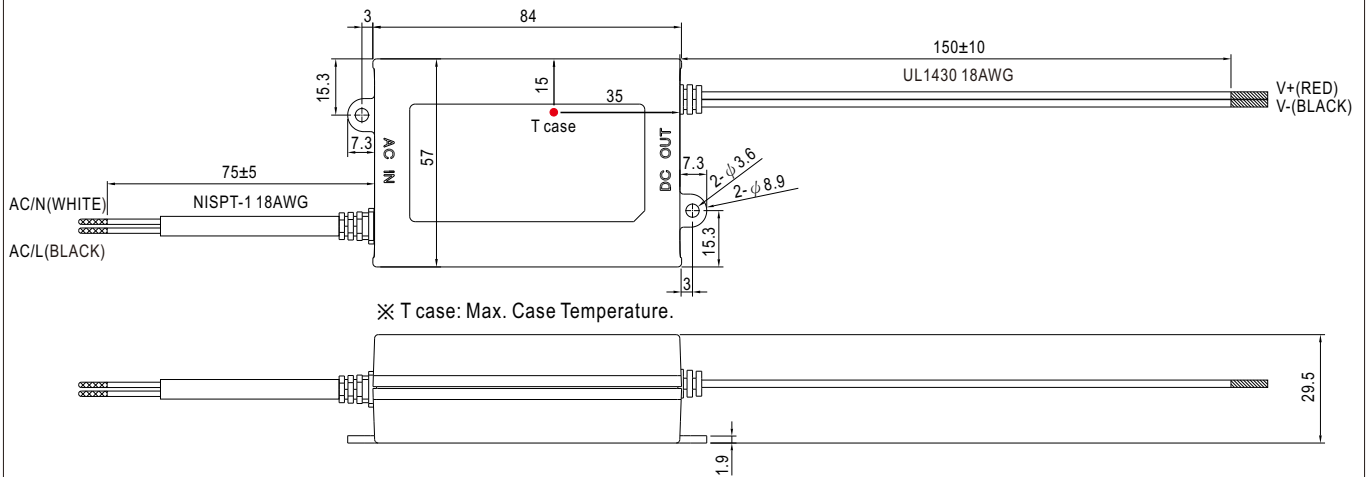


**Block Diagram**

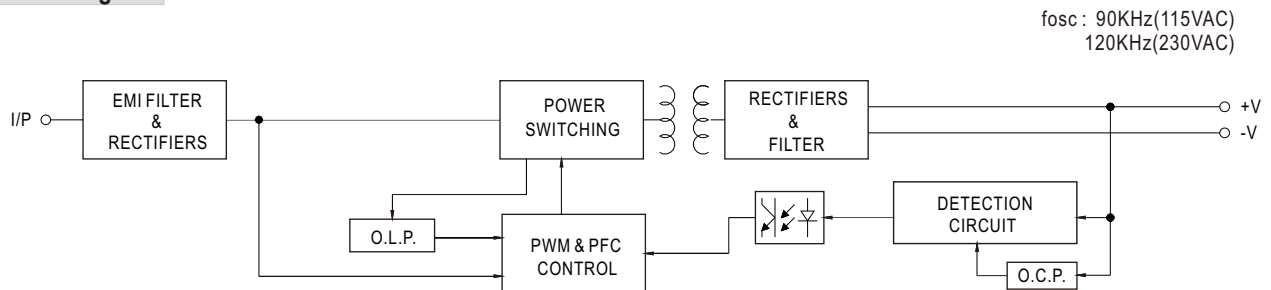


**Derating Curve**

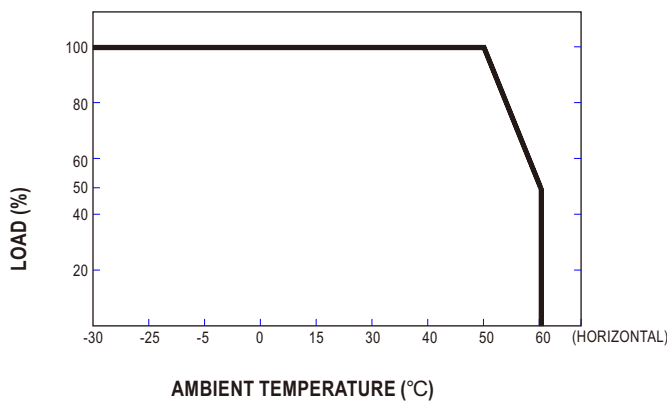

**Static Characteristics**

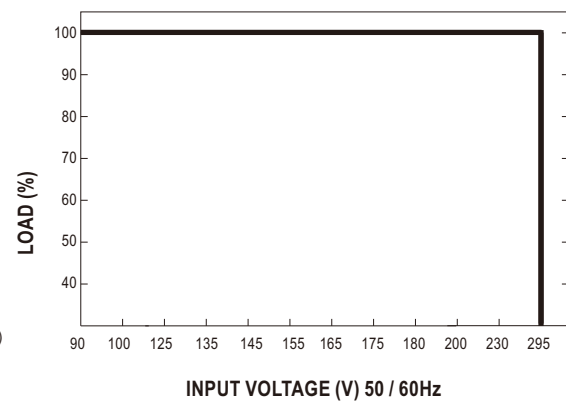


**Power Factor Characteristic**

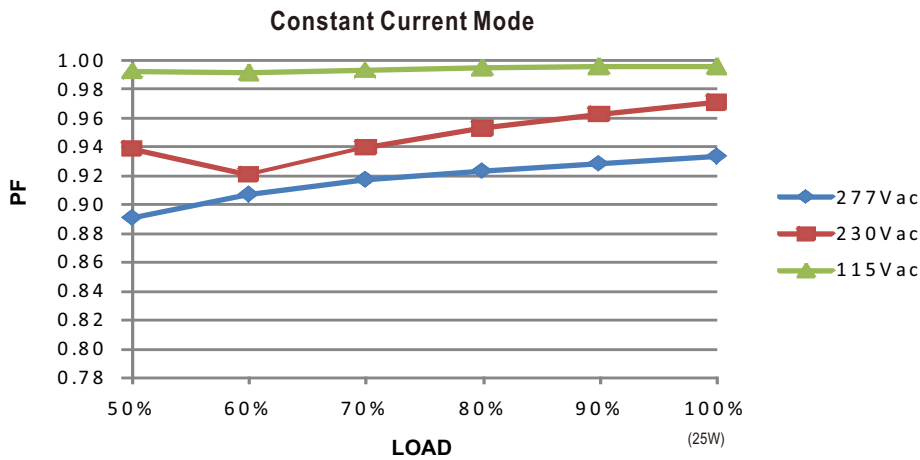

**EFFICIENCY vs LOAD (PLD-25-700)**

PLD-25 series possess superior working efficiency that up to 86% can be reached in field applications.

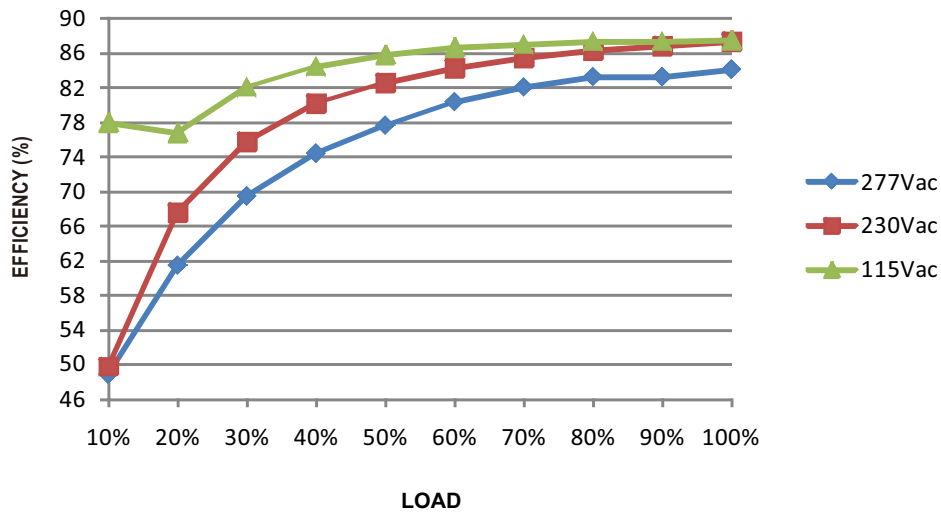

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9