

### Features

- ◆ Small SMD package with standard footprint
- ◆ I/O isolation voltage 1500 VDC
- ◆ Single and dual output models
- ◆ Input voltage 5, 12 and 24 VDC
- ◆ High efficiency up to 80 %
- ◆ Operating temperature range -40 to +85°C
- ◆ High accuracy of pin co-planarity
- ◆ Qualified for leadfree reflow solder process according IPC/JEDEC J-STD-020D
- ◆ Available in tape and reel package
- ◆ 3-year product warranty



With their small footprint these 2 Watt DC/DC converters are an ideal and economical solution for many applications where an isolated voltage is required. Typical applications are ground loop elimination, noise reduction, voltage isolation in digital interfaces and voltage conversion in distributed power systems. With a new package design these converters are qualified for the higher temperatures requested by lead-free reflow solder processes. For automated SMD production lines the devices can be supplied in standard tape and reel package.

### Models

| Ordercode   | Input voltage                   | Output voltage | Output current max. | Efficiency typ. |
|-------------|---------------------------------|----------------|---------------------|-----------------|
| TES 2-0510H | 5 VDC ±10%<br>(5 VDC nominal)   | 3.3 VDC        | 500 mA              | 70 %            |
| TES 2-0511H |                                 | 5 VDC          | 400 mA              | 73 %            |
| TES 2-0512H |                                 | 12 VDC         | 165 mA              | 77 %            |
| TES 2-0521H |                                 | ±5 VDC         | ±200 mA             | 74 %            |
| TES 2-0522H |                                 | ±12 VDC        | ±83 mA              | 76 %            |
| TES 2-0523H |                                 | ±15 VDC        | ±66 mA              | 76 %            |
| TES 2-1210H | 12 VDC ±10%<br>(12 VDC nominal) | 3.3 VDC        | 500 mA              | 72 %            |
| TES 2-1211H |                                 | 5 VDC          | 400 mA              | 75 %            |
| TES 2-1212H |                                 | 12 VDC         | 165 mA              | 79 %            |
| TES 2-1222H |                                 | ±12 VDC        | ±83 mA              | 80 %            |
| TES 2-1223H |                                 | ±15 VDC        | ±66 mA              | 80 %            |
| TES 2-2410H | 24 VDC ±10%<br>(24 VDC nominal) | 3.3 VDC        | 500 mA              | 72 %            |
| TES 2-2411H |                                 | 5 VDC          | 400 mA              | 75 %            |
| TES 2-2412H |                                 | 12 VDC         | 165 mA              | 79 %            |
| TES 2-2422H |                                 | ±12 VDC        | ±83 mA              | 79 %            |
| TES 2-2423H |                                 | ±15 VDC        | ±66 mA              | 79 %            |

**Input Specifications**

|                                   |  |
|-----------------------------------|--|
| Input current no load / full load | 5 Vin; 3.3 VDC model: 60 mA / 470 mA typ.<br>5 Vin; other models: 60 mA / 540 mA typ.<br>12 Vin; 3.3 VDC model: 30 mA / 190 mA typ.<br>12 Vin; other models: 30 mA / 210 mA typ.<br>24 Vin; 3.3 VDC model: 15 mA / 95 mA typ.<br>24 Vin; other models: 15 mA / 110 mA typ. |
| Surge voltage (1 sec. max.)       | 5 Vin models: 9 V max.<br>12 Vin models: 18 V max.<br>24 Vin models: 30 V max.   |
| Reverse voltage protection        | 0.3 A max.   |
| Input filter                      | internal capacitor   |

**Output Specifications**


|   |   |
|---|---|
| Voltage set accuracy                                | see graphs below  |
| Voltage balance (dual output models, balanced load) | 1 % max.  |
| Regulation<br>- Input variation<br>- Load variation | 1.2 % / 1 % change Vin<br>see graphs below  |
| Ripple and noise (20 MHz Bandwidth)                 | 120 mVpp max.   |
| Temperature coefficient                             | ±0.02 %/K max.  |
| Short circuit protection                            | limited 0.5 sec. max.   |
| Capacitive load                                     | 3.3 & 5.0 VDC models: 47 µF max.<br>12 & ±5 VDC models: 10 µF max. (each output)<br>±12 & ±15 VDC models: 4.7 µF max. (each output) |

**General Specifications**


|   |  |
|---|--|
| Temperature ranges<br>- Operating<br>- Storage<br>- Case              | -40°C to +85°C<br>-40°C to +125°C<br>95°C max. |
| Derating (convection cooling)   | 4 %/K above 75°C                               |
| Humidity (non condensing)   | 95 % rel. H max.                               |
| Reliability, calculated MTBF (MIL-HDBK-217F, at +25°C, ground benign) | >2'000'000 h                                   |
| Isolation voltage (60 sec)  | 1500 VDC                                       |
| Isolation capacitance (100 kHz, 1 V)                                  | 60 pF typ.                                     |
| Isolation resistance (500 VDC)  | >10 Gohm                                       |
| Switching frequency   | 50 to 120 kHz (depending on load)              |

**Output voltage variation dependent on load (at nominal input voltage)**

3.3 & 5.0 VDC models:

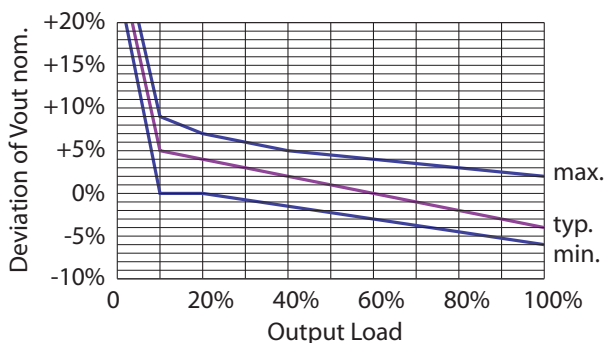

other models:

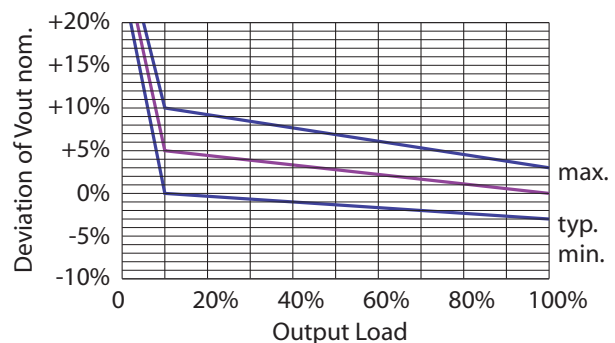

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.


**Physical Specifications**

|                                  |  |                                     |
|----------------------------------|--|-------------------------------------|
| Casing material                  | plastic (UL94V-0 rated)  |                                     |
| Weight                           | single output models: 1.5 g (0.05 oz)  | dual output models: 2.2 g (0.08 oz) |
| Lead-free reflow solder process  | as per J-STD-020D.1 (to find at: <a href="http://www.jedec.org">www.jedec.org</a> - free registration required)  |                                     |
| Moisture sensitivity level (MSL) | level 2 as per J-STD-033B.1 (to find at: <a href="http://www.jedec.org">www.jedec.org</a> - free registration required)  |                                     |
| Washing process                  | <a href="http://www.tracopower.com/products/smd-wash.pdf">www.tracopower.com/products/smd-wash.pdf</a>   |                                     |
| Packaging                        | <a href="http://www.tracopower.com/products/tes2h-pack.pdf">www.tracopower.com/products/tes2h-pack.pdf</a>   |                                     |
| Environmental compliance         | - Reach<br>- RoHS<br><a href="http://www.tracopower.com/products/reach-declaration.pdf">www.tracopower.com/products/reach-declaration.pdf</a><br>RoHS directive 2011/65/EU |                                     |

**Application note:** [www.tracopower.com/products/tes2h-application.pdf](http://www.tracopower.com/products/tes2h-application.pdf)

**Outline Dimensions**

Single Output Models

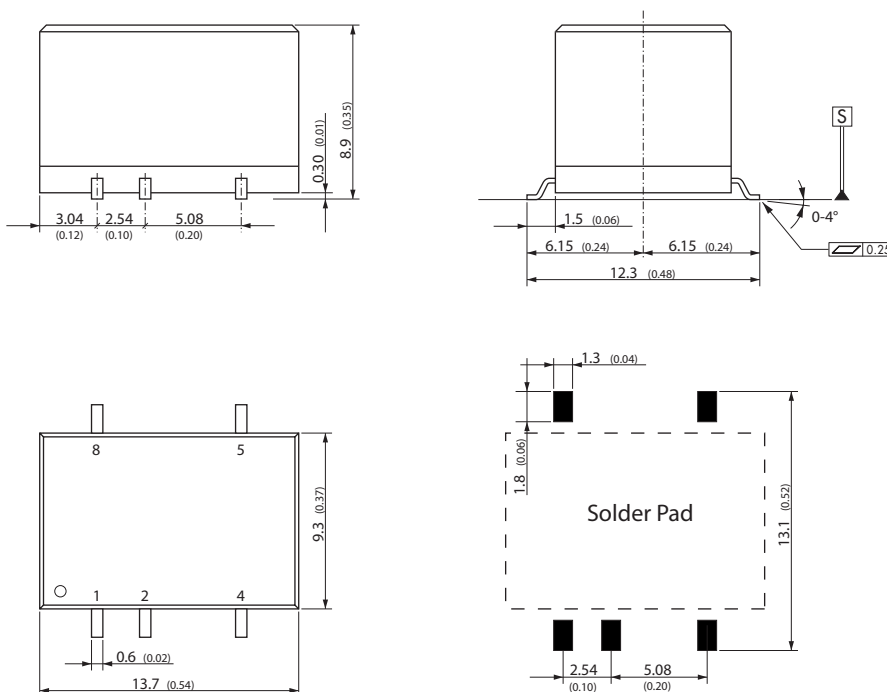

| Pin-Out |            |
|---------|------------|
| Pin     | Single     |
| 1       | -Vin (GND) |
| 2       | +Vin (Vcc) |
| 4       | -Vout      |
| 5       | +Vout      |
| 8       | No con.    |



No con. = Pin to be isolated from circuitry

Dimensions in [mm], ( ) = Inch  
 Pin pitch tolerances: ±0.13 (±0.005)  
 Other tolerances: ±0.25 (±0.01)

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.



**Outline Dimensions**

Dual Output Models

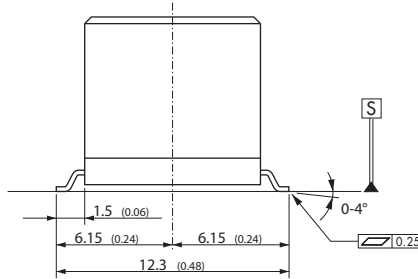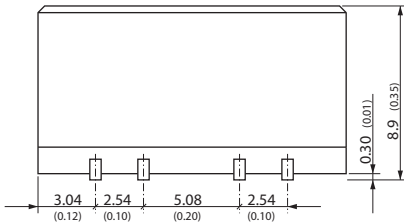

| Pin-Out |            |
|---------|------------|
| Pin     | Dual       |
| 1       | -Vin (GND) |
| 2       | +Vin (Vcc) |
| 4       | Common     |
| 5       | -Vout      |
| 7       | +Vout      |
| 10      | No con.    |

No con. = Pin to be isolated from circuitry

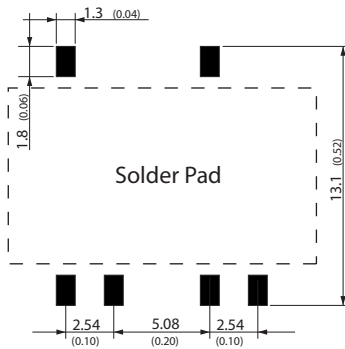

Dimensions in [mm], ( ) = Inch  
Pin pitch tolerances:  $\pm 0.13$  ( $\pm 0.005$ )  
Other tolerances:  $\pm 0.25$  ( $\pm 0.01$ )

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9