



EC5C SERIES

15 WATT 4:1 INPUT DC-DC CONVERTERS



FEATURES

- * 15W Isolated Output
- * 2" X 2" Six-Sided Shield Metal Case
- * 4:1 Input Range
- * Efficiency to 84%
- * Remote ON/OFF Control
- * Regulated Outputs
- * Continuous Short Circuit Protection
- * CE Mark Meets 2004/108/EC
- * UL60950-1 Approval



MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT		INPUT CURRENT		% EFF.	Capacitor Load max.
			MIN.	MAX.	NO LOAD	FULL LOAD		
EC5C01	9-36VDC	5VDC	0mA	3000 mA	15 mA	770 mA	81	T.B.D
EC5C02	9-36VDC	12VDC	0mA	1250 mA	15 mA	745 mA	84	T.B.D
EC5C03	9-36VDC	15VDC	0mA	1000 mA	15 mA	760 mA	82	T.B.D
EC5C04	9-36VDC	±5VDC	±0mA	±1500 mA	20 mA	770 mA	81	T.B.D
EC5C05	9-36VDC	±12VDC	±0mA	±625 mA	20 mA	760 mA	82	T.B.D
EC5C06	9-36VDC	±15VDC	±0mA	±500 mA	20 mA	750 mA	83	T.B.D
EC5C07	9-36VDC	5/±12VDC	250/±100 mA	1500/±310 mA	20 mA	780 mA	80	T.B.D
EC5C08	9-36VDC	5/±15VDC	250/±100 mA	1500/±250 mA	20 mA	780 mA	80	T.B.D
EC5C09	9-36VDC	3.3VDC	0mA	3000 mA	15 mA	530 mA	78	T.B.D
EC5C11	18-72VDC	5VDC	0mA	3000 mA	10 mA	385 mA	81	T.B.D
EC5C12	18-72VDC	12VDC	0mA	1250 mA	10 mA	375 mA	83	T.B.D
EC5C13	18-72VDC	15VDC	0mA	1000 mA	10 mA	380 mA	82	T.B.D
EC5C14	18-72VDC	±5VDC	±0mA	±1500 mA	15 mA	385 mA	81	T.B.D
EC5C15	18-72VDC	±12VDC	±0mA	±625 mA	15 mA	375 mA	83	T.B.D
EC5C16	18-72VDC	±15VDC	±0mA	±500 mA	15 mA	385 mA	81	T.B.D
EC5C17	18-72VDC	5/±12VDC	250/±100 mA	1500/±310 mA	15 mA	385 mA	81	T.B.D
EC5C18	18-72VDC	5/±15VDC	250/±100 mA	1500/±250 mA	15 mA	390 mA	80	T.B.D
EC5C19	18-72VDC	3.3VDC	0mA	3000 mA	10 mA	270 mA	77	T.B.D

NOTE: 1. Nominal Input Voltage 24 or 48VDC

章 節	C-6
頁 次	1-1

SPECIFICATIONS

All Specifications Typical At Nominal Line, Full Load, and 25°C Unless Otherwise Noted

INPUT SPECIFICATIONS:

Input Voltage Range	24V	9 – 36V
	48V	18 – 72V
Input Surge Voltage (100ms max.)	24V	50Vdc max.
	48V	100Vdc max.
Input Filter		Pi Type

OUTPUT SPECIFICATIONS:


Voltage Accuracy	
Single Output, Dual +Output	±1.0% max.
Dual – Output	±3.0% max.
Triple, 5V	±2.0% max.
12V/15V	±3.0% max.
Voltage Balance (Dual)	
	±1.0% max.
Transient Response.	
Single 25% Step Load Change	<500us
Dual FL-1/2L±1% Error Band	<500us
External Trim Adj. Range	
	±10%
Ripple and Noise, 20MHz BW	
	10mV RMS. max., 75mV p-p max.
Temperature Coefficient	
	±0.02%/°C
Short Circuit Protection	
	Continuous
Line Regulation Single/Dual (note 1)	
	±0.2% max.
Triple	±1.0% max.
Load Regulation Single/Dual (note 2)	
	±1.0% max.
Triple	±5.0% max.
Start up time	
	300ms typ.

GENERAL SPECIFICATIONS:

Efficiency	See Table
Isolation Voltage	500 VDC min.
Isolation Resistance	10 ⁹ ohms
Isolation Capacitance	1000pF typ.
Switching Frequency	300KHz typ.
Case Grounding	Connected to Output Common
Operating Ambient Temperature Range	-25°C to +71°C
De-rating, Above 71°C	Linearly to Zero power at 100°C
Case Temperature (note 3)	100°C max.
Cooling	Natural Convection
Storage Temperature Range	-55°C to +105°C
Humidity	95% RH max. Non condensing
MTBF	MIL-STD-217F, GB, 25°C, Full Load 1300khrs Typ.
EMI/RFI	Six-Sided Continuous Shield
Dimensions	2.00×2.00×0.40 inches (50.8×50.8×10.2mm)
Case Material	Black Coated Copper With Non-Conductive Base
Weight	59g

NOTE:

1. Measured From High Line to Low Line
2. Measured From Full Load to 1/4 Full Load
3. Maximum case temperature under any operating condition should not be exceeded 100°C

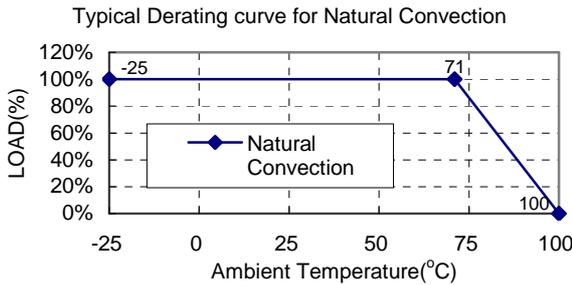


Output (Pin No.)	Voltage	Amperes	
		Min. (2)	Nom.
7	+5	0.25	1.5
8 & 5	+12 & -12	0.10	0.31
8 & 5	+15 & -15	0.10	0.25

NOTE:

1. Maximum total power from all outputs is limited to 15 watts but no output should be allowed to exceed its maximum current
2. Minimum current on each output is required to maintain specified regulation

Case C Dimensions:

All Dimensions In Inches(mm)
 Tolerance Inches: .XX=±0.04, .XXX=±0.010
 Millimeters: .X=±1.0, .XX=±0.25

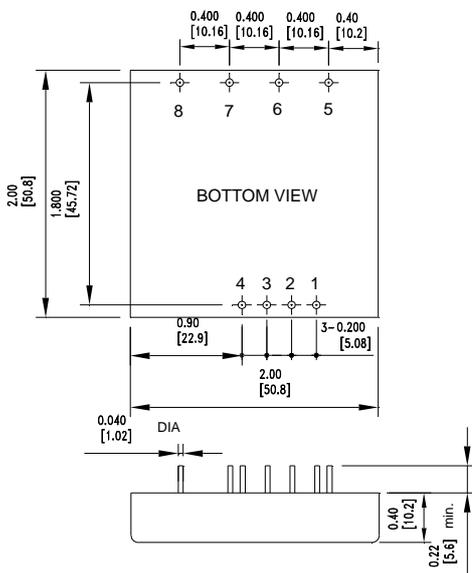


Pin	Single	Dual	Triple
1.	Remote On/Off Control		
2.	No Pin	No Pin	No Pin
3.	-Vin	-Vin	-Vin
4.	+Vin	+Vin	+Vin
5.	Trim	Trim	-Aux. Out
6.	-Vout	-Vout	Common
7.	+Vout	Common	+5Vout
8.	No Pin	+Vout	+Aux. Out

Logic Compatibility	CMOS or Open Collector TTL
Ec-On	>+5.5 VDC to 75Vdc or Open Circuit
Ec-Off	<1.8 VDC
Shutdown Idle Current	10mA
Control Common	Referenced to Input Minus

EXTERNAL OUTPUT TRIM

Output may optionally be externally trimmed (±10%) with a fixed resistor or an external trimpot as shown.

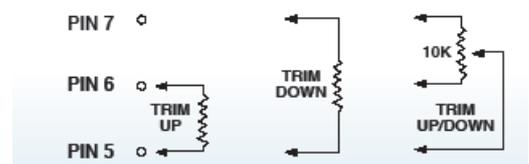

章 節	C-6
頁 次	1-2

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9