


MICRO-LIMIT SWITCHES

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

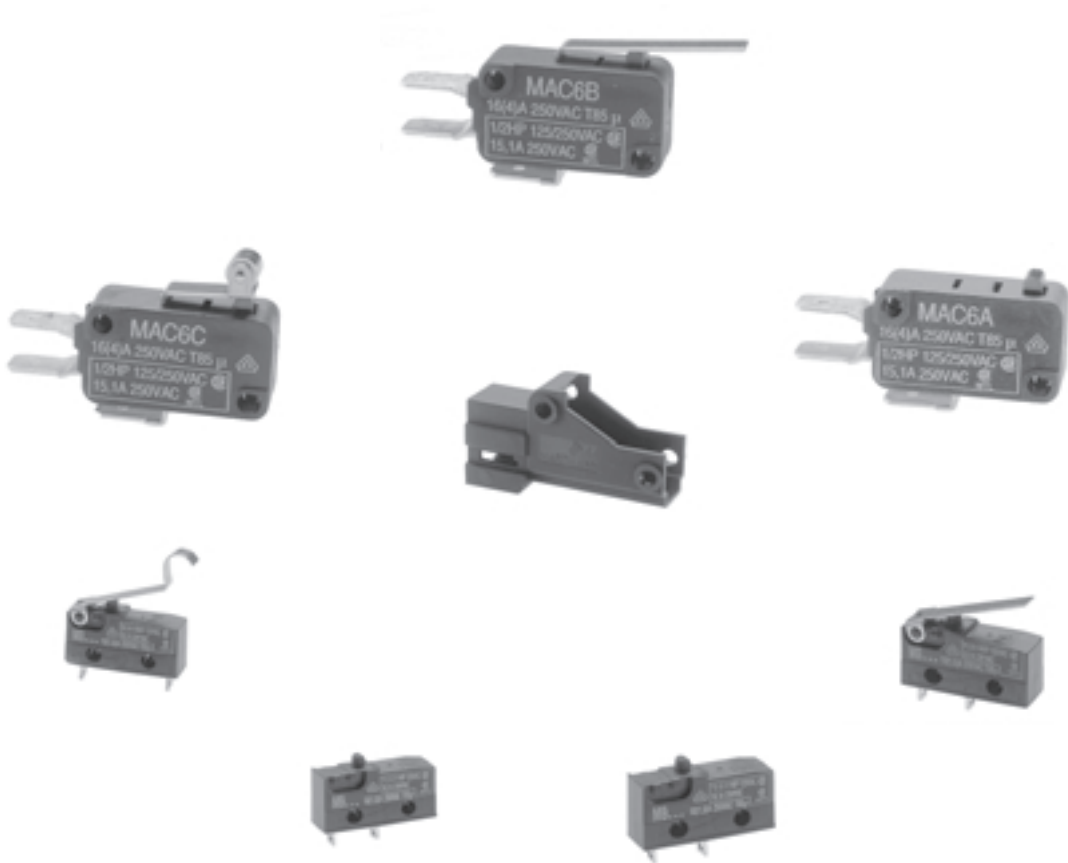

H

MICRO-LIMIT SWITCHES

Micro-limit pushbutton switches are used in many applications including microwave ovens, vending machines, copy and fax machines, medical and security equipment, computer peripherals and many others. They are characterized by close tolerance precision switching positions and long service life. APEM micro-limit switches are 100% electronic tested prior to shipment to insure proper operation and conformance with specifications.

DEFINITIONS OF TERMS

Free position

Position of the switch actuator when no force is applied.

Operating position

The position of the actuator when the contact snaps.

Overtravel position

The final position of the actuator.

Release position

The position of the actuator when the contact snaps back from the operating position to original position.

Contact opening gap

The distance between the open contact pair.

Pretravel

The distance between free and operating positions.

Overtravel

The distance the actuator travels after the contact actuates.

Movement differential

The distance from the operating to release position of the actuator.

Free travel

The distance between the release and free positions.

Back travel

The distance between the overtravel and release positions.

Total travel

The sum of pretravel and overtravel.

Operating force

The force required to cause snap action of contact.

End operating force

The force to be applied to keep the actuator in the allowed final position.

Release force

The force applied to the actuator at the moment the contact snaps back from the operating position.

Differential force

The difference between the operating force and the release force.

Mechanical life

The minimum number of actuations with no load on the switch.


Electrical life

The minimum number of actuations at rated voltage, rated current and resistive load at 20°C ambient temperature.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

H

- | | |
|-----|-----------------------|
| 1 | free position |
| 2 | operating position |
| 3 | overtravel position |
| 4 | release position |
| A | total travel |
| B | free travel |
| C | back travel |
| D | pretravel |
| E | overtravel |
| F | movement differential |
| I | total force |
| II | operating force |
| III | differential force |
| IV | release force |

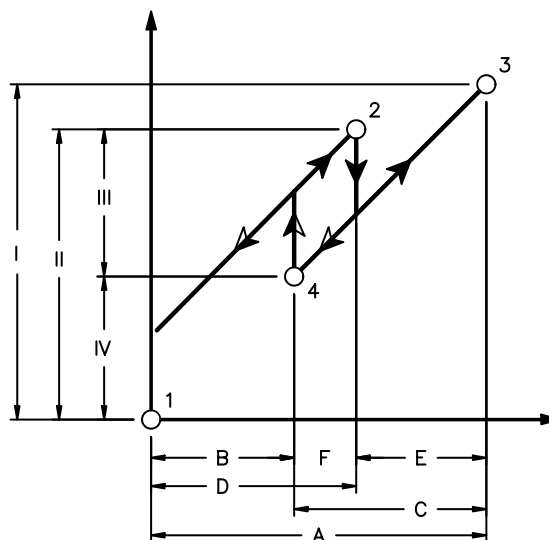

**FORCE vs.
TRAVEL
DIAGRAM**

MA SERIES - MICRO-LIMIT SWITCHES



FEATURES

- **Ratings:** 16 Amps 250 VAC (resistive load). 4 Amps 250 VAC (motor load) or 3 Amps 250 VAC (resistive load). 0.1 Amps 250 VAC (motor load).
- **Single pole CO (change-over or alternate action), NC (normally closed momentary) and NO (normally open momentary) configurations.**
- **Close tolerance switching action with long life (10,000,000 mechanical cycles min.).**
- **Pin plunger, hinge lever or roller lever actuator options.**

MATERIALS

Contacts:	Stationary: Nicker silver Shorting: Beryllium copper
Actuator:	FS 161 (UL94V-O)
Case & cover:	PBT (UL94V-O)
Terminals:	Silver plated copper/zinc

AGENCY RECOGNITION



Approval pending.

SPECIFICATIONS

Operating force:	≤ 12.59 oz. (343 grams) approx. for 16 Amp models ≤ 0.72 oz. (20 grams) approx. for 3 Amp models
Pretravel:	$\leq .047$ " (1.2mm)
Overtravel:	$\geq .059$ " (1.5mm) min.
Movement differential:	$\leq .016$ " (0.4mm)
Free position:	$\leq .649$ " (16.5mm)
Operating position:	$.578 \pm .020$ " (14.7mm $\pm$ 0.5mm)
Operating temperature:	-40°C to +85°C
Contact gap:	less than .118" (3mm)
Tracking resistance:	> PTI 175

MA SERIES - MICRO-LIMIT SWITCHES

ORDER FORMAT


M A A 6 B

Series	Circuit & quick-connect terminals	Switch rating	Actuator style
MA	A Normally open (standard) .031 x .248" (0.8x6.3mm) B Normally closed (standard) .031 x .248" (0.8x6.3mm) C Change-over (standard) .031 x .248" (0.8x6.3mm) D Normally open, .031 x .248" (0.8x6.3mm), spacing .197" (5mm) E Normally closed, .031 x .248" (0.8x6.3mm), spacing .197" (5mm) F Change-over, .031 x .248" (0.8x6.3mm), spacing .197" (5mm) G Normally open, .020 x .189" (0.5x4.8mm) H Normally closed, .020 x .189" (0.5x4.8mm) I Change-over, .020 x .189" (0.5x4.8mm) J Normally open, .031 x .189" (0.8x4.8mm) K Normally closed, .031 x .189" (0.8x4.8mm) L Change-over, .031 x .189" (0.8x4.8mm)	6 16(4)A 250 VAC 7 3(0.1)A 250 VAC	A Pin actuator B Hinge actuator C Roller actuator


STANDARD MODELS

Quick-connect terminal		.031x.248" (0.8x6.3mm)		.031x.248" (0.8x6.3mm) pin spacing - .197"(5mm)	.020x.189" (0.5x4.8mm)		.031x.189" (0.8x4.8mm)	
Switching capacity		16(4)A	3(0.1)A	16(4)A	16(4)A	3(0.1)A	16(4)A	3(0.1)A
Pin plunger	NO	MAA6A	MAA7A	MAD6A	MAG6A	MAG7A	MAJ6A	MAJ7A
	NC	MAB6A	MAB7A	MAE6A	MAH6A	MAH7A	MAK6A	MAK7A
	CO	MAC6A	MAC7A	MAF6A	MAI6A	MAI7A	MAL6A	MAL7A
Hinge lever	NO	MAA6B	-	MAD6B	MAG6B	-	MAJ6B	-
	NC	MAB6B	-	MAE6B	MAH6B	-	MAK6B	-
	CO	MAC6B	-	MAF6B	MAI6B	-	MAL6B	-
Roller lever	NO	MAA6C	-	MAD6C	MAG6C	-	MAJ6C	-
	NC	MAB6C	-	MAE6C	MAH6C	-	MAK6C	-
	CO	MAC6C	-	MAF6C	MAI6C	-	MAL6C	-


NO =
NORMALLY OPEN:

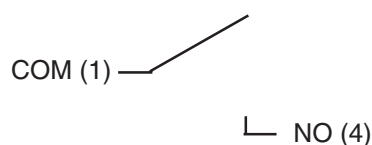

NC =
NORMALLY CLOSED:



CO =
CHANGE-OVER:

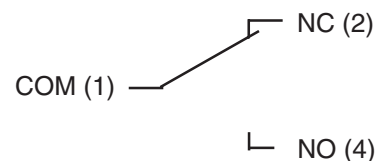


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE


MA SERIES - MICRO-LIMIT SWITCHES

MECHANICAL OUTLINES


Models with quick-connect terminal .031x.248" (0.8x6.3mm)

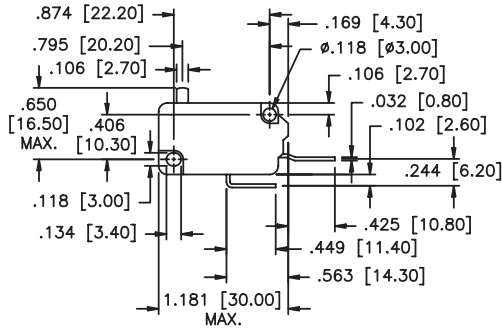


Normally open




Side view




Hinge lever

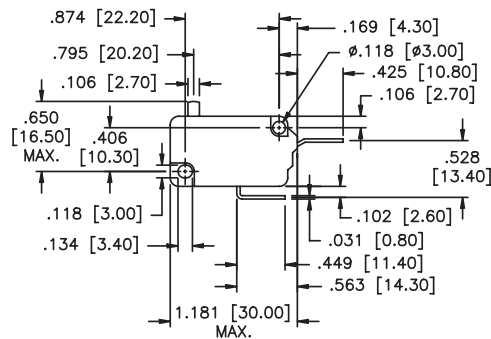


Normally closed

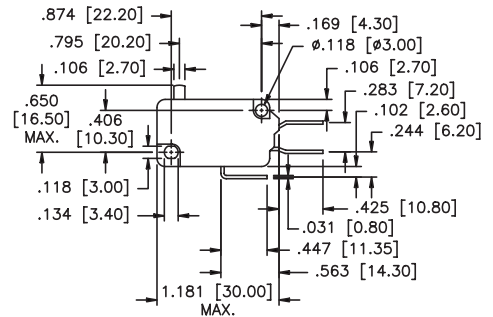

Change-over



Quick-connect terminal




Roller lever

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE


MA SERIES - MICRO-LIMIT SWITCHES

MECHANICAL OUTLINES


Models with quick-connect terminal .031x.248" (0.8x6.3mm) & pin spacing .197" (5mm)

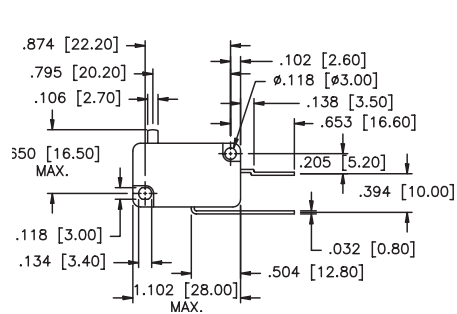


Normally open

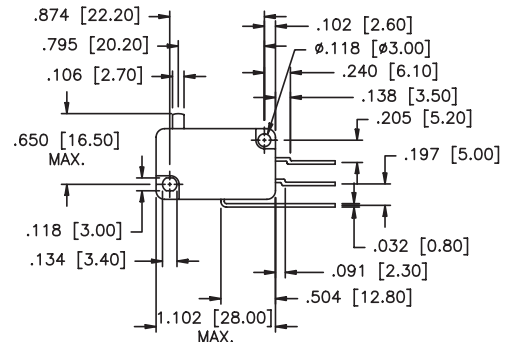


Change-over




Side view

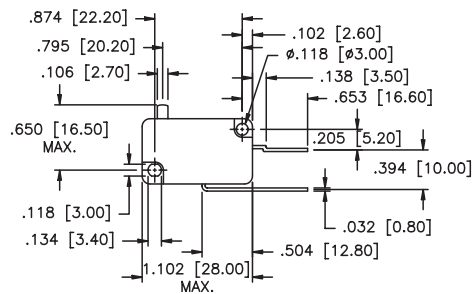


Normally closed




Quick-connect terminal



Hinge lever



Roller lever




Adaptor element

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE


MA SERIES - MICRO-LIMIT SWITCHES

MECHANICAL OUTLINES


Models with quick-connect terminal .020 or .031x.248" (0.8 or 0.8x6.3mm)

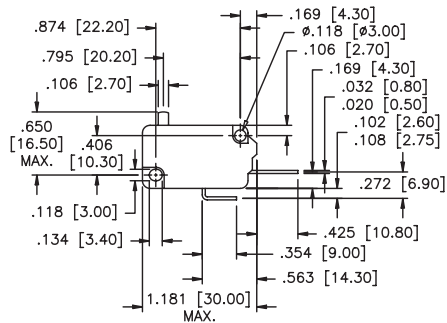


Normally open

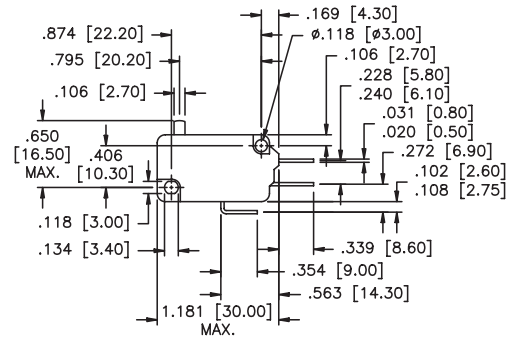


Change-over

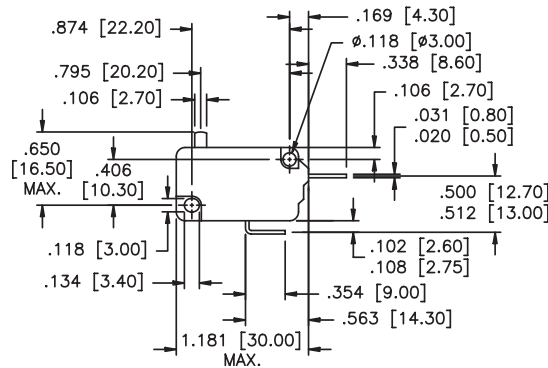


Normally closed




Hinge lever



Roller lever



Side view



Quick connect terminal

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

H

MB SERIES - MICRO-LIMIT SWITCHES



FEATURES

- Ratings: 10 Amps 250 VAC (resistive load). 1.5 Amps 250 VAC (motor load).
- Single pole CO (change-over or alternate action), NC (normally closed momentary) and NO (normally open momentary) configurations.
- Close tolerance switching action with long life (10,000,000 mechanical cycles min.).
- Pin plunger, hinge lever or roller lever actuator options.

MATERIALS

Contacts:	Stationary: Nickel silver Shorting: Beryllium copper
Actuator:	POM (UL94HB)
Case & cover:	PBT (UL94V-O)
Terminals:	Silver plated copper/zinc

AGENCY RECOGNITION



SPECIFICATIONS

Operating force:	≤ 10 oz. (274 grams) approx.
Pretravel:	≤ .039" (1mm)
Overtravel:	≥ .024" (0.6mm)
Movement differential:	≤ .005" (0.13mm)
Free position:	≤ .366" (9.3mm)
Operating position:	.331" ± .012" (8.4mm ± (0.3mm)
Operating temperature:	-40°C to +85°C
Contact gap:	< .118" (3mm)
Tracking resistance:	>PTI 175

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

MB SERIES - MICRO-LIMIT SWITCHES

ORDER FORMAT

M B D 5 B 1

Series

MB

Circuit & quick-connect terminals

- D** Normally open (solder terminal)
- E** Normally closed (solder terminal)
- F** Change-over (solder terminal)
- G** Normally open (p.c. terminal)
- H** Normally closed (p.c. terminal)
- J** Change-over (p.c. terminal)

Switch rating

5 10(1.5)A 250 VAC

Actuator style

- A** Pin actuator
- B** Hinge actuator
- C** Roller actuator


Length

Actuator length and fixed position- (see table below)

STANDARD MODELS

Circuit			Normally open		Normally closed		Change-over	
Terminals			Solder	P.C.	Solder	P.C.	Solder	P.C.
Pin plunger with radius			MBD5A	MBG5A	MBE5A	MBH5A	MBF5A	MBJ5A
Pin plunger, spherical form			MBD5D	MBG5D	MBE5D	MBH5D	MBF5D	MBJ5D
Lever type	Fix	Act. length						
Hinge lever	EH	.189" (4.8mm)	MBD5B	MBG5B	MBE5B	MBH5B	MBF5B	MBJ5B
	EV	.276" (7.0mm)	MBD5B2	MBG5B2	MBE5B2	MBH5B2	MBF5B2	MBJ5B2
	EH	.276" (7.0mm)	MBD5B1	MBG5B1	MBE5B1	MBH5B1	MBF5B1	MBJ5B1
	EV	.370" (9.4mm)	MBD5B3	MBG5B3	MBE5B3	MBH5B3	MBF5B3	MBJ5B3
Roller lever	EH	.098" (2.5mm)	MBD5C	MBG5C	MBE5C	MBH5C	MBF5C	MBJ5C
	EV	.185" (4.7mm)	MBD5C2	MBG5C2	MBE5C2	MBH5C2	MBF5C2	MBJ5C2
	EH	.185" (4.7mm)	MBD5C1	MBG5C1	MBE5C1	MBH5C1	MBF5C1	MBJ5C1
	EV	.280" (7.1mm)	MBD5C3	MBG5C3	MBE5C3	MBH5C3	MBF5C3	MBJ5C3
Simulated roller lever	EH	.098" (2.5mm)	MBD5E	MBG5E	MBE5E	MBH5E	MBF5E	MBJ5E
	EV	.185" (4.7mm)	MBD5E2	MBG5E2	MBE5E2	MBH5E2	MBF5E2	MBJ5E2
	EH	.185" (4.7mm)	MBD5E1	MBG5E1	MBE5E1	MBH5E1	MBF5E1	MBJ5E1
	EV	.280" (7.1mm)	MBD5E3	MBG5E3	MBE5E3	MBH5E3	MBF5E3	MBJ5E3


**NO =
NORMALLY OPEN:**

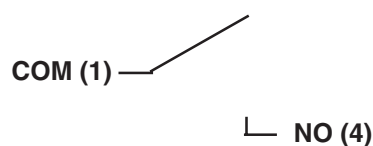

**NC =
NORMALLY CLOSED:**




**CO =
CHANGE-OVER:**

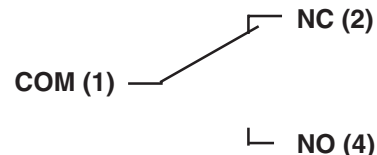


MB SERIES - MICRO-LIMIT SWITCHES


ACTUATORS AND SPECIFICATIONS



Hinge lever




Roller lever




Simulated roller lever

Actuator	Hinge lever				Roller lever				Simulated roller lever			
Actuator length, inches $\pm .031"$ $\pm 0.8\text{mm}$	.189 4.8	.276 7.0	.276 7.0	.370 9.4	.098 2.5	.185 4.7	.185 4.7	.280 7.1	.098 2.5	.185 4.7	.185 4.7	.280 7.1
Fixed position, EH=rear EV=front	EH	EV	EH	EV	EH	EV	EH	EV	EH	EV	EH	EV
Operating force, $\leq$ grams $\leq ???$	100	45	85	40	110	50	95	40	115	60	95	50
Pre-travel, $\leq$ inches $\leq$ mm	.177 4.5	.354 9	.197 5	.394 10	.177 4.5	.354 9	.197 5	.394 10	.177 4.5	.354 9	.197 5	.394 10
Overtravel, min. inches min. mm	.030 0.75	.049 1.25	.030 0.75	.059 1.5	.030 0.75	.049 1.25	.030 0.75	.059 1.5	.030 0.75	.049 1.25	.030 0.75	.059 1.5
Overtravel, max. inches max. mm	.059 1.5	.098 2.5	.059 1.5	.118 3	.059 1.5	.098 2.5	.059 1.5	.118 3	.059 1.5	.098 2.5	.059 1.5	.118 3
Movement diff. $\leq$ inches $\leq$ mm	.035 0.9	.059 1.5	.047 1.2	.071 1.8	.028 0.7	.059 1.5	.039 1	.071 1.8	.028 0.7	.059 1.5	.039 1	.071 1.8
Free position, $\leq$ inches $\leq$ mm	.551 14	.709 18	.591 15	.787 20	.748 19	.866 22	.787 20	.945 24	.748 19	.866 22	.787 20	.945 24
Operating position, inches Tolerance inches $\pm$	.421 .063	.472 .118	.437 .071	.492 .138	.622 .063	.669 .118	.638 .071	.689 .138	.630 .063	.677 .118	.646 .071	.697 .138
Operating position, mm Tolerance mm $\pm$	10.7 1.6	12 3	11.1 1.8	12.5 3.5	15.8 1.6	17 3	16.2 1.8	17.5 3.5	16 1.6	17.2 3	16.4 1.8	17.7 3.5
Order code	B	B2	B1	B3	C	C2	C1	C3	E	E2	E1	E3


MECHANICAL OUTLINES

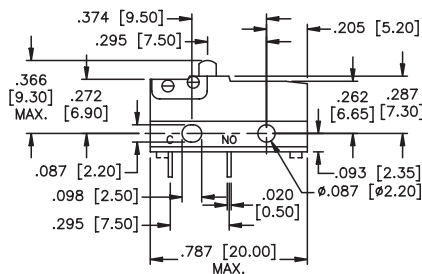


Normally open




Side view (w/solder terminal)

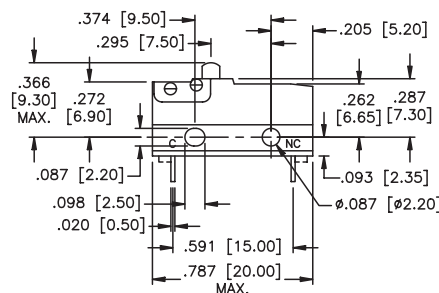

Normally closed

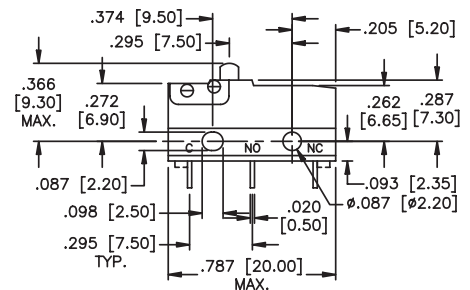

Change-over



P.C. terminal

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9