


Copyright FCI.


**CONFIDENTIAL**

spec ref	-	dr	Louis Ng	2011/05/11	projection	MM	size	A3	scale	5:2	
tolerance std	ISO 406 ISO 1101	eng	Guat-Lian Loo	2012/10/10			ecn no	ELX-S-005680-1			
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	-	-			rel level	Released			
surface	✓	appr	Chen-Hong Tan	2012/10/10	product family	SCA-2	rel level	Released			
ISO 1302	linear	0.X	±.3		SCA-2 PLUG CONNECTOR		dwg no	71292		rev	U
		0.XX	±.13		STRADDLE MOUNT						
	angular	0°	±2°		cat. no.	-	Product - Customer Drw	sheet 1 of 4			


PRODUCT NO.  
SEE TABLE

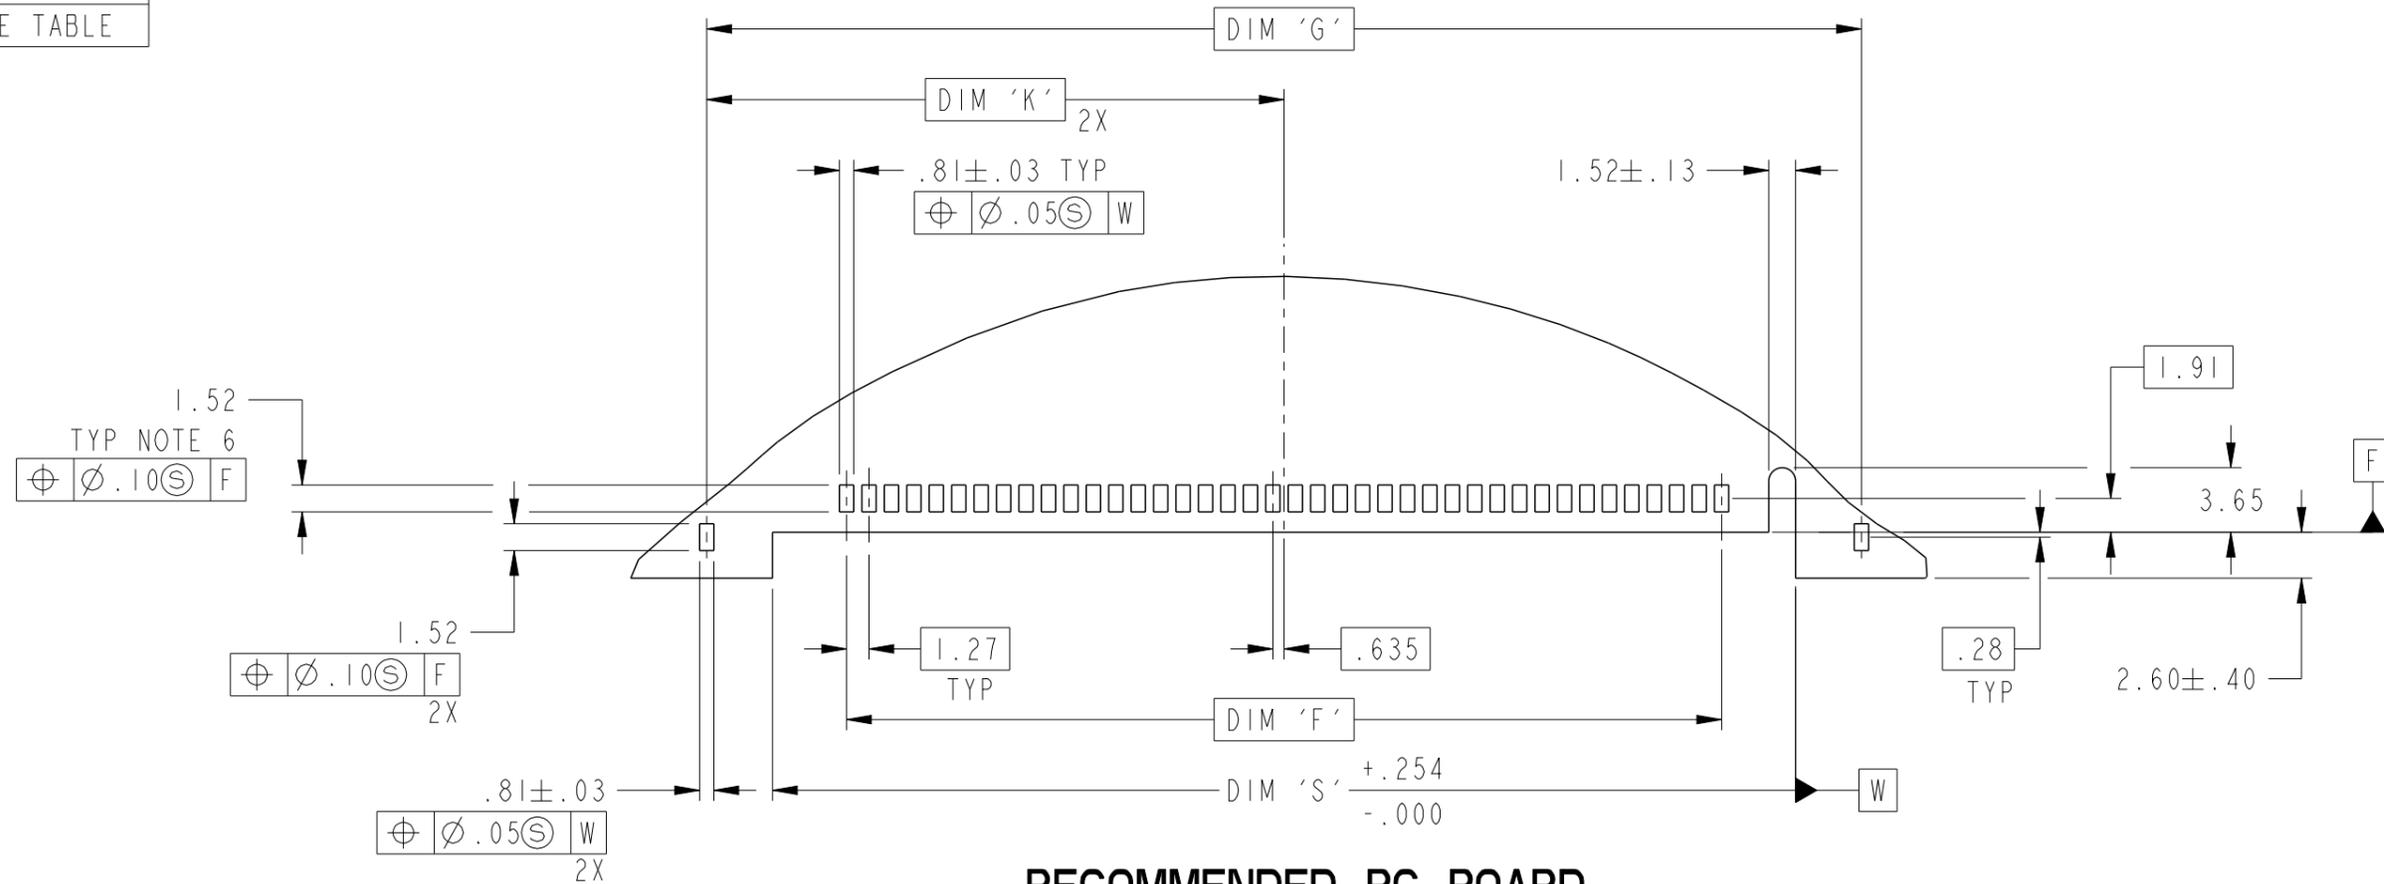


**RECOMMENDED PC BOARD  
MOUNTING DIMENSIONS**

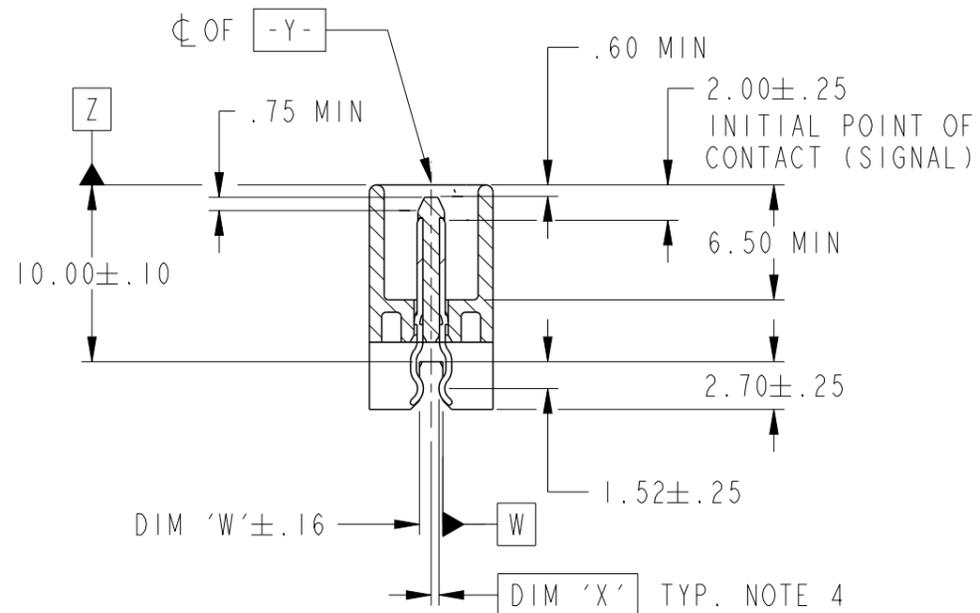

SECTION X-X  
SCALE 5:2

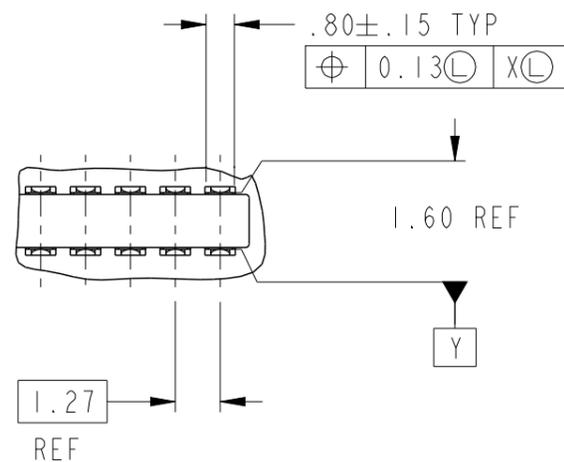

DETAIL A  
SCALE 5:1

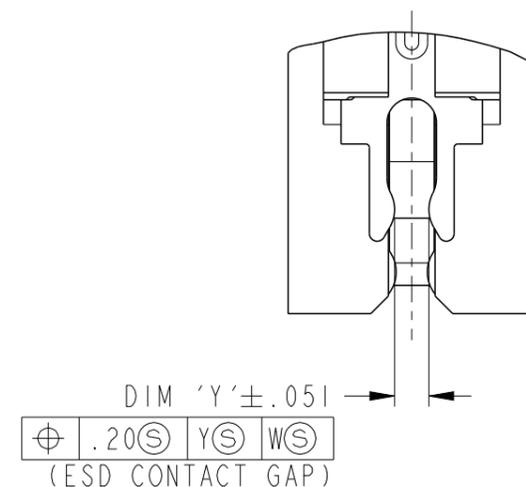

DETAIL B  
SCALE 5:1

**CONFIDENTIAL**

spec ref	-	dr	Louis Ng	2011/05/11	projection	MM	size	A3	scale	5:2	
tolerance std	ISO 406 ISO 1101	eng	Guat-Lian Loo	2012/10/10			ecn no	ELX-S-005680-1	rel level	Released	
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	-	appr							Chen-Hong Tan
surface	ISO 1302	linear	0.X	±.3				dwg no	71292	rev	U
			0.XX	±.13	SCA-2 PLUG CONNECTOR STRADDLE MOUNT						
		angular	0°	±2°	www.fci.com	cat. no.	-	Product - Customer Drw	sheet 2 of 4		

PRODUCT NO.	NO. POS.	RECOMMENDED PCB THICKNESS	DIM A REF	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	DIM H	DIM J	DIM K	POS. N	POS. P	POS. R	DIM S	DIM T	DIM U	DIM V	DIM W	DIM X	DIM Y	PLATING
71292-001	80	1.19	62.15	51.17	55.27	57.87	63.30	49.53	65.36	66.50	66.40	32.68	41	40	80	57.91	57.82	28.88	1.32	1.30	0.44	0.97	NOTE 2
-001S																							-101S
71292-002	40	1.19	36.75	25.77	29.87	32.47	37.90	24.13	39.95	41.10	41.00	19.98	21	20	40	32.52	32.41	16.20	1.32	1.30	0.44	0.97	NOTE 2
-002S																							-102S
71292-003S	80	1.57	62.15	51.17	55.27	57.87	63.30	49.53	65.36	66.50	66.40	32.68	41	40	80	57.91	57.82	28.88	1.83	1.83	0.72	1.52	NOTE 2
-103S																							NOTE 10
71292-004S	40	1.57	36.75	25.77	29.87	32.47	37.90	24.13	39.95	41.10	41.00	19.98	21	20	40	32.52	32.41	16.20	1.83	1.83	0.72	1.52	NOTE 2
-104S																							NOTE 10



NOTES:

1. HOUSING : LCP, UL94V-0 RATED, COLOR: BLACK  
 CONTACTS: PHOSPHOR-BRONZE  
 ESD CONTACT: PHOSPHOR-BRONZE

2. PLATING:  
 CONTACTS: 0.76µm (30µ") MIN GXT IN CONTACT AREA,  
 2.54µm (100µ") MIN TIN-LEAD ON P.C. BOARD LEG,  
 1.27µm (50µ") MIN NICKEL UNDERPLATE OVER ENTIRE  
 TERMINAL.  
 ESD CONTACT: 2.54µm (100µ") MIN TIN-LEAD  
 PLATING W/1.27µm (50µ") NICKEL UNDERPLATE.

③ MEASURED AT THE FLOOR OF THE CAVITY MEASURED  
 6mm FROM DATUM -Z-

④ APPLIES TO ALL SURFACES OF CONTACT TAILS.

⑤ MAXIMUM BOARD THICKNESS THAT CONNECTOR CAN  
 ACCOMODATE IS DEFINED BY DIM 'V'.

⑥ THESE DIMENSIONS RESULT IN THE CONTACT RESTING  
 IN CENTER OF PAD WIDTH. THESE DIMENSIONS ARE  
 SUBJECT TO CHANGE DEPENDING ON CUSTOMER'S  
 MANUFACTURING PREFERENCES IN PROCESS SOLDER  
 PLACEMENT AND REFLOW.

⑦ DATE CODE IN THIS AREA.

⑧ MEASUREMENT MADE AT CENTER OF PART, MAY BE  
 AS LOW AS 6.55. DESIGN TO BE MADE TO ACHIEVE  
 THE NOMINAL DIMENSION ACROSS THE ENTIRE PART.

⑨ DISTANCE MEASURED ACROSS CONTACT MATING SURFACES  
 ALONG EFFECTIVE MATING AREA AND CONTACT MUST BE  
 ABOVE PLASTIC ALONG EFFECTIVE MATING AREA.

10. PLATING:  
 CONTACTS: 0.76µm (30µ") MIN GOLD IN CONTACT AREA,  
 2.54µm (100µ") MIN TIN-LEAD ON P.C. BOARD LEG,  
 1.27µm (50µ") MIN NICKEL UNDERPLATE OVER ENTIRE  
 TERMINAL.  
 ESD CONTACT: 2.54µm (100µ") MIN TIN-LEAD  
 PLATING W/1.27µm (50µ") NICKEL UNDERPLATE.

11. PART NUMBERS ENDING IN -0xx OR -0xxS OR -1xxS ARE  
 MANUFACTURED WITH BRIGHT FINISH TIN-LEAD PLATING  
 IN P.C. BOARD LEG AREA.

**CONFIDENTIAL**

spec ref	-	dr	Louis Ng	2011/05/11	projection	MM	size	A3	scale	5:2	
tolerance std	ISO 406 ISO 1101	eng	Guat-Lian Loo	2012/10/10			ecn no	ELX-S-005680-1			
	TOLERANCES UNLESS OTHERWISE SPECIFIED	chr	-	-				rel level	Released		
surface	linear	appr	Chen-Hong Tan	2012/10/10	product family	SCA-2	dwg no	71292		rev	U
	angular	www.fci.com		cat. no.	-		Product - Customer Drw		sheet 3 of 4		

PRODUCT NO.	NO. POS.	RECOMMENDED PCB THICKNESS	DIM A REF	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	DIM H	DIM J	DIM K	POS. N	POS. P	POS. R	DIM S	DIM T	DIM U	DIM V	DIM W	DIM X	DIM Y	PLATING
71292-001LF	80	1.19	62.15	51.17	55.27	57.87	63.30	49.53	65.36	66.50	66.40	32.68	41	40	80	57.91	57.82	28.88	1.32	1.30	0.44	0.97	NOTE 16
-201LF																							NOTE 12
71292-002LF	40	1.19	36.75	25.77	29.87	32.47	37.90	24.13	39.95	41.10	41.00	19.98	21	20	40	32.52	32.41	16.20	1.32	1.30	0.44	0.97	NOTE 16
-202LF																							NOTE 12
71292-003LF	80	1.57	62.15	51.17	55.27	57.87	63.30	49.53	65.36	66.50	66.40	32.68	41	40	80	57.91	57.82	28.88	1.83	1.83	0.72	1.52	NOTE 16
-203LF																							NOTE 12
71292-004LF	40	1.57	36.75	25.77	29.87	32.47	37.90	24.13	39.95	41.10	41.00	19.98	21	20	40	32.52	32.41	16.20	1.83	1.83	0.72	1.52	NOTE 16
-204LF																							NOTE 12



NOTES:

- 12. PLATING: CONTACT: 0.76µm (30µ") MIN GOLD IN CONTACT AREA, 2.54µm (100µ") - 5.08µm (200µ") TIN (LEAD-FREE) ON P.C. BOARD LEG, 1.27µm (50µ") MIN NICKEL UNDERPLATE OVER ENTIRE TERMINAL. ESD CONTACT: 2.54µm (100µ") - 5.08µm (200µ") TIN PLATING (LEAD-FREE) WITH 1.27µm (50µ") NICKEL UNDERPLATE.
- ⑬. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
- ⑭. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- 15. PART NUMBERS ENDING IN "LF" MEANS FOR NOTE 14 LEAD FREE IDENTIFICATION. P/N XXXXX-2XXLF IS EQUIVALENT TO PREVIOUS P/N XXXXX-2XX.
- 16. PLATING: CONTACT: 0.76µm (30µ") MIN GXT IN CONTACT AREA, 2.54µm (100µ") - 5.08µm (200µ") TIN (LEAD-FREE) ON P.C. BOARD LEG, 1.27µm (50µ") MIN NICKEL UNDERPLATE OVER ENTIRE TERMINAL. ESD CONTACT: 2.54µm (100µ") - 5.08µm (200µ") TIN PLATING (LEAD-FREE) WITH 1.27µm (50µ") NICKEL UNDERPLATE.
- 17. A SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

**CONFIDENTIAL**

spec ref	-	dr	Louis Ng	2011/05/11	projection	MM	size	A3	scale	5:2	
tolerance std	ISO 406 ISO 1101	eng	Guat-Lian Loo	2012/10/10		← →	ecn no	ELX-S-005680-1			
	TOLERANCES UNLESS OTHERWISE SPECIFIED	chr	-	-			product family	SCA-2	rel level	Released	
surface	✓	appr	Chen-Hong Tan	2012/10/10	FCj		dwg no	71292		rev	U
	linear	0.X ±.3		www.fci.com		cat. no.	-		Product - Customer Drw		sheet 4 of 4
		0.XX ±.13									
		0.XXX ±.051									
	angular	0° ±2°									



Copyright FCI.

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9