

SPECIFICATIONS

MAKE-BEFORE-BREAK

MATERIALS:
ACTUATOR— THERMOPLASTIC, UL94HB
TERMINAL BOARD— PHENOLIC LAMINATED SHEET, UL94HB, NATURAL
FRAME— STEEL, NICKEL PLATE
TERMINAL/FIXED CONTACT— COPPER ALLOY, GOLD OR SILVER OVER NICKEL PLATE
MOVING CONTACT— COPPER ALLOY, GOLD OR SILVER OVER NICKEL PLATE
DETENT BALL— STEEL
COIL SPRING— GALVANIZED SPRING WIRE
LEVER,(K SERIES ONLY)— ALUMINUM
SEAL— EPOXY







ELECTRICAL:
CONTACT RATING— .4VA@20VDC OR PEAK AC (GOLD); 300mA@125V AC (SILVER)
INITIAL CONTACT RESISTANCE— 30 milliohm max.
FINAL CONTACT RESISTANCE— 100 milliohm max. (AFTER TEST)
INSULTAION RESISTANCE— 1,000 Megohms min.
DIELECTRIC STRENGTH— 500V RMS@SEA LEVEL
LIFE EXPECTANCY— 15,000 CYCLES MIN.

MECHANICAL:
ACTUATION FORCE- 600+/-300 GRAMS
TRAVEL- SEE P/N TABLE

ENVIRONMENTAL:
OPERATING TEMPERATURE- -20 TO +85 DEGREES C
STORAGE TEMPERATURE- -40 TO +100 DEGREES C
RESISTANCE TO SOLDER HEAT PER 109-202, CONDITION B
SOLDERABILITY PER EIA-364-52, CLASS 2, CATEGORY 1, 95% MIN COVERAGE



NOTES:

- | | |
|---|--|
| 1 | COUNTRY OF ORIGIN AND TE CONNECTIVITY LOGO LOCATED APPROXIMATELY AS SHOWN |
| 2 | ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS) |
| 3 | ANTI SOLDER WICK SEAL AT TERMINAL TO BOARD INTERFACE |
| 4 | ALL PERFORMANCE TESTING WAS DONE IN ACCORDANCE TO TE CONNECTIVITY SPECIFICATION 102-2469 |
| 5 | OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI |




OBSOLETE 	1-1825289-1	MHS233KG04	DP3T	2.00	GOLD	—	6-5 2-1	—	7-6 3-2	—	8-6 4-2
	1-1825289-0	MHS233K04	DP3T	2.00	SILVER	—	6-5 2-1	—	7-6 3-2	—	8-6 4-2
	1825289-9	MHS233G04	DP3T	2.00	GOLD	—	6-5 2-1	—	7-6 3-2	—	8-6 4-2
	1825289-8	MHS23304	DP3T	2.00	SILVER	—	6-5 2-1	—	7-6 3-2	—	8-6 4-2
	—	MHS223KG04	DPDT	2.00	GOLD	5-4 2-1	—	OFF	—	6-5 3-2	—
	1825289-7	MHS223K04	DPDT	2.00	SILVER	5-4 2-1	—	OFF	—	6-5 3-2	—
	1825289-6	MHS223G04	DPDT	2.00	GOLD	5-4 2-1	—	OFF	—	6-5 3-2	—
	1825289-5	MHS22304	DPDT	2.00	SILVER	5-4 2-1	—	OFF	—	6-5 3-2	—
OBSOLETE 	1825289-4	MHS222KG04	DPDT	4.00	GOLD	5-4 2-1	—	NONE	—	6-5 3-2	—
	1825289-3	MHS222K04	DPDT	4.00	SILVER	5-4 2-1	—	NONE	—	6-5 3-2	—
	1825289-2	MHS222G04	DPDT	4.00	GOLD	5-4 2-1	—	NONE	—	6-5 3-2	—
	1825289-1	MHS22204	DPDT	4.00	SILVER	5-4 2-1	—	NONE	—	6-5 3-2	—
	PART NO.	T&B PART NO.	TYPE	TRAVEL	PLATING						
						1 2 3 4 5 6	1 234 5 678	1 2 3 4 5 6	1 234 5 678	1 2 3 4 5 6	1 234 5 678

TERMINALS CONNECTED WHEN SLIDE IS
IN POSITION SHOWN.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. BROWN CHK M. SARVER		21DEC005 21DEC005		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0. PLC ± — 1. PLC ± 0.3 [0.12] 2. PLC ± — 3. PLC ± — 4. PLC ± — ANGLES ± 1° FINISH —		NAME SLIDE SWITCH, MHS SERIES, DOUBLE POLE, VERTICAL		SIZE A1	
MATERIAL —		WEIGHT —		CAGE CODE 00779		DRAWING NO 1825289	
CUSTOMER DRAWING		SCALE 4:1		SHEET 1 OF 2		REV B.3	

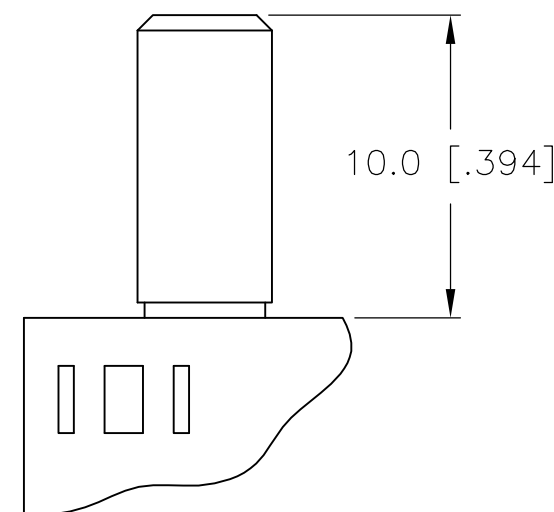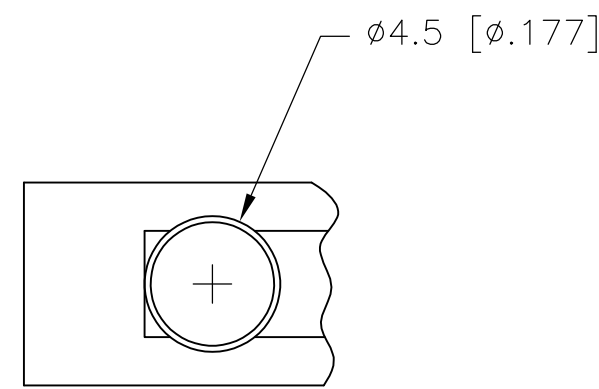


MHS222K & MHS223K
LEVER

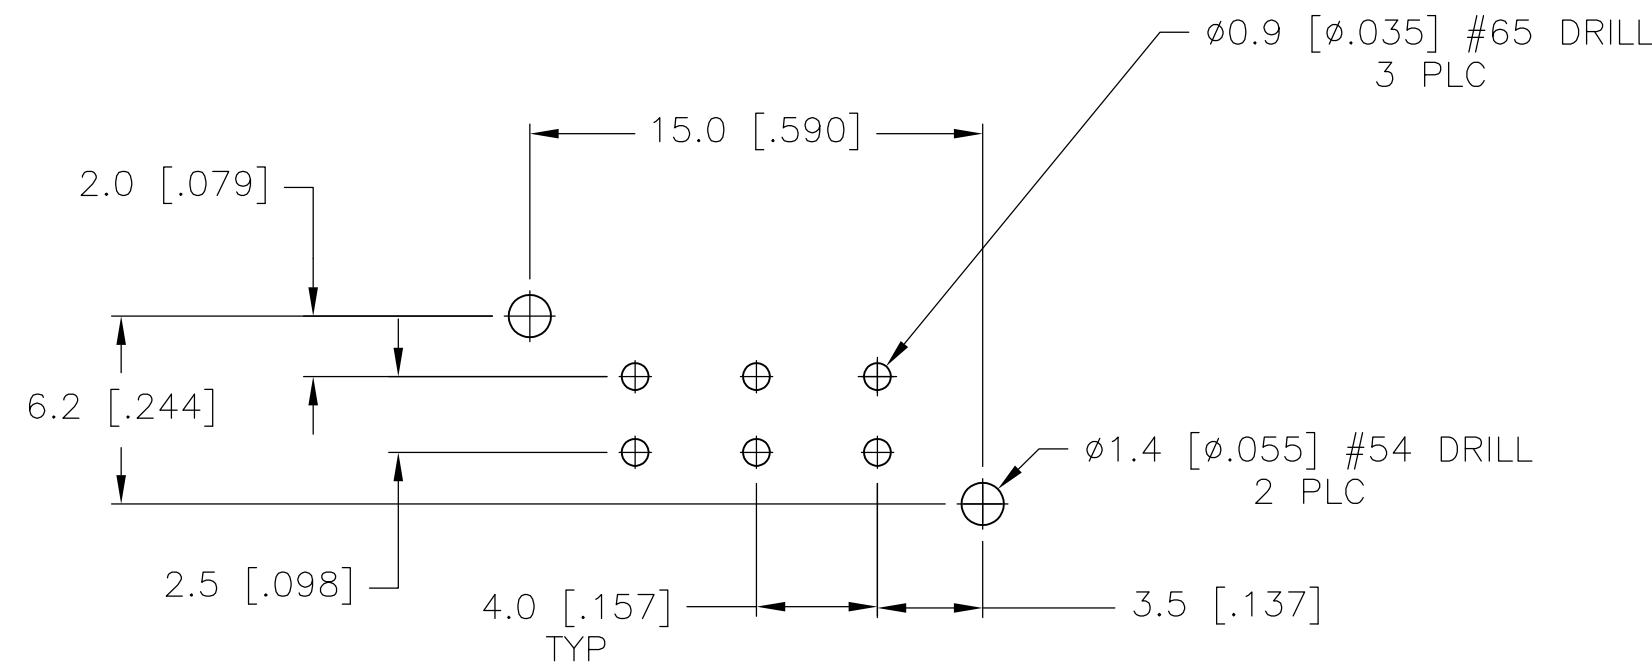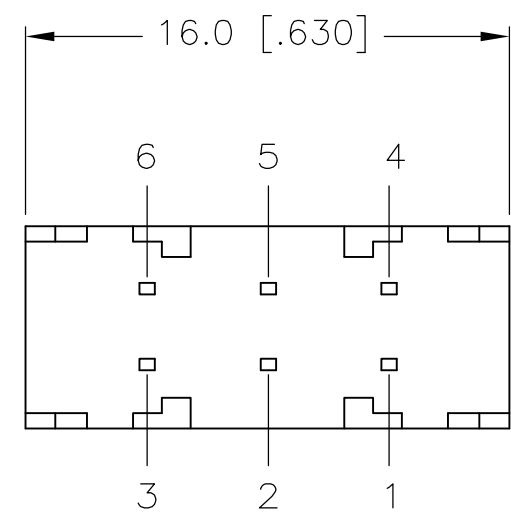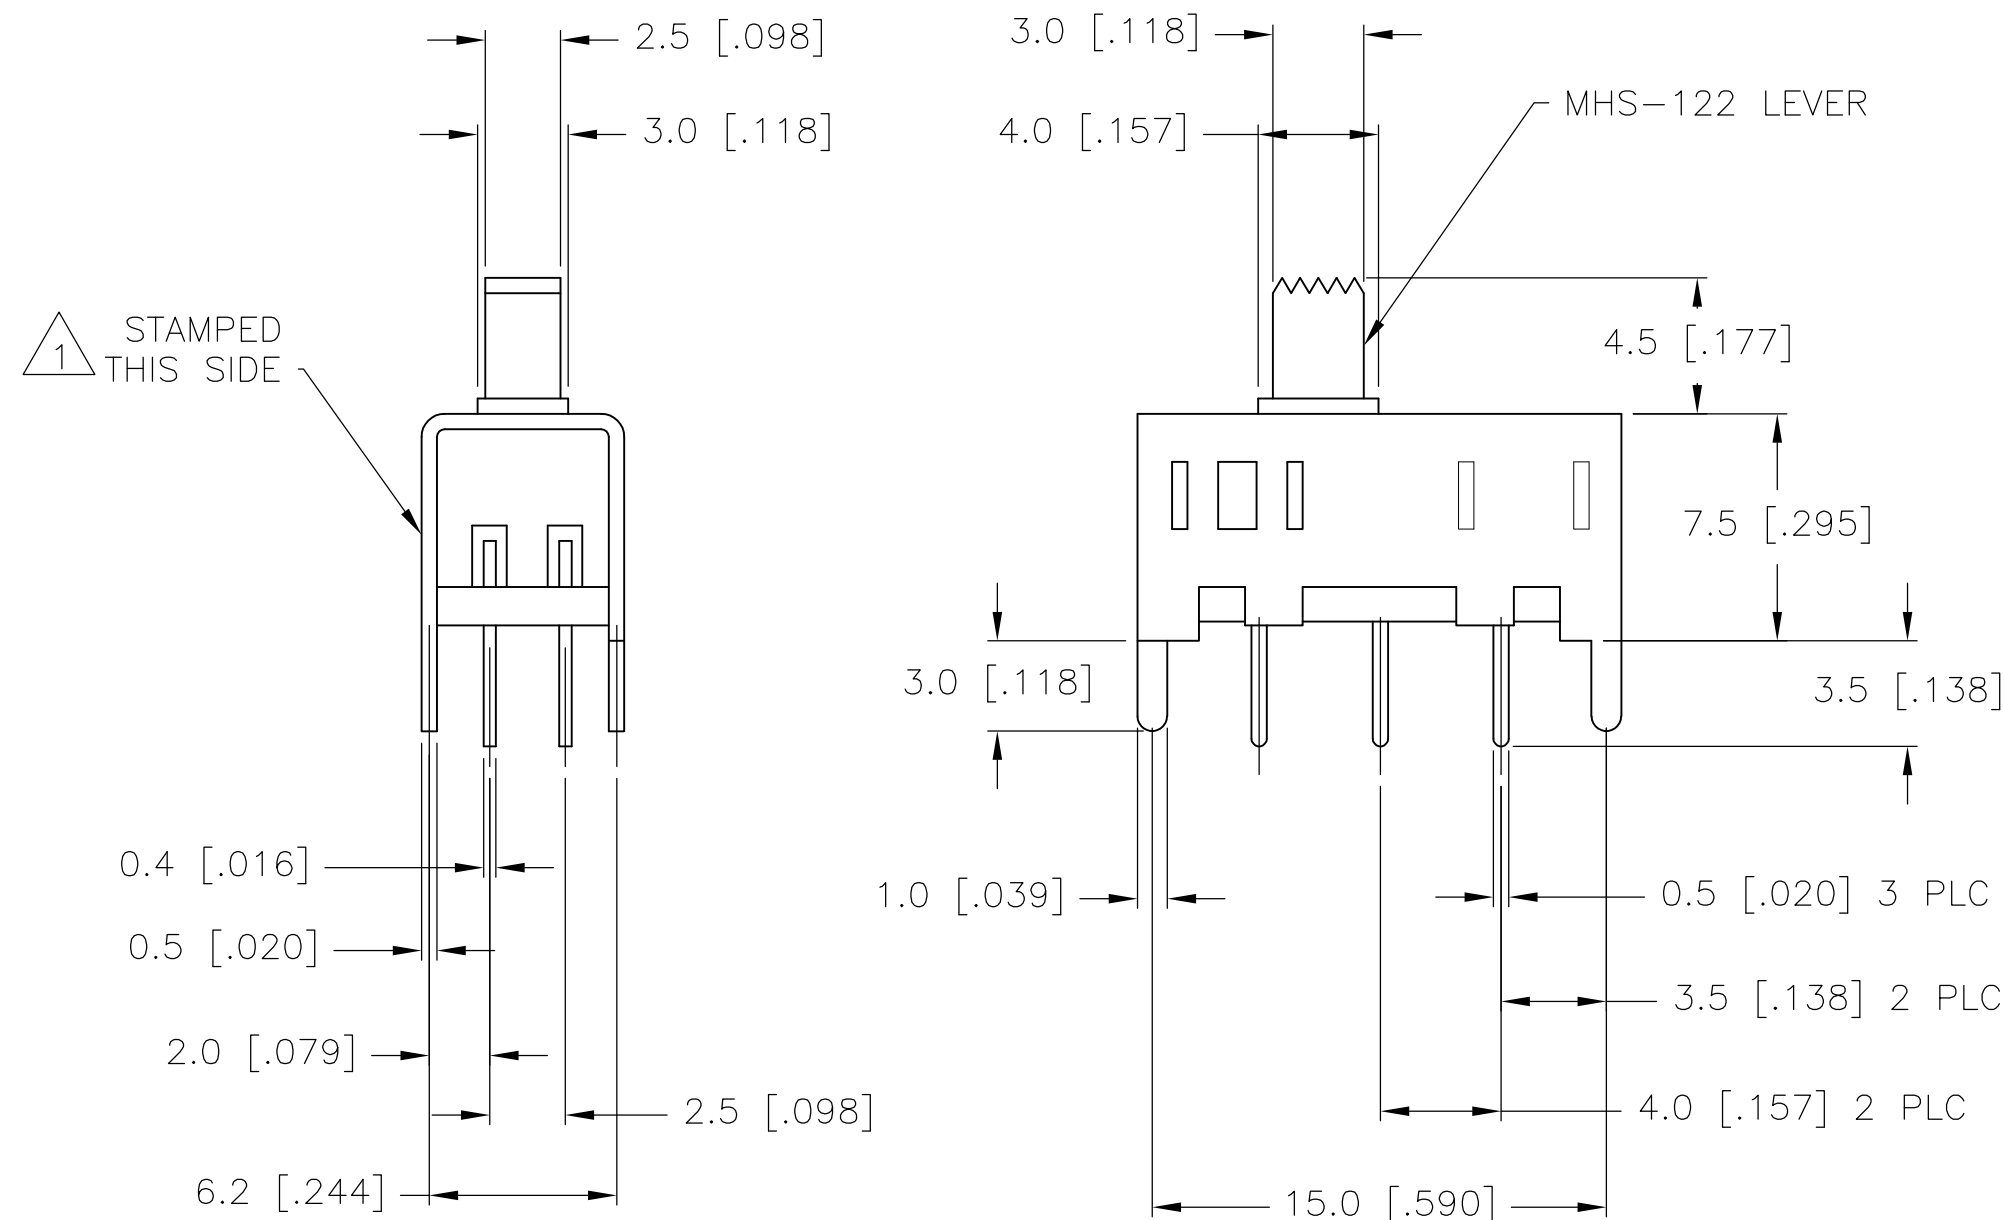

RECOMMENDED BOARD LAYOUT
PC LAYOUT TOLERANCE: ± 0.002

MHS222 & MHS223 SERIES SWITCH

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

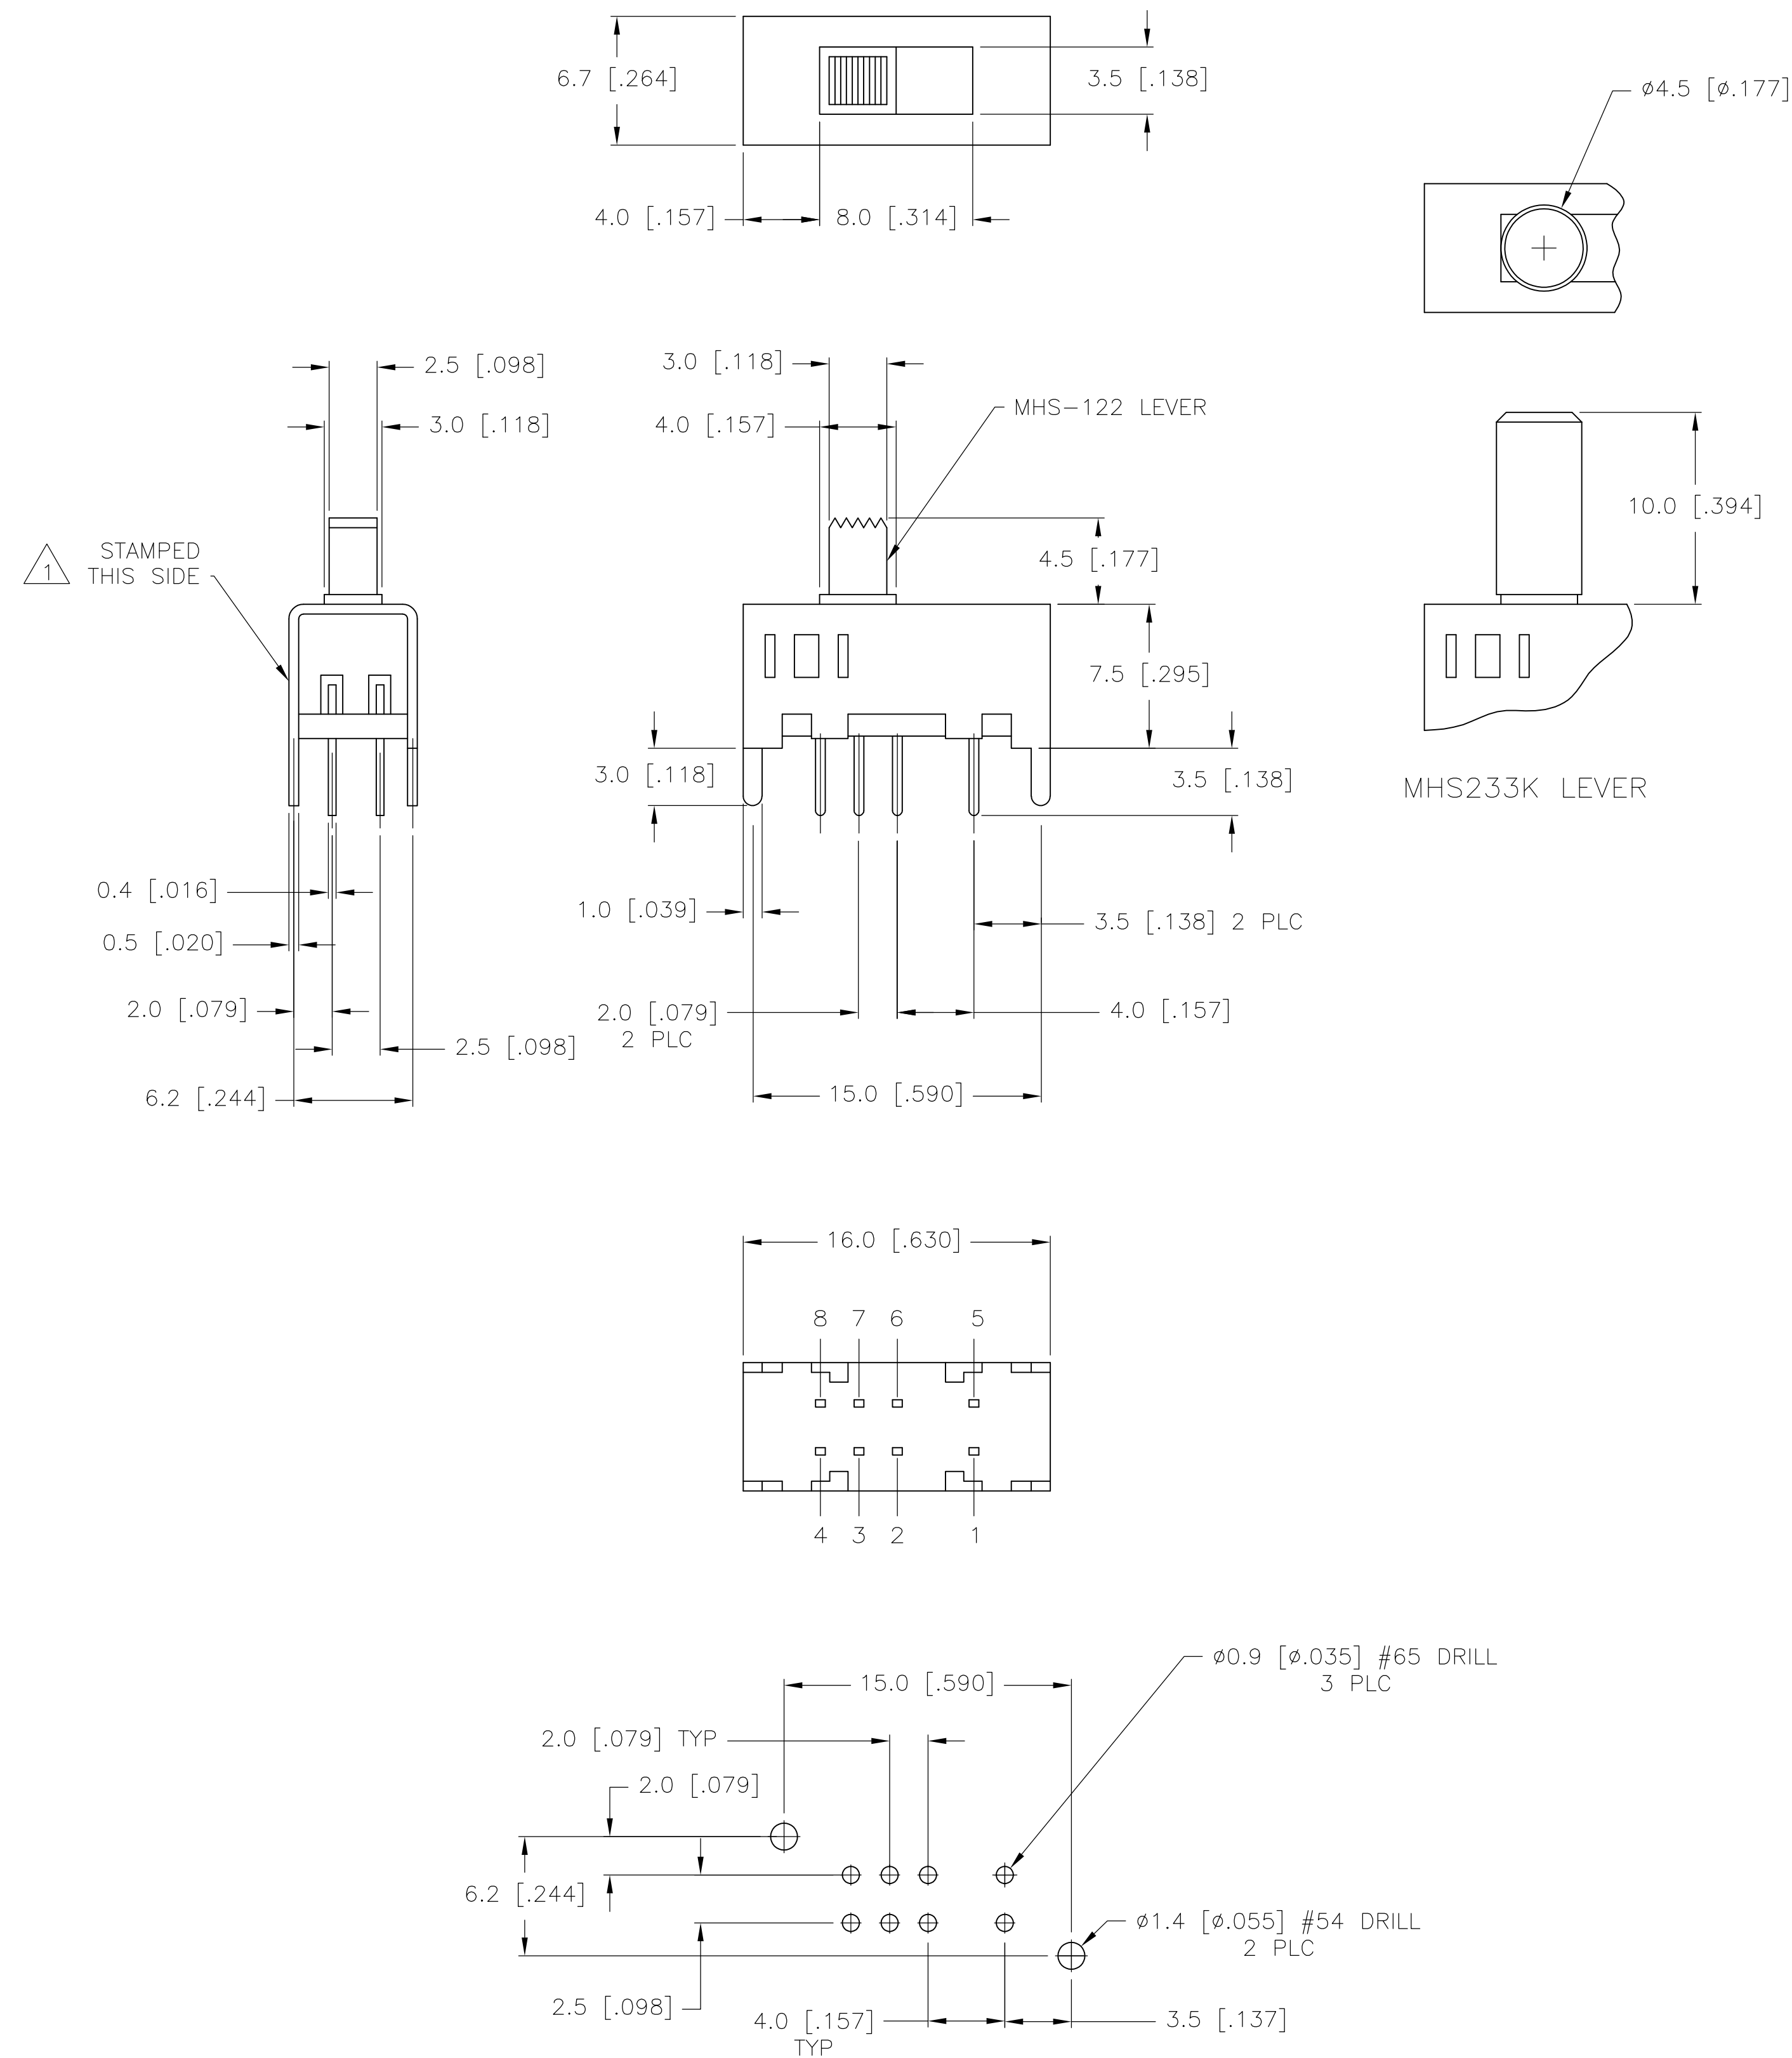

SPECIFICATIONS MAKE-BEFORE-BREAK

MATERIALS:

ACTUATOR- THERMOPLASTIC, UL94HB
 TERMINAL BOARD- PHENOLIC LAMINATED SHEET, UL94HB, NATURAL
 FRAME- STEEL, NICKEL PLATE
 TERMINAL/FIXED CONTACT- COPPER ALLOY, GOLD OR SILVER OVER NICKEL PLATE
 MOVING CONTACT- COPPER ALLOY, GOLD OR SILVER OVER NICKLE PLATE
 DETENT BALL- STEEL
 COIL SPRING- GALVANIZED SPRING WIRE
 LEVER,(K SERIES ONLY)- ALUMINUM
 SEAL- EPOXY

ELECTRICAL:

CONTACT RATING— .4VA@20VDC OR PEAK AC (GOLD); 300mA@125V AC (SILVER)
INITIAL CONTACT RESISTANCE— 30 milliohm max.
FINAL CONTACT RESISTANCE— 100 milliohm max. (AFTER TEST)
INSULATION RESISTANCE— 1,000 Megohms min.
DIELECTRIC STRENGTH— 500V RMS@SEA LEVEL
LIFE EXPECTANCY— 15,000 CYCLES MIN.

MECHANICAL:

ACTUATION FORCE- 600+/-300 GRAMS
TRAVEL- SEE P/N TABLE

ENVIRONMENTAL:

OPERATING TEMPERATURE- -20 TO +85 DEGREES C
STORAGE TEMPERATURE- -40 TO +100 DEGREES C
RESISTANCE TO SOLDER HEAT PER 109-202, CONDITION B
SOLDERABILITY PER EIA-364-52, CLASS 2, CATEGORY 1, 95% MIN COVERAGE

NOTES:

1. COUNTRY OF ORIGIN AND TE CONNECTIVITY LOGO PER TEC-202-36 LOCATED APPROXIMATELY AS SHOWN
2. ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS)
3. ANTI SOLDER WICK SEAL AT TERMINAL TO BOARD INTERFACE
4. ALL PERFORMANCE TESTING WAS DONE IN ACCORDANCE TO TE CONNECTIVITY SPECIFICATION 102-2469

THIS DRAWING IS A CONTROLLED DOCUMENT.						OWN R BROWN		210DEC05				TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK M. SARVER		210DEC05		NAME		SLIDE SWITCH, MHS SERIES, DOUBLE POLE, VERTICAL			
				APVD M. SARVER		210DEC05							
		0 PLG ± — [012] 1 PLG ± — 2 PLG ± — 3 PLG ± — ANGLES ± 1° FINISH —		PRODUCT SPEC									
				APPLICATION SPEC									
MATERIAL —				WEIGHT —				SIZE A1		CAGE CODE 100779		DRAWING NO C-1825289	
										RESTRICTED TO —			
CUSTOMER DRAWING								SCALE 4:1		SHEET 2 OF 2		REV B	

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9