


## Accessories Industrial Power Relay RT

- For Industrial Power Relay RT  
pinnings 3.5mm / 5mm; relay height 15.7 mm
- New retainer clip with ejection function
- Easy replacement of relays on a densely packed DIN rail
- No reduction of protection class or creepage/clearance with plastic retainer
- Simple plug-in indicator- and protection modules
- White snap-on marking tags
- RoHS compliant (Directive 2002/95/EC)


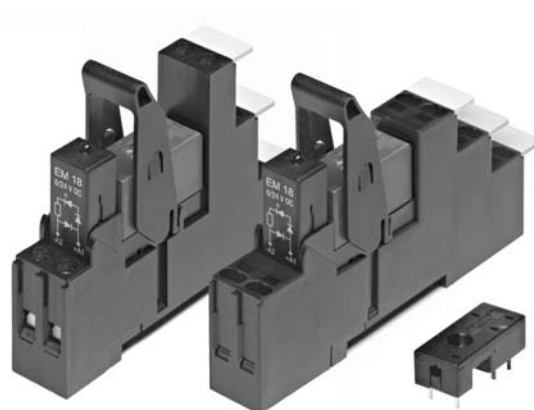


F0228-F

### Premium socket with screwless terminals for DIN rail mounting

**RT 78 72P** Premium socket, logical terminal arrangement

- Screwless Clamps
- Mounting of solid wires without tool
- Double Clamps per terminal
- Jumper links for interconnection
- Open coil circuit for active modules
- Logical terminal arrangement

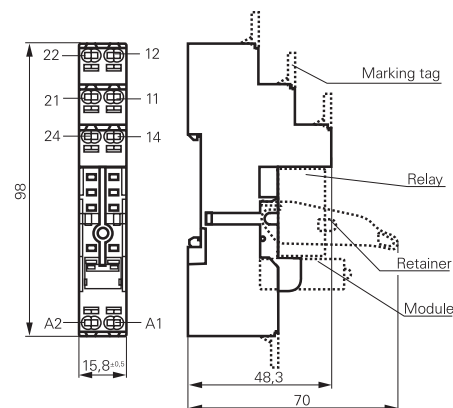

### Approvals


VDE REG.-Nr. 6106, cULus E135149

### Technical data

|                                           |                 |
|-------------------------------------------|-----------------|
| Rated current                             | 2 x 8 A, 16 A*) |
| Rated voltage / max. switching voltage AC | 240/400 VAC     |
| Dielectric strength coil-contact circuit  | 5000 Vrms       |
| open contact circuit                      | 1000 Vrms       |
| adjacent contact circuits                 | 2500 Vrms       |
| Clearance / creepage coil-contact circuit | ≥ 10 / 10 mm    |
| Material group of insulation parts        | ≥ IIIa          |
| Insulation to IEC 60664-1                 |                 |
| Type of insulation coil-contact circuit   | reinforced      |
| open contact circuit                      | functional      |
| adjacent contact circuits                 | functional      |
| Rated insulation voltage                  | 250 V           |
| Pollution degree                          | 2               |
| Rated voltage system                      | 230/400 V       |
| Overvoltage category                      | III             |
| RoHS - Directive 2002/95/EC               | compliant       |
| Degree of protection DIN 40050            | IP20            |

\*) For 1 pole relays (16 A) the relay terminals 11-21, 12-22 and 14-24 have to be bridged.

- Not suitable for bistable relays with 2 coils!

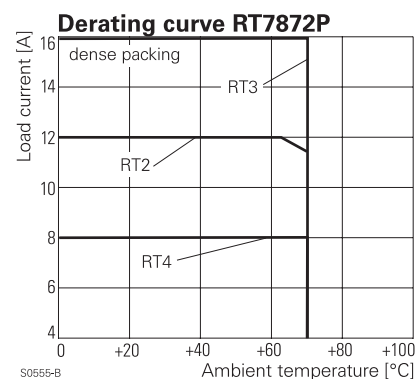

## Accessories Industrial Power Relay RT (Continued)

### Technical data (Continued)

|                                                 |                                                              |
|-------------------------------------------------|--------------------------------------------------------------|
| Ambient temperature range                       |                                                              |
| for mounting/handling                           | -20...+70°C                                                  |
| in operation                                    | -40...+70°C                                                  |
| Terminals                                       | screwless                                                    |
| Wire strip length                               | 12 mm                                                        |
| Wire cross section                              |                                                              |
| solid wire                                      | 1 x 0.75/1/1.5 mm <sup>2</sup><br>2 x 0.75/1 mm <sup>2</sup> |
| with standard isolation (no oversize isolation) | 2 x 1.5 mm <sup>2</sup>                                      |
| stranded wire                                   |                                                              |
| without bootlace crimp                          | 1 x 0.75/1/1.5 mm <sup>2</sup><br>2 x 0.75/1 mm <sup>2</sup> |
| without bootlace crimp with standard isolation  | 2 x 1.5 mm <sup>2</sup>                                      |
| with bootlace crimp                             | 1 x 0.75/1 mm <sup>2</sup><br>2 x 0.75 mm <sup>2</sup>       |
| with bootlace crimp without isolation           | 1 x 1.5 mm <sup>2</sup>                                      |
| or isolation min 18 mm long                     |                                                              |

For stranded wires with braids 0.05 mm or smaller the use of bootlace crimps is recommended. When using stranded wires without bootlace crimp the clamp must be opened during insertion.

|                            |                  |
|----------------------------|------------------|
| Insertion cycles           | A (10)           |
| Max. Insertion Force total | 100 N            |
| Mounting distance          | 0, dense packing |
| Weight                     | 36 g             |
| Packaging unit             | 10 pcs           |




### Socket with screwless terminals for DIN rail mounting

| Type             |                                                                                                                        | Part Number |
|------------------|------------------------------------------------------------------------------------------------------------------------|-------------|
| <b>RT 78 72P</b> | Premium socket, logical terminal arrangement<br>Socket with screwless terminals,<br>pinning 5 mm for DIN rail mounting | 1860200-1   |


### Accessories for RT 78 72P

| Type             |                                           | Part Number |
|------------------|-------------------------------------------|-------------|
| <b>RT 17 017</b> | Plastic retaining clip, relay height 15.7 | 2022103-1   |
| <b>RT 17 040</b> | Marking tag                               | 2-1415038-1 |
| <b>RT 17 0P1</b> | Jumper link, max load 12 A                | 1860211-1   |

### How to use, Precautions

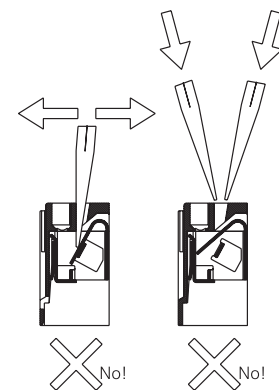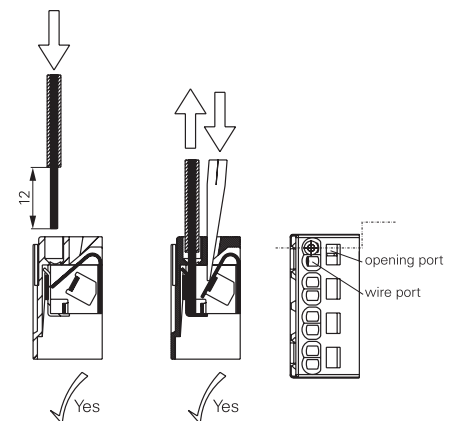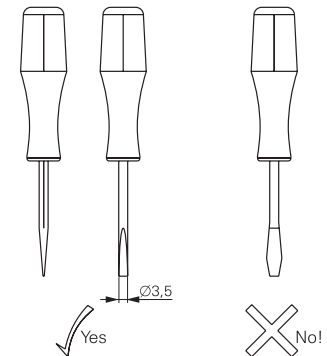

### Jumper link

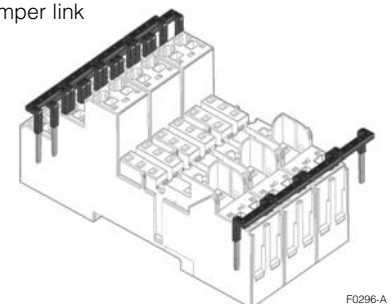


## Accessories Industrial Power Relay RT (Continued)

### Socket with screw-type terminals for DIN rail mounting

**RT 78 724** Socket with screw-type terminals, pinning 3.5 mm for DIN rail mounting


**RT 78 726** Socket with screw-type terminals, pinning 5 mm for DIN rail mounting, logical terminal arrangement

- Din-rail socket with logical setup of connections (input/output)
- High quality rising clamp terminals
- Captive combination terminal screws
- Jumper bars for interconnection

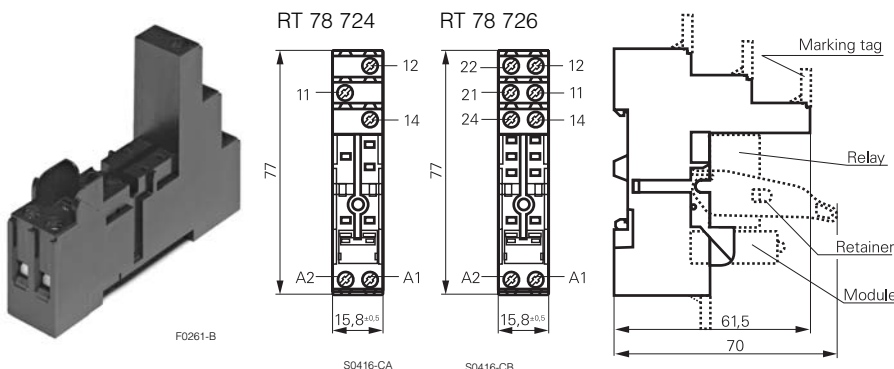

**RT 78 725** Socket with screw-type terminals, pinning 5 mm for DIN rail mounting, conventional terminal arrangement

- Conventional terminal arrangement

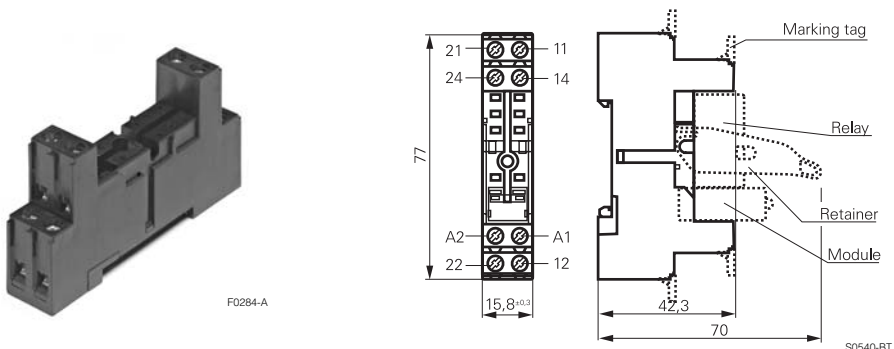

### Approvals

VDE REG.-Nr. 6106 in preparation, cULus E135149

### Technical data RT 78 724 / RT 78 726 RT 78 725


|                                           |                       |                |
|-------------------------------------------|-----------------------|----------------|
| Rated current                             | 12 A, 2 x 8 A, 16 A*) |                |
| Rated voltage / max.switching voltage AC  | 240/400 VAC           |                |
| Dielectric strength coil-contact circuit  | 5000 Vrms             | 4000 Vrms      |
| open contact circuit                      | 1000 Vrms             | 1000 Vrms      |
| adjacent contact circuits                 | 2500 Vrms             | 2500 Vrms      |
| Clearance / creepage coil-contact circuit | ≥ 10 / 10 mm          | ≥ 4.7 / 4.7 mm |
| Material group of insulation parts        | ≥ IIIa                |                |
| Insulation to IEC 60664-1                 |                       |                |
| Type of insulation coil-contact circuit   | reinforced            | basic          |
| open contact circuit                      | functional            |                |
| adjacent contact circuits                 | functional            |                |
| Rated insulation voltage                  | 250 V                 |                |
| Pollution degree                          | 2                     |                |
| Rated voltage system                      | 230/400 V             |                |
| Overvoltage category                      | III                   |                |
| RoHS - Directive 2002/95/EC               | compliant             |                |
| Degree of protection DIN 40050            | IP20                  |                |
| Ambient temperature range                 |                       |                |
| for mounting/handling                     | -20...+70°C           |                |
| in operation                              | -40...+70°C           |                |

\*) For 1 pole relays (16 A) the relay terminals 11-21, 12-22 and 14-24 have to be bridged.

For 1 pole relays (12 A) the relay terminals 11-12-14 have to be connected to the socket terminals 21-12-24

- Not suitable for bistable relays with 2 coils!

### Derating curve RT78724

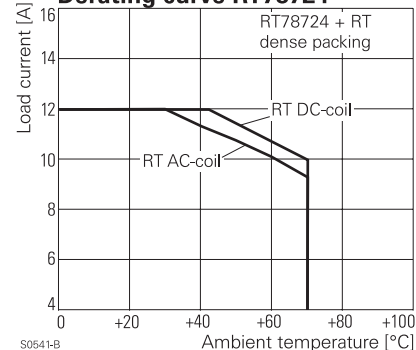

## Accessories Industrial Power Relay RT (Continued)

| Technical data (Continued)           | RT 78 724 / RT 78 726   | RT 78 725 |
|--------------------------------------|-------------------------|-----------|
| Terminals                            | screw                   |           |
| Terminal screw torque acc. IEC 61984 | 0.5 Nm                  |           |
| max.                                 | 0.7 Nm                  |           |
| Wire cross section                   |                         |           |
| single wire                          | 2 x 2.5 mm <sup>2</sup> |           |
| fine wire                            | 2 x 2.5 mm <sup>2</sup> |           |
| with bootlace crimp (DIN 46228/1)    | 2 x 1.5 mm <sup>2</sup> |           |
| Insertion cycles                     | A (10)                  |           |
| Max. Insertion Force total           | 100 N                   |           |
| Mounting distance                    | 0, dense packing        |           |
| Weight                               | 36 g                    |           |
| Packaging unit                       | 10 pcs                  |           |


### Socket with screw-type terminals for DIN rail mounting

| Type                                                                                                                     | Part Number |
|--------------------------------------------------------------------------------------------------------------------------|-------------|
| <b>RT 78 724</b> Socket with screw-type terminals, pinning 3.5 mm for DIN rail mounting, logical terminal arrangement    | 8-1415035-1 |
| <b>RT 78 726</b> Socket with screw-type terminals, pinning 5 mm for DIN rail mounting, logical terminal arrangement      | 6-1415035-1 |
| <b>RT 78 725</b> Socket with screw-type terminals, pinning 5 mm for DIN rail mounting, conventional terminal arrangement | 1860306-1   |


### Accessories for RT 78 724, RT 78 725, RT 78 726

| Type                                                                            | Part Number |
|---------------------------------------------------------------------------------|-------------|
| <b>RT 17 017</b> Plastic retaining clip, relay height 15.7                      | 2022103-1   |
| <b>RT 17 040</b> Marking tag                                                    | 2-1415038-1 |
| <b>RT 17 0R8</b> Jumper bar, max load 12 A for connection of up to 8 RT sockets | 1860517-8   |


Derating curve RT78725

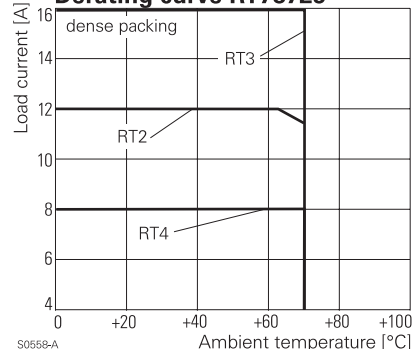

Derating curve RT78726

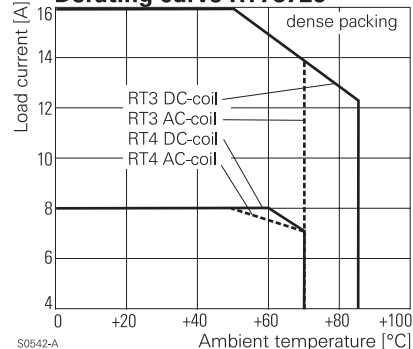


Jumper bar



Marking tags

- White marking area 15.5 x 6 mm
- Snaps on socket in up to 4 positions

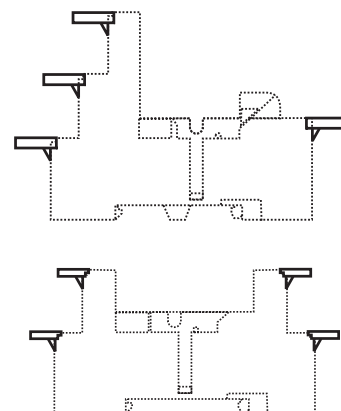

S0540-AC

## Accessories Industrial Power Relay RT (Continued)

### LED- and Protection Modules for RT 78 72P, RT 78 724, RT 78 725, RT 78 726

Easy insertion of module into the socket

Wiring in parallel to the coil

| Type                                                         | Part Number |
|--------------------------------------------------------------|-------------|
| <b>PTM TO 0A0</b> EM09 Protection diode (standard, A1+, A2-) | 9-1415036-1 |
| <b>PTM TO 0L0</b> EM01 Protection diode (A1-, A2+)           | 1415037-1   |
| <b>PTM U0 524</b> EM02 RC-network 6...60 VAC                 | 1-1415037-1 |
| <b>PTM U0 730</b> EM03 RC-network 110...230 VAC              | 2-1415037-1 |
| <b>PTM V0 524</b> EM04 Varistor 24 VAC                       | 3-1415037-1 |
| <b>PTM V0 615</b> EM13 Varistor 115 VAC                      | 6-1415365-1 |
| <b>PTM V0 730</b> EM05 Varistor 230 VAC                      | 4-1415037-1 |
| <b>PTM R0 730</b> EM29 Bleeder Resistor 110...230 VAC        | 1-1415539-2 |

### LED

|                                                                            |             |
|----------------------------------------------------------------------------|-------------|
| <b>PTM L0 024</b> EM18 red LED 6...24 VDC w. prot.diode (std, A1+, A2-)    | 5-1415036-1 |
| <b>PTM G0 024</b> EM12 green LED 6...24 VDC w. prot.diode (std, A1+, A2-)  | 2-1415036-1 |
| <b>PTM L1 024</b> EM08 red LED 6...24 VDC w. prot. diode (A1-, A2+)        | 8-1415036-1 |
| <b>PTM L0 060</b> EM16 red LED 24...60 VDC w. prot.diode (std, A1+, A2-)   | 5-1415539-3 |
| <b>PTM G0 060</b> EM25 green LED 24...60 VDC w. prot.diode (std, A1+, A2-) | 7-1415539-7 |
| <b>PTM L0 110</b> EM19 red LED 60...110 VDC w. prot. diode (A1+, A2-)      | 2-1415392-1 |
| <b>PTM G0 110</b> EM26 green LED 60...110 VDC w. prot diode (A1+, A2-)     | 1-1415539-7 |
| <b>PTM L0 220</b> EM27 red LED 110...220 VDC w. prot. diode (A1+, A2-)     | 1-1415539-4 |
| <b>PTM G0 220</b> EM28 green LED 110...220 VDC w. prot diode (A1+, A2-)    | 1-1415539-6 |
| <b>PTM L0 524</b> EM07 red LED 6...24 VDC/VAC                              | 6-1415036-1 |
| <b>PTM G0 524</b> EM11 green LED 6...24 VDC/VAC                            | 3-1415036-1 |
| <b>PTM L0 560</b> EM14 red LED 24...60 VDC/VAC                             | 1-1415539-3 |
| <b>PTM G0 560</b> EM30 green LED 24...60 VDC/VAC                           | 1-1415539-5 |
| <b>PTM L0 730</b> EM06 red LED 110...230 VAC                               | 7-1415036-1 |
| <b>PTM G0 730</b> EM10 green LED 110...230 VAC                             | 4-1415036-1 |



F0231-A



F0232-A

### Relay Packages

Complete packages consisting of a relay mounted on a socket: see Relay Package RT


## Accessories Industrial Power Relay RT (Continued)

### Sockets for PCB mount

**RP 78 601** Socket with PCB terminals, pinning 3.5 mm




F0116-A

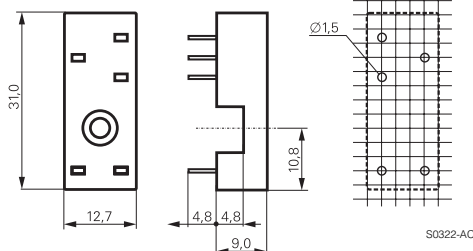

**RP 78 602** Socket with PCB terminals, pinning 5 mm



F0117-A

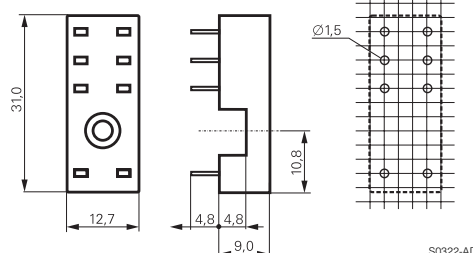

### Approvals

**UL** E135149

### Technical data

#### RP 78 601 / RP 78 602

|                                           |                       |
|-------------------------------------------|-----------------------|
| Rated current                             | 12 A *)               |
| Limiting continuous current               | see derating curve    |
| Rated voltage / max. switching voltage AC | 240/400               |
| Dielectric strength coil-contact circuit  | 4000 V <sub>rms</sub> |
| open contact circuit                      | 1000 V <sub>rms</sub> |
| adjacent contact circuits                 | 2500 V <sub>rms</sub> |
| Clearance / creepage coil-contact circuit | ≥ 10 / 10 mm          |
| Material group of insulation parts        | ≥ IIIa                |
| Insulation to IEC 60664-1                 |                       |
| Type of insulation coil-contact circuit   | reinforced            |
| open contact circuit                      | functional            |
| adjacent contact circuits                 | functional            |
| Rated insulation voltage                  | 250 V                 |
| Pollution degree                          | 2                     |
| Rated voltage system                      | 230/400 V             |
| Overvoltage category                      | III                   |
| RoHS - Directive 2002/95/EC               | compliant             |
| Degree of protection DIN 40050            | IP20                  |
| Ambient temperature range                 | -40...+80°C           |
| Terminals                                 | pcb                   |
| Insertion cycles                          | A (10)                |
| Max. Insertion Force total                | 100 N                 |
| Mounting distance                         | 0, dense packing      |
| Resistance to soldering heat              | 270°C / 10 s          |
| Weight                                    | 3 g                   |
| Packaging unit                            | 100 pcs               |


### Socket with PCB terminals

| Type                                                       | Part Number |
|------------------------------------------------------------|-------------|
| <b>RP 78 601</b> Socket with PCB terminals, pinning 3.5 mm | 8-1393234-4 |
| <b>RP 78 602</b> Socket with PCB terminals, pinning 5 mm   | 8-1393234-5 |


### Accessories for RP 78 601, RP 78 602

| Type                                                             | Part Number |
|------------------------------------------------------------------|-------------|
| <b>RT 16 041</b> Plastic retaining clip RT, relay height 15.7 mm | 3-1393161-4 |
| <b>RT 28 516</b> Metal retaining clip RT, relay height 15.7 mm   | 1419108-7   |

### Derating curve RP78601

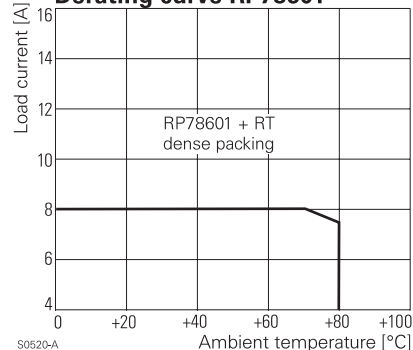

### Derating curve RP78602

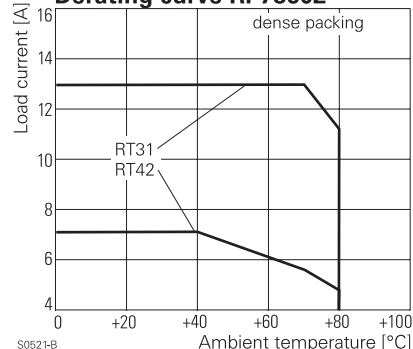

\*) For 1 pole relays (16 A) the relay terminals 11-21, 12-22 and 14-24 have to be bridged on the PCB.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9