

## Surge protection device - S-PT-EX-24DC-1/2" - 2800035

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Surge protection for one floating signal circuit in screw-on module with IP67 protection for sensor heads, connection 1/2-inch 14 NPT. Tested in acc. with the protection types in Ex areas Ex d / Ex tD / Ex ia IIC / Ex iaD.

### Why buy this product

- Arresters in hexagonal pipe with various outer threads



### Key commercial data

Packing unit	0
Minimum order quantity	1
Catalog page	Page 115 (TT-2011)
GTIN	 4 046356 411011
Custom tariff number	85363010
Country of origin	GERMANY

### Technical data

#### General

Housing material	High-grade steel
Color	silver
Standards for air and creepage distances	IEC 60664-1
Standards for air and creepage distances	IEC 60079-11
Total surge current (8/20) µs	20 kA
Total surge current (10/350) µs	2 kA
Ambient temperature (operation)	-25 °C ... 80 °C (non-EX)
Mounting type	1/2 inch NPT
Design	Screw-in module
Number of positions	2
Degree of protection	IP67
Direction of action	Line-Line & Line-Earth Ground
Width	28 mm
Height	28 mm
Depth	79 mm

## Surge protection device - S-PT-EX-24DC-1/2" - 2800035

### Technical data

#### Protective circuit

IEC category	C1
IEC category	C2
IEC category	C3
IEC category	D1
Nominal voltage UN	24 V DC
Maximum continuous operating voltage UC	36 V DC
Maximum continuous operating voltage UC	25 V AC
Maximum continuous voltage UC (wire-wire)	36 V DC
Maximum continuous voltage UC (wire-wire)	25 V AC
Ground conductor current IPE	≤ 2 μA
Nominal discharge surge current In (8/20) μs (Core-Core)	260 A
Nominal discharge surge current In (8/20) μs (Core-Earth)	10 kA
Total surge current (8/20) μs	20 kA
Nominal pulse current I <sub>an</sub> (10/1000) μs (Core-Core)	50 A
Lightning test current (10/350) μs, peak value limp	1 kA
Output voltage limitation at 1 kV/μs (Core-Core) spike	≤ 130 V
Output voltage limitation at 1 kV/μs (Core-Earth) spike	≤ 1.1 kV
Output voltage limitation at 1 kV/μs (Core-Core) static	≤ 60 V
Protection level UP (Core-Core)	≤ 65 V (C3 - 10 A)
Protection level UP (Core-Earth)	≤ 1.1 kV (C3 - 100 A)
Protection level UP (Core-Earth)	≤ 1.1 kV (C1 - 500 A)
Protection level UP (Core-Earth)	≤ 1.2 kV (C2 - 10 kV / 5 kA)
Response time tA (Core-Core)	≤ 1 ns
Response time tA (Core-Earth)	≤ 100 ns
Input attenuation aE, sym.	Typ. 0.1 dB (30 MHz / 50 Ω)
Input attenuation aE, sym.	Typ. 0.1 dB (6 MHz / 150 Ω)
Cut-off frequency f <sub>g</sub> (3 dB), sym. in 50 Ohm system	Typ. 70 MHz
Cut-off frequency f <sub>g</sub> (3 dB), sym. in 150 Ohm system	Typ. 70 MHz
Capacity (Core-Core)	Typ. 20 pF
Capacity (Core-Earth)	Typ. 5 pF
Resistance in series	0 Ω
Message: Surge protection fault	None
Surge carrying capacity in acc. with IEC 61643-21 (Core-Core)	C3 (25 A)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth)	C1 (1 kV / 500 A)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth)	C2 (10 kV/5 kA)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth)	C3 (100 A)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth)	D1 - 1kA
Alternating current carrying capacity in acc. with IEC 61643-21 (Core-Earth)	10 A - 1 s

#### Connection data

Connection method	Individual wires
-------------------	------------------

#### Connection, protective circuit

# Surge protection device - S-PT-EX-24DC-1/2" - 2800035

## Technical data

### Connection, protective circuit

Standards/regulations	EN 61643-21
Standards/regulations	EN 60079-0
Standards/regulations	EN 60079-1
Standards/regulations	EN 60079-11
Standards/regulations	EN 60079-26
Standards/regulations	EN 61241-0
Standards/regulations	EN 61241-1
Standards/regulations	EN 61241-11

## Classifications

### eclass

eCl@ss 4.0	27140201
eCl@ss 4.1	27130801
eCl@ss 5.0	27130801
eCl@ss 5.1	27130801
eCl@ss 6.0	27130807
eCl@ss 7.0	27130807

### etim


ETIM 2.0	EC000943
ETIM 3.0	EC000943
ETIM 4.0	EC000943
ETIM 5.0	EC000943

### unspsc


UNSPSC 6.01	30212010
UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610
UNSPSC 13.2	39121620

## Drawings

### Dimensioned drawing




### Circuit diagram

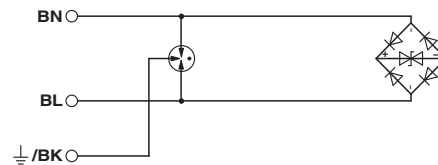

# Surge protection device - S-PT-EX-24DC-1/2" - 2800035

Application drawing

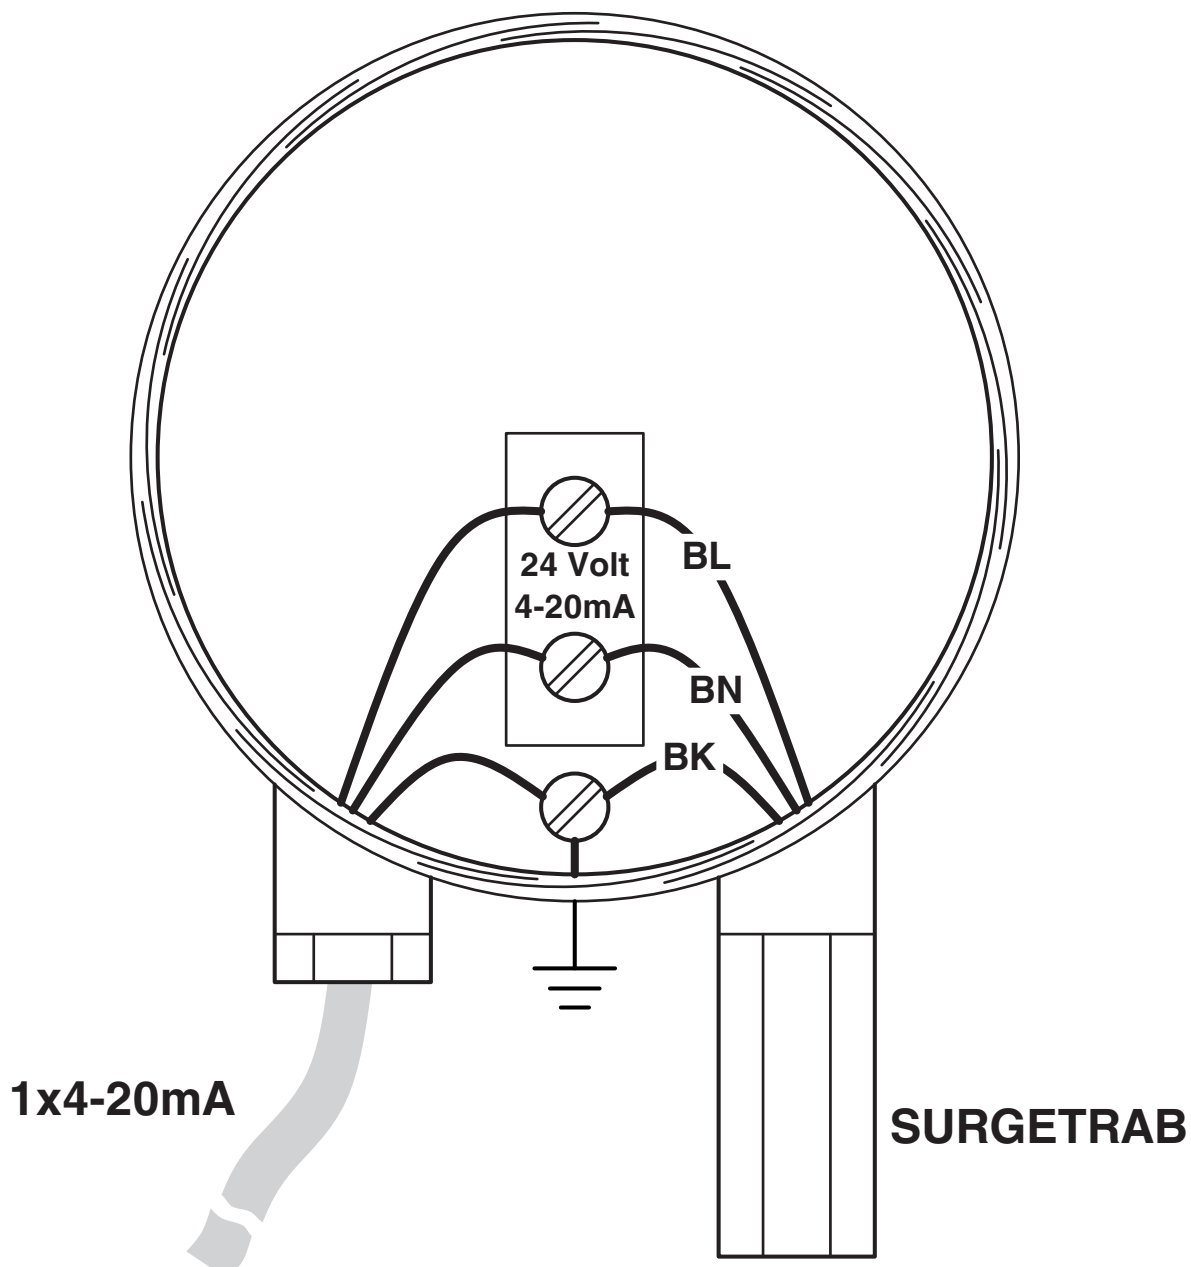



## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9